



(11)

EP 2 243 397 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
03.05.2017 Bulletin 2017/18

(51) Int Cl.:
A47B 57/26 ^(2006.01) **F25D 25/02** ^(2006.01)
F25D 25/04 ^(2006.01)

(21) Application number: **10159087.5**

(22) Date of filing: **06.04.2010**

(54) **A system for vertically adjusting a shelf**

System zur vertikalen Verstellung eines Regals

Système pour l'ajustement vertical d'étagère

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK SM TR**

(30) Priority: **23.04.2009 SI 200900116**

(43) Date of publication of application:
27.10.2010 Bulletin 2010/43

(73) Proprietor: **Gorenje d.d.
3503 Velenje (SI)**

(72) Inventor: **Mejac, Matej
3272, Rimske Toplice (SI)**

(74) Representative: **Ivancic, Bojan
Inventio d.o.o.
Dolenjska cesta 11
1000 Ljubljana (SI)**

(56) References cited:
**WO-A1-2006/120102 WO-A1-2008/095545
WO-A1-2008/095775 CH-A- 477 187
FR-A- 417 377**

EP 2 243 397 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention refers to a system for vertically adjusting a shelf, such as in refrigerating appliances, cabinets, lockers and similar, said shelf comprises horizontal support members arranged perpendicularly to vertical guides where they can be vertically adjusted, and a deposit plate, a drawer or similar, being attached to said horizontal support members.

[0002] The aforementioned system for vertically adjusting a shelf is known from international patent applications No. WO 2008/095775, WO 2008/095545 and WO 2006/120102. All the said known solutions have several drawbacks. The fact that a shelf, when raised and afterwards lowered, can freely fall is particularly outstanding. Furthermore, in order to adjust the shelf vertically it must be moved and rotated in several directions, representing a sever obstacle for a user. In addition to inaccurate vertical adjusting of the shelf, the embodiment of the system itself is rather technologically demanding and time consuming.

[0003] Furthermore, a system for vertically adjusting a shelf is known from the document CH 477 187 A. Said shelf comprises horizontal support members arranged perpendicularly to vertical guides where they can be vertically adjusted. Said shelf being fixed in a form-locking and friction-type manner in the vertical guides by means of the horizontal support members. With this solution too, in order to adjust the shelf vertically it must be moved and rotated in several directions, representing a sever obstacle for a user.

[0004] It is the object of the present invention to create a system for vertically adjusting a shelf of the aforesaid kind with which said drawbacks of the known solutions will be remedied.

[0005] According to the invention, said object is solved by a shelf being fixed in a form-locking and friction-type manner in vertical guides by means of horizontal support members. Each said vertical guide, having a C-shaped cross-section, comprises a web formed with a plurality of through holes for passing the air, and a side arranged opposite to said web, said side being formed with folds facing each other. Preferably, the free end of at least one fold is formed with a gearing extending over the entire length of each said guide.

[0006] Furthermore, it is provided for according to the invention that each said horizontal support member is formed on the side cooperating with each of said guides with a flange-like extension, an oblong and relatively narrow tongue-like projection being associated thereto in longitudinal direction. The upper section of said projection is formed with a pair of vertically and horizontally spaced circular projections intended to mesh with said gearing of each guide. Thus, a form-locking connection between the guide and the horizontal support member being provided in this manner. Said friction-type connection between the guide and the horizontal support member is created in a manner that the surface of the flange-

like extension facing the guide is pressed against each guide due to dead load of the shelf.

[0007] An embodiment of the invention will now be described with reference to the accompanying drawings without being limited thereto.

- Fig. 1 shows a shelf according to the invention in a three-dimensional view,
- Fig. 2 shows a detail of a vertical guide of the shelf of Fig. 1,
- Fig. 3 shows a horizontal support member of the shelf of Fig. 1 in a three-dimensional view,
- Fig. 4 shows a detail of the support member of Fig. 3,
- Fig. 5 shows a detail of the support member as in Fig. 4 but from another perspective,
- Fig. 6 shows a side view of the shelf according to the invention,
- Fig. 7 shows a side view of the shelf according to the invention and ready to be vertically adjusted,
- Fig. 8 shows a side view of the shelf according to the invention and fixed in the vertical guides,
- Fig. 9 shows a cross-section of the vertical guide and the shelf according to the invention incorporated into a cooling appliance,
- Fig. 10 shows a cross-section of another embodiment of the vertical guide and the shelf according to the invention incorporated into a cooling appliance.

[0008] A system for vertically adjusting a shelf being described in details with reference to a cooling appliance comprises at least one, preferably two vertical guides 1, 2 being mutually spaced and formed in the cross-section as the letter C. Since said guides are preferably identical, only the first guide 1 is fully described in the foregoing and with reference to Fig. 2. Said guides 1, 2 are preferably placed against each other in a manner that webs 3 thereof faces each other. However, it is obvious that said guides 1, 2 may be arranged in a manner that said webs 3 are averted from each other. Each web 3 of said guides 1, 2 is formed with a plurality of through holes 4 enabling the air passage. A side 5 of each C-formed guide 1, 2 arranged opposite to said web 3 is formed as a pair of folds 6, 7 facing each other, the free end of at least one fold 6, 7 being preferably formed over the entire length of said guide 1, 2 with a gearing 8, 9.

[0009] To each of said guides 1, 2 there is attached by means of a form-locking connection and on the principle of a cantilever a slender support member 10, 11, said form-locking connection being fully described below, wherein said support member 10, 11 being relocatable in the longitudinal direction of said guides 1, 2 and a deposit plate 12 being superimposed on said support members 10, 11. Since both said support members are identical only the first support member 10 is fully described in the foregoing and with reference to Fig. 3, Fig. 4 and Fig. 5. Said deposit plate 12 is attached to said support members 10, 11 either irremovably, by means of an ad-

hesive means for example, or removably whereby in the latter case said deposit plate 12 being fixed on each said support member 10, 11 by means of a safeguard 13, thus preventing a displacement of said deposit plate 12 relative to said support member 10, 11. Here, said deposit plate 12 being formed of an opaque or partially or entirely translucent material such as glass or plastic, for instance. Said safeguard 13 having preferably the same width as said support member 10, 11 is connected with said support member 10, 11 by means of a form-locking connection, for example, wherein said safeguard 13 is formed on the side facing said support member 10, 11 with a T-shaped guide 14 cooperating with a suitable T-shaped groove 15 formed in said support member 10, 11. In the present embodiment said groove 15 extends at least over a part of the width of said support member 10, 11, nevertheless it could extend over the entire width thereof. Optionally, said safeguard 13 is additionally secured by means of a fixing means not shown which can be inserted through a hole 16 in the safeguard 13 into a hole 17 in the support member 10, 11. Each said support member 10, 11 is formed on the side cooperating with each vertical guide 1, 2 with a flange-like extension 18 extending in the direction of said vertical guide, an oblong and relatively narrow tongue-like projection being associated with said extension 18 in the longitudinal direction of said vertical guide. The upper section 20 of said projection 19 is formed with a pair of vertically and horizontally spaced circular projections 21, 22 intended to mesh with the gearing 8, 9 of each vertical guide 1, 2. Here, said projections 21, 22 are horizontally spaced to the extent that they just sit into a gap between two neighbouring teeth of each gearing 8, 9 when the shelf according to the invention is in locked horizontal position. Said section 20 is formed on the inner side of the projection 19 with a guide 23 whereto a slider 24 snaps on which cooperates with the vertical guide 1, 2. Each said projection 19 is herewith intended to cooperate with each vertical guide 1, 2 in a manner that it extends through a vertical gap between a wall 26 of a cooling appliance and each vertical guide 1, 2, said guide 23 along with the slider 24 being arranged within each said vertical guide 1, 2. The slider 24 acts as a guidance for each support member 10, 11 inside the vertical guide 1, 2, whereas the circular projections 21, 22 mesh with the gearing 8, 9 of each vertical guide 1, 2, thus each support member 10, 11 as well as the shelf 12 being fixed in the position.

[0010] The shelf consisting of said support members 10, 11 and said deposit plate 12 is vertically adjusted in said vertical guides 1, 2 in a manner that it is lifted up at the end averted from said vertical guides 1, 2 so that it rotates about its centre of rotation which lies approximately in the horizontal axis of said slider 24. It is provided for in this manner that said circular projections 21, 22 unmesh the gearing 8, 9 due to which the shelf can be moved in height for the arbitrary number of teeth of the gearing 8, 9. The precision of the adjusting the shelf according to the invention depends on the size of the teeth

of the gearing 8, 9, the pitch of said teeth and the diameter of said circular projections 21, 22. The system as described above provides for a form-locking fixing of the shelf. The shelf according to the invention is additionally fixed in a horizontal position in a manner that a surface 27 of the flange-like extension 18 facing the vertical guide 1, 2 is pressed, due to dead load of the shelf, against the vertical guide 1, 2 and, respectively, against a decorative profile 28 which optionally covers each vertical guide 1, 2. In this manner a friction-type blocking of the shelf is obtained.

Claims

1. A system for vertically adjusting a shelf, such as in refrigerating appliances, cabinets, lockers and similar, said system comprising horizontal support members (10, 11) arranged perpendicularly to vertical guides (1, 2) where they can be vertically adjusted, and a deposit plate (12), a drawer or similar, being attached to said horizontal support members (10, 11), said plate being fixed in a form-locking and friction-type manner in vertical guides (1, 2) by means of horizontal support members (10, 11), **characterized in that** said vertical guide (1, 2), having a C-shaped cross-section, comprises a web (3) formed with a plurality of through holes (4) for passing the air, and a side (5) arranged opposite to said web (3), said side (5) being formed with folds (6) facing each other, where the free end of at least one fold (6, 7) is formed with a gearing (8, 9) extending preferably over the entire length of said guide (1, 2).
2. A system according to claim 1, **characterized in that** each said horizontal support member (10, 11) is formed on the side cooperating with each of said guides (1, 2) with a flange-like extension (18), an oblong and relatively narrow tongue-like projection (19) being associated thereto in longitudinal direction, the upper section (20) of said projection (19) is formed with a pair of vertically and horizontally spaced circular projections (21, 22) intended to mesh with said gearing (8, 9) of each said guide (1, 2).
3. A system according to any of the preceding claims, **characterized in that** said section (20) is formed in the inner side of the projection (19) with a guide (23) whereto a slider (24) snaps on which cooperates with said vertical guide (1, 2).
4. A system according to any of the preceding claims, **characterized in that** said deposit plate (12) is fixed on horizontal support members (10, 11) by means of a safeguard (13) being connected in a form-locking manner with said support member (10, 11).
5. A system according to claim 4, **characterized in that**

said safeguard (13) is formed on the side facing said support member (10, 11) with a T-shaped guide (14) which cooperates with a suitable T-shaped groove (15) formed in said support member (10, 11).

6. A system according to any of the preceding claims, **characterized in that** said plate is additionally fixed in a horizontal position by means of a friction-type blocking in a manner that a surface (27) of the flange-like extension (18) facing the vertical guide (1, 2) is pressed, due to dead load of the plate against the vertical guide (1, 2) and, respectively, against a decorative profile (28) which optionally covers each vertical guide (1, 2).

Patentansprüche

1. System zum vertikalen Verstellen eines Regals, beispielsweise in Kühlgeräten, Schränken, Spinden und dergleichen, wobei das System umfasst:

horizontale Stützelemente (10, 11), die senkrecht zu vertikalen Führungen (1, 2) angeordnet sind, an denen sie vertikal verstellt werden können, und eine Ablageplatte (12), ein Schubfach oder dergleichen, die an den horizontalen Stützelementen (10, 11) befestigt ist, wobei die Platte mittels der horizontalen Stützelemente (10, 11) in einer formschlüssigen und kraftschlüssigen Weise an den vertikalen Führungen (1, 2) fixiert ist, **dadurch gekennzeichnet, dass** die vertikale Führung (1, 2), welche einen C-förmigen Querschnitt hat, einen Steg (3), der mit einer Mehrzahl von Durchgangslöchern (4) zum Durchlass von Luft ausgebildet ist, und eine Seite (5) umfasst, die gegenüber von dem Steg (3) angeordnet ist, wobei die Seite (5) mit Abkantungen (6) ausgebildet ist, welche zueinander zeigen, wobei das freie Ende von wenigstens einer Abkantung (6, 7) mit einer Verzahnung (8, 9) ausgebildet ist, welche sich vorzugsweise über die gesamte Länge der vertikalen Führung (1, 2) erstreckt.

2. System nach Anspruch 1, **dadurch gekennzeichnet, dass** jedes horizontale Stützelement (10, 11) an der Seite gebildet ist, die mit jeder der Führungen (1, 2) mit einer flanschähnlichen Verlängerung (18) zusammenwirkt, wobei ein länglicher und relativ schmaler zungenähnlicher Vorsprung (19) damit in Längsrichtung verbunden ist, wobei der obere Abschnitt (20) von dem Vorsprung (19) mit einem Paar von vertikal und horizontal beabstandeten kreisförmigen Vorsprüngen (21, 22) ausgebildet ist, die zum Eingriff mit der Verzahnung (8, 9) von jeder Führung (1, 2) dienen.

3. System nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** der Abschnitt (20) an der inneren Seite des Vorsprungs (19) mit einer Führung (23) ausgebildet ist, an welcher ein Schieber (24) einrastet, der mit der vertikalen Führung (1, 2) zusammenwirkt.

4. System nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** die Ablageplatte (12) mittels eines Sicherungsteils (13), das in einer formschlüssigen Weise mit dem Stützelement (10, 11) verbunden ist, an den horizontalen Stützelementen (10, 11) fixiert ist.

5. System nach Anspruch 4, **dadurch gekennzeichnet, dass** das Sicherungsteil (13) an der Seite, die dem Stützelement (10, 11) zugewandt ist, mit einer T-förmigen Führung (14) ausgebildet ist, welche mit einer passenden T-förmigen Rille (15) zusammenwirkt, die in dem Stützelement (10, 11) ausgebildet ist.

6. System nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** die Platte zusätzlich mittels einer kraftschlüssigen Sperrung in einer horizontalen Position in einer Weise fixiert ist, dass eine Oberfläche (27) der flanschähnlichen Verlängerung (18), welche der vertikalen Führung (1, 2) zugewandt ist, aufgrund des Eigengewichts der Platte gegen die vertikale Führung (1, 2) und entsprechend gegen ein Dekorprofil (28) gedrückt wird, das jede der vertikalen Führungen (1, 2) optional bedeckt.

Revendications

1. Système pour l'ajustement vertical d'une étagère, tel que dans des appareils de réfrigération, des armoires, des vestiaires et analogues, ledit système comprenant des éléments de support horizontaux (10, 11) disposés perpendiculairement à des guides verticaux (1, 2) où ils peuvent être ajustés verticalement, et une plaque de dépôt (12), un tiroir ou analogue, fixée auxdits éléments de support horizontaux (10, 11), ladite plaque étant fixée, d'une manière à verrouillage de forme et de type à frottement, dans les guides verticaux (1, 2) au moyen des éléments de support horizontaux (10, 11), **caractérisé par le fait que** ledit guide vertical (1, 2), ayant une section transversale en forme de C, comprend une âme (3) comportant une pluralité de trous traversants (4) pour laisser passer l'air, et un côté (5) disposé à l'opposé de ladite âme (3), ledit côté (5) comportant des rebords (6) se faisant face l'un l'autre, l'extrémité libre d'au moins un rebord (6, 7) comportant une denture (8, 9) s'étendant, de préférence, sur toute la longueur dudit guide (1, 2).

2. Système selon la revendication 1, **caractérisé par le fait que** chaque élément de support horizontal (10, 11) comporte, sur le côté coopérant avec chacun desdits guides (1, 2), une extension de type bride (18), une saillie de type languette oblongue et relativement étroite (19) étant associée à celle-ci dans une direction longitudinale, la section supérieure (20) de ladite saillie (19) comporte une paire de saillies circulaires espacées horizontalement et verticalement (21, 22) destinées à s'engrener avec ladite denture (8, 9) de chaque guide (1, 2). 5
10
3. Système selon l'une quelconque des revendications précédentes, **caractérisé par le fait que** ladite section (20) comporte, dans le côté interne de la saillie (19), un guide (23) sur lequel un curseur (24) est emboîté élastiquement, lequel coopère avec ledit guide vertical (1, 2). 15
4. Système selon l'une quelconque des revendications précédentes, **caractérisé par le fait que** ladite plaque de dépôt (12) est fixée sur les éléments de support horizontaux (10, 11) au moyen d'une protection (13) reliée d'une manière à verrouillage de forme audit élément de support (10, 11). 20
25
5. Système selon la revendication 4, **caractérisé par le fait que** ladite protection (13) comporte, sur le côté faisant face audit élément de support (10, 11), un guide en forme de T (14) qui coopère avec une rainure en forme de T appropriée (15) formée dans ledit élément de support (10, 11). 30
6. Système selon l'une quelconque des revendications précédentes, **caractérisé par le fait que** ladite plaque est également fixée dans une position horizontale au moyen d'un blocage de type à frottement d'une manière telle qu'une surface (27) de l'extension de type bride (18) faisant face au guide vertical (1, 2) est pressée, en raison d'un poids propre de la plaque, contre le guide vertical (1, 2) et, respectivement, contre un profil décoratif (28) qui recouvre facultativement chaque guide vertical (1, 2). 35
40
45
50
55

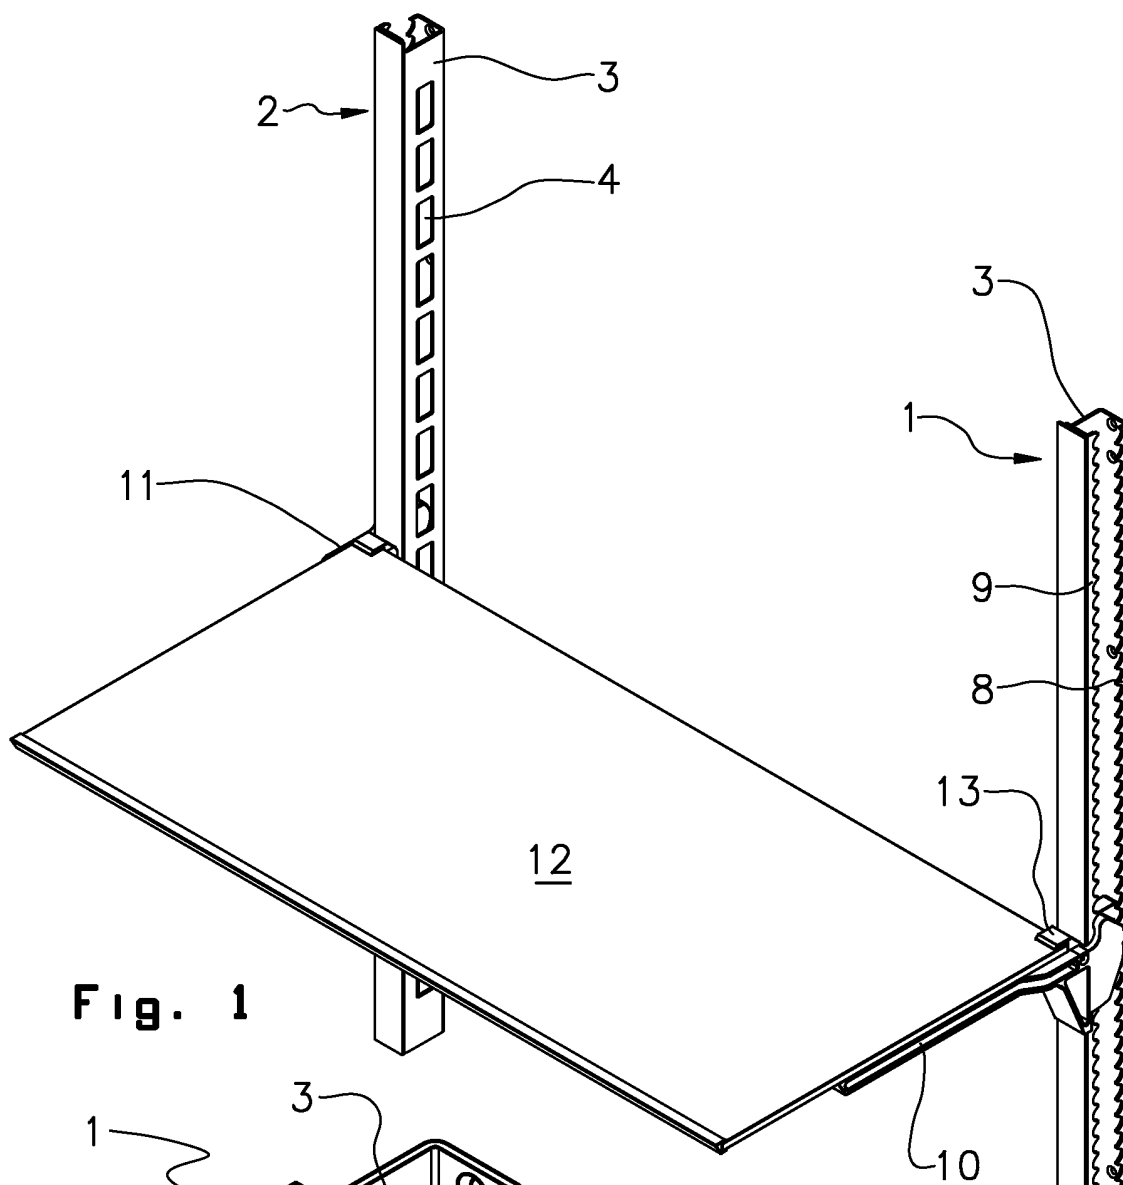


Fig. 1

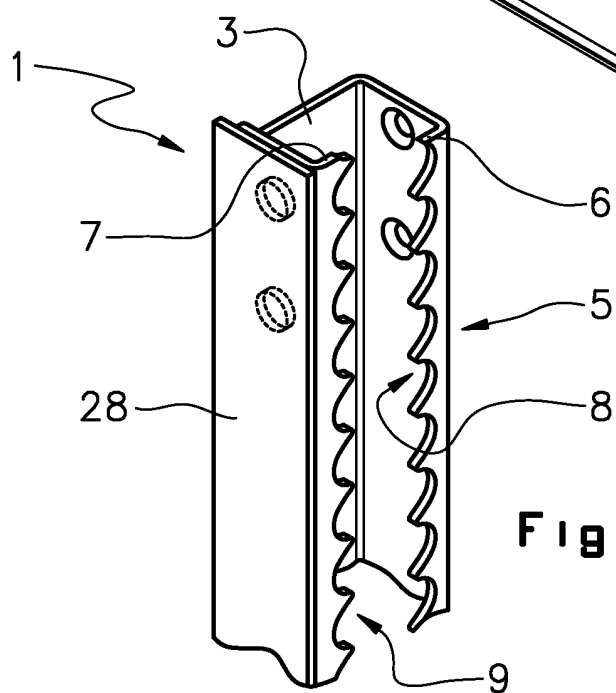


Fig. 2

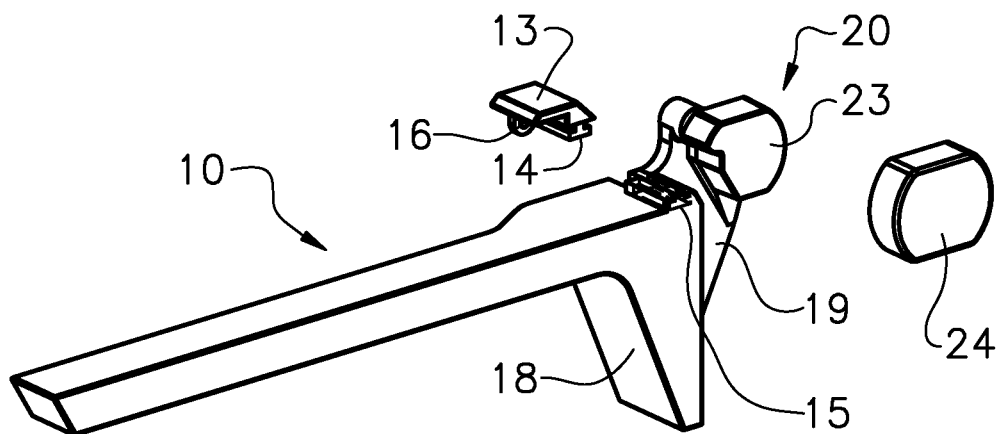


Fig. 3

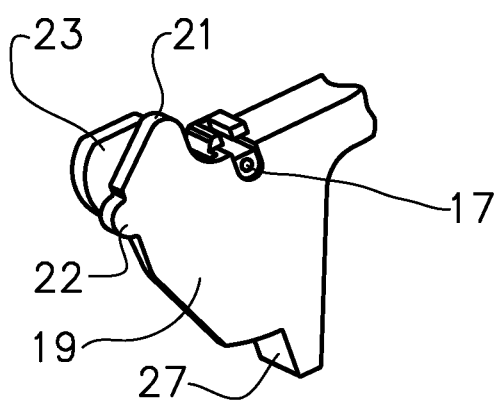


Fig. 4

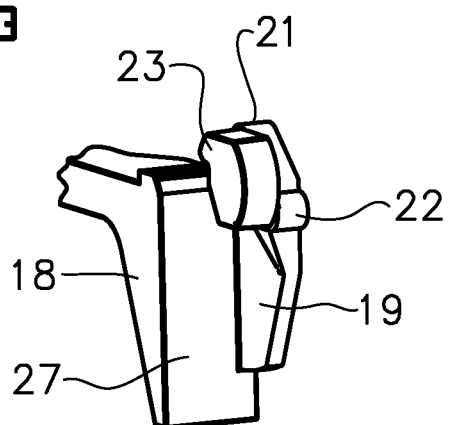


Fig. 5

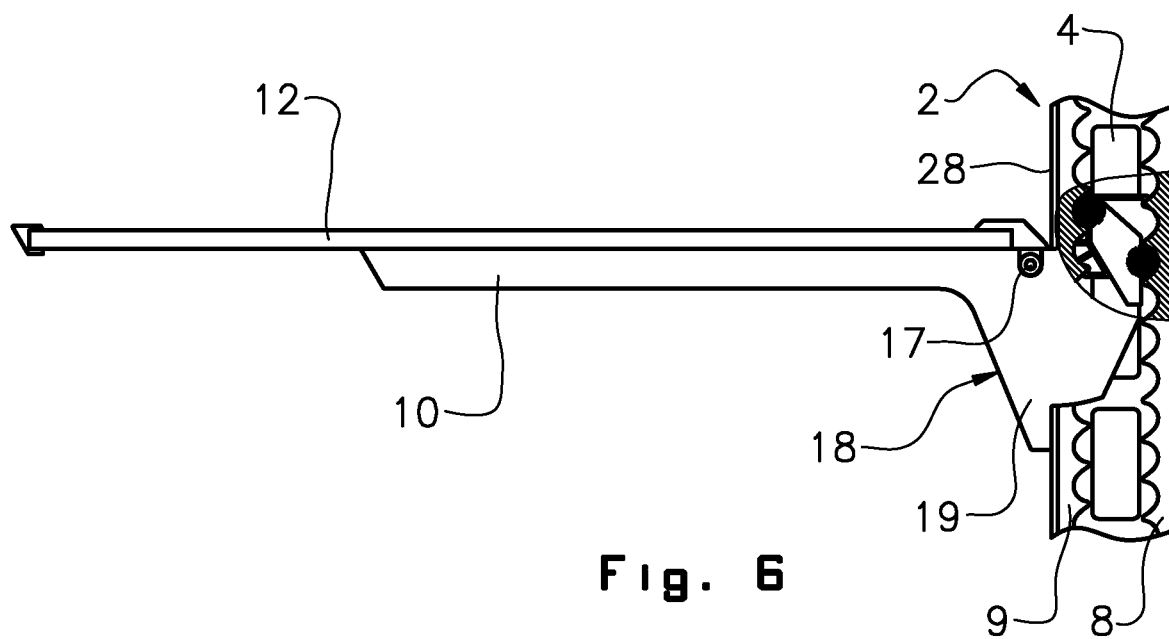
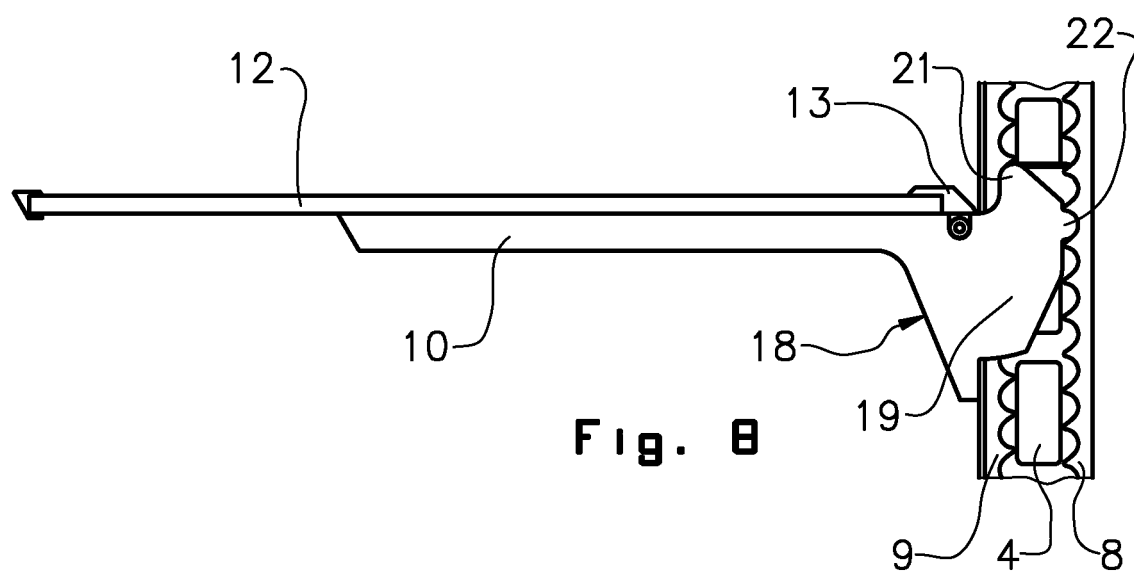
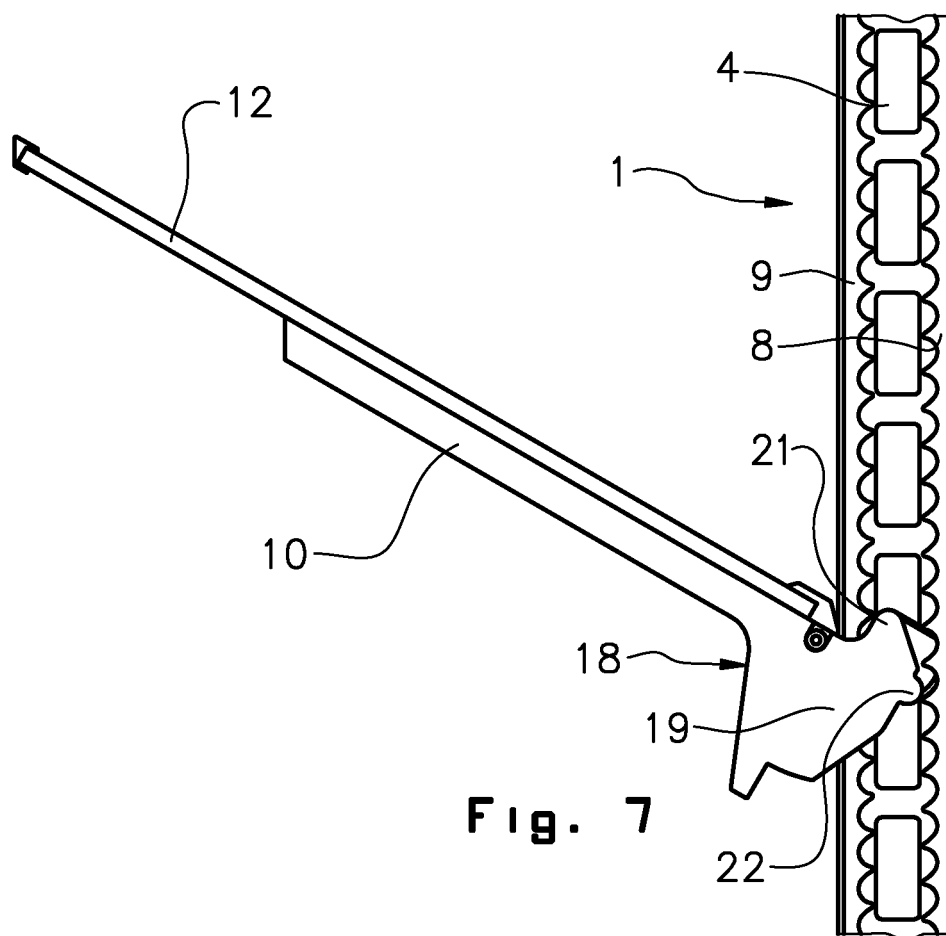


Fig. 6



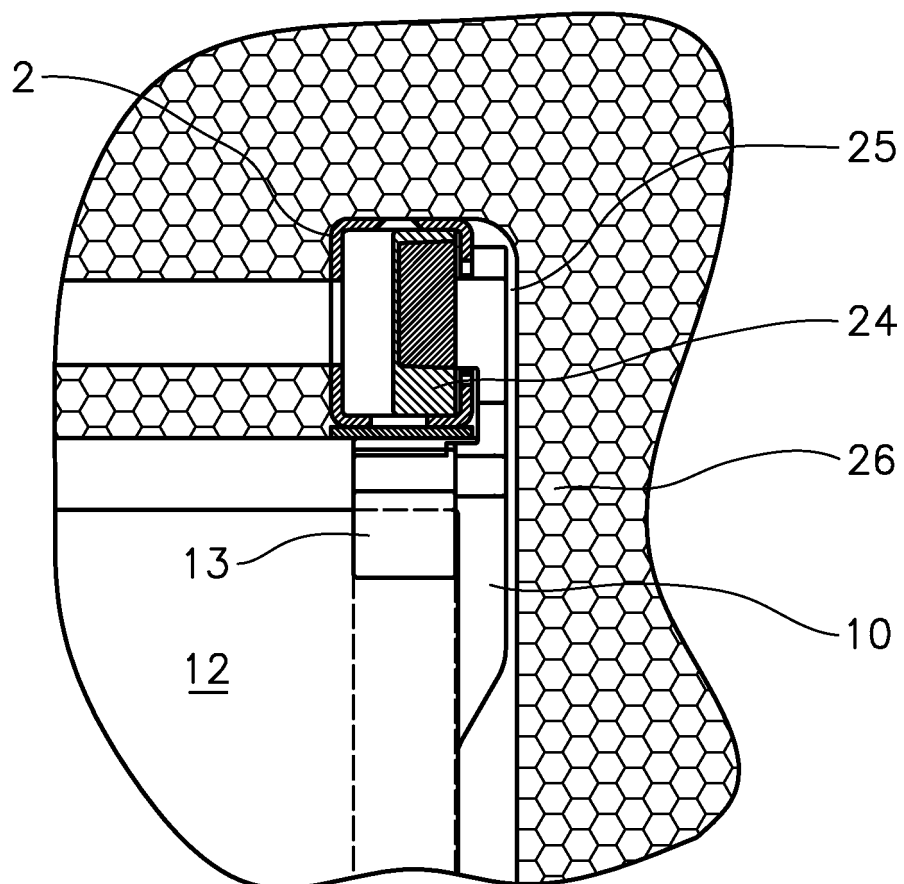


Fig. 9

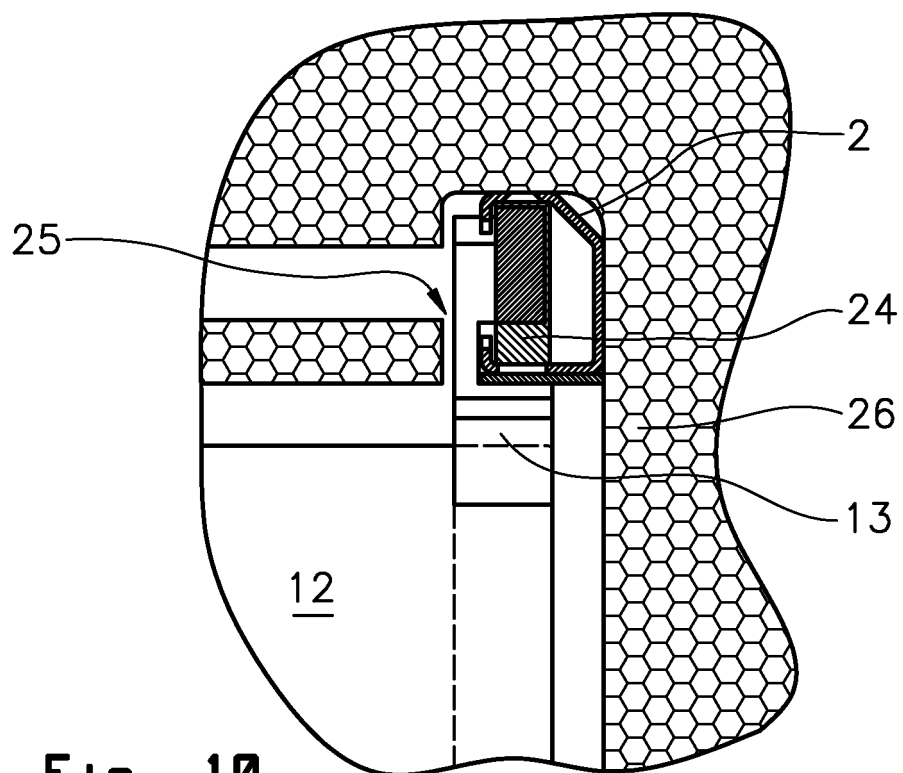


Fig. 10

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2008095775 A [0002]
- WO 2008095545 A [0002]
- WO 2006120102 A [0002]
- CH 477187 A [0003]