



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
27.10.2010 Bulletin 2010/43

(51) Int Cl.:
C22C 38/00 (2006.01) **C21D 9/46** (2006.01)
C22C 38/14 (2006.01)

(21) Application number: **09708321.6**

(86) International application number:
PCT/JP2009/052244

(22) Date of filing: **04.02.2009**

(87) International publication number:
WO 2009/099237 (13.08.2009 Gazette 2009/33)

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK TR
Designated Extension States:
AL BA RS

- **OKUDA, Kaneharu**
Tokyo 100-0011 (JP)
- **SHIMIZU, Tetsuo**
Tokyo 100-0011 (JP)
- **MORIYASU, Noriaki**
Tokyo 100-0011 (JP)
- **WATABE, Masahide**
Tokyo 100-0011 (JP)

(30) Priority: **08.02.2008 JP 2008028455**

(71) Applicant: **JFE Steel Corporation**
Chiyoda-ku
Tokyo 100-0011 (JP)


(74) Representative: **Grünecker, Kinkeldey, Stockmair & Schwanhäusser**
Anwaltssozietät
Leopoldstrasse 4
80802 München (DE)

(72) Inventors:
• **KANEKO, Shinjiro**
Tokyo 100-0011 (JP)

(54) **HIGH-STRENGTH HOT-ROLLED STEEL SHEET AND PROCESS FOR PRODUCTION THEREOF**

(57) There is provided a high-strength hot-rolled steel sheet having a tensile strength (TS) of 540 to 780 MPa, only small variations in strength, and excellent uniformity in strength using a general-purpose Ti-containing steel sheet, which is inexpensive. The high-strength hot-rolled steel sheet includes, on a mass percent basis, 0.05%-0.12% C, 0.5% or less Si, 0.8%-1.8% Mn, 0.030% or less P, 0.01% or less S, 0.005%-0.1% Al, 0.01% or less N, 0.030%-0.080% Ti, and the balance being Fe and incidental impurities. The microstructure have a volume fraction of polygonal ferrite of 70% or more, and the amount of Ti present in a precipitate having a size of less than 20 nm is 50% or more of the value of Ti* calculated using formula (1): $Ti^* = [Ti] - 48/14 \times [N]$ (1) where [Ti] and [N] represent a Ti content (percent by mass) and a N content (percent by mass), respectively, of the steel sheet.

FIG. 1

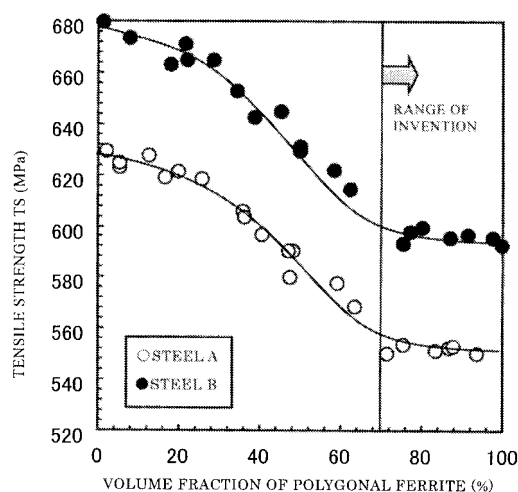

Description

Technical Field

5 **[0001]** The present invention relates to a high-intensity hot-rolled steel sheet having a tensile strength (TS) of 540 to 780 MPa, only small variations in strength, and excellent uniformity in strength between coils and within a coil, and being useful as a steel sheet for automobiles and so forth, and to a method for manufacturing the same.

Background Art

10 **[0002]** From the viewpoint of global environmental protection, improvement in the fuel economy of automobiles has recently been required to regulate the amount of CO₂ emission. In addition, it is also required to improve safety by focusing on collision characteristics of automobile bodies in order to ensure the safety of passengers in case of accident. Thus, both the weight reduction and strengthening of automobile bodies are being actively promoted. To simultaneously
15 achieve the weight reduction and strengthening of automobile bodies, an increase in the strength of a material for members and a reduction in weight by reducing the thickness of sheets to the extent that rigidity is not impaired are said to be effective. Nowadays, high-strength steel sheets are positively used for automotive parts. The use of high-strength steel sheets results in a significant weight reduction effect. Thus, in the motor vehicle industry, for example, there is a trend toward the use of steel sheets as a structural member with a tensile strength (TS) of 540 MPa or more.

20 **[0003]** Many automotive parts made from steel sheets are manufactured by press forming. Regarding the formability of high-strength steel sheets, dimensional accuracy is important in addition to prevention of cracking and wrinkling. In particular, the control of springback is an important problem. Nowadays, new automobiles are developed very efficiently by computer assisted engineering (CAE) can predict the amount of springback more accurately by the input of the characteristics of the steel sheet. So, it is not necessary to make many dies. Variations in the amount of springback
25 cause a problem when parts are connected to each other and thus should be reduced. If the steel sheets used for automobile parts have wide variations in strength, CAE can not predict the amount of springback. So, in particular, a high-strength steel sheet having only small variations in strength and excellent uniformity in strength is required.

[0004] As a method for reducing variations in strength in a coil, Patent Document 1 (Japanese Unexamined Patent Application Publication No. 4-289125) discloses the following method: In the case of hot-rolling Nb-containing low-manganese steel (Mn: 0.5% or less), a rough-rolled sheet bar is temporarily wound into a coil. Next, the sheet bar is
30 joined to the preceding sheet bar while being unwound, and then continuously finish-rolled to achieve uniformity in the strength of the high-strength hot-rolled steel sheet in a coil. Patent Document 2 (Japanese Unexamined Patent Application Publication No. 2002-322541) discloses a high-strength hot-rolled steel sheet with excellent uniformity in strength, i.e., only small variations in strength, produced by the addition of both Ti and Mo to form very fine precipitates uniformly
35 dispersed therein.

Patent Document 1: Japanese Unexamined Patent Application Publication No. 4-289125

Patent Document 2: Japanese Unexamined Patent Application Publication No. 2002-322541

40 Disclosure of Invention

[0005] The foregoing related art, however, has problems described below.

[0006] The method described in Patent Document 1 has a problem in which when the sheet is wound into a coil, the sheet is divided. Furthermore, the addition of Nb causes an increase in cost, which is economically disadvantageous.
45 In the steel sheet described in Patent Document 2, which is a Ti system, it is necessary to add Mo, which is expensive, thus causing an increase in cost. Moreover, in any of the patent documents, two-dimensional uniformity in strength in the in-plane directions including both of the width direction and the longitudinal direction of the coil is not taken into consideration. Disadvantageously, even if the coiling temperature is uniformly controlled, the variations in the in-plane strength of the coil are inevitably caused by different cooling histories for each position in the wound coil.

50 **[0007]** In consideration of the above-described situation, it is an object of the present invention to advantageously solve the foregoing problems and provide a high-strength hot-rolled steel sheet having a tensile strength (TS) of 540 to 780 MPa, only small variations in strength, and excellent uniformity in strength using a general-purpose Ti-containing steel sheet, which is inexpensive.

[0008] To overcome the foregoing problems, the inventors have conducted intensive studies and have successfully
55 provided a high-strength hot-rolled steel sheet having excellent uniformity in strength and only small variations in strength over the entire area of the hot-rolled steel sheet by controlling the chemical composition and the metal microstructure of the steel sheet and the precipitation state of Ti that contributes to precipitation strengthening, leading to the completion of the present invention.

[0009] The gist of a high-strength hot-rolled steel sheet according to the present invention and a method for manufacturing the high-strength hot-rolled steel sheet are described below, the steel sheet having only small variations in in-plane strength and excellent uniformity in strength.

[1] A high-strength hot-rolled steel sheet includes, on a mass percent basis, 0.05%-0.12% C, 0.5% or less Si, 0.8%-1.8% Mn, 0.030% or less P, 0.01% or less S, 0.005%-0.1% Al, 0.01% or less N, 0.030%-0.080% Ti, the balance being Fe and incidental impurities, and microstructures whose volume fraction of polygonal ferrite is 70% or more, in which the amount of Ti present in a precipitate having a size of less than 20 nm is 50% or more of the value of Ti* calculated using formula (1):

$$Ti^* = [Ti] - 48/14 \times [N] \quad (1)$$

where [Ti] and [N] represent a Ti content (percent by mass) and a N content (percent by mass), respectively, of the steel sheet.

[2] A method for manufacturing a high-strength hot-rolled steel sheet includes the steps of heating a steel slab to 1150°C to 1300°C, the steel slab containing, on a mass percent basis, 0.05%-0.12% C; 0.5% or less Si, 0.8%-1.8% Mn, 0.030% or less P, 0.01% or less S, 0.005%-0.1% Al, 0.01% or less N, 0.030%-0.080% Ti, and the balance being Fe and incidental impurities, subjecting the slab to finish hot rolling at a finishing temperature of 800°C to 950°C, starting cooling at a cooling rate of 20 °C/s or more within 2 seconds after the completion of the finish hot rolling, stopping cooling at 650°C to 750°C, subsequently performing natural cooling for 2 seconds to 15 seconds, cooling the steel sheet at a cooling rate of less than 100 °C/s, and winding the steel sheet into a coil in the temperature range of 550°C to 650°C.

According to the present invention, it is possible to reduce variations in strength in a coil of a high-strength hot-rolled steel sheet having a tensile strength (TS) of 540 to 780 MPa, thereby achieving the stabilization of the shape fixability of the steel sheet at the time of press forming and the strength and durability of a part. This leads to improvement in reliability at the time of the production and use of an automotive part. Furthermore, in the present invention, the above-mentioned effect is provided without adding an expensive raw material such as Nb, thus reducing the cost.

Brief Description of Drawings

[0010]

[Fig. 1] Fig. 1 shows the investigation results of the relationship between the volume fraction of polygonal ferrite (%) and the tensile strength TS (MPa).

[Fig. 2] Fig. 2 shows the investigation results of the relationship between the proportion of the amount of Ti contained in a precipitate having a size of less than 20 nm with respect to Ti* and the tensile strength TS (MPa).

Best Mode for Carrying Out the Invention

[0011] The present invention will be described in detail below. 1) A method for evaluating small variations in strength, i.e., uniformity in strength, according to the present invention will be described.

[0012] An example of a target steel sheet is a coiled steel sheet having a weight of five tons or more and a steel sheet width of 500 mm or more. In this case, in an as-hot-rolled state, the innermost turn including the front end in the longitudinal direction, the outermost turn including the rear end in the longitudinal direction, and regions extending from both sides to 10 mm from both sides in the width direction are not evaluated. Variations in the strength of the steel sheet are evaluated on the basis of tensile-strength distribution obtained from two-dimensional measurement at at least 10 points in the longitudinal direction and at least 5 points in the width direction. Furthermore, the present invention covers a steel sheet having a tensile strength (TS) of 540 MPa to 780 MPa. 2) The reason for the limitation of the chemical components (composition) of steel according to the present invention will be described below.

[0013] The units of the content of each component in the steel composition are "percent by mass" and are simply indicated by "%" unless otherwise specified.

C: 0.05% to 0.12%

[0014] C is an important element as well as Ti described below in the present invention. C forms a carbide with Ti and is effective in increasing the strength of a steel sheet by precipitation strengthening. In the present invention, the C content is preferably 0.05% or more and more preferably 0.06% or more from the viewpoint of precipitation strengthening. A C content exceeding 0.12% liable to adversely affect satisfactory elongation and flangeability. Thus, the upper limit

of the C content is set to 0.12% and preferably 0.10% or less.

Si: 0.5% or less

[0015] Si is effective in enhancing solid-solution strengthening and improving ductility. To provide the effect described above, the Si content is effectively 0.01% or more. A Si content exceeding 0.5% is liable to cause the occurrence of a surface defect called red scale during hot rolling, which can reduce the quality of surface appearance when a steel sheet is produced. Thus, the Si content is preferably 0.5% or less and more preferably 0.3% or less.

Mn: 0.8% to 1.8%

[0016] Mn is effective in achieving higher strength and has the effect of reducing the transformation point and the ferrite grain size. The Mn content needs to be 0.8% or more. More preferably, the Mn content is set to 1.0% or more. A Mn content exceeding 1.8% causes the formation of a low-temperature transformation phase after hot rolling to reduce the ductility and is liable to make TiC precipitation unstable. Thus, the upper limit of the Mn content is set to 1.8%.

P: 0.030% or less

[0017] P is an element effective for solid-solution strengthening. P also has the effect of reducing the scale defect due to Si. An excessive P content more than 0.030%, however, is liable to cause the segregation of P into grain boundaries and reduce toughness and weldability. Thus, the upper limit of the P content is set to 0.030%.

S: 0.01% or less

[0018] S is an impurity and causes hot tearing. Furthermore, S is present in the form of an inclusion in steel, deteriorating the various characteristics of a steel sheet. Thus, the S content needs to be minimized. Specifically, the S content is set to 0.01% because the S content is allowable to 0.01%.

Al: 0.005% to 0.1%

[0019] Al is useful as a deoxidizing element for steel. Al also has the effect of fixing dissolved N present as an impurity, thereby improving resistance to room-temperature aging. To provide the effect, the Al content needs to be 0.005% or more. An Al content exceeding 0.5% leads to an increase in alloy cost and is liable to cause surface defects. Thus, the upper limit of the Al content is set to 0.1%.

N: 0.01% or less

[0020] N is an element which degrades the resistance to room-temperature aging and in which the N content is preferably minimized. A higher N content causes a reduction in resistance to room-temperature aging. To fix dissolved N, it is necessary to perform the addition of large amounts of Al and Ti. Thus, the N content is preferably minimized. The upper limit of the N content is set to 0.01%.

Ti: 0.030% to 0.080%

[0021] Ti is an important element to strengthen steel by precipitation strengthening. In the present invention, Ti contributes to precipitation strengthening by forming a carbide with C.

[0022] That is, in order to produce a high-strength steel sheet having a tensile strength TS of 540 MPa to 780 MPa, it is preferred to form fine precipitates each having a size of less than 20 nm. Furthermore, it is important to increase the proportion of the fine precipitates (each having a size of less than 20 nm). One of the reasons for this may be that precipitates having a size of 20 nm or more are less likely to provide the effect of suppressing dislocation migration and fail to sufficiently harden polygonal ferrite, which can reduce strength. It is thus preferred that the precipitates have a size of less than 20 nm. In the present invention, the fine precipitates containing Ti and each having a size of less than 20 nm are formed by the addition of Ti and C within the above ranges. In this specification, the precipitates containing Ti and C are generically referred to as a "Ti-containing carbide". Examples of the Ti-containing carbide include TiC and $\text{Ti}_4\text{C}_2\text{S}_2$. The carbide may further contain N as a component and may be precipitated in combination with, for example, MnS.

[0023] In the high-strength steel sheet according to the present invention, it is observed that the Ti-containing carbide is mainly precipitated in polygonal ferrite. This is probably because supersaturated C is easily precipitated as a carbide in polygonal ferrite because of a low solid-solubility limit of C in polygonal ferrite. The precipitates allow soft polygonal ferrite to harden, thereby achieving a tensile strength (TS) of 540 MPa to 780 MPa. Furthermore, Ti is readily bonded to dissolved N and thus an element suitable for fixation of dissolved N. From that standpoint, the Ti content is set to 0.030% or more.

[0024] However, an excessive addition of Ti only results in the formation of coarse undissolved TiC or the like, which is a carbide of Ti but does not contribute to strength, and is thus uneconomical, which is not preferred. The upper limit of the Ti content is set to 0.080% from this viewpoint.

[0025] In the present invention, it is preferred that the composition of the balance other than the components described above be substantially iron and incidental impurities.

3) The reason for the limitation of the steel microstructure of the steel sheet will be described below. The steel sheet has microstructures whose the volume fraction of polygonal ferrite is 70% or more, and the amount of Ti in a precipitate having a size of less than 20 nm is 50% or more of the value of Ti^* calculated using formula (1).

[0026] The strength of the high-strength hot-rolled steel sheet according to the present invention is determined by the superposition of the amounts of strengthening based on three strengthening mechanisms, i.e., solid-solution strengthening, microstructural strengthening, and precipitation strengthening, on the base strength of the steel itself. The base strength is inherent strength of iron. The amount of solid-solution strengthening is almost uniquely determined by a chemical composition. Thus, these two strengthening mechanisms are negligibly involved in the variations in strength in a coil. The strengthening mechanism that is the most closely related to the variations in strength is precipitation strengthening, followed by microstructural strengthening.

[0027] The amount of strengthening by precipitation strengthening is determined by the size and dispersion of precipitates (specifically, precipitate spacing). The dispersion of precipitates can be expressed by the amount and size of the precipitates. Thus, if the size and amount of the precipitates are determined, the amount of strengthening by precipitation strengthening will be determined. Microstructural strengthening is determined by the type of steel microstructure. The type of steel microstructure is determined by a transformation-temperature range from austenite. If a chemical composition and a steel microstructure are determined, the amount of strengthening will be determined. 4) Experimental facts used as the basis of the present invention will be described below.

[0028] Steel A in which the amount of Ti added was 0.04% and steel B in which the amount of Ti added was 0.06%, each of steel A and steel B having a basic chemical composition of 0.08C-0.1Si-1.5Mn-0.011P-0.0025-0.017Al-0.005N, were ingoted in a laboratory into cast strands. These cast strands were formed into sheet bars each having a thickness of 25 mm by slabbing. Each of the sheet bars was heated to 1230°C, hot-rolled in five passes so as to have a finishing temperature of 880°C, and water-cooled at a cooling rate of 25 °C/s 1.7 seconds after finish rolling. At this time, the cooling stop temperature was changed between 720°C and 520°C. After the water cooling, each sheet bar was subjected to natural cooling for 10 seconds. Each sheet bar was inserted into an electric furnace having a temperature of 500°C to 700°C and wound. The holding time in the furnace was changed between 1 and 300 minutes. At this time, in the case where the difference between the cooling stop temperature and the furnace temperature is 30°C or higher, after the natural cooling, water cooling is performed at a cooling rate of 25 °C/s in such a manner that the sheet bar has a temperature 30°C higher than the furnace temperature. Hot-rolled steel sheets having different precipitation states of Ti and different steel microstructures were manufactured by the method described above. The hot-rolled steel strips were subjected to pickling and then temper rolling at an elongation of 0.5%. Test pieces for a tensile test and analytical samples of precipitates were taken.

[0029] Steel sheets in which the amount of Ti contained in precipitates having a size of less than 20 nm was 50% or more of the amount of Ti* expressed as formula (1) described below were selected from the hot-rolled steel sheets manufactured as described above. Fig. 1 shows the investigation results of the relationship between the volume fraction of polygonal ferrite (%) and the tensile strength TS (MPa). As shown in this figure, the tensile strength TS tends to decrease as the volume fraction of polygonal ferrite increases. At a volume fraction of polygonal ferrite of 70% or more, a change in TS is small, and TS is stabilized.

[0030] For example, the volume fraction of polygonal ferrite can be determined as follows. A portion of an L section (a section parallel to a rolling direction) of a steel sheet, the portion excluding surface layers each having a thickness equal to 10% of the thickness of the sheet, is etched with 5% nital. The microstructures of the etched portion are photographed with a scanning electron microscope (SEM) at a magnification of 1000x. Smooth ferrite crystal grains in which grain boundaries have a small step height of less than 0.1 μm and corrosion marks are not left in the grains are defined as polygonal ferrite. Polygonal ferrite is distinguished from other ferrite phases and different transformation phases such as pearlite and bainite. These are color-coded with image-analysis software. The area ratio is defined as the volume fraction of polygonal ferrite.

[0031] Similarly, steel sheets each having a volume fraction of polygonal ferrite of 70% or more were selected from the hot-rolled steel sheets manufactured as described above. Fig. 2 shows the investigation results of the relationship between the proportion of the amount of Ti contained in a precipitate having a size of less than 20 nm with respect to Ti* expressed as formula (1) described below and the tensile strength TS (MPa). As described above, the precipitates each having a size of less than 20 nm and contributing to precipitation strengthening are composed of added Ti. Thus, whether Ti is efficiently precipitated as fine precipitates or not can be determined by the grasp of the amount of Ti in the precipitate having a size of less than 20 nm. As shown in this figure, TS tends to increase as the amount of Ti contained in the precipitate having a size of less than 20 nm increases. In the case where the amount of Ti contained in the precipitate is 50% or more of Ti*, a change in TS is small, and TS is stabilized.

[0032] From the above result, it is conceivable that in the case where the steel microstructures are controlled so as to have a volume fraction of polygonal ferrite of 70% or more and where the amount of Ti contained in the precipitate having a size of less than 20 nm is controlled in the range of 50% or more of Ti* expressed as formula (1) described below, the resulting variations in strength are significantly small and practically satisfactory even if inevitable variations in strength occur because the cooling histories of the coil after winding are different for each position,

$$Ti^* = [Ti] - 48/14 \times [N] \quad (1)$$

where [Ti] and [N] represent a Ti content (percent by mass) and a N content (percent by mass), respectively, of the steel sheet.

[0033] Thus, in the case where requirements of the present invention are met, in other words, in the case where the facts that a steel sheet has microstructures whose volume fraction of polygonal ferrite is 70% or more and that the amount of Ti contained in a precipitate having a size of less than 20 nm is 50% or more of Ti^* expressed as formula (1) described above are met, at any position of a steel sheet, even if the cooling histories of a coil are different for each position, substantially the same amount of strengthening is obtained at any position of the steel sheet. Thus, the steel sheet has only small variation in strength and excellent uniformity in strength. 5) The amount of Ti contained in a precipitate having a size of less than 20 nm can be measured by a method described below.

[0034] After a sample is electrolyzed in an electrolytic solution by a predetermined amount, the test piece is taken out of the electrolytic solution and immersed in a solution having dispersibility. Then precipitates contained in this solution are filtered with a filter having the pore size of 20 nm. Precipitates passing through the filter having a pore size of 20 nm together with the filtrate each have a size of less than 20 nm. After the filtration, the filtrate is appropriately analyzed by inductively-coupled-plasma (ICP) emission spectroscopy, ICP mass spectrometry, atomic absorption spectrometry, or the like to determine the amount of Ti in the precipitates having a size of less than 20 nm. 6) An example of a preferred method for manufacturing a high-strength hot-rolled steel sheet according to the present invention will be described below.

[0035] The composition of a steel slab used in the manufacturing method of the present invention is the same as the composition of the steel sheet described above. Furthermore, the reason for the limitation of the composition is the same as above. The high-strength hot-rolled steel sheet of the present invention is manufactured through a hot-rolling step of subjecting a raw material to rough hot rolling to form a hot-rolled steel sheet, the raw material being the steel slab having a composition within the range described above.

i) Heating Temperature: 1150°C to 1300°C

[0036] With respect to the heating temperature of a slab, the hot-rolled steel sheet is preferably heated to 1150°C or higher in order that an undissolved Ti-containing carbide, such as TiC , may not be present in a heating stage. This is because the presence of the undissolved Ti-containing carbide adversely affects the tensile strength of a hot-rolled steel sheet; hence, the absence of the undissolved Ti-containing carbide is preferred. However, heating at excessively high temperatures causes problems, for example, an increase in scale loss due to an increase in oxidation weight. Thus, the upper limit of the heating temperature of the slab is preferably set to 1300°C.

[0037] The steel slab heated under the foregoing conditions is subjected to hot rolling in which rough rolling and finish rolling are performed. Here, the steel slab is formed into a sheet bar by the rough rolling. The conditions of the rough rolling need not be particularly specified. The rough rolling may be performed according to a common method. It is preferred to use what is called a sheet-bar heater from the viewpoints of reducing the heating temperature of the slab and preventing problems during the hot rolling.

[0038] Then the sheet bar is subjected to finish rolling to form a hot-rolled steel sheet.

ii) Finishing Temperature (FDT): 800°C to 950°C

[0039] A high finishing temperature results in coarse grains to reduce formability and is liable to cause scale defects; hence, the finishing temperature is set to 950°C or lower. A finishing temperature of less than 800°C results in an increase in rolling force to increase the rolling load and an increase in rolling reduction to develop an abnormal texture in austenite non-recrystallization, which is not preferred from the viewpoint of achieving uniform strength. Accordingly, the finishing temperature is set in the range of 800°C to 950°C and preferably 840°C to 920°C.

[0040] To reduce the rolling force during the hot rolling, some or all passes of the finish rolling may be replaced with lubrication rolling. The lubrication rolling is effective from the viewpoint of improving uniformity in the shape of a steel sheet and uniformity in strength. The coefficient of friction during the lubrication rolling is preferably in the range of 0.10 to 0.25. Furthermore, a continuous rolling process is preferred in which a preceding sheet bar and a succeeding sheet bar are joined to each other and then the joined sheet bars are continuously finish-rolled. The use of the continuous rolling process is desirable from the viewpoint of achieving the stable operation of the hot rolling.

iii) Cooling (primary cooling) at a cooling rate of 20 °C/s or more within 2 seconds after finish hot rolling

[0041] When a time exceeding 2 seconds elapses between the start of cooling and the completion of the finish rolling,

a strain accumulated during the finish rolling is relieved. Thus, even if cooling control described below is performed, ferrite is not effectively formed, failing to stably precipitate TiC. Furthermore, the same phenomenon is liable to occur when the cooling rate is less than 20 °C/s.

- 5 iv) Stop of cooling in a temperature range of 650°C to 750°C and natural cooling step for 2 seconds to 15 seconds

[0042] With respect to a temperature during natural cooling, in order to effectively precipitate the Ti-containing carbide such as TiC in a short time required for the passage of a steel sheet through a run-out table, it is necessary to hold the steel sheet for a predetermined period of time in a temperature range where ferrite transformation proceeds at a maximum. At a natural cooling (holding) temperature of less than 650°C, it is impossible to ensure the amount of the Ti-containing carbide required for the desired amount of strengthening because of a low growth rate of precipitates of the Ti-containing carbide. At a natural cooling temperature exceeding 750°C, coarse Ti-containing carbide grains are sparsely distributed because of the insufficient nucleation of precipitates and a high growth rate, thereby reducing the strengthening ability. Accordingly, the natural cooling temperature is set in the range of 650°C to 750°C.

[0043] A natural cooling time of less than 2 seconds results in an insufficient amount of the Ti-containing carbide precipitated. It is thus difficult to ensure the amount of strengthening required. A natural cooling time exceeding 15 seconds causes a reduction in strengthening ability because coarse Ti-containing carbide grains are sparsely distributed. Therefore, the natural cooling time is set in the range of 2 seconds to 15 seconds.

- 20 v) Cooling (secondary cooling) at a cooling rate of 100 °C/s

[0044] In the case where the cooling rate subsequent to the natural cooling treatment is 100°C or more, the controllability of a coiling temperature is reduced, causing difficulty in achieving stable strength. Thus, the cooling rate is set to less than 100 °C/s. The lower limit of the cooling rate is not particularly limited but is 5 °C/s or more from the viewpoint of inhibiting the coarsening of precipitates.

- vi) Winding the steel sheet into a coil in a temperature range of 550°C to 650°C

[0045] In the case where the coiling temperature is less than 550°C, a portion that is not transformed on the run-out table is formed as a low-temperature transformed phase to cause variations in strength and a reduction in ductility. In the case where the coiling temperature exceeds 650°C, the growth of the Ti-containing carbide such as TiC proceeds after the completion of the winding, so that coarse Ti-containing carbide grains are sparsely distributed, thereby reducing the strengthening ability. This is also liable to cause variations in strength corresponding to cooling histories after the winding. Thus, the coiling temperature is set in the range of 550°C to 650°C.

[0046] In the case where the variations in strength are taken into consideration in the coil, the precipitation of the Ti-containing carbide such as TiC proceeds mainly in a cooling stage after the completion of the winding; hence, it is desirable to take into consideration of the cooling histories of the steel sheet after the winding. In particular, the front end and the rear end of the coil are rapidly cooled, so that the precipitation of the Ti-containing carbide does not sufficiently proceed, in some cases. Thus, the temperatures of the front and rear ends of the coil are increased with respect to the temperature of the inner portion of the coil other than the front and rear ends, thereby further improving the variations in strength.

EXAMPLE 1

[0047] An example of the present invention will be described below.

[0048] Molten steels having compositions shown in Table 1 were made with a converter and formed into slabs by a continuous casting process. These steel slabs were heated to 1250°C and rough-rolled into sheet bars. Then the resulting sheet bars were subjected to a hot-rolling step in which finish rolling was performed under conditions shown in Table 2, thereby forming hot-rolled steel sheets.

[0049] These hot-rolled steel sheets were subjected to pickling and temper rolling at an elongation of 0.5%. Regions extending from both sides to 10 mm from both sides in the width direction were removed by trimming. Various properties were evaluated. Steel sheets were taken at positions at which the innermost turn including the front end and the outermost turn including the rear end of the coil in the longitudinal direction were cut. Furthermore, steel sheets were taken at 20 equally divided points of the inner portion in the longitudinal direction. Test pieces for a tensile test and analytical samples of precipitates were taken from both sides of each of the steel sheets in the width direction and 8 equally divided points of each steel sheet in the width direction.

[0050] The test pieces for a tensile test were taken in a direction (L direction) parallel to a rolling direction and processed into JIS No. 5 test pieces. The tensile test was performed according to the regulation of JIS Z 2241 at a crosshead speed

of 10 mm/min to determine tensile strength (TS). Table 2 shows the investigation results of tensile properties of the resulting hot-rolled steel sheets.

[0051] With respect to microstructures, a portion of an L section (a section parallel to a rolling direction) of each of the steel sheets, the portion excluding surface layers each having a thickness equal to 10% of the thickness of the sheet, was etched with nital. The microstructures of the etched portion were identified with a scanning electron microscope (SEM) at a magnification of 1000x. The volume fraction of polygonal ferrite was measured by the method described above with image processing software.

[0052] The quantification of Ti in a precipitate having a size of less than 20 nm was performed by a quantitative procedure described below.

[0053] The resulting hot-rolled steel sheets described above were cut into test pieces each having an appropriate size. Each of the test pieces was subjected to constant-current electrolysis in a 10% AA-containing electrolytic solution (10 vol% acetylacetone-1 mass% tetramethylammonium chloride-methanol) at a current density of 20 mA/cm² so as to be reduced in weight by about 0.2 g.

[0054] After electrolysis, each of the test pieces having surfaces to which precipitates adhered was taken from the electrolytic solution and immersed in an aqueous solution of sodium hexametaphosphate (500 mg/l) (hereinafter, referred to as an "SHMP aqueous solution"). Ultrasonic vibration was applied thereto to separate the precipitates from the test piece. The separated precipitates were collected in the SHMP aqueous solution. The SHMP aqueous solution containing the precipitates was filtered with a filter having a pore size of 20 nm. After the filtration, the resulting filtrate was analyzed with an ICP emission spectrometer to measure the absolute quantity of Ti in the filtrate. Then the absolute quantity of Ti was divided by an electrolysis weight to obtain the amount of Ti (percent by mass) contained in the precipitates each having a size of less than 20 nm. Note that the electrolysis weight was determined by measuring the weight of the test piece after the separation of the precipitates and subtracting the resulting weight from the weight of the test piece before electrolysis. Next, the resulting amount of Ti (percent by mass) contained in the precipitates each having a size of less than 20 nm was divided by Ti* calculated by substituting the Ti content and the N content shown in Table 1 in formula (1), thereby determining the proportion (%) of the amount of Ti contained in the precipitates each having a size of less than 20 nm.

Table 1

Symbol	Chemical component (% by mass)								Ti*	T (°C)	Remarks
	C	Si	Mn	P	S	Al	N	Ti			
A	0.071	0.01	1.35	0.008	0.005	0.034	0.0035	0.035	0.023	678	Adaptation example
B	0.075	0.01	1.30	0.008	0.003	0.032	0.0032	0.045	0.034	679	Adaptation example
C	0.082	0.01	1.25	0.008	0.004	0.040	0.0030	0.058	0.048	678	Adaptation example
D	0.090	0.01	1.35	0.010	0.005	0.034	0.0015	0.05	0.045	676	Adaptation example
E	0.085	0.01	1.40	0.008	0.005	0.034	0.0020	0.032	0.025	678	Adaptation example
F	0.078	0.01	1.65	0.008	0.003	0.035	0.0015	0.042	0.037	682	Adaptation example
G	0.079	0.25	1.35	0.008	0.005	0.035	0.0030	0.034	0.024	685	Adaptation example
H	0.081	0.01	0.50	0.008	0.003	0.036	0.0032	0.042	0.031	672	Comparative example
I	0.040	0.01	1.35	0.009	0.002	0.034	0.0032	0.045	0.034	670	Comparative example
J	0.095	0.01	1.35	0.008	0.005	0.034	0.0032	0.025	0.014	675	Comparative example
K	0.082	0.01	1.35	0.008	0.005	0.036	0.0033	0.1	0.089	679	Comparative example

Table 2

Steel sheet No.	Steel No.	Thickness mm	Heating temperature °C	Finishing temperature (FDT) °C	Cooling start time s	Primary cooling rate °C/s	Natural cooling temperature °C	Natural cooling time s	Secondary cooling rate °C/s	Coiling temperature (CT) after finish hot rolling °C	Volume fraction of polygonal ferrite %	Amount of Ti present in precipitate with size of less than 20 nm % by mass	Proportion of amount of Ti contained in precipitate with size of less than 20 nm %	TS MPa	Proportion of compliant steel microstructure %	Proportion of compliant TS %	ΔTS MPa	Remarks
1	A	6.0	1220	880	1.7	25	700	10	25	600	91	0.019	82	623	100	100	44	Inventive example
2		2.6	1220	880	0.8	55	700	7	55	600	92	0.018	79	603	100	100	33	Inventive example
3		6.0	1100	880	1.7	25	700	10	25	600	87	0.007	32	582	56	92	64	Comparative example
4		6.0	1220	1000	1.7	25	700	10	25	600	63	0.012	53	604	6	100	68	Comparative example
5		6.0	1220	880	3.4	25	700	10	25	600	97	0.009	38	597	5	97	51	Comparative example
6		6.0	1210	880	1.7	15	700	10	15	600	86	0.010	45	605	7	95	61	Comparative example
7		6.0	1210	880	1.7	25	760	10	25	600	95	0.009	39	602	5	85	73	Comparative example
8		6.0	1210	880	1.7	25	700	1	25	600	53	0.011	49	619	0	89	53	Comparative example
9		6.0	1220	880	1.7	25	700	10	25	670	90	0.007	31	579	3	57	55	Comparative example
10		6.0	1220	880	1.7	25	700	10	25	540	42	0.009	40	624	0	72	51	Comparative example
11	B	4.5	1220	880	1.4	35	700	10	35	600	84	0.025	73	632	100	100	40	Inventive example
12		1.6	1220	880	0.6	100	700	5	80	600	84	0.026	75	621	100	100	39	Inventive example
13		4.5	1220	880	1.4	35	640	10	35	600	56	0.015	44	653	0	93	75	Comparative example
14		4.5	1220	880	1.4	35	700	30	35	600	85	0.010	30	602	3	83	68	Comparative example
15	C	3.2	1230	880	0.9	50	700	6	50	600	95	0.036	76	665	100	100	33	Inventive example
16	D	6.0	1220	880	1.7	25	700	10	25	600	97	0.030	67	658	100	100	49	Inventive example
17	E	6.0	1210	880	1.7	25	700	10	25	600	86	0.016	65	600	100	100	36	Inventive example
18	F	6.0	1230	870	1.7	25	700	10	25	600	97	0.027	72	617	100	100	43	Inventive example
19	G	4.5	1230	880	1.4	35	700	10	35	600	83	0.017	72	645	100	100	40	Inventive example
20	H	6.0	1230	890	1.7	25	700	10	25	600	90	0.013	43	526	4	0	46	Comparative example
21	I	6.0	1230	890	1.7	25	700	10	25	600	94	0.013	37	504	3	0	62	Comparative example
22	J	6.0	1230	870	1.7	25	700	10	25	600	91	0.005	37	536	5	0	33	Comparative example
23	K	6.0	1220	870	1.7	25	700	10	25	600	59	0.059	67	792	6	100	64	Comparative example

[0055] In the results shown in Table 2, values of the proportion of the volume fraction of polygonal ferrite, the amount of Ti contained in precipitates each having a size of less than 20 nm with respect to Ti* expressed as formula (1), and the tensile strength TS are defined as representative values at a middle portion in the longitudinal and transverse directions. The proportion of compliant steel microstructures is defined as the proportion of points where both requirements of the volume fraction of polygonal ferrite and the proportion of the amount of Ti in the precipitates each having a size of less than 20 nm are satisfied to 189 measurement points. The proportion of compliant TS is defined as the proportion of points where TS is 540 MPa or more to 189 measurement points. ΔTS is a value obtained by determining the standard deviation σ of TS values at 189 measurement points and multiplying the standard deviation σ by 4.

[0056] As is clear from the investigation results shown in Table 2, in any inventive example, the steel sheet having satisfactory uniformity in strength is manufactured, in which the steel sheet has a TS of 540 MPa or more, which is high strength, and the variations in strength (ΔTS) in the coil in the in-plane direction are 50 MPa or less.

Industrial Applicability

[0057] According to the present invention, it is possible to stably manufacture a hot-rolled steel sheet having a tensile strength (TS) of 540 MPa or more and only small variations in strength at low cost, which provides a marked, industrially beneficial effect. For example, the use of a high-strength hot-rolled steel sheet of the present invention for automotive parts reduces variations in the amount of springback after formation using the high-tensile steel sheet and variations in collision characteristics, thus making it possible to design automobile bodies with higher accuracy and to contribute sufficiently to the collision safety and weight reduction of automobile bodies.

Claims

1. A high-strength hot-rolled steel sheet comprising, on a mass percent basis, 0.05%-0.12% C, 0.5% or less Si, 0.8%-1.8% Mn, 0.030% or less P, 0.01% or less S, 0.005%-0.1% Al, 0.01% or less N, 0.030%-0.080% Ti, the balance being Fe and incidental impurities, and microstructures whose volume fraction of polygonal ferrite is 70% or more, wherein the amount of Ti present in a precipitate having a size of less than 20 nm is 50% or more of the value of Ti* calculated using formula (1):

$$Ti^* = [Ti] - 48/14 \times [N] \quad (1)$$

where [Ti] and [N] represent a Ti content (percent by mass) and a N content (percent by mass), respectively, of the

steel sheet.

2. A method for manufacturing a high-strength hot-rolled steel sheet, comprising the steps of heating a steel slab to 1150°C to 1300°C, the steel slab containing, on a mass percent basis, 0.05%-0.12% C; 0.5% or less Si, 0.8%-1.8% Mn, 0.030% or less P, 0.01% or less S, 0.005%-0.1% Al, 0.01% or less N, 0.030%-0.080% Ti, and the balance being Fe and incidental impurities, subjecting the slab to finish hot rolling at a finishing temperature of 800°C to 950°C, starting cooling at a cooling rate of 20 °C/s or more within 2 seconds after the completion of the finish hot rolling, stopping cooling at 650°C to 750°C, subsequently performing natural cooling for 2 seconds to 15 seconds, cooling the steel sheet at a cooling rate of less than 100 °C/s, and winding the steel sheet into a coil in the temperature range of 550°C to 650°C.

FIG. 1


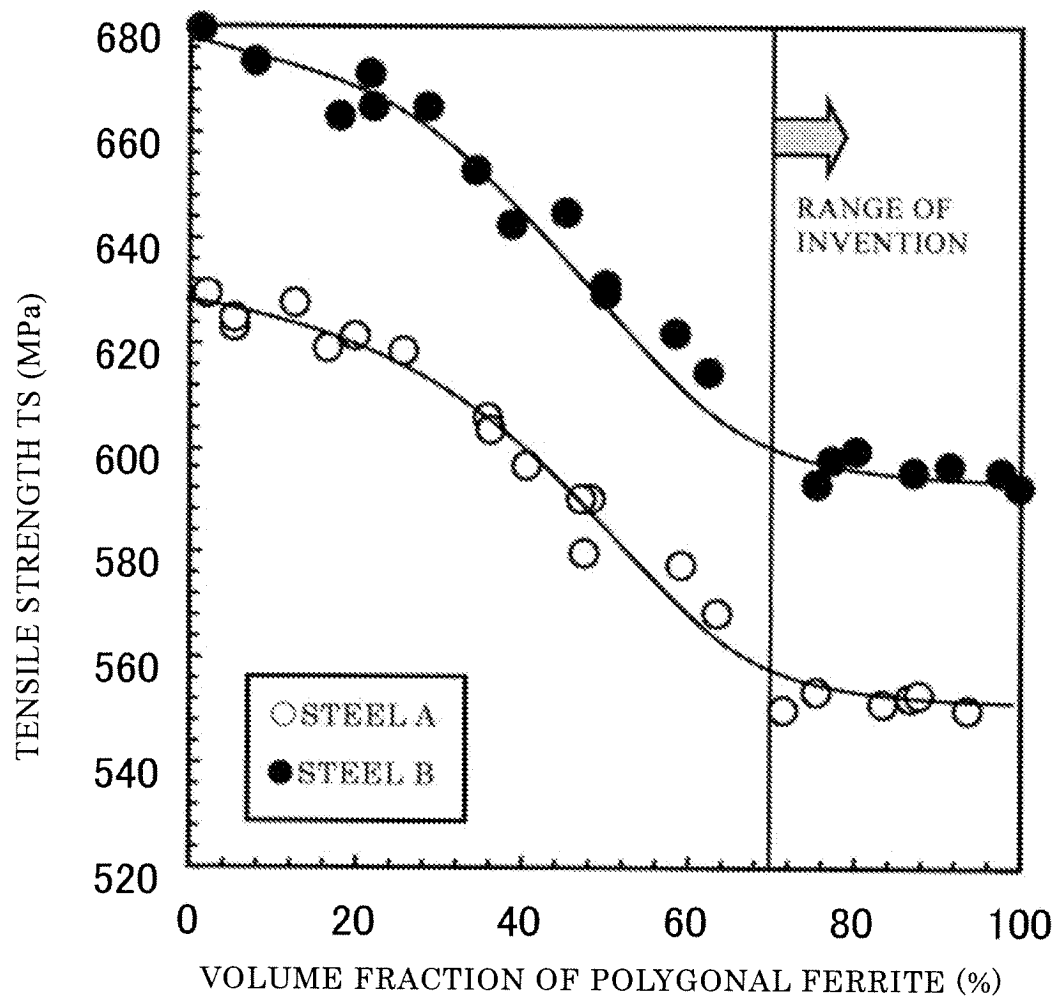


FIG.2

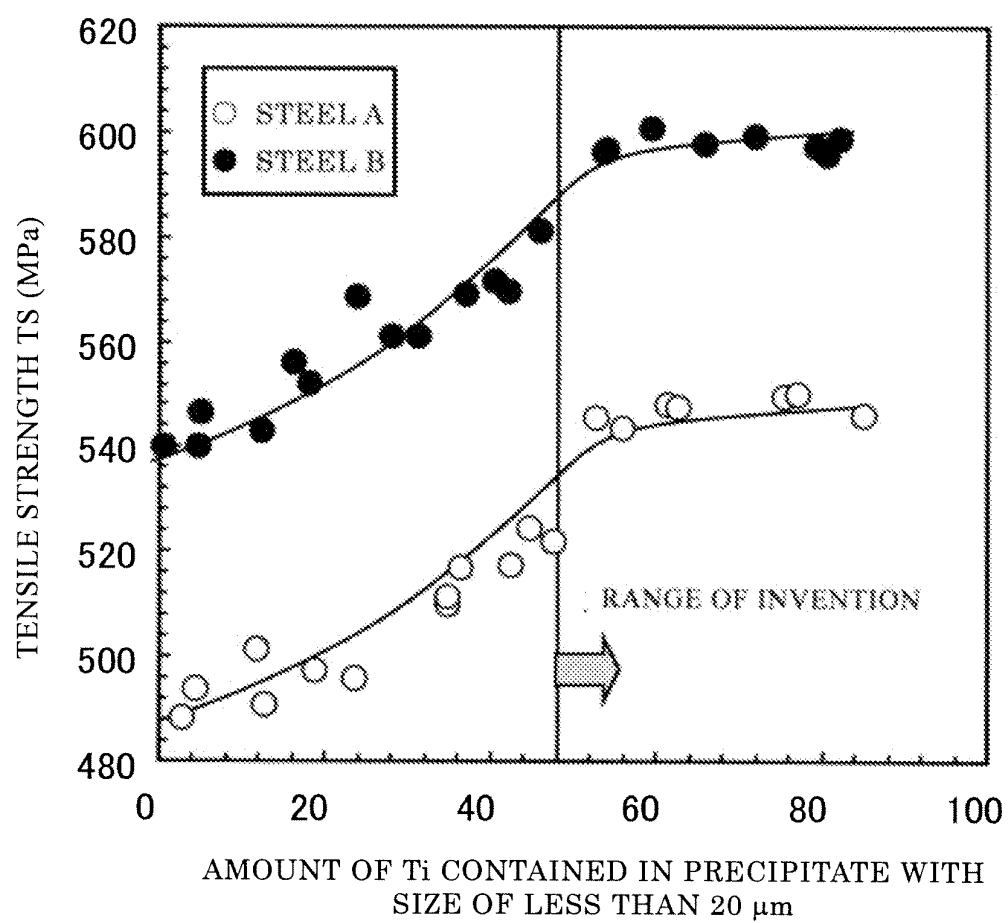

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2009/052244

A. CLASSIFICATION OF SUBJECT MATTER

C22C38/00(2006.01) i, C21D9/46(2006.01) i, C22C38/14(2006.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C22C38/00, C21D9/46, C22C38/14

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho	1922-1996	Jitsuyo Shinan Toroku Koho	1996-2009
Kokai Jitsuyo Shinan Koho	1971-2009	Toroku Jitsuyo Shinan Koho	1994-2009

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 6-200351 A (Kobe Steel, Ltd.), 19 July, 1994 (19.07.94), (Family: none)	1-2
A	JP 7-11382 A (Kobe Steel, Ltd.), 13 January, 1995 (13.01.95), (Family: none)	1-2
A	JP 2002-161340 A (Nippon Steel Corp.), 04 June, 2002 (04.06.02), (Family: none)	1-2
A	JP 2007-239097 A (JFE Steel Corp.), 20 September, 2007 (20.09.07), (Family: none)	1-2

☒ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search
11 May, 2009 (11.05.09)Date of mailing of the international search report
19 May, 2009 (19.05.09)Name and mailing address of the ISA/
Japanese Patent Office

Authorized officer

Facsimile No.

Telephone No.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2009/052244

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 2004-27249 A (Sumitomo Metal Industries, Ltd.), 29 January, 2004 (29.01.04), (Family: none)	1-2

Form PCT/ISA/210 (continuation of second sheet) (April 2007)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 4289125 A [0004]
- JP 2002322541 A [0004]