



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
03.11.2010 Bulletin 2010/44

(51) Int Cl.:
H04L 9/32 (2006.01) G06F 21/24 (2006.01)

(21) Application number: **08739476.3**

(86) International application number:
PCT/JP2008/056363

(22) Date of filing: **31.03.2008**

(87) International publication number:
WO 2009/104284 (27.08.2009 Gazette 2009/35)

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT RO SE SI SK TR
Designated Extension States:
AL BA MK RS

(72) Inventor: **YOSHIOKA, Takashi**
Kawasaki-shi
Kanagawa 211-8588 (JP)

(30) Priority: **19.02.2008 JP 2008037445**


(74) Representative: **Wilding, Frances Ward**
Haseltine Lake LLP
Lincoln House, 5th Floor
300 High Holborn
London WC1V 7JH (GB)

(71) Applicant: **Fujitsu Limited**
Kawasaki-shi, Kanagawa 211-8588 (JP)

(54) **STREAM DATA MANAGEMENT PROGRAM, METHOD AND SYSTEM**

(57) Storing in a sequence header of the top original moving image information a terminal ID indicating a terminal which generated original moving image information and date-and-time information which is guaranteed by a third party, storing in a sequence header of the next original moving image information a characteristic value of the last partial information of the preceding original moving image information, generating signature-related information of the original moving image information, generating cutout moving image information-1 and -2 to which a sequence header is added, the sequence header including the terminal ID, the date-and-time information and the characteristic value of the last partial information of the preceding original data item, generating signature-related information of the cutout moving image information-1 and -2, and verifying originality and actual time of cutout stream data based on the cutout moving image information-1 and -2, the signature-related information of the cutout moving image information -1 and -2, and the signature-related information of the original moving image information.

FIG. 1

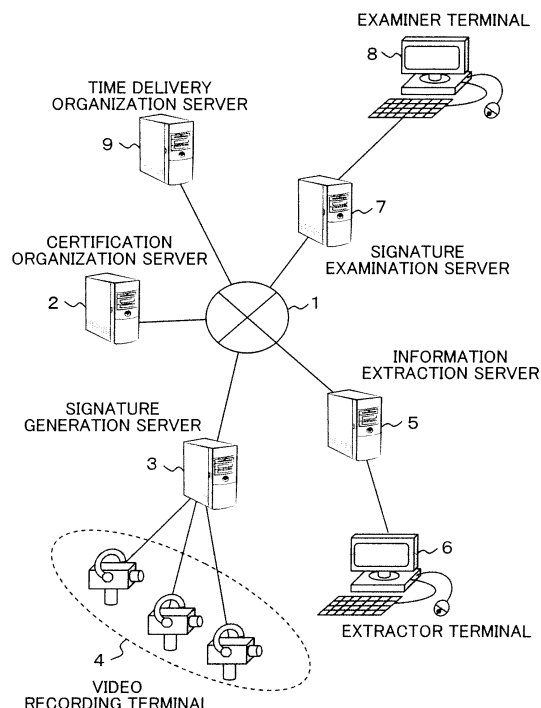

Description

Technical Field

[0001] The present invention relates to a stream data management program, method and system and particularly to a program, method and system that can identify an extracted portion from original stream data working together with date-and-time information guaranteed by a third party for streaming data such as moving image or audio where partial extraction (which specifically includes changes, extraction, sanitization and the like) takes place as well as capable of guaranteeing the validity of extracted data and allowing a third party to verify.

Background Art

[0002] In recent years, the installation of surveillance cameras in stores, shopping districts, apartment complexes or the like and of drive recorders in commercial vehicles has become common. The number of cases where moving images are used as evidence is increasing. To deal with troubles when dealing or customer support is carried out over the phone, it has become almost a common practice to record conversations between customers and operators and store them as evidence.

[0003] These days, video tapes and image and audio files are offered without change when moving images and audio are used as evidence. However, as more images and audios are stored in digital format, it becomes easier to alter and edit the images and audios. Therefore, verification by third parties, such as signature or time stamp, is required when the images and audios are used as evidence. Services or products to tape or record the voices of telephone operators along with time stamps are actually on sale. Demand for such techniques is expected to grow over the years ahead.

[0004] Meanwhile, as the number of surveillance cameras or the like increases, there are problems with privacy protection for the use of taken images. Debates are going on in the Ministry of Internal Affairs and Communications and the like.

[0005] Due to the enforcement of the Personal information Protection Law and the like, there are stringent restrictions on the use of individual's privacy information. Disclosure, partial deletion or the like is required at the request of the identical person.

[0006] For such problems as meeting the requirements of both evidence and privacy protection, what goes on is the research on a technique for sanitizable signatures to ensure the partial originality (integrity) of a portion of a digital document and to conceal (sanitization).

[0007] In particular, what is disclosed in Patent Document 1 is a sanitizable signature technique for digital documents to solve the problem that a signature put on a document may not be examined because the document is partially concealed (the present technique is referred to as PIAT, hereinafter). The application of the above

PIAT enables the signature to be examined even for the sanitized digital document to which the signature is added and also allows a third party to verify that any portions other than the sanitized portion (where modification and addition are possible) is not altered.

[0008] There is also a technique, as disclosed in Japanese Patent Application No. 2007-12048, aimed at guaranteeing the originality of moving image or audio data, extracting from a signature target data whose privacy may be protected, and reducing a significant amount of signature-related data.

[0009] Moreover, there is a technique, as disclosed in Japanese Patent Application No. 2007-326801, which, even if a portion of original stream data is cut out, allows a third party to verify no alterations have been made with the use of a portion of the original stream data while preventing the cutout portion of the stream data from being incapable of playing.

[Patent Document 1]

[0010]

International Publication Pamphlet No. WO2006/08847

Disclosure of the Invention

Problems to be Solved by the Invention

[0011] However, the problem with Patent Document 1 is that when a portion of large-size data (long video and audio) such as moving image or audio is extracted, the amount of information related to the signature is large.

[0012] According to the technique of Japanese Patent Application No. 2007-12048, which has solved the problem, the format of moving image/audio data is not noticed. Therefore, even if a portion of original stream data is cut out, it is difficult to allow a third party to verify that no alterations have been made with the use of a portion of the original stream data while preventing the cutout portion of the stream data from being incapable of playing.

[0013] According to the technique of Japanese Patent Application No. 2007-326801, which has solved the problem, a means is provided to add the contents of the most recent sequence header to the head of partial information (GOP) to which a sequence header (a header in which sequence information of the entire streaming data is stored) is not added at a time when the signature for the original stream data is generated, when the cutout portion of the stream data is stored, when the signature for the cutout portion of the stream data is generated, or when the signature of the stream data is examined and to generate or examine PIAT signature information with the sequence header being included. However, even though it is possible to identify the total time of the recorded streaming data and the range of the cutout time, it is impossible to identify the actual date and time indicating

when the streaming data is recorded.

[0014] One conceivable way to address the problem is to acquire date-and-time information guaranteed by a third party from a time delivery organization or the like at a time when the recording ends and store the date-and-time information along with the signature. However, if the recording continues for a long time, the amount of information of streaming data becomes large. Accordingly, the information is preferable to be stored on a given unit basis (on a one hour basis, for example). As a result, at a time when the recording of the entire original stream data ends, it is preferable to acquire the date-and-time information guaranteed by a third party from a time delivery organization or the like. Therefore, costs increase. Moreover, since there is a given constant extra period of time (one hour, for example) before the next original stream data is stored, there is a possibility that wrongdoing such as alterations or extraction may be carried out by an insider or third party in the meantime.

[0015] The present invention has been made to solve the above problems. The object of the present invention is to provide a stream data management program, method and system that can verify the originality and the actual time at low cost for the cutting out of a portion of the stream data.

Means for Solving the Problems

[0016] A stream data management program according to the present invention includes: a step of generating an original stream data item including a plurality of original data items that each include a plurality of pieces of partial information and are divided by a predetermined time unit by using a stream data generation terminal, storing in a sequence header of any one of the original data items a terminal ID indicating the stream data generation terminal and date-and-time information that is guaranteed by a third party at a time when the original stream data item is generated, and storing in a sequence header of the next original data item a characteristic value of the last piece of partial information of the preceding original data item; a step of generating signature-related information of the original data item by adding the contents of the sequence header including the terminal ID and the date-and-time information for the original data item having the sequence header in which the terminal ID and the date-and-time information are stored, while generating signature-related information of the original data item by adding the contents of the sequence header including the characteristic value of the last piece of partial information of the preceding original data item for the other original data items; a step of cutting out a portion of the original stream data item, producing a cutout data item by adding a sequence header including the terminal ID, the date-and-time information and the characteristic value of the last piece of partial information of the preceding original data item to each of the original data items including the cutout portion, and generating a cutout stream data item

consisting of the cutout data items; a step of generating the signature-related information of the cutout data item that includes the terminal ID and the date-and-time information when the cutout data item is in the original data item having the sequence header in which the terminal ID and the date-and-time information are stored, while generating the signature-related information of the cutout data item that includes the characteristic value of the last piece of partial information of the preceding original data item in other cases; and a step of verifying the originality and actual time of the cutout stream data item on the basis of the cutout stream data item, the signature-related information of each cutout data item in the cutout stream data item and the signature-related information of each original data item in the original stream data item.

[0017] According to an aspect of the present invention, there is provided a stream data management method including: generating an original stream data item including a plurality of original data items that each include a plurality of pieces of partial information and are divided by a predetermined time unit by using a stream data generation terminal, storing in a sequence header of any one of the original data items a terminal ID indicating the stream data generation terminal and date-and-time information that is guaranteed by a third party at a time when the original stream data item is generated, and storing in a sequence header of the next original data item a characteristic value of the last piece of partial information of the preceding original data item; generating signature-related information of the original data item by adding the contents of the sequence header including the terminal ID and the date-and-time information for the original data item having the sequence header in which the terminal ID and the date-and-time information are stored, while generating signature-related information of the original data item by adding the contents of the sequence header including the characteristic value of the last piece of partial information of the preceding original data item for the other original data items; cutting out a portion of the original stream data item, producing a cutout data item by adding a sequence header including the terminal ID, the date-and-time information and the characteristic value of the last piece of partial information of the preceding original data item to each of the original data items including the cutout portion, and generating a cutout stream data item consisting of the cutout data items; generating the signature-related information of the cutout data item that includes the terminal ID and the date-and-time information when the cutout data item is in the original data item having the sequence header in which the terminal ID and the date-and-time information are stored, while generating the signature-related information of the cutout data item that includes the characteristic value of the last piece of partial information of the preceding original data item in other cases; and verifying the originality and actual time of the cutout stream data item on the basis of the cutout stream data item, the signature-related information of each cutout data item in the

cutout stream data item and the signature-related information of each original data item in the original stream data item.

[0018] According to an aspect of the present invention, there is provided a stream data management system including original stream data generation means for generating an original stream data item including a plurality of original data items that each include a plurality of pieces of partial information and are divided by a predetermined time unit by using a stream data generation terminal, storing in a sequence header of any one of the original data items a terminal ID indicating the stream data generation terminal and date-and-time information that is guaranteed by a third party at a time when the original stream data item is generated, and storing in a sequence header of the next original data item a characteristic value of the last piece of partial information of the preceding original data item; original signature-related information generation means for generating signature-related information of the original data item by adding the contents of the sequence header including the terminal ID and the date-and-time information for the original data item having the sequence header in which the terminal ID and the date-and-time information are stored, while generating signature-related information of the original data item by adding the contents of the sequence header including the characteristic value of the last piece of partial information of the preceding original data item for the other original data items; cutout stream data generation means for cutting out a portion of the original stream data item, producing a cutout data item by adding a sequence header including the terminal ID, the date-and-time information and the characteristic value of the last piece of partial information of the preceding original data item to each of the original data items including the cutout portion, and generating a cutout stream data item consisting of the cutout data items; cutout signature-related information generation means for generating the signature-related information of the cutout data item that includes the terminal ID and the date-and-time information when the cutout data item is in the original data item having the sequence header in which the terminal ID and the date-and-time information are stored, while generating the signature-related information of the cutout data item that includes the characteristic value of the last piece of partial information of the preceding original data item in other cases; and verification means for verifying the originality and actual time of the cutout stream data item on the basis of the cutout stream data item, the signature-related information of each cutout data item in the cutout stream data item and the signature-related information of each original data item in the original stream data item.

Advantages of the Invention

[0019] According to the present invention, by acquiring the date-and-time information guaranteed by a third party just one time, it is possible to verify the originality and the

actual time at low cost for the cutting out of a portion of the stream data.

Brief Description of the Drawings

[0020]

FIG. 1 is a configuration diagram of a stream data management system according to an embodiment of the present invention.

FIG. 2 is a configuration diagram of a certification organization server according to an embodiment of the present invention.

FIG. 3 is a configuration diagram of a signature generation server according to an embodiment of the present invention.

FIG. 4 is a configuration diagram of an information extraction server according to an embodiment of the present invention.

FIG. 5 is a configuration diagram of a signature examination server according to an embodiment of the present invention.

FIG. 6 is a configuration diagram of a time delivery organization server according to an embodiment of the present invention.

FIG. 7 is a flowchart illustrating a registration process of a public key between a transmitting device and the certification organization server according to an embodiment of the present invention.

FIG. 8 is a flowchart illustrating a transmitting/receiving process of information to which an electronic signature is attached and an examination process of a receiving device.

FIG. 9 is a diagram illustrating an outline of a PIAT algorithm.

FIG. 10 is a diagram illustrating an example of an image type of MPEG1 and arrangement thereof.

FIG. 11 is a diagram illustrating an example of a Video frame structure of MPEG1 according to an embodiment of the present invention.

FIG. 12 is a flowchart illustrating a video recording and signature generation process according to an embodiment of the present invention.

FIG. 13 is a flowchart illustrating a video recording and signature generation process according to an embodiment of the present invention.

FIG. 14 is a flowchart illustrating a video recording and signature generation process according to an embodiment of the present invention.

FIG. 15 is a flowchart illustrating an information extraction process according to an embodiment of the present invention.

FIG. 16 is a flowchart illustrating a signature examination process according to an embodiment of the present invention.

FIG. 17 is a diagram illustrating a signature generation method for original moving image information-1 according to an embodiment of the present invention.

tion.

FIG. 18 is a diagram illustrating an example of a frame structure when a sequence header is not added according to an embodiment of the present invention.

FIG. 19 is a diagram illustrating the contents of PIAT signature information of a video recording terminal according to an embodiment of the present invention.

FIG. 20 is a diagram illustrating a signature generation method of original moving image information-2 according to an embodiment of the present invention.

FIG. 21 is a diagram illustrating an accumulation state of all original moving image information and PIAT signature information according to an embodiment of the present invention.

FIG. 22 is a diagram illustrating an operation of selecting original moving image information according to an embodiment of the present invention.

FIG. 23 is a diagram illustrating an operation of extracting original moving image information according to an embodiment of the present invention.

FIG. 24 is a diagram illustrating a generation method of cutout moving image information-2 according to an embodiment of the present invention.

FIG. 25 is a diagram illustrating a generation method of cutout moving image information-1 according to an embodiment of the present invention.

FIG. 26 is a diagram illustrating a generation method of cutout moving image information that stretches across a plurality of pieces of original moving image information according to an embodiment of the present invention.

FIG. 27 is a diagram illustrating a signature generation method of cutout moving image information-2 according to an embodiment of the present invention.

FIG. 28 is a diagram illustrating a signature generation method of cutout moving image information-1 according to an embodiment of the present invention.

FIG. 29 is a diagram illustrating the contents of PIAT signature information of an extractor according to an embodiment of the present invention.

FIG. 30 is a diagram illustrating a signature generation method of cutout moving image information that stretches across a plurality of pieces of original moving image information according to an embodiment of the present invention.

FIG. 31 is a diagram illustrating a selection screen of examination-target moving image information and examination information according to an embodiment of the present invention.

FIG. 32 is a diagram illustrating a signature examination method of cutout moving image information-2 according to an embodiment of the present invention.

FIG. 33 is a diagram illustrating a signature exami-

nation method of cutout moving image information-1 according to an embodiment of the present invention.

FIG. 34 is a diagram illustrating a signature examination method of cutout moving image information that stretches across a plurality of pieces of original moving image information according to an embodiment of the present invention.

FIG. 35 is a diagram illustrating a date-and-time examination method of cutout moving image information according to an embodiment of the present invention.

FIG. 36 is a diagram illustrating the structure of a picture of cutout moving image information and a calculation method of a frame time of each picture according to an embodiment of the present invention.

FIG. 37 is a diagram illustrating a list of the total sum of pictures that exist right up to the preceding one in GOP position according to an embodiment of the present invention.

FIG. 38 is a diagram illustrating a signature examination result of cutout moving image information according to an embodiment of the present invention.

FIG. 39 is a diagram illustrating a signature generation method of original moving image information according to another embodiment of the present invention.

Best Mode for Carrying Out the Invention

[0021] Hereinafter, embodiments of the present invention will be described with reference to the accompanying drawings.

First, the configuration of a stream data management system of the present embodiment will be described with reference to FIG. 1. In FIG. 1, the reference numeral 1 denotes a network. However, the reference numeral 1 includes all telecommunication networks such as the Internet, intranets and wide-area networks. The reference numeral 2 denotes a server of a certification organization which manages electronic signature information. As publicly known, an electronic signature is about transmitting to an opposite party signature information obtained by encrypting summary information (which is message-digested) of signature target information with a secret key of a sender, the signature target information, and a public key certificate; the receiver decrypts, after confirming the validity of the public key certificate, the encrypted signature information with a public key included in the public key certificate and compares the signature information with the summary information obtained from the signature target information. The technique is to make a determination as to whether transmission is performed by a valid opposite party depending on whether the result of comparison depicts the same information (detailed later).

[0022] According to the technique, it is necessary to

guarantee the validity of the certificate. Accordingly, like the present embodiment, it is common for a certification organization server 2 to be installed that accumulates public keys of a video recording terminal, a time delivery organization and an extractor. As illustrated in FIG. 2, the certification organization server 2 includes a public key DB 21 that stores public keys of a video recording terminal, a time delivery organization and an extractor; a certificate issuing section 22 that issues the public key certificate in response to a request; a certificate examination section 23 that examines the public key certificate; and a communication means 24 for communicating through the network 1.

[0023] The reference numeral 3 denotes a signature generation server that stores information transmitted from a video recording terminal 4 described below and performs a signature process. As illustrated in FIG. 3, the signature generation server 3 includes a document management DB 31 that stores information transmitted from the video recording terminal 4 described below and information transmitted to an information extraction server 5 described below; a document management TB 32 that controls access to the document management DB 31; a time stamp acquisition section 33 that acquires date-and-time information guaranteed by a third party as described below; a signature generation section 34 that adds PIAT signature information of the video recording terminal 4 described below and an electronic signature to information; and a communication means 35 for communicating through the network 1.

[0024] The reference numeral 4 denotes a video recording terminal that constitutes a stream data generation terminal of the present invention and is a terminal for filming and recording information that is to be a target, i.e. original stream data (referred to as original moving image information, hereinafter). For example, the video recording terminal 4 is the equivalent of a commercial surveillance camera or the like. The video recording terminal 4 is capable of communicating with the signature generation server 3.

[0025] The reference numeral 5 denotes an information extraction server. As illustrated in FIG. 4, the information extraction server 5 includes a document management DB 51 that accumulates information transmitted from the signature generation server 3 and information transmitted to a signature examination server 7 described below: a document management TB 52 that controls access to the document management DB 51; a signature generation section 53 that adds PIAT signature information of an extractor and an electronic signature to information; a signature examination section 54 that examines an electronic signature attached to transmitted information; and a communication means 55 for communicating through the network.

[0026] The reference numeral 6 is a terminal that allows an extractor to operate the information extraction server 5. The extractor terminal 6 is capable of communicating with the information extraction server 5.

[0027] The reference numeral 7 denotes a signature examination server. As illustrated in FIG. 5, the signature examination server 7 includes a document management DB 71 that accumulates information transmitted from the information extraction server 5; a document management TB 72 that controls access to the document management DB 71; a signature examination section 73 that examines the electronic signature and PIAT signature information attached to transmitted information; and a communication means 74 for communicating through the network.

[0028] The reference numeral 8 denotes a terminal that allows an examiner to operate the signature examination server 7. The examiner terminal 8 is capable of communicating with the signature examination server 7.

[0029] The reference numeral 9 is a time delivery organization server. As illustrated in FIG. 6, the time delivery organization server 9 includes a time stamp issuing section 91 that issues date-and-time information and adds an electronic signature; and a communication means 92 for communicating through the network.

[0030] Incidentally, the signature generation server 3 constitutes an original stream data generation means and original signature related information generation means of the present invention. The information extraction server 5 constitutes a cutout stream data generation means and cutout signature related information generation means of the present invention. The signature examination server 7 constitutes a verification means of the present invention.

[0031] The following describes a processing operation of the system having the above configuration.

[0032] Described first is an electronic signature process.

[0033] For the electronic signature, the sender generates a pair of keys (secret key and public key) in advance, transmits a public key to the certification organization server 2 to have a public key certificate issued, and stores the secret key and the public key certificate in a transmitting device. When the transmitting device transmits information, summary information (message digest) of signature target information is generated; information obtained by encrypting the summary information with a secret key of a sender is regarded as signature information. Subsequently, the signature target information, the signature information and the public key certificate of the sender are transmitted to an opposite party. The opposite party (receiver) who has received the signature target information, the signature information and the public key certificate examines the validity of the public key certificate of the sender acquired for the certification organization server 2. If the public key certificate is valid, the decoding of the signature information with the public key is carried out. Then, a summary of the signature target information is generated. If the summary is the same as the decoded information after comparison, it is possible to verify that the information is the real one transmitted from the sender and has not been altered.

[0034] The summary information here is information (hash information) calculated by using a cryptographic one-way hash function for the signature target information. Since it is possible to compress the signature target information in size, the summary information is also referred to as a message digest. The hash information generated by the cryptographic one-way hash function is the sole information that may be generated only from the signature target information and is characterized in that the original information may not be restored from the hash information generated. Therefore, the hash information is often used for encrypting of information and generating of electronic signatures. As for the cryptographic one-way hash function, there are such algorithms as MD5, SHA-1 and SHA-256. Information (hash information generation algorithm) about which algorithm is used to generate the summary information (hash information) for information is recorded in the public key certificate.

[0035] A process of generating an electronic signature will be detailed below.

[0036] First, a process of registering a public key between the transmitting device and the certification organization server 2 will be described with reference to a flowchart of FIG. 7.

[0037] Incidentally, in the system of FIG. 1, the signature generation server 3, the information extraction server 5 and the time delivery organization server 9 serve as transmitting devices for electronic signatures.

[0038] First, the sender generates a pair of keys (secret key and public key) (S1001). Subsequently, after the sender operates the transmitting device to input certificate issuance request information (S1002), the transmitting device transmits the input certificate issuance request information to the certification organization server 2 along with the public key (S1003).

[0039] The certificate issuing section 22 of the certification organization server 2 that has received the information through the communication means 24 (S1004) generates a public key certificate including the public key (S1005) and accumulates the generated public key certificate in the public key DB 21 (S1006).

[0040] Then, the certificate issuing section 22 controls the communication means 24 to transmit the issued public key certificate through the network 1 to the transmitting device that has transmitted the certificate issuance request information (S1007).

[0041] The transmitting device that has received the information (S1008) accumulates the secret key generated at S1001 and the public key certificate issued by the certification organization server 2 in a storage device that the transmitting device has (a storage area inside the signature generation section 34 of the signature generation server 3, a storage area inside the signature generation section 53 of the information extraction server 5, or a storage area inside the time stamp issuing section 91 of the time delivery organization server 9) (S1009) and ends the process.

[0042] The following describes a transmitting/receiving

process for electronic signature-attached information and an examination process by a receiving device with reference to a flowchart of FIG. 8.

[0043] First, after the sender inputs instructions to generate an electronic signature for the given signature target information and transmit to the receiving device (S2001), the transmitting device encrypts the summary information (hash information) of the signature target information that is stored in the storage area and specified by the secret key (S2002) and transmits the summary information to the receiving device along with the public key certificate that is similarly stored (S2003).

[0044] The receiving device that has received the above kinds of information (S2004) transmits the public key certificate to the certification organization server 2 in order to confirm the period of validity of the transmitted public key certificate, expiration information and the like (S2005). In this case, suppose that the certification organization server 2 supports a series of functions for issuing and examining the certificate. Then, the certification organization server 2 examines the validity of the public key certificate received (S2006) and transmits the result of examination to the receiving device (S2007). The receiving device that has received the result of validity examination (S2008) confirms whether the public key certificate is valid (S2009). When it is confirmed that the public key certificate is valid, the receiving device makes reference to a hash information generation algorithm included in the sender's public key certificate acquired from the transmitting device and generates hash information from the signature target information received from the transmitting device (S2010). Subsequently, using the public key included in the public key certificate, the receiving device performs a decoding process for the signature information received from the transmitting device (S2011). The receiving device compares the hash information generated at S2010 with the information obtained by the decoding process of S2011 and makes a determination as to whether the hash information and the obtained information are the same (S2012). When it is confirmed as a result of the determination that the hash information and the obtained information are the same, it is proven that the hash information and the obtained information are those transmitted from the transmitting device (sender) and have not been altered (S2013) and the hash information and the obtained information are stored (S2014).

[0045] When the hash information and the information obtained by the decoding process are different it is determined that the information may not be proven to be the one from the transmitting device (sender) (or that the information has been altered during communication; the determination may be made in other ways) (S2015). The receiving device performs a notification process, such as displaying a message for an operator of the receiving device that says it is impossible to prove (S2016). During the process of S2009, it is similarly determined that the information may not be proven to be the one from the

transmitting device (S2015) when the validity of the public key certificate may not be confirmed; the receiving device performs a notification process, such as displaying a message for an operator of the receiving device that says it is impossible to prove (S2016).

[0046] An outline of the PIAT algorithm will be described with reference to FIG. 9.

[0047] A signer divides the signature target data into data portions, calculates the hash information of each data portion, and generates a hash information group. After that, the signer puts the signer's electronic signature to the generated hash information group and regards the hash information group and the electronic signature collectively as PIAT signature information.

[0048] The extractor extracts a data portion from the data to which the signer has applied the PIAT signature information (and deletes the remaining data portions). After that, the extractor carries out the same operation as the signer does to generate the extractor's PIAT signature information.

[0049] The examiner examines the integrity of the hash information group from the signer's PIAT signature information and the extractor's PIAT signature information. Then, the examiner generates a hash information group from the disclosed data portion and examines whether the hash information group is the same as the hash information group included in the extractor's PIAT signature information. Finally, by comparing the signer's hash information group and the extractor's hash information group, the same portion of the hash information proves to be an extraction position from the original data. If the hash information of the signer's PIAT signature information is not included in the hash information of the extracted data, it is clear that the data portion has been altered.

[0050] The following describes and defines streaming information, which is a target of the present embodiment. Typical moving image formats include MPEG1/2/4; audio formats include MP3 (MPEG1 Audio Layer-3), WAV and the like. According to the present embodiment, MPEG1 will be described.

[0051] There are various versions of the MPEG1 format. What are examined here are applications to moving images whose images are relatively simple. The target is a Video frame of MPEG1 from which an audio portion has been removed in order to simplify. What are examined are applications to a CBR (Constant Bit Rate) method and to an ES (Elementary Stream) that handles only images encoded in MPEG1. Hereinafter, the target format is simply referred to as MPEG1.

[0052] MPEG1 is a moving image encoding technique standardized in ISO/IEC 11172-2. Moving images are realized by displaying still images at relatively high speed. For example, about 30 images are displayed per second for television. The number of images displayed per second is referred to as a frame rate. According to the moving image encoding technique, a (still) image compression process that relies on encoding and a compression process that relies on inter-frame prediction en-

coding are performed in order to reduce the amount of data. According to MPEG1, a DCT technique is employed for the still image compression process and a bilateral prediction technique for the inter-frame prediction encoding. According to MPEG1, for bilateral prediction, there are three types of a retaining method of still images. FIG. 10 illustrates an example of an image type of MPEG1 and arrangement thereof.

[0053] An I frame retains all compressed image data needed to display. A P frame is called an inter-frame prediction image. With the most recently decoded image of I or P frame being regarded as a reference image, the P frame retains only values of difference from the reference image and the like. With the most recently decoded images of the future and past I frames and P frames being regarded as reference images, a B frame retains values of difference from the reference images and the like. For P and B frames, the differences between preceding and subsequent images are taken to eliminate time-direction redundancy, allowing a high level of data compression to be achieved. According to MPEG1, as illustrated in FIG. 10, some of the images are put together into the smallest unit of moving images called GOP (Group of Pictures). The unit of GOP may be played independently with the above unit. The structure of GOP allows a moving image to be played or edited from the middle.

[0054] FIG. 11 illustrates an example of the frame structure of MPEG1. The Video frame of MPEG1 includes a sequence header (referred to as a SH, hereinafter), a GOP header (referred to as a GH, hereinafter), picture headers (referred to as PHs, hereinafter) and picture data (which is layer data that follows a PH and hereinafter referred to as PD). In particular, recorded in the SH are common parameters across the entire video sequence, such as information representing the size of an image, the number of frames encoded per second, and information about communication speed.

[0055] The following describes an application of PIAT to MPEG1 in the system of the present embodiment with reference to flowcharts of FIGS. 12 to 16.

[0056] Before the specific flow of the process is described, the premises of the present embodiment are defined. First, what is considered is a case in which the video recording terminal 4 that records the original moving image information adds the signature. For example, the video recording terminal 4 is equivalent to a surveillance camera, a commercial camera or the like. The video recording terminal is connected to the time delivery organization server 9 via the network 1 to properly receive and acquire the date-and-time information guaranteed by a third party and is expected to divide the recorded video into given time units before saving. The premise is that saving is performed at intervals of one hour. The frame rate and the number of pictures included in each GOP of each piece of original moving image information are fixed and it is easy to identify a playing time in the original moving image information.

[0057] According to the present embodiment, three op-

erators, an administrative manager of the video recording terminal 4, an extractor and an examiner, appear. By pushing a recording start button/recording stop button that the video recording terminal 4 is equipped with, the administrative manager issues video recording starting/stopping instructions to the video recording terminal 4; the extractor generates cutout moving image information by cutting out a portion of the target original moving image information; and the examiner examines the disclosed cutout moving image information.

[0058] Moreover, the following conditions are set for the video recording terminal 4, the extractor and the examiner. The video recording terminal 4 guarantees the contents of the signature-target original moving image information by putting the signature. It is preferable to put the signature under the condition that it is unknown which portion of the target original moving image information is due to be extracted. The extractor partially extracts data from the original moving image information to which the video recording terminal 4 has added the signature and discloses the data as the cutout moving image information to the examiner. There are two extraction methods: a prominent name extraction method in which information about the extractor is simultaneously disclosed to make it clear who has performed the extraction process, and an anonymous extraction method in which the extractor performs the extraction process anonymously.

[0059] The present embodiment is described based on the assumption that the prominent name extraction method is carried out. The examiner examines whether the disclosed cutout moving image information is guaranteed by the video recording terminal 4. The disclosed cutout moving image information is examined as to whether the disclosed cutout moving image information is part of the original moving image information to which the video recording terminal 4 has added the signature as well as whether the extraction is carried out by the extractor. Incidentally, as for the electronic signature process, the devices each carry out the above procedures of electronic signature.

[0060] First, a first embodiment of the present invention will be described. As illustrated in FIG. 12, the video recording terminal 4 starts recording the signature-target original moving image information (S3001A). The administrative manager of the video recording terminal 4 instructs the video recording terminal 4 to start recording, for example by pushing the recording start button the video recording terminal 4 is equipped with. Suppose that the video images being recorded are to be accumulated in a storage area of the video recording terminal 4.

[0061] At the same time as the recording starts, the video recording terminal 4 transmits a acquisition request for date-and-time information to the signature generation server 3 (S3002). At this time, the video recording terminal 4 transmits, along with the acquisition request, a terminal ID uniquely assigned.

[0062] After receiving the acquisition request for data-

and-time information and the terminal ID from the video recording terminal 4 through the communication means 35 (S3003), the signature generation server 3 puts aside the received terminal ID (S3004). The putting aside of the received terminal ID is performed, for example, by temporarily recording the received terminal ID in a storage area inside the document management DB 31 of the signature generation server 3.

[0063] Subsequently, the time stamp acquisition section 33 transmits an issuance request for date-and-time information to the time delivery organization server 9 through the communication means 35 (S3005). The time delivery organization server 9 receives the issuance request for date-and-time information from the signature generation server 3 through the communication means 92 (S3006); the time stamp issuing section 91 acquires and issues the current date-and-time information and adds the electronic signature of the time delivery organization to the issued date-and-time information (S3007). The time delivery organization server 9 transmits the date-and-time information to which the issued electronic signature is attached to the signature generation server 3 through the communication means 92 (S3008).

[0064] The signature generation server 3 receives the date-and-time information to which the electronic signature of the time delivery organization is attached from the time delivery organization server 9 through the communication means 35 (S3009) and puts aside the received date-and-time information to which the electronic signature is attached (S3010). The putting aside of the date-and-time information is performed, for example, by temporarily recording the date-and-time information in a storage area inside the document management DB 31 of the signature generation server 3. The signature generation server 3 transmits a date-and-time information acquisition completion notification to the video recording terminal 4 through the communication means 35 (S3011).

[0065] The video recording terminal 4 receives the date-and-time information acquisition completion notification from the signature generation server 3 (S3012). In parallel with the flow of the date-and-time information acquisition process that has been carried out so far (the processes of S3002 to S3012), the video recording terminal 4 continuously records the original moving image information (S3001 B). If anything unusual occurs in the time-and-date information acquisition process (S3013: YES), the video recording terminal 4 in some way informs the administrative manager accordingly (S3013B). When anything unusual happens, the administrative manager performs a process of stopping the recording of the original moving image information at the time to end.

[0066] Meanwhile, when the video recording terminal 4 receives a notification depicting that the acquiring of the date-and-time information is properly completed (S3013: NO), the video recording terminal 4 then enters a process of making a determination as to whether to end the recording of the original moving image information (S3014). The administrative manager instructs the

recording of the original moving image information to be ended, for example, by pushing the recording stop button the video recording terminal 4 is equipped with. At the time when the recording is ended (S3014: YES), the flow of subsequent processes shifts to S3016A. The subsequent processes will be described later.

[0067] When the recording of the original moving image information is not ended (S3014: NO), the video recording terminal 4 then enters a process of making a determination as to whether one hour, which is a division retaining unit, has passed (S3015). For a method of determining whether one hour has passed since the start of the recording, what is conceivable is, for example, that if a service is carried out by the time delivery organization server 9 to automatically notify after one hour has passed since the issuance of the date-and-time information, the signature generation server 3 uses the service to notify the video recording terminal 4. For another method, what is conceivable is that after one hour has passed since the date-and-time information is received at S3009, the signature generation server 3 notifies the video recording terminal 4. For still another method, what is conceivable is that with a counter clock installed inside the video recording terminal 4, a determination is made as to whether one hour has passed. Even with any of the above ways, the acquiring of the date-and-time information used for verification after the fact is performed through the network 1 for the time delivery organization server 9 and passes from sever to server (on communication). Here, a time lag on the communication is not necessarily zero and some kind of action needs to be taken. However, according to the embodiment of the present embodiment, the time lag is regarded as an error (which means the time lag is not taken into account). The following description is based on the assumption that the acquiring of the date-and-time information from the time delivery organization server 9 is carried out in a timely manner without any errors and that the date-and-time information is properly acquired.

[0068] When one hour has not passed (S3015: NO), the video recording terminal 4 returns to S3001 B and continues recording the original moving image information. When one hour has passed (S3015: YES), the video recording terminal 4 transmits a signature generation request to the signature generation server 3 (S3016A). At this time, the video recording terminal 4 transmits to the signature generation server 3 one hour worth of original moving image information accumulated in the storage area of the video recording terminal 4 and the fact that the signature generation request is made because one hour has passed. At the time when the signature generation request is transmitted, the original moving image information stored in the storage area of the video recording terminal 4 is discarded (S3016B02), and the next one hour worth of original moving image information continues to be recorded. At this time, if there is space on the storage area of the video recording terminal 4, the original moving image information may not be discarded

at the same time as when the signature generation request is transmitted; the original moving image information may be accumulated until the recording of the original moving image information or the generating of the signature ends. Since the main object of the video recording terminal 4 is a function of recording video, it is expected to be difficult to secure a relatively large amount of space on the storage area of the video recording terminal 4. Accordingly, the original moving image information may not be discarded at the same time as when the signature generation request is transmitted. For example, management may be conducted by providing another accumulation server that serves as a backup in addition to the signature generation server 3.

[0069] When the recording is stopped by the administrative manager (S3014: YES), the video recording terminal 4 transmits to the signature generation server 3 the original moving image information accumulated in the storage area of the video recording terminal 4 and the fact that the signature generation request is made because the recording is stopped (S3016A). At the time when the transmitting is completed, the video recording terminal 4 ends the process (S3016B01: YES).

[0070] The signature generation server 3 receives the signature generation request transmitted at S3016A from the video recording terminal 4 through the communication means 35 (S3017) and makes a determination as to whether the signature generation request is the first one (first time) (S3018). The determination may be made by the signature generation server 3, for example, by using incremental counting to store how many times the signature generation request is received from the video recording terminal 4.

[0071] The following describes the signature generation process (S3019A) that is performed when the signature generation request is the first one (S3018: YES). FIG. 13 illustrates a flowchart of the first signature generation process. First, the signature generation server 3 stores the terminal ID, which is put aside at S3004, in a user data area of the SH of the one hour worth of original moving image information transmitted from the video recording terminal 4 (S3019A01). Similarly, the date-and-time information to which the electronic signature of the time delivery organization is attached, which is put aside at S3010, is stored (S3019A02). The present embodiment does not refer to the structure of the user data area inside the SH and the storage method. Suppose that there is such an area.

[0072] The following describes a signature generation method for the original moving image information. The signature generation method for the original moving image information begins with a process of dividing the original moving image information into pieces of partial information. When the MPEG1 data is divided into data portions so that extraction is possible, there is no independence of a PD unit since the inter-frame prediction technique is used. Therefore, extraction may be restricted. According to the present invention, as for the frame struc-

ture as illustrated in FIG. 11, the SH serves as the top, the portion that continues until the PD followed by the subsequent SH (or the subsequent GH if there is no SH) appears is regarded as one GOP (a data portion of MPEG1), and the dividing of the MPEG1 data into data portions is performed on a GOP basis for simplification.

[0073] Furthermore, when the recording time of the moving image is long or when the frame rate of the moving image is high (the number of frames or GOPs is large), the amount of data of the hash information group included in the PIAT signature information may increase. To address the increase in the amount of data, it is possible to reduce the amount of signature-related data by using such inventions as the one disclosed in the above Japanese Patent Application No. 2007-12048. Given the above, the PIAT algorithm is applied. Incidentally, since the object is to extract the moving image data, the premise is that of all data, one portion of the consecutive moving images is cut out according to the present embodiment.

[0074] The signature generation section 34 generates the PIAT signature information for the original moving image information. FIG. 17 illustrates how the generation method works. In practice, if the frame rate is expected to be 29.97, one GOP is expected to be about 500 milliseconds, and the number of pictures included in one GOP is expected to be about 18, the number of GOPs for about one hour (60 minutes) may differ depending on conditions for generating the moving image data but may be around 6,000. However, according to the present embodiment, for purposes of simplification of explanation, suppose that 5 GOPs (partial information), from GOP1 to GOP5, are one hour worth of GOPs; the following description is based on the assumption that the 5 GOPs constitute one original data item. First, the original moving image information is divided by GOP, and the hash information of each GOP is calculated. At this time, when the frame structure is like the one illustrated in FIG. 18, it is unknown from which position the GOP is cut out at the time when the signature of the original moving image information is put. Therefore, the contents of the most recent SH are added to the GOP to which the SH is not added; the hash information is generated so as to include the SH. However, the adding of the SH is not recorded in the actual body of the original moving image information; the adding of the SH means that the SH is added, for example, on the storage area (memory or the like) when the hash information is generated.

[0075] The SH may be separated into the following areas: an area (SHM) that stores data necessary for such processes as playing moving images, and a user data area (SHU) where a user may freely store data. At this time, the signature generation server 3 generates the hash information by adding the terminal ID, which is stored in the SHU at S3019A01, and the contents of the SH including the date-and-time information to which the electronic signature of the time delivery organization is attached, which is similarly stored in the SHU at

S3019A02 (S3019A03). Moreover, using the group of hash information and a method of managing hash information with the use of a binary tree (referred to as a binary tree method, hereinafter), which is famous in the field of encryption systems, the signature generation server 3 generates one piece of root hash information. After that, the signature generation server 3 generates the electronic signature of the video recording terminal 4 for the generated root hash information and regards the root hash information and the electronic signature collectively as the PIAT signature information of the video recording terminal 4 (S3019A04).

[0076] FIG. 19 illustrates the contents of the PIAT signature information of the video recording terminal 4. In the example here, the root hash information is recorded as examination information for the original moving image information. To generate the root hash information, MD5 is used as a cryptographic one-way hash function. FIG. 19 illustrates how to record with a capacity of 16 bytes (PIAT1). SIGN1 represents the electronic signature of the video recording terminal 4 for the examination information (root hash information). According to the present embodiment, the examination information for the original moving image information and the electronic signature of the video recording terminal 4 are put together before being recorded as the PIAT signature information. However, the examination information for the original moving image information and the electronic signature may be recorded and managed separately.

[0077] After the PIAT signature information of the original moving image information is generated, the signature generation server 3 accumulates, through the document management TB 32 of the signature generation server 3, the original moving image information and the PIAT signature information in pairs in the document management DB 31 (S3020 of FIG. 12). There are the following methods of recording and managing the PIAT signature information: a method of recording and managing a group of hash information for the original moving image information and the electronic signature after the group of hash information and the electronic signature are put together into the PIAT signature information, and a method of separately recording and managing the group of hash information for the original moving image information and the electronic signature. Moreover, according to the present embodiment, the root hash information is recorded as the examination information for the original moving image information by using the binary tree method. The reason the binary tree method is used is to reduce the amount of signature data. If no consideration is given to the reduction in the amount of signature data, the group of hash information of each GOP may be recorded without change.

[0078] The following describes the signature generation process (S3019B) that is performed when the signature generation request is the second one (S3018: NO). FIG. 14 illustrates a flowchart of the second and subsequent signature generation process. First, the sig-

nature generation server 3 adds the SH (SHM) as the actual body of the SHM of the original moving image information, excluding the terminal ID of the preceding original moving image information stored in the SHU of the one hour worth of original moving image information transmitted from the video recording terminal 4 and the date-and-time information (S3019B01). According to the present embodiment, the SH including the terminal ID and the date-and-time information is only for the first original moving image information. Only the SHM that does not include the terminal ID and the date-and-time information is added to the second or subsequent original moving image information.

[0079] Then, the signature generation server 3 generates a characteristic value based on the last GOP information (LGOP in FIG. 20) of the preceding original moving image information (S3019B02). The characteristic value turns out to be information indicating that there is a connection (link) to the preceding original moving image information. The generated characteristic value is stored in the SHU of the original moving image information (S3019B03). Incidentally, according to the present embodiment, the stored characteristic value is the hash information generated based on the last GOP information (LGOP in FIG. 20) of the preceding original moving image information. Instead, the PIAT signature information of the preceding original moving image information may be stored.

[0080] The following describes a signature generation method for the original moving image information. In the same way as the signature is generated for the first original moving image information, the signature generation section 34 generates the PIAT signature information for the original moving image information. FIG. 20 illustrates how the generation method works. First, the original moving image information is divided by GOP, and the hash information of each GOP is calculated. At this time, like the generating of the signature for the first original moving image information, the contents of the most recent SH are added to the GOP to which the SH is not added; the hash information is generated so as to include the SH. The adding of the SH is not recorded in the actual body of the original moving image information; the adding of the SH means that the SH is added, for example, on the storage area (memory or the like) when the hash information is generated.

[0081] At this time, the signature generation server 3 generates the hash information by adding the contents of the SH including the characteristic value (FGOP) of the last GOP information of the preceding original moving image information that is stored in the SHU at S3019B03 (S3019B04). Using the group of hash information and the binary tree method, the signature generation server 3 generates one piece of root hash information. After that, the signature generation server 3 generates the electronic signature of the video recording terminal 4 for the generated root hash information and regards the root hash information and the electronic signature collectively

as the PIAT signature information of the video recording terminal 4 (S3019B05).

[0082] After the PIAT signature information of the original moving image information is generated, the signature generation server 3 accumulates, through the document management TB 32 of the signature generation server 3, the original moving image information and the PIAT signature information in pairs in the document management DB 31 (S3020 of FIG. 12). Even for the second and subsequent processes of recording and managing the PIAT signature information, there are the following methods: a method of recording and managing a group of hash information for the original moving image information and the electronic signature after the group of hash information and the electronic signature are put together into the PIAT signature information, and a method of separately recording and managing the group of hash information for the original moving image information and the electronic signature. Moreover, according to the present embodiment, the root hash information is recorded as the examination information for the original moving image information by using the binary tree method. The reason the binary tree method is used is to reduce the amount of signature data. If no consideration is given to the reduction in the amount of signature data, the group of hash information of each GOP may be recorded without change.

[0083] The processes described above complete generating the signature for the first, second and subsequent original moving image information. FIG 21 illustrates an accumulation state at a time when the original moving image information-1 to original moving image information-N are produced according to the above method and the PIAT signature information of each piece of original moving image information is generated.

[0084] When the signature generation request has been issued at S3016A after one hour has passed (S3021: NO), the signature generation server 3 transmits a signature generation completion notification to the video recording terminal 4 through the communication means 35 (S3022A). Then, the video recording terminal 4 receives the signature generation completion notification (S3023A); when the process is normal (S3024A: NO), the video recording terminal 4 continues the recording of the next one hour worth of original moving image information. When the video recording terminal 4 receives anything unusual about the process from the signature generation server 3 at the time (S3024A: YES), the video recording terminal 4 in some way notifies the administrative manager accordingly (S3025A). When anything unusual happens, the administrative manager carries out a process of stopping the recording of the original moving image information at the time to end.

[0085] When the signature generation request has been issued at S3016A due to the ending of the recording (S3021: YES), the signature generation server 3 takes out all pairs of original moving image information and PIAT signature information, from the original moving im-

age information-1 to original moving image information-N accumulated in the document management DB 31, through the document management TB 32 and transmits all the taken-out pairs of original moving image information and PIAT signature information to the information extraction server 5 through the communication means 35 (S3022B). The information extraction server 5 receives all the pairs of original moving image information and PIAT signature information through the communication means 55 (S3023B) and accumulates all the original moving image information and PIAT signature information in pairs in the document management DB 51 through the document management TB 52 of the information extraction server 5 (S3024B). According to the present embodiment, the signature generation server 3 and the information extraction server 5 exist separately so that the function of generating the signature is separated from the function of extracting a portion. However, the signature generation server 3 may perform all the processes of generating the signature, storing, managing and extracting a portion; the information extraction server 5 is unnecessary in this case.

[0086] Subsequently, the extractor receives a generation completion notification of the original moving image information from the administrative manager of the video recording terminal 4 through some communication means and then starts a cutout process for the original moving image information. The action is taken when it is required for the original moving image information to be disclosed to a third party and when a preferable portion is extracted for disclosure. More specifically, it is expensive to disclose all the original moving image information since the amount of the original moving image information accumulated is enormous, a network shared server or the like with a large-capacity storage device needs to be installed, and other things may be preferable. Therefore, there may be a demand that a portion be cut out for disclosure or that a portion of the original moving image information be cut out because of privacy information included in part of the original moving image information. In such cases, the cutout process of the original moving image information occurs.

[0087] As illustrated in FIG. 15, the extractor uses the extractor terminal 6 and transmits instructions to the information extraction server 5 to cut out the cutout-target original moving image information (S4001). The information extraction server 5 receives the instructions to cut out the cutout-target original moving image information (S4002). The information extraction server 5 takes out the cutout-target original moving image information and PIAT signature information accumulated in the document management DB 51 through the document management TB 52 of the information extraction server 5 (S4003) and examines the electronic signature attached to the PIAT signature information through the signature examination section 54 (S4004). When the information extraction server 5 fails to examine the electronic signature (S4005: NO), the information extraction server 5 judges that some

kind of alteration has occurred and notifies the extractor accordingly (S4099). When the information extraction server 5 succeeds in examining the electronic signature (S4005: YES), a list of original moving image information is transmitted to the extractor terminal 6 (S4006). After the extractor terminal 6 receives the list of original moving image information (S4007), the list of original moving image information is displayed on a display device the extractor terminal 6 is equipped with. The extractor then selects the original moving image information from which the extractor cuts out; cuts out a preferable portion from the original moving image information; produces a cutout data item for each original data item including a cutout portion; and generates cutout moving image information (cutout stream data) consisting of the cutout data items (S4008).

[0088] FIG. 22 illustrates an example of a selection operation by the extractor for the original moving image information. First, the list of the original moving image information accumulated in the document management DB 51 is displayed on an one-hour basis, enabling the extractor to select the original moving image information from which the extractor cuts out (PICUPGENPON). A simplified play tool is provided in order to search for a cutout portion. The pushing of a play button (PREVIEW-GENPON) makes it possible to play a cutout portion for confirmation before the cutout process. In order to play, the specified original moving image information is acquired from the information extraction server 5 and plays. If the extractor has already known which portion is to be cut out, the operation is unnecessary. In this case, the extractor selects (PICUPGENPON) the original moving image information from which the extractor cuts out and pushes (EXTRACTRUN) a cutout button. After the cutout button is pushed, the information extraction server 5 acquires the selected original moving image information to generate the cutout moving image information. FIG. 23 illustrates an example of an extraction operation by the extractor for the original moving image information.

[0089] Thanks to the play button (PREVIEW), the extractor may visually check to cut out by specifying a range from which a preferable portion is cut out while the cutout moving image information is being played. One way to cut out is to use and operate a seek bar (SEEKBAR) until the seek bar reaches a starting position for cutting out; push a start button (STARTSET) at the time when the seek bar is at the position to set a cutout start position; simply use and operate the seek bar (SEEKBAR) until the seek bar reaches an ending position for cutting out; and push an end button (ENDSET) at the time when the seek bar is at the position to set a cutout end position. Thanks to the operation, a cutout range (CUTAREA) is set. Therefore, the extractor then selects a generation menu of the cutout moving image information and generates the cutout moving image information.

[0090] In the example of the frame structure of MPEG1 illustrated in FIG. 11, the SH is attached to the heads of all the GOPs. However, it is unnecessary to attach the

SH to each GOP. Therefore, when each GOP is observed, the SH may be attached to the top GOP (GH1); there may be a frame structure in which the SH is not attached to the subsequent GOP. FIG. 18 illustrates an example of the frame structure thereof.

[0091] When the GOP starts with the SH, it is possible to recognize the start of the GOP by detecting the SH. Even if the GOP starts with the GH because no SH is attached to the GOP, it is possible to recognize the start of the GOP by detecting the GH. However, there is some problem about applying the technique to the MPEG1 with the frame structure illustrated in FIG. 18 when a portion is cut out for privacy protection. That is, when the frame structure illustrated in FIG. 18 is used, it may be impossible to play the cutout moving image if the moving image is cut out at GH2, GH3 or GH4. The problem occurs because there is a rule under the MPEG1 standard that the top GOP (GH1) of streaming data must include the SH to guarantee a play operation.

[0092] The following steps are taken to avoid the situation in which the cutout moving image may not play as described above.

[0093] First, there may be two cutout methods: a method of cutting out a portion from each piece of original moving image information in such a way that the portion does not stretch across a plurality of pieces of original moving image information (a method of cutting out one hour or less worth of original moving image information), and a method of cutting out a portion in such a way that the portion stretches across a plurality of pieces of original moving image information (a method of cutting out one hour or more worth of original moving image information). As for the former method of cutting out one hour or less worth of original moving image information, there are different methods of generating the hash information for the cutting out of the original moving image information-2 and the subsequent original moving image information and for the cutting out of the original moving image information-1. FIGS. 24 and 25 illustrate a cutout method for one hour or less worth of original moving image information; FIG. 26 illustrates an example of three cutout methods for one hour or more worth of original moving image information. Based on FIGS. 24, 25 and 26, the generation process of the cutout moving image information and the generation process of the PIAT signature information will be described in detail.

[0094] First, the cutout method for one hour or less worth of the original moving image information-2 will be described. FIG. 24 illustrates an example in which a middle portion (GOP8 and GOP9) of the original moving image information-2 is cut out. First, the cutout moving image information is generated by adding the SH including the terminal ID stored in the original moving image information-1, the date-and-time information and the characteristic value of the last GOP information of the preceding original moving image information. At this time, the added SH is added to the actual body of the cutout moving image information, thereby avoiding the situation in which the

moving image may not be played. FIG. 24 illustrates an example in which a portion extending from GOP8, which serves as the top, to GOP9 is cut out. However, if the SH is added to the top GOP, it is possible to play the cutout moving image information. Therefore, in order to reduce the amount of data of the cutout moving image information, it is unnecessary to add the SH to GOP9.

[0095] After the cutout moving image information is generated, the extractor terminal 6 transmits the generated cutout moving image information to the information extraction server 5 (S4009). After receiving the cutout moving image information (S4010), the signature generation section 53 of the information extraction server 5 generates the PIAT signature information for the cutout moving image information. More specifically, the signature generation section 53 generates a plurality of pieces of root hash information (referred to as a deletion root hash information list, hereinafter) consisting only of GOPs that are removed during extraction. At this time, in a similar way to when the PIAT signature information for the original moving image information is generated, the information extraction server 5 generates the deletion root hash information list including the SH by adding the contents of the most recent SH to the GOP to which the SH is not added in a deletion portion. FIG. 27 illustrates the generation method thereof. The adding of the SH is not recorded in the actual body of the original moving image information; the adding of the SH means that the SH is added, for example, on the storage area (memory or the like) when the hash information is generated. At this time, the hash information is generated by adding the contents of the SH including the characteristic value (FGOP1) of the last GOP information of the original moving image information-1 that is stored in the SHU. Moreover, the information extraction server 5 generates the electronic signature of the extractor for the generated deletion root hash information list and regards the deletion root hash information list and the electronic signature collectively as the PIAT signature information of the extractor (S4011).

[0096] FIG. 25 illustrates an example in which a middle portion (GOP3 and GOP4) of the original moving image information-1 is cut out. In the original moving image information-1, unlike the original moving image information-2 and the subsequent original moving image information, the characteristic value of the last GOP information of the preceding original moving image information is not included in the SH. Accordingly, in the process of cutting out from the original moving image information-1, the cutout moving image information is generated by adding the SH including the terminal ID stored in the original moving image information-1 and the date-and-time information. At this time, the added SH is added to the actual body of the cutout moving image information, thereby avoiding the situation in which the moving image may not be played. Similarly, FIG. 25 illustrates an example in which a portion extending from GOP3, which serves as the top, to GOP4 is cut out. However, if the SH

is added to the top GOP, it is possible to play the cutout moving image information. Therefore, in order to reduce the amount of data of the cutout moving image information, it is unnecessary to add the SH to GOP4.

[0097] The following additional description is about the flow of how to generate the PIAT signature information for the cutout moving image information in the case of FIG. 25. Similarly, when generating the deletion root hash information list, the information extraction server 5 generates the deletion root hash information list including the SH by adding the contents of the most recent SH to the GOP to which the SH is not added in a deletion portion. FIG. 28 illustrates the generation method thereof. The adding of the SH is not recorded in the actual body of the original moving image information; the adding of the SH means that the SH is added, for example, on the storage area (memory or the like) when the hash information is generated. At this time, the hash information is generated by adding the contents of the SH including the terminal ID stored in the SHU and the date-and-time information to which the electronic signature of the time delivery organization is attached. Moreover, the information extraction server 5 generates the electronic signature of the extractor for the generated deletion root hash information list and regards the deletion root hash information list and the electronic signature collectively as the PIAT signature information of the extractor (S4011).

[0098] FIG. 29 illustrates the contents of the PIAT signature information of the extractor. In the example here, as the examination information for the cutout moving image information, the following items of information are recorded in the following order (PIAT2): the total number of GOPs of original moving image information that serves as a foundation (MAXGOPCNT), a GOP number of a cutout start position (STARTGOPNUM), the number of GOPs cut out (CUTGOPCNT), number-of-GOPs sum information indicating what number GOP the top GOP of the cutout moving image information is from the start of the original moving image information (COUNTGOPSUM), and the deletion root hash information list (HASHLIST). SIGN2 represents the electronic signature of the extractor for the examination information. According to the present embodiment, the examination information for the cutout moving image information and the electronic signature of the extractor are put together before being recorded as the PIAT signature information. However, the examination information for the cutout moving image information and the electronic signature may be recorded and managed separately.

[0099] After the PIAT signature information of the cutout moving image information is generated, the information extraction server 5 accumulates the cutout moving image information and the PIAT signature information in pairs in the document management DB 51 through the document management TB 52 of the information extraction server 5 (S4012). Subsequently, the information extraction server 5 transmits three kinds of information, the cutout moving image information, the PIAT signature in-

formation of the original moving image information and the PIAT signature information of the cutout moving image information, to the signature examination server 7 through the communication means 55 (S4013). The signature examination server 7 receives the three kinds of information, the cutout moving image information, the PIAT signature information of the original moving image information and the PIAT signature information of the cutout moving image information, through the communication means 74 (S4014) and accumulates the three kinds of information, the cutout moving image information, the PIAT signature information of the original moving image information and the PIAT signature information of the cutout moving image information, in the document management DB 71 through the document management TB 72 of the signature examination server 7 (S4015).

[0100] The following describes the cutout method for one hour or more worth of original moving image information. FIG. 26 illustrates an example in which a portion extending from a final portion (GOP4 and GOP5) of the original moving image information-1 to an opening portion (GOP6 and GOP7) of the original moving image information-2 is extracted.

[0101] When a plurality of pieces of original moving image information, which stretches into the next one hour worth of original moving image information, is cut out as mentioned above, the generating of the cutout moving image information is similarly performed: cutout moving image information-1 and cutout moving image information-2, which are cutout data items corresponding to the original moving image information-1 and the original moving image information-2, are generated by adding the SH including the terminal ID stored in the original moving image information-1, the date-and-time information, and the characteristic value of the last GOP information of the preceding original moving image information. At this time, the added SH is added to the actual body of the cutout moving image information, thereby avoiding the situation in which the moving image may not be played. FIG. 26 illustrates an example in which a portion extending from GOP4, which serves as the top, to GOP5 is cut out as well as an example in which a portion extending from GOP6, which serves as the top, to GOP7 is cut out. However, if the SH is added to the top GOP, it is possible to play the cutout moving image information. Therefore, in order to reduce the amount of data of the cutout moving image information, it is unnecessary to add the SH to GOP5 and GOP7.

[0102] Then, in the process of generating the PIAT signature information for the cutout moving image information, with the use of the methods illustrated above with reference to FIGS. 27 and 28, the PIAT signature information of the cutout moving image information is generated for the original moving image information-1 and another for the original moving image information-2. Accordingly, what is used here is a method of generating the PIAT signature information for the cutout moving image information for each piece of original moving image

information. FIG. 30 illustrates the generation method thereof: the upper part depicts the signature generation method for the cutout moving image information-1, while the lower part depicts the signature generation method for the cutout moving image information-2.

[0103] After the PIAT signature information of the cutout moving image information is generated, the information extraction server 5 accumulates the cutout moving image information-1 and the cutout moving image information-2 and each pair of pieces of PIAT signature information for both the cutout moving image information-1 and the cutout moving image information-2 in the document management DB 51 through the document management TB 52 of the information extraction server 5 (S4012). Subsequently, the information extraction server 5 transmits six kinds of information, the cutout moving image information-1, the PIAT signature information of the original moving image information-1, the PIAT signature information of the cutout moving image information-1, the cutout moving image information-2, the PIAT signature information of the original moving image information-2, and the PIAT signature information of the cutout moving image information-2, to the signature examination server 7 through the communication means 55 (S4013). The signature examination server 7 receives the six kinds of information through the communication means 74 (S4014) and accumulates the six kinds of information in the document management DB 71 through the document management TB 72 of the signature examination server 7 (S4015).

[0104] Subsequently, the examiner receives a disclosure notification of the cutout moving image information from the extractor through some communication means and then starts a process of confirming and examining the disclosed cutout moving image information.

[0105] As illustrated in FIG. 16, the examiner uses the examiner terminal 8 to transmit instructions to the signature examination server 7 to take out the examination-target cutout moving image information (S5001). FIG. 31 illustrates an example of the examination-target moving image information and a selection screen for the PIAT signature information (examination information). In the example here, in the process of examining the signature, it is possible to select the cutout moving image information and the original moving image information and to examine each piece of moving image information (VERIFYTYPE). For example, if the cutout moving image information is selected by VERIFYTYPE, then it becomes possible to select the cutout moving image information, the PIAT signature information of the video recording terminal 4, and the PIAT signature information of the extractor. By pushing a reference button of each field (GET-STREAM), each piece of information may be selected on Explorer. Moreover, by pushing the reference button, it is possible to make reference to or select the cutout moving image information accumulated in the document management DB 71 of the signature examination server 7. Finally, by pushing a signature examination button

(VERIFYRUN), the signature examination process starts for the selected cutout moving image information.

[0106] According to the present embodiment, the examiner is supposed to select the PIAT signature information of the video recording terminal 4 and the PIAT signature information of the extractor. Instead, the examiner may select only the cutout moving image information without regard to the presence of the PIAT signature information (examination information). For example, the following method is also possible: titles are added so that it is possible to easily guess or identify what the contents of the cutout moving image information are, and the examiner is allowed to see a list of the titles and select from the list. In this case, such measures as retaining link information are preferable for identifying which piece of moving image information is selected from among those accumulated in the document management DB 71 of the signature examination server 7 when the piece of moving image information is selected from the list.

[0107] FIG. 31 illustrates a screen that is displayed when the examination process is performed in association with the disclosure of one hour or less worth of cutout moving image information. However, in the case of a plurality of pieces of cutout moving image information that stretches into the next one hour worth of original moving image information, two kinds of moving image information need to be selected. Even in this case, there may be a method that allows the examiner to select only the cutout moving image information without regard to the fact that the moving image information and the PIAT signature information are divided into a plurality of pieces.

[0108] After the signature examination process starts, the signature examination server 7 receives instructions to take out the examination-target cutout moving image information (S5002). First, the signature examination process for one hour or less worth of cutout moving image information will be described. The signature examination server 7 takes out the three kinds of information accumulated in the document management DB 71, the cutout moving image information, the PIAT signature information of the original moving image information and the PIAT signature information of the cutout moving image information, through the document management TB 72 of the signature examination server 7 (S5003). If the original moving image information-2 is cut out and disclosed, the signature examination server 7 takes out the following three kinds of information: the cutout moving image information-2, the PIAT signature information of the original moving image information-2 and the PIAT signature information of the cutout moving image information-2. If the original moving image information-1 is cut out and disclosed, the signature examination server 7 takes out the following three kinds of information: the cutout moving image information-1, the PIAT signature information of the original moving image information-1 and the PIAT signature information of the cutout moving image information-1. The signature examination server 7 then examines the electronic signature attached to the PIAT sig-

nature information through the signature examination section 73 (S5004). When the signature examination server 7 fails to examine the electronic signature (S5005: NO), the signature examination server 7 judges that some kind of alteration has occurred and notifies the examiner accordingly (S5099).

[0109] When the signature examination server 7 succeeds in examining the electronic signature (S5005: YES), the signature examination server 7 then examines the PIAT signature information for the cutout moving image information (S5006). FIGS. 32 and 33 illustrate the examination methods of the PIAT signature information for one hour or less worth of cutout moving image information. At this time, if two consecutive pieces of partial information of GOP are cut out as illustrated in FIGS. 24 and 25, the examination process of the PIAT signature information for the cutout moving image information fails when the hash information is generated with the SHs not included in the second and subsequent GOPs because it is unnecessary to add the SHs to the second and subsequent GOPs. Therefore, even when the examination process of the PIAT signature information of the cutout moving image information is performed, the contents of the most recent SH are similarly added to the GOP to which the SH is not added, and the hash information is so generated as to include the SH.

[0110] In FIG. 32, the hash information is generated by adding the SH that does not have the terminal ID in the SHU and the date-and-time information but includes the characteristic value of the last GOP information of the preceding original moving image information. In FIG. 33, the hash information is generated by adding the SH including the terminal ID in the SHU and the date-and-time information.

[0111] Subsequently, the root hash information of the original moving image information, as well as the deletion root hash information list included in the PIAT signature information of the extractor (the PIAT signature information of the cutout moving image information), is restored to be examined and compared with the PIAT signature information of the video recording terminal 4 (the PIAT signature information of the original moving image information).

[0112] Similarly, even for the signature examination of one hour or more worth of cutout moving image information, the signature examination server 7 takes out six kids of information accumulated in the document management DB 71, the cutout moving image information-1, the PIAT signature information of the original moving image information-1, the PIAT signature information of the cutout moving image information-1, the cutout moving image information-2, the PIAT signature information of the original moving image information-2 and the PIAT signature information of the cutout moving image information-2 (S5003). First, the signature examination server 7 examines the electronic signature attached to the PIAT signature information through the signature examination section 73 (S5004). When the signature examination

server 7 fails to examine the electronic signature (S5005: NO), the signature examination server 7 judges that some kind of alteration has occurred and notifies the examiner accordingly (S5099).

5 **[0113]** When the signature examination server 7 succeeds in examining the electronic signature (S5005: YES), the signature examination server 7 then examines the PIAT signature information for the cutout moving image information (S5006). FIG 34 illustrates the examination methods of the PIAT signature information for one hour or more worth of cutout moving image information. The examination methods are each the same as those illustrated in FIGS. 32 and 33 and thus will not be described here. However, if it is confirmed as a result of both examination processes that the PIAT signature information is part of the original moving image information and has not been altered, the signature examination server 7 succeeds in examining the PIAT signature information.

20 **[0114]** When the signature examination server 7 fails to examine the PIAT signature information (S5007: NO), the signature examination server 7 judges that some kind of alteration has occurred and notifies the examiner accordingly (S5099). When the signature examination server 7 succeeds in examining the PIAT signature information (S5007: YES), the signature examination server 7 then moves to a process of examining the date-and-time information of the cutout moving image information in response to the result of the examination (S5008).

30 **[0115]** The following uses an example of the examination method of the date-and-time information for one hour or more worth of cutout moving image information. FIG. 35 illustrates the examination method thereof. First, the signature examination server 7 takes out the date-and-time information (which is hereinafter assumed to be 2007/11/01AM9:00:00.000 for explanation) stored in the SHU-1 and SHU-2, with the electronic signature of the time delivery organization being attached to the date-and-time information (GETTIME) and examines the electronic signature of the time delivery organization (VERIFYSIGTIME). Then, in order to confirm that the cutout moving image information-1 is followed by the cutout moving image information-2, the signature examination server 7 generates a characteristic value from the last GOP (GOP5) of the cutout moving image information-1 (CREATEHASH). Subsequently, the signature examination server 7 takes out a characteristic value stored in the SHU-2 of the cutout moving image information-2 (CETHASH) and compares and examines the characteristic value and the characteristic value generated by CREATEHASH (VERIFYMATCH). When the characteristic values are equal, it is possible to confirm that the cutout moving image information-1 is followed by the cutout moving image information-2. Moreover, the signature examination server 7 takes out the terminal IDs (which are hereinafter assumed to be CAMERA-34819AF for explanation) stored in the SHU-1 and SHU-2 (GETDEVID) and confirms that the terminal IDs are equal. Therefore, it is

possible to confirm that the consecutive moving image data items are disclosed at the same video recording terminal 4 and that the moving image data items are part of the original moving image information and have not been altered.

[0116] Thanks to the examination of VERIFYSIGN-TIME, it is proven that the date-and-time information has been issued by the time delivery organization and is valid. Therefore, according to the present embodiment, in order to prove the actual time of the cutout moving image information, what needs to be done first is to verify the date-and-time information of the top GOP (GOP4) of the cutout moving image information-1. The date-and-time information taken out by GETTIME is the date-and-time information indicating the time when the video recording of the original moving image information-1 has started. Thus, by using information of MAXGOPCNT1, STARTGOPNUM1, CUTGOPCNT1 and COUNTGOPSUM1 stored in the cutout moving image information-1, the date and time of GOP4 are identified. According to the present embodiment, the cutout moving image information-1 means that from the original moving image information-1 that is formed by including a collection of five pieces (MAXGOPCNT1) of partial information (GOP) and from the fourth one (STARTGOPNUM1), two (GUTGOPCNT1) GOPs are cut out. As described above, according to the premise of the present embodiment, the frame rate and the number of pictures included in each GOP of each piece of original moving image information are fixed; it is easy to identify a playing time in the original moving image information. Therefore, based on such kinds of information, it is also possible to identify the date-and-time information of the top GOP (GOP4) of the cutout moving image information-1.

[0117] FIG. 36 illustrates the structure of a picture recorded in each GOP and a calculation method of a frame time of each picture in the cutout moving image information-1 and cutout moving image information-2. If the frame rate is 29.97, the frame times are identified through calculation: the frame time of the first picture (GOP1-P1) in the top GOP (GOP1) is at zero second, the frame time of the second picture (GOP1-P2) at 1/29.97 seconds, the frame time of the third picture (GOP1-P3) at 2/29.97 seconds, and so forth. The frame time of the nth picture is calculated by the following calculating formula: $(N-1)/29.97$ seconds. Thus, based on the number of pictures included in each GOP and the value of the frame rate, it is possible to identify the frame time of the top picture of a given GOP. In that manner, the frame time of the top picture (GOP4-P1) of the top GOP (GOP4) of the cutout moving image information-1 is identified, for example, as 62,937/29.97 seconds.

[0118] There may be the following method: the total sum of pictures existing from the top picture of the top GOP (GOP1) to the top picture of the GOP at the cutout start position, i.e. what number picture the top picture of the GOP at the cutout start position is from the top picture of the top GOP (GOP1), is calculated in advance and

kept as a list. FIG. 37 illustrates a list of the total sum of pictures that exist right up to the preceding one in each GOP position. For example, it may be confirmed from the present table that when the cutout start position is GOP4, the last picture of the preceding GOP3 is the 62,936th picture from the top picture of the top GOP (GOP1), i.e. the total sum of the pictures is 62,936. As a result, it may be confirmed that the top picture (GOP4-P1) of the top GOP (GOP4) of the cutout moving image information-1 is the 62,937th picture, with one picture added to the information.

[0119] Moreover, the actual time of the first picture (GOP1-P1) of the top GOP (GOP1) is equal to the date-and-time information (2007/11/01AM9:00:00.000) taken out by GETTIME. The first actual time of the cutout moving image information-1 turns out to be the time (2007/11/01AM9:35:00.000), which is obtained by adding 62,937/29.97 seconds to the above date-and-time information. The last frame time of the last GOP (GOP7) of the cutout moving image information-2 is similarly calculated: the last actual time of the cutout moving image information-2 turns out to be the time (2007/11/01AM10:25:00.000), which is obtained by adding 152,847/29.97 seconds.

[0120] Accordingly, the date-and-time range of the cutout moving image information extends from 2007/11/01AM9:35:00.000 to 2007/11/01AM10:25:00.000; it may be confirmed that about 50 minutes worth of information is cut out.

[0121] Thanks to the examination described above, it may be proven to a third party that the cutout moving image information is part of the original moving image information, has not been altered, is recorded by the video recording terminal 4 having a terminal ID of CAMERA-34819AF and is cut out with the date-and-time range of 2007/11/01AM9:35:00.000 to 2007/11/01AM10:25:00.000.

[0122] Subsequently, the signature examination server 7 transmits the examination result of the PIAT signature information of the cutout moving image information to the examiner terminal 8 (S5009). After the examiner terminal 8 receives the examination result of the PIAT signature information of the cutout moving image information (S5010), the examination result of the PIAT signature information of the cutout moving image information is displayed on a display device the examiner terminal 8 is equipped with (S5011).

[0123] FIG. 38 illustrates an example of the signature examination result displayed on the display device the examiner terminal 8 is equipped with. By making reference to the examination result, the examiner may verify the originality of the cutout moving image information (VERIFY1 and VERIFY 2) because what is displayed allows the examiner to confirm that the information is part of the original moving image information as well as making clear the cutout range indicating which portion of the original moving image information is cut out and the actual time, the fact that the portion has not been altered,

and which video recording terminal 4 is used to record. Moreover, thanks to the process of confirming the electronic signatures of the video recording terminal 4 and examiner, it is possible to confirm that the original moving image information is generated by the video recording terminal 4 and that the cutout moving image information is generated by the extractor (VERIFY3). Furthermore, it is possible to confirm the terminal ID indicating which video recording terminal 4 is used for recording (VERIFY4).

[0124] It is also possible to carry out examination for original moving image information. If the original moving image information is selected by VERIFYTYPE of FIG 31, in a similar way to the signature examination of the cutout moving image information, it is possible to select the original moving image information and the PIAT signature information of the video recording terminal 4 (it is unnecessary to select the PIAT signature information of the extractor); by pushing the signature examination button (VERIFYRUN), the signature examination process for the selected original moving image information starts.

[0125] Incidentally, according to the present embodiment, in order to reduce the amount of data of the PIAT signature information, such inventions as the one disclosed in the above Japanese Patent Application No. 2007-12048 are used, in which case the hash information is managed by binary tree. However, if there is extra storage space on the document management DB of each server, instead of the method in which the hash information is managed by binary tree, such methods as the one disclosed in WO2006/008847 may be used without change to generate and record the hash information for each GOP included in the original moving image information.

[0126] According to the present embodiment, what has been described is the method in which the date-and-time information is stored and recorded in the SH of the first original moving image information. However, the date-and-time information may be stored in anything other than the SH of the first original moving image information (The date-and-time information may be stored after the last GOP, for example). According to the present embodiment in which the date-and-time information is stored in the SH of the first original moving image information at the start of the recording, the effect is that it is possible to examine the originality of those actually recorded and to guarantee the date and time even if the video recording terminal 4 is unable to continue recording due to some malfunction or the like immediately after the start of the recording.

[0127] There may be another method as illustrated in FIG. 39, according to a second embodiment of the present invention. One of the objects of the present invention is to prevent wrongdoing such as extraction or addition from occurring by focusing on consecutive pieces of original moving image information. When such methods as the one disclosed in the above Patent Document 1 are used, it is possible to guarantee the origi-

nality, continuity, and time-series quality of all pieces of original moving image information divided by a given unit.

[0128] More specifically, as illustrated in FIG. 39, first the PIAT signature information of each piece of original moving image information is generated; the generated pieces of PIAT signature information are then put together in chronological order in such a way that it is possible to recognize the order that the pieces of PIAT signature information are generated. At this time, as described above, the PIAT signature information is recorded on a one hour basis. Therefore, there is a possibility that alterations or the like may occur in the meantime. Accordingly, the PIAT signature information, which is generated on a one hour basis, is accumulated in a way that makes it impossible to alter the PIAT signature information (such methods as storing the PIAT signature information in a tamper-proof area, for example). After the generating of the PIAT signature information is completed, the electronic signature-attached date-and-time information acquired from the time delivery organization and the terminal ID of the video recording terminal 4 are added; finally, for the entire information described above, the recording and management process is performed with the following information being used as the examination information: the PIAT signature information of the video recording terminal 4 to which the electronic signature of the video recording terminal 4 is attached. Even in the above embodiment, the date-and-time information is acquired just one time; it is possible to guarantee the originality, continuity, and time-series quality of all pieces of original moving image information divided by a given unit.

[0129] According to the present invention, even if a portion of the original moving image information is cut out for privacy protection and the like, it is possible to avoid the situation in which the cutout moving image information may not play and to examine the originality of the cutout moving image information including the detecting of the cutout point (position) and the cutout actual time. The examiner is identified from the electronic signature for the PIAT signature information. Therefore, even if the extractor alters the cutout moving image information or adds something to the cutout moving image information, it is possible to trace the alterations or additions.

[0130] Incidentally, by providing a program that causes a computer to execute each of the operations represented by the flowcharts and steps illustrated in the above embodiments with reference to the drawings, it is possible to offer a stream data management program of the present invention. The program may be executed by a computer after the program is recorded in a computer-readable medium. Computers include a host device such as personal computer, a controller of a testing device, and a controller such as MPU or CPU of a storage device. Computer-readable media include a portable storage medium such as CD-ROM, flexible disk, DVD disc, magnetic optical disc and IC card; a database for storing computer programs; another computer and a database there-

of; and a transmission medium on a line.

Claims

1. A stream data management program that causes a computer to execute:

a step of generating an original stream data item including a plurality of original data items that each include a plurality of pieces of partial information and are divided by a predetermined time unit by using a stream data generation terminal, storing in a sequence header of any one of the original data items a terminal ID indicating the stream data generation terminal and date-and-time information that is guaranteed by a third party at a time when the original stream data item is generated, and storing in a sequence header of the next original data item a characteristic value of the last piece of partial information of the preceding original data item; 10

a step of generating signature-related information of the original data item by adding the contents of the sequence header including the terminal ID and the date-and-time information for the original data item having the sequence header in which the terminal ID and the date-and-time information are stored, while generating signature-related information of the original data item by adding the contents of the sequence header including the characteristic value of the last piece of partial information of the preceding original data item for the other original data items; 15

a step of cutting out a portion of the original stream data item, producing a cutout data item by adding a sequence header including the terminal ID, the date-and-time information and the characteristic value of the last piece of partial information of the preceding original data item to each of the original data items including the cutout portion, and generating a cutout stream data item consisting of the cutout data items; 20

a step of generating the signature-related information of the cutout data item that includes the terminal ID and the date-and-time information when the cutout data item is in the original data item having the sequence header in which the terminal ID and the date-and-time information are stored, while generating the signature-related information of the cutout data item that includes the characteristic value of the last piece of partial information of the preceding original data item in other cases; and 25

a step of verifying the originality and actual time of the cutout stream data item on the basis of 30

35

40

45

50

55

the cutout stream data item, the signature-related information of each cutout data item in the cutout stream data item and the signature-related information of each original data item in the original stream data item.

2. The stream data management program according to claim 1, wherein the terminal ID and the date-and-time information are stored in the sequence header of the top original data item.
3. The stream data management program according to claim 2, wherein the characteristic value of the last piece of partial information of the preceding original data item is stored in the sequence headers of the second and subsequent original data items.
4. The stream data management program according to claim 1, wherein hash information is generated for each piece of partial information by adding the contents of the most recent sequence header to a piece of partial information to which the sequence header is not added, an electronic signature of the stream data generation terminal is generated for one piece of root hash information obtained from the hash information, and the root hash information and the electronic signature of the stream data generation terminal are regarded collectively as the signature-related information of the original data item.
5. The stream data management program according to claim 1, wherein when the cutting out from the original stream data item is within a predetermined time unit and in the first original data item, the cutout data item is generated by adding the sequence header including the terminal ID and the date-and-time information.
6. The stream data management program according to claim 1, wherein when the cutting out from the original stream data item is within a predetermined time unit and in the second to nth original data items, the cutout data item is generated by adding the sequence header including the terminal ID, the date-and-time information and the characteristic value of the last piece of partial information of the preceding original data item.
7. The stream data management program according to claim 1, wherein when the cutting out from the original stream data item is performed for a plurality of original data items in a way that goes beyond a predetermined time unit, the cutout data items are generated by adding the sequence header including the terminal ID, the date-and-time information and the characteristic value of the last piece of partial information of the preceding original data item to a plurality of the original data items.

8. The stream data management program according to claim 4, wherein deletion root hash information is generated by adding the contents of the most recent sequence header to a piece of partial information to which the sequence header is not added for a piece of partial information that is deleted by the cutting out from the original stream data item, an electronic signature of an extractor is generated for the deletion root hash information, and the deletion root hash information, the electronic signature of the extractor and sum information indicating what number piece of partial information the cutout data item is from the start of the original stream data item are regarded collectively as the signature-related information of the cutout data item. 5
9. The stream data management program according to claim 8, wherein after the electronic signatures included in the signature-related information of the original data item and the signature-related information of the cutout data item are examined, the originality of the cutout stream data item is examined and the date-and-time information of the cutout stream data item is examined. 10
10. The stream data management program according to claim 9, wherein the hash information is generated for each piece of partial information by adding the contents of the most recent sequence header to a piece of partial information to which the sequence header is not added for each cutout data item in the cutout stream data item, the root hash information of the corresponding original data item is restored from the hash information and the deletion root hash information included in the signature-related information of the cutout data item, and the originality of the cutout stream data item is examined by comparing the restored root hash information of the original data item and the root hash information included in the signature-related information of the original data item. 15
11. The stream data management program according to claim 9, wherein after the electronic signature of the third party attached to the date-and-time information included in the sequence header of each cutout data item in the cutout stream data item is examined, the actual time of the cutout stream data item is verified based on the date-and-time information and the sum information included in the signature-related information of the cutout data item. 20
12. The stream data management program according to claim 11, wherein a frame time of the cutout data item is calculated based on a preset frame rate and the sum information included in the signature-related information of the cutout data item, and the actual time of the cutout stream data item is calculated by adding the frame time and the date-and-time information. 25
13. The stream data management program according to claim 11, wherein a characteristic value is generated from the last piece of partial information of each cutout data item when the cutout stream data item includes a plurality of cutout data items that appear one after another over time, and the continuity of a plurality of the cutout data items is examined by comparing the characteristic values with the characteristic values included in the sequence headers of the next cutout data items. 30
14. The stream data management program according to claim 11, wherein when the cutout stream data item includes a plurality of cutout data items that appear one after another over time, the identity of the stream data generation terminal is examined by comparing the terminal IDs included in the sequence headers of the cutout data items. 35
15. The stream data management program according to claim 1, wherein the third party is a time delivery organization server that issues date-and-time information and, after a predetermined time unit has passed since the issuance of the date-and-time information, the time delivery organization server automatically notifies accordingly. 40
16. The stream data management program according to claim 1, wherein the signature-related information is PIAT signature information. 45
17. A stream data management method comprising:
 - generating an original stream data item including a plurality of original data items that each include a plurality of pieces of partial information and are divided by a predetermined time unit by using a stream data generation terminal, storing in a sequence header of any one of the original data items a terminal ID indicating the stream data generation terminal and date-and-time information that is guaranteed by a third party at a time when the original stream data item is generated, and storing in a sequence header of the next original data item a characteristic value of the last piece of partial information of the preceding original data item; 50
 - generating signature-related information of the original data item by adding the contents of the sequence header including the terminal ID and the date-and-time information for the original data item having the sequence header in which the terminal ID and the date-and-time information are stored, while generating signature-related

information of the original data item by adding the contents of the sequence header including the characteristic value of the last piece of partial information of the preceding original data item for the other original data items; 5
cutting out a portion of the original stream data item, producing a cutout data item by adding a sequence header including the terminal ID, the date-and-time information and the characteristic value of the last piece of partial information of the preceding original data item to each of the original data items including the cutout portion, and generating a cutout stream data item consisting of the cutout data items; 10
generating the signature-related information of the cutout data item that includes the terminal ID and the date-and-time information when the cutout data item is in the original data item having the sequence header in which the terminal ID and the date-and-time information are stored, while generating the signature-related information of the cutout data item that includes the characteristic value of the last piece of partial information of the preceding original data item in other cases; and 25
verifying the originality and actual time of the cutout stream data item on the basis of the cutout stream data item, the signature-related information of each cutout data item in the cutout stream data item and the signature-related information of each original data item in the original stream data item. 30

18. A stream data management system comprising:

original stream data generation means for generating an original stream data item including a plurality of original data items that each include a plurality of pieces of partial information and are divided by a predetermined time unit by using a stream data generation terminal, storing in a sequence header of any one of the original data items a terminal ID indicating the stream data generation terminal and date-and-time information that is guaranteed by a third party at a time when the original stream data item is generated, and storing in a sequence header of the next original data item a characteristic value of the last piece of partial information of the preceding original data item; 35
original signature-related information generation means for generating signature-related information of the original data item by adding the contents of the sequence header including the terminal ID and the date-and-time information for the original data item having the sequence header in which the terminal ID and the date- 40
and-time information are stored, while generating signature-related information of the original data item by adding the contents of the sequence header including the characteristic value of the last piece of partial information of the preceding original data item for the other original data items; 45
cutout stream data generation means for cutting out a portion of the original stream data item, producing a cutout data item by adding a sequence header including the terminal ID, the date-and-time information and the characteristic value of the last piece of partial information of the preceding original data item to each of the original data items including the cutout portion, and generating a cutout stream data item consisting of the cutout data items; 50
cutout signature-related information generation means for generating the signature-related information of the cutout data item that includes the terminal ID and the date-and-time information when the cutout data item is in the original data item having the sequence header in which the terminal ID and the date-and-time information are stored, while generating the signature-related information of the cutout data item that includes the characteristic value of the last piece of partial information of the preceding original data item in other cases; and 55
verification means for verifying the originality and actual time of the cutout stream data item on the basis of the cutout stream data item, the signature-related information of each cutout data item in the cutout stream data item and the signature-related information of each original data item in the original stream data item.

and-time information are stored, while generating signature-related information of the original data item by adding the contents of the sequence header including the characteristic value of the last piece of partial information of the preceding original data item for the other original data items; 5
cutout stream data generation means for cutting out a portion of the original stream data item, producing a cutout data item by adding a sequence header including the terminal ID, the date-and-time information and the characteristic value of the last piece of partial information of the preceding original data item to each of the original data items including the cutout portion, and generating a cutout stream data item consisting of the cutout data items; 10
cutout signature-related information generation means for generating the signature-related information of the cutout data item that includes the terminal ID and the date-and-time information when the cutout data item is in the original data item having the sequence header in which the terminal ID and the date-and-time information are stored, while generating the signature-related information of the cutout data item that includes the characteristic value of the last piece of partial information of the preceding original data item in other cases; and 25
verification means for verifying the originality and actual time of the cutout stream data item on the basis of the cutout stream data item, the signature-related information of each cutout data item in the cutout stream data item and the signature-related information of each original data item in the original stream data item. 30

19. A stream data management program that causes a computer to execute:

a step of generating an original stream data item including a plurality of original data items that each include a plurality of pieces of partial information and are divided by a predetermined time unit by using a stream data generation terminal; 35
a step of generating a piece of signature-related information of each original data item; 40
a step of putting together the pieces of signature-related information of the original data items in chronological order; and
a step of generating signature-related information for the put-together pieces of signature-related information of the original data items to which added are a terminal ID indicating the stream data generation terminal and date-and-time information that is guaranteed by a third party at a time when the original stream data item is generated. 45
50
55

20. A stream data management method comprising the steps of:

generating an original stream data item including a plurality of original data items that each include a plurality of pieces of partial information and are divided by a predetermined time unit by using a stream data generation terminal; 5
generating a piece of signature-related information of each original data item; 10
putting together the pieces of signature-related information of the original data items in chronological order; and
generating signature-related information for the put-together pieces of signature-related information of the original data items to which added are a terminal ID indicating the stream data generation terminal and date-and-time information that is guaranteed by a third party at a time when the original stream data item is generated. 20

25

30

35

40

45

50

55

FIG. 1

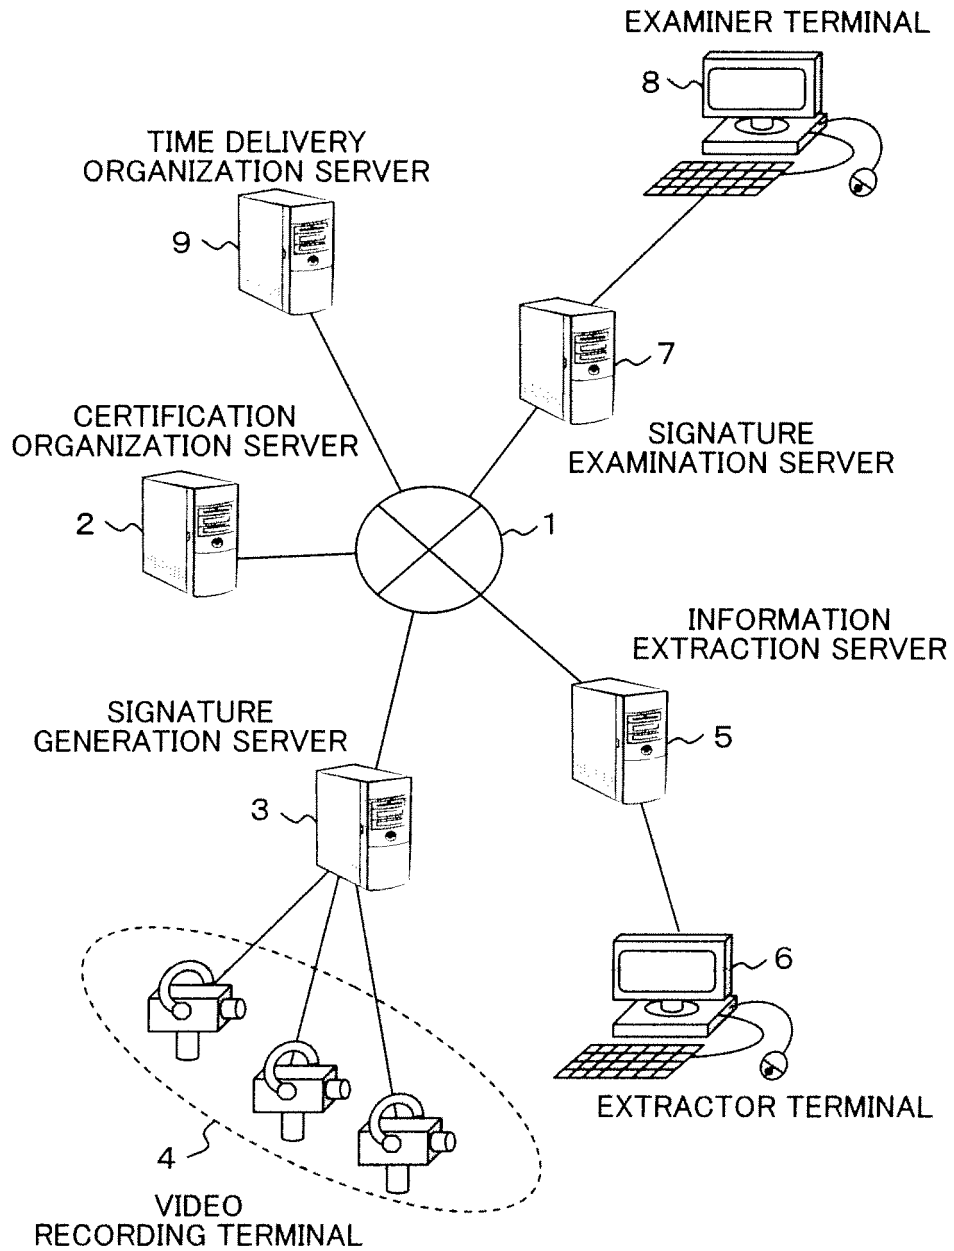


FIG. 2

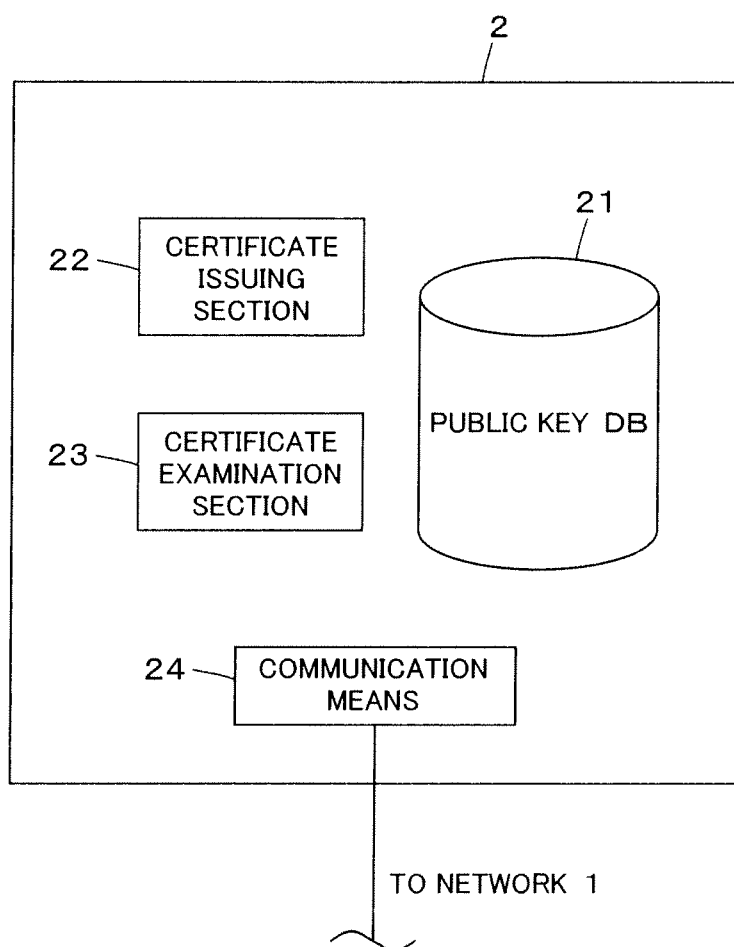


FIG. 3

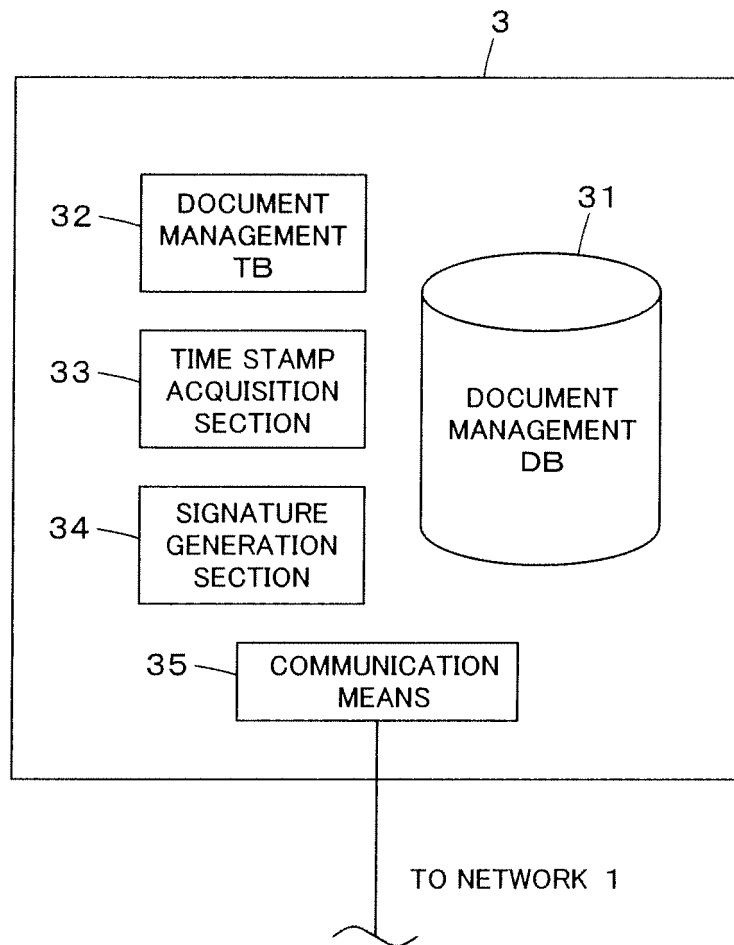


FIG. 5

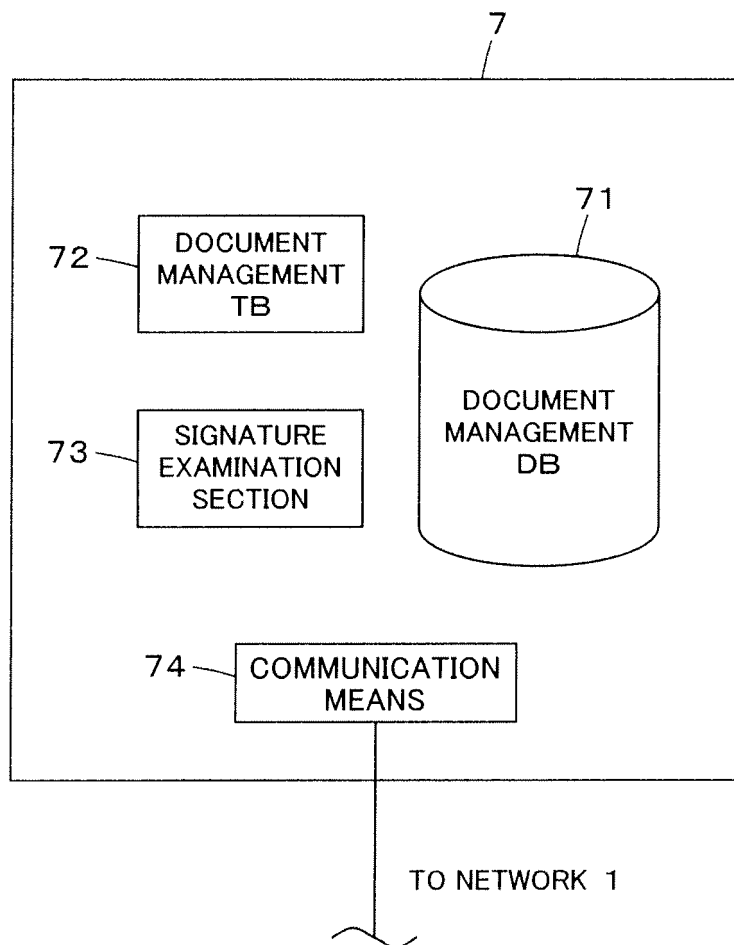


FIG. 4

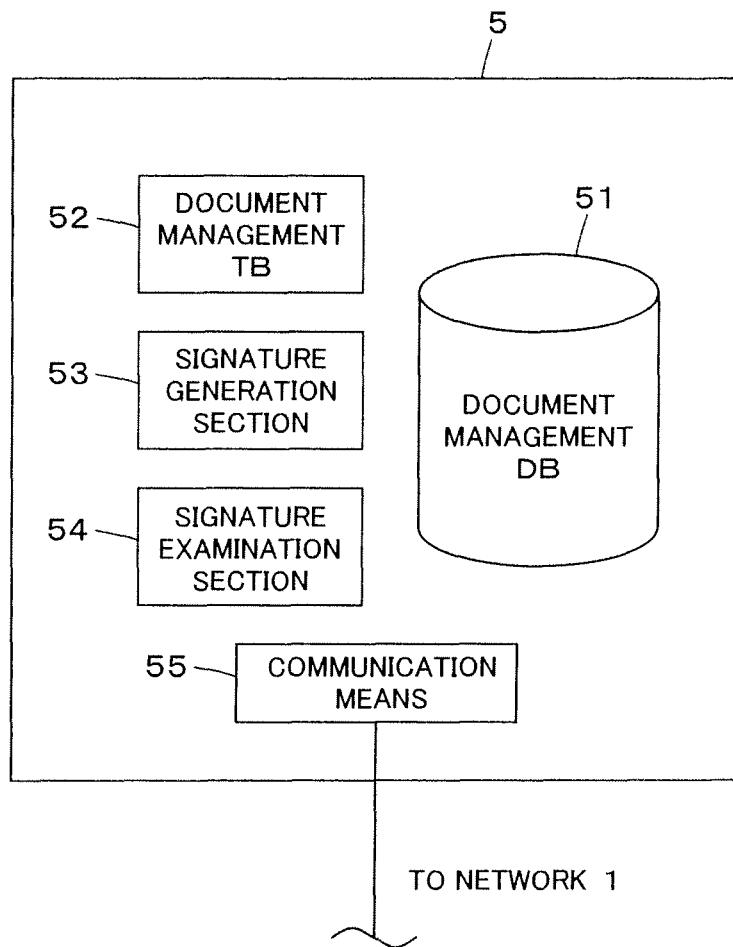


FIG. 6

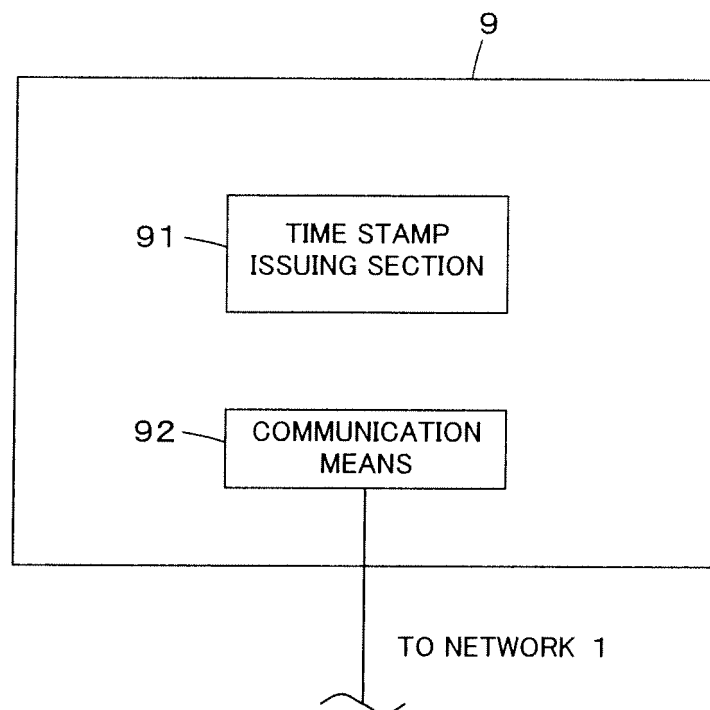


FIG. 7

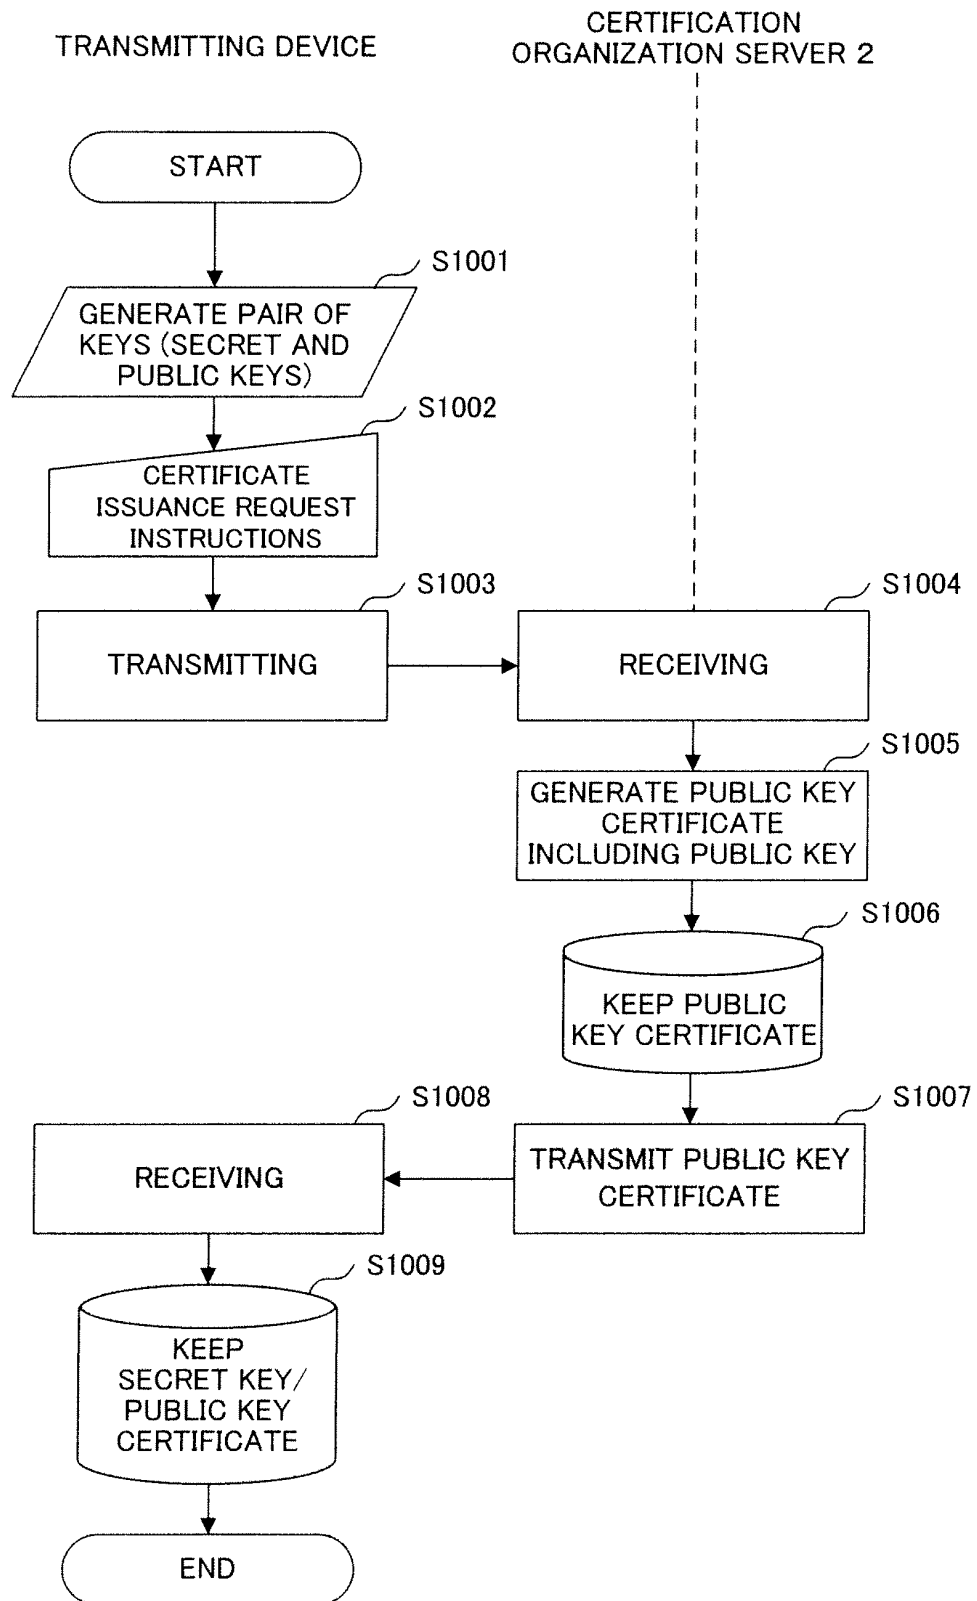


FIG. 8

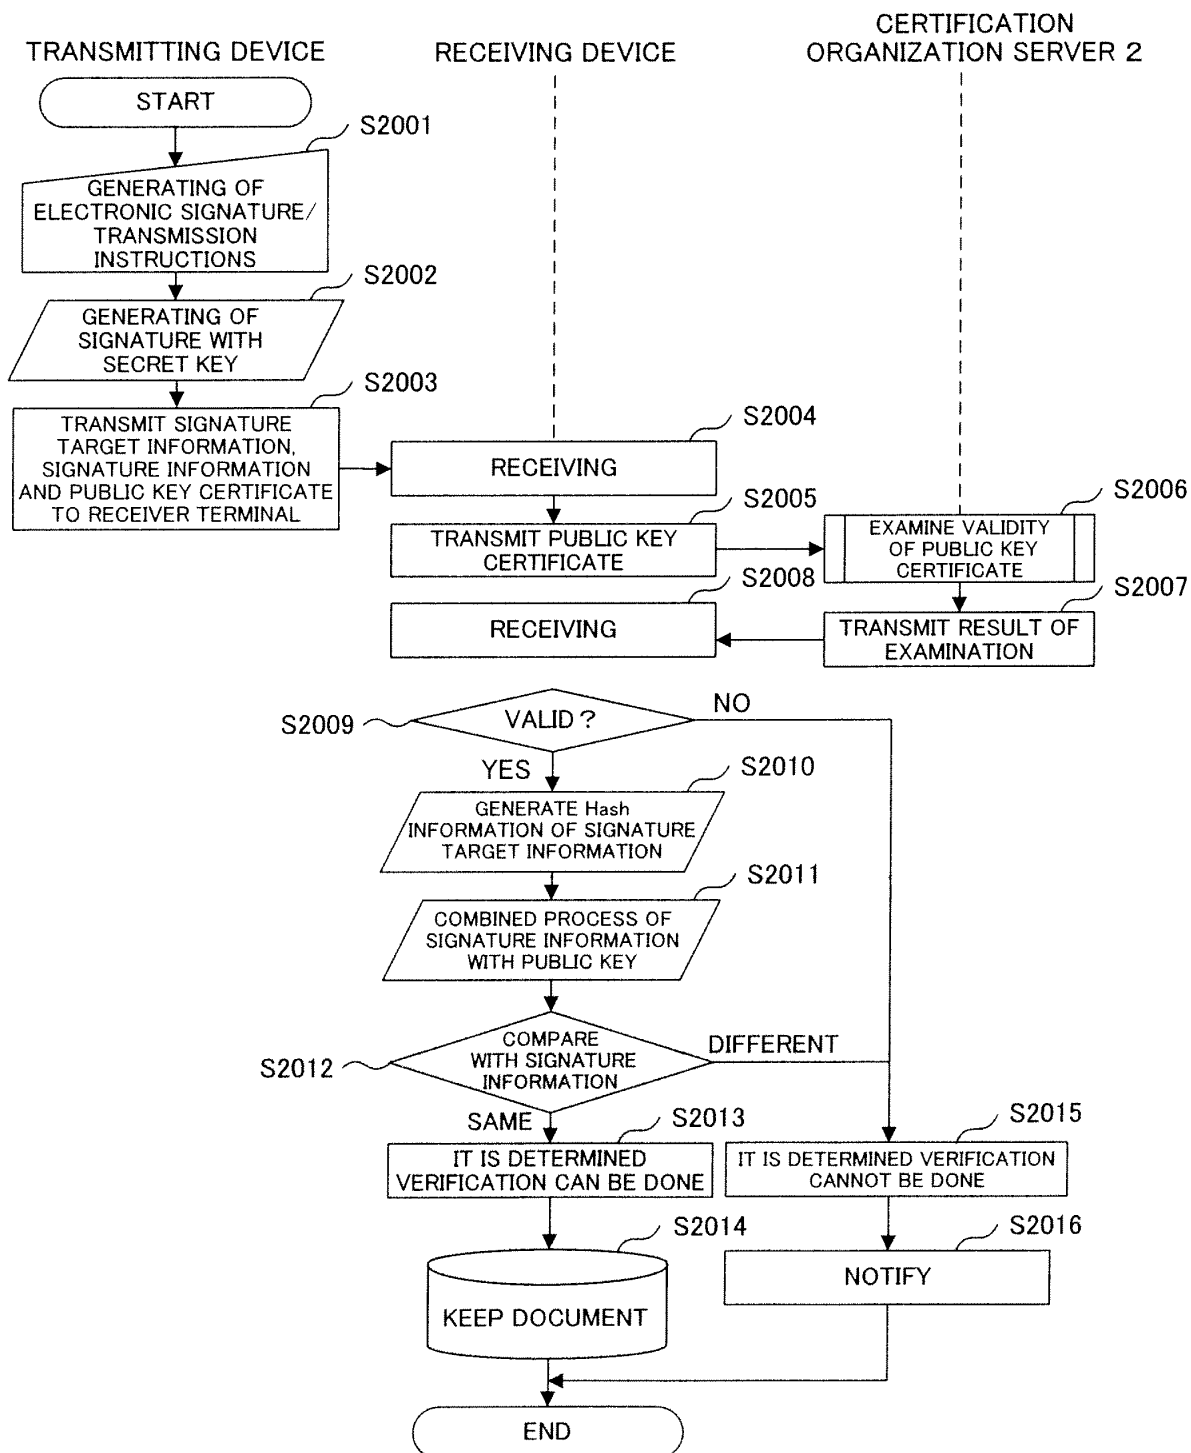


FIG. 9

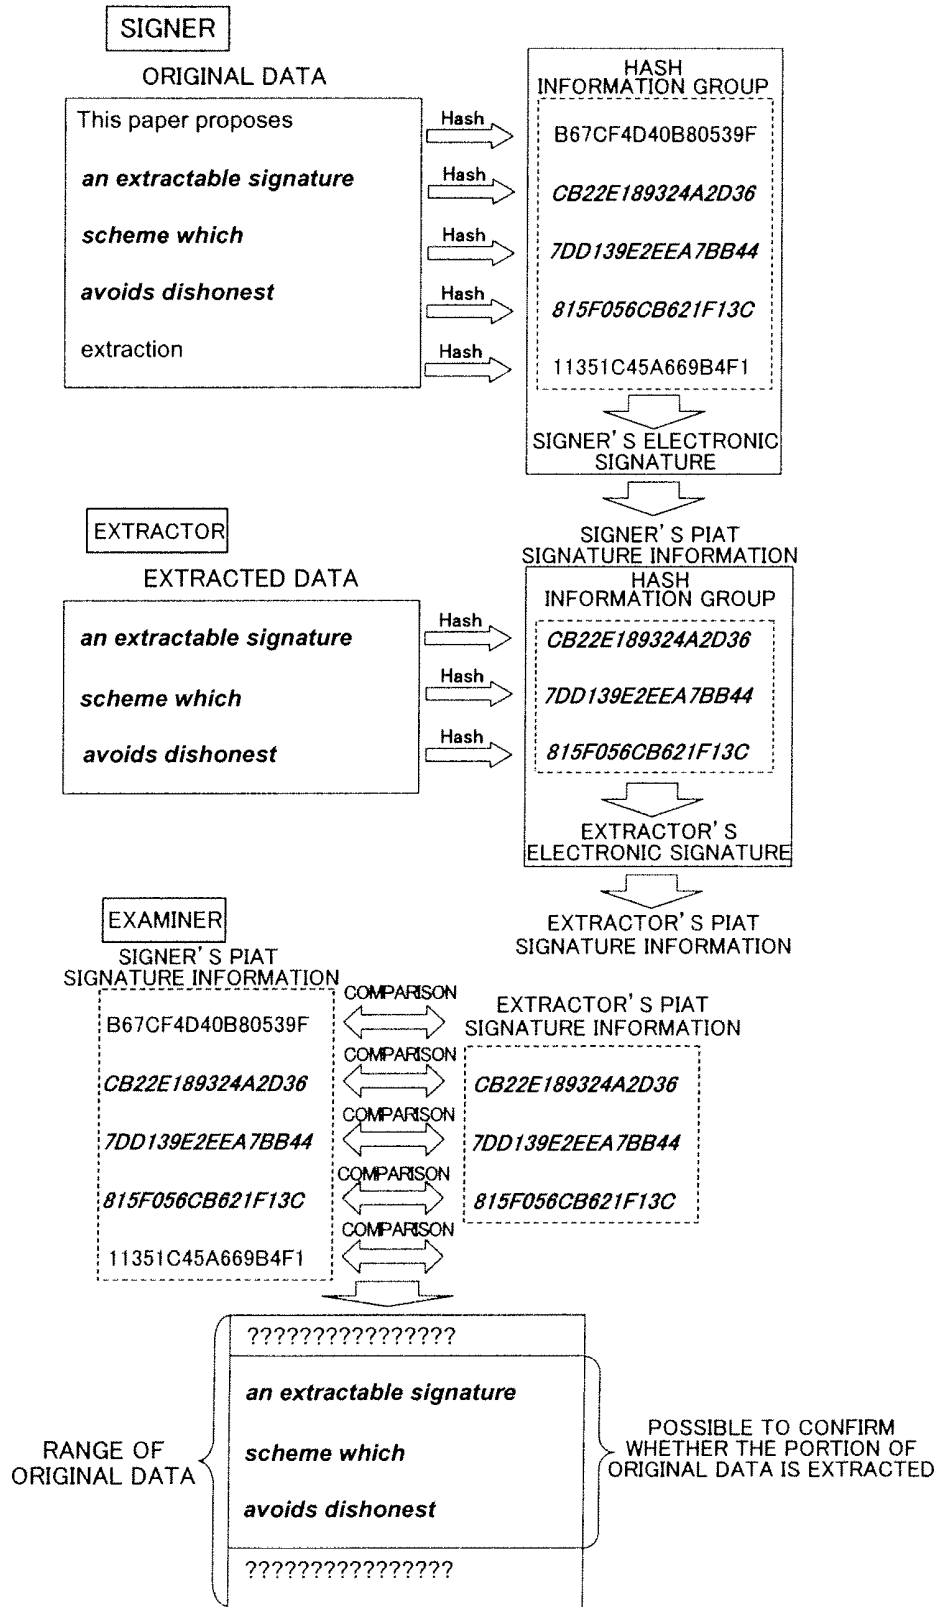


FIG. 10

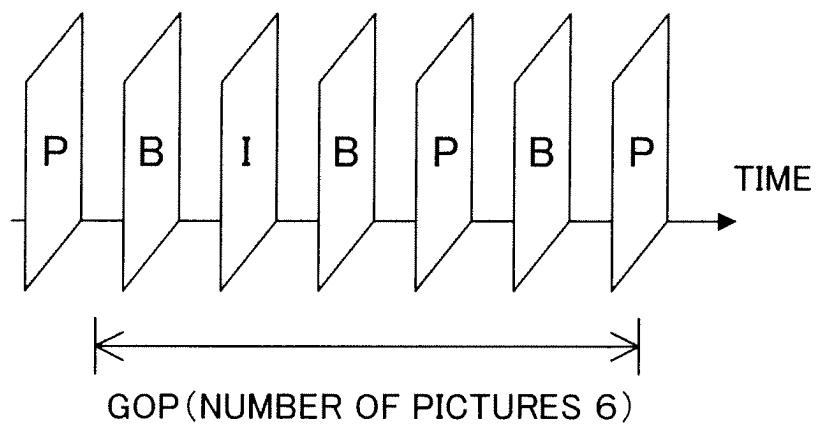


FIG. 11

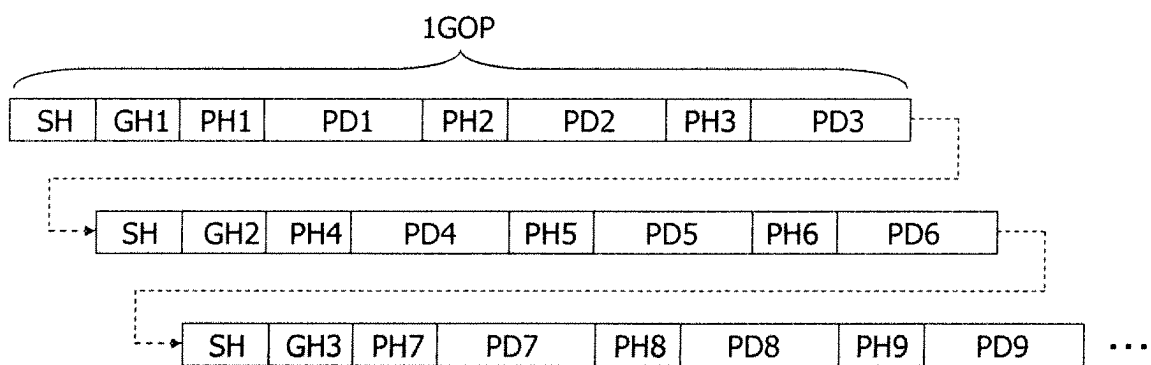


FIG. 12

11/37

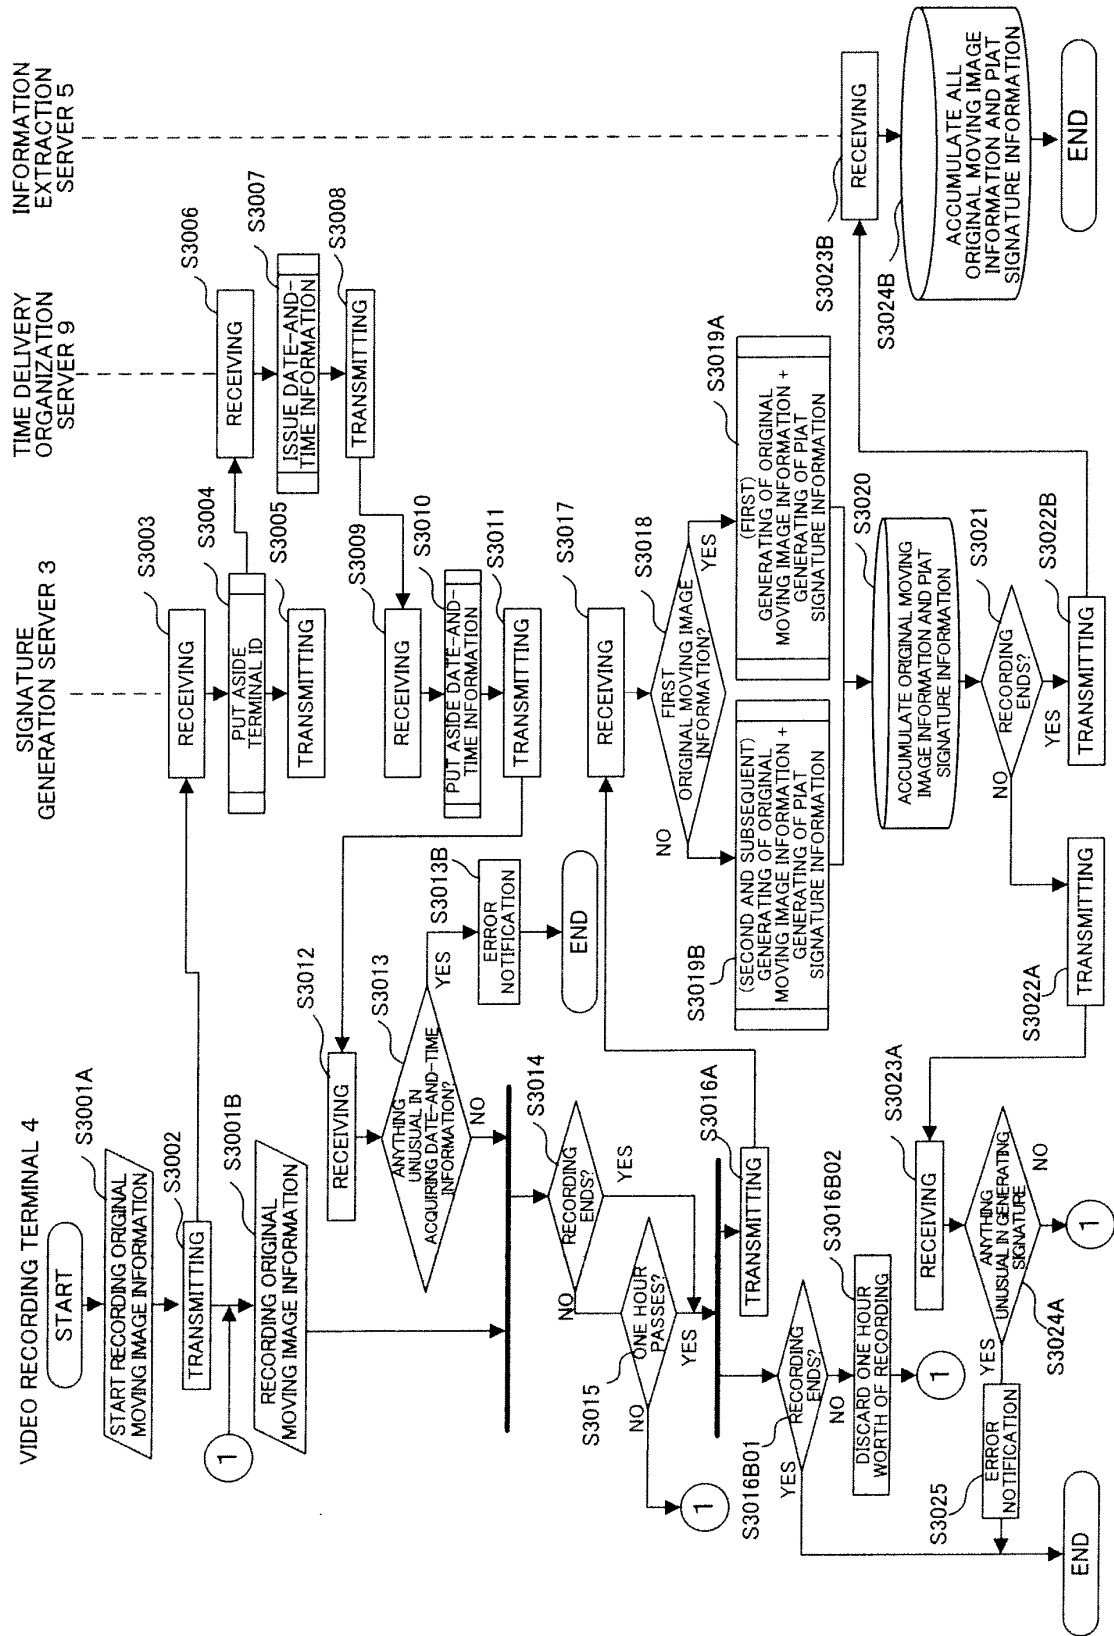


FIG. 13

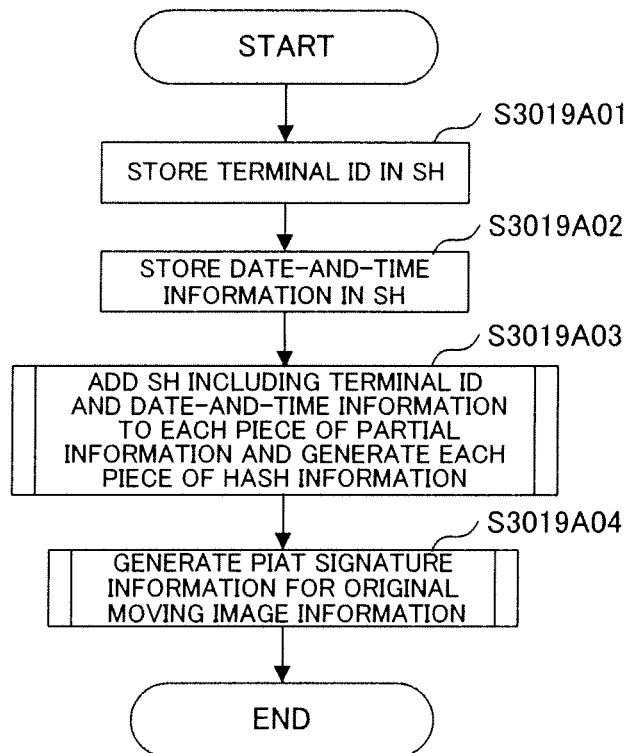
SIGNATURE
GENERATION SERVER 3

FIG. 14

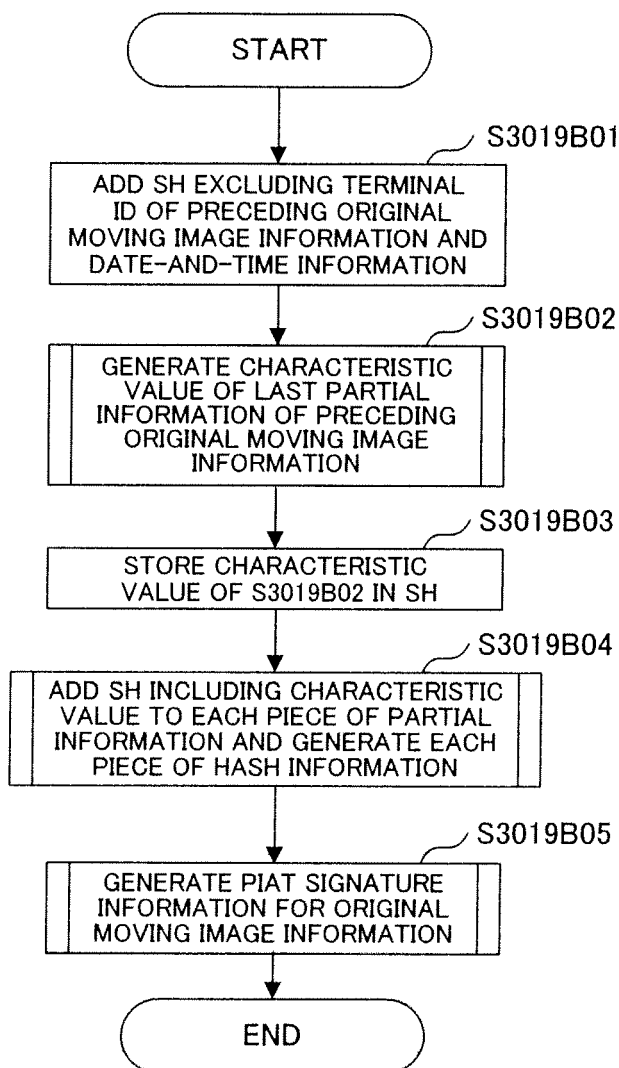
SIGNATURE
GENERATION SERVER 3

FIG. 15

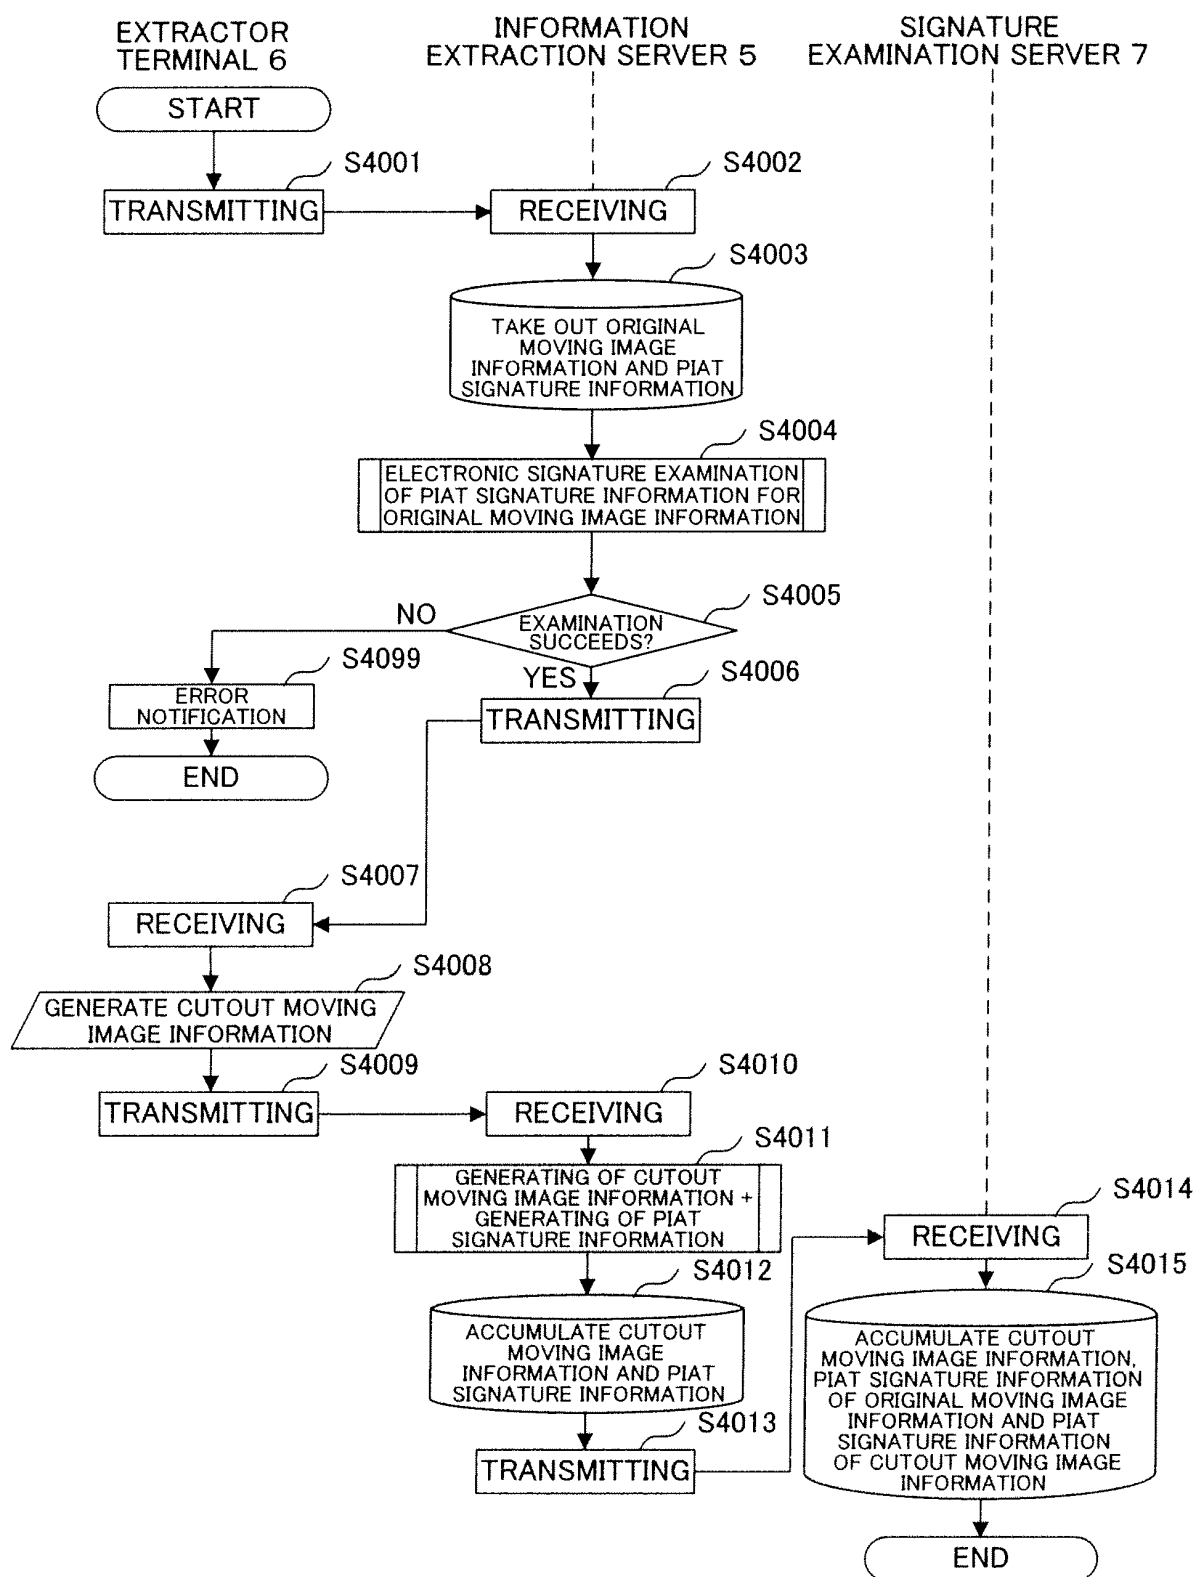


FIG. 16

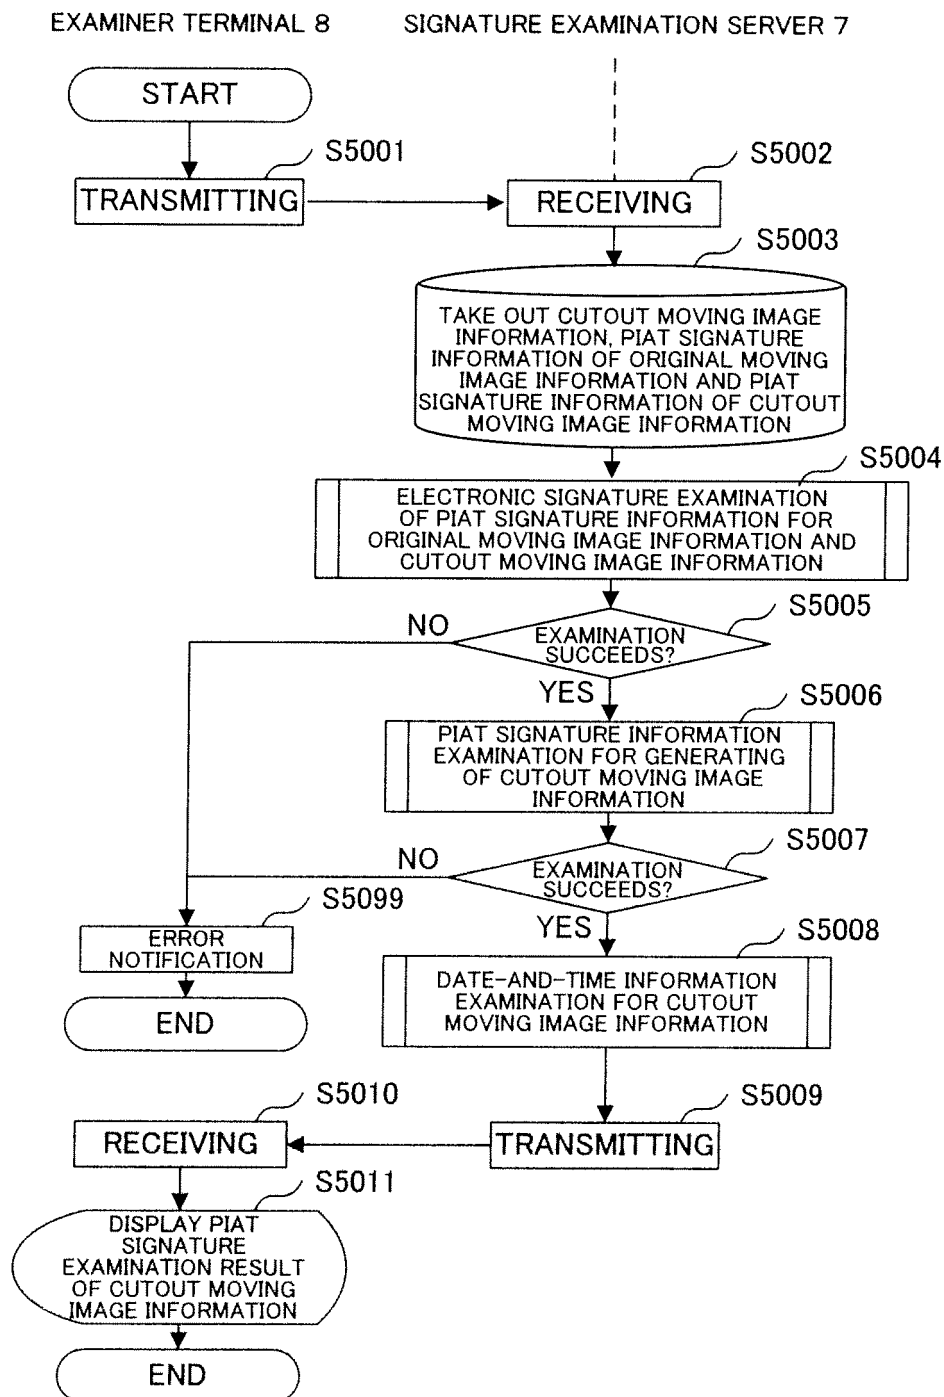


FIG. 17

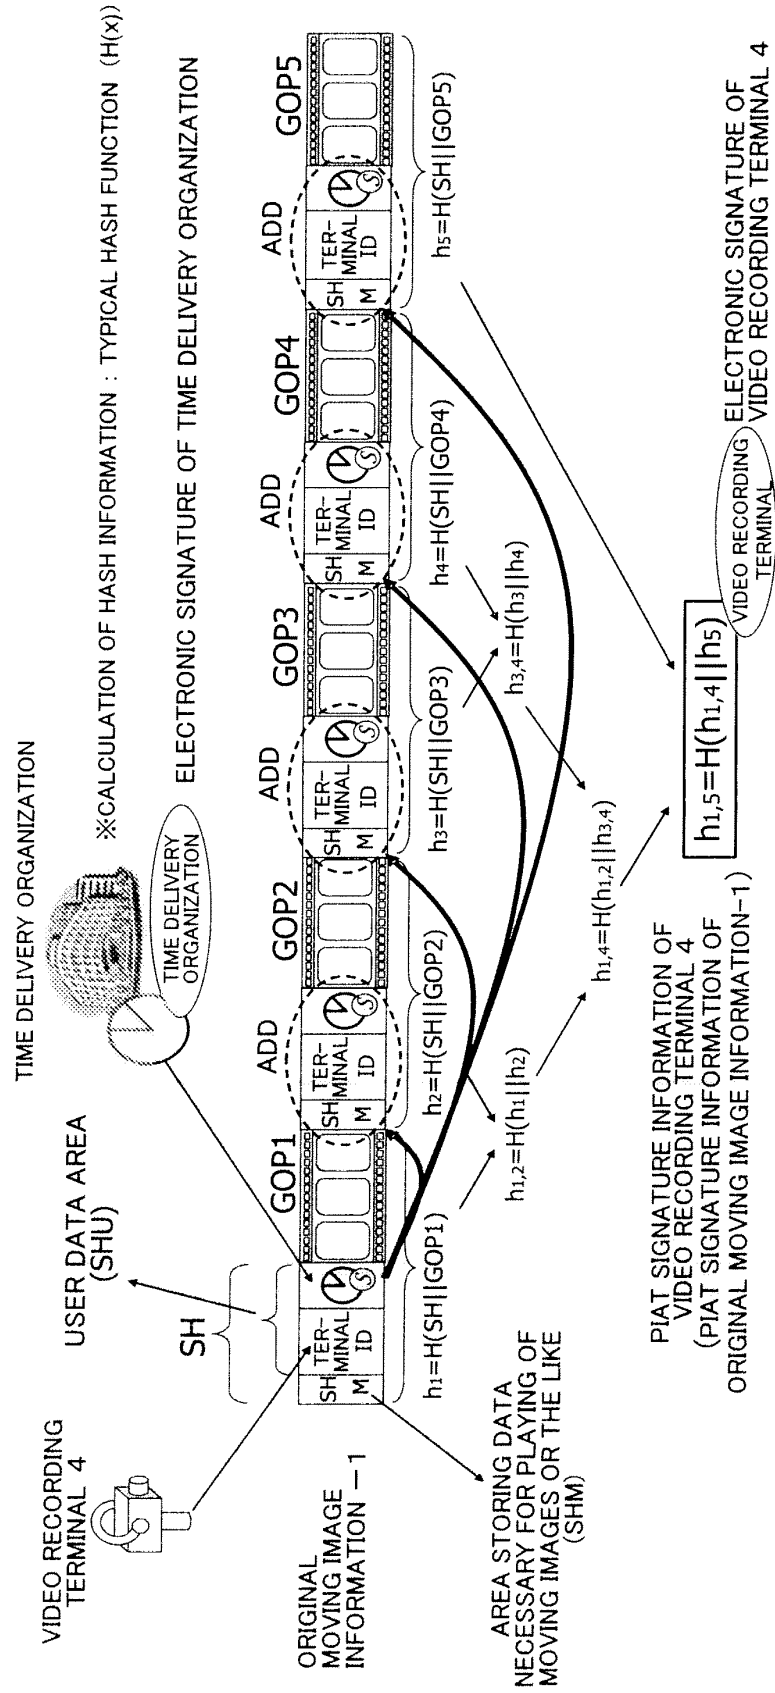


FIG. 18

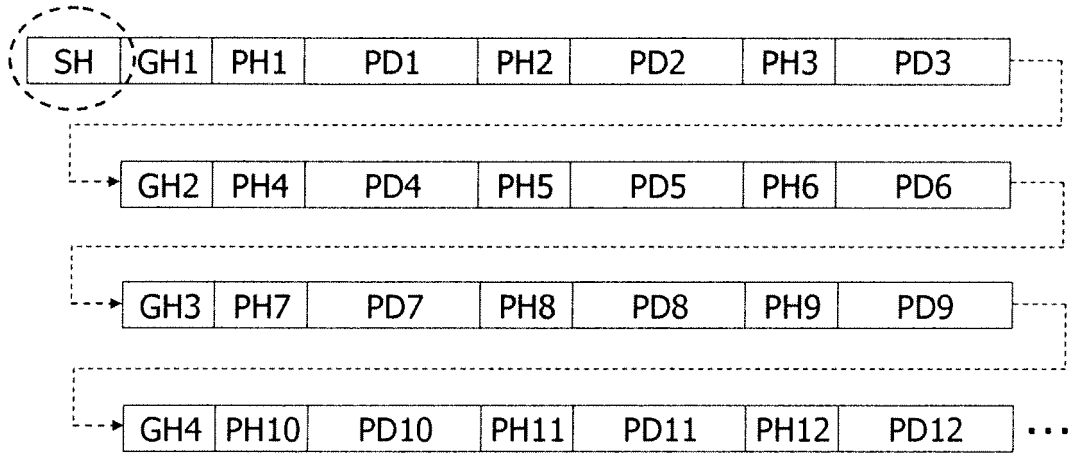


FIG. 19

PIAT SIGNATURE INFORMATION OF VIDEO RECORDING TERMINAL 4															
E8 BD 73 5D 13 65 58 1F 79 AF E9 70 21 55 FA 79															
11 27 A0 FD B8 0B 10 D0 DA 07 02 0F 10 30 82 6A															
5F 2D 68 3A CE 3E E0 7B 80 19 FF BF 75 D3 D8 24															
06 3E 15 D9 89 6A 0F 61 5D 63 90 D0 89 21 BD 8D															
...31 0F A1 77															

PIAT1

SIGN1

FIG. 21

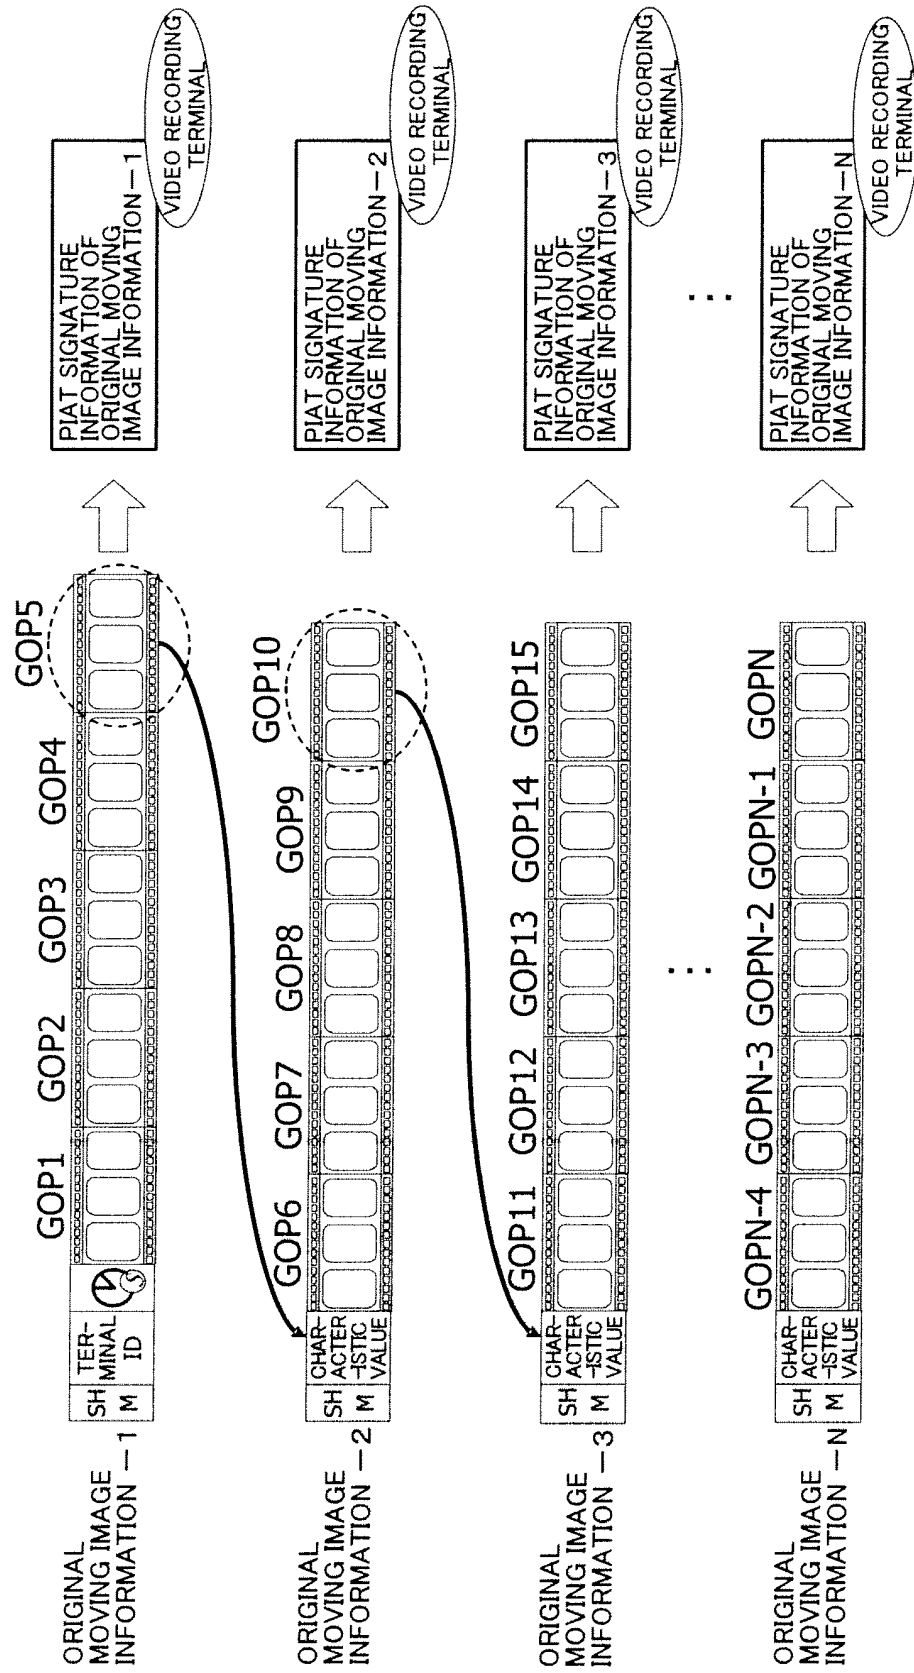


FIG. 22

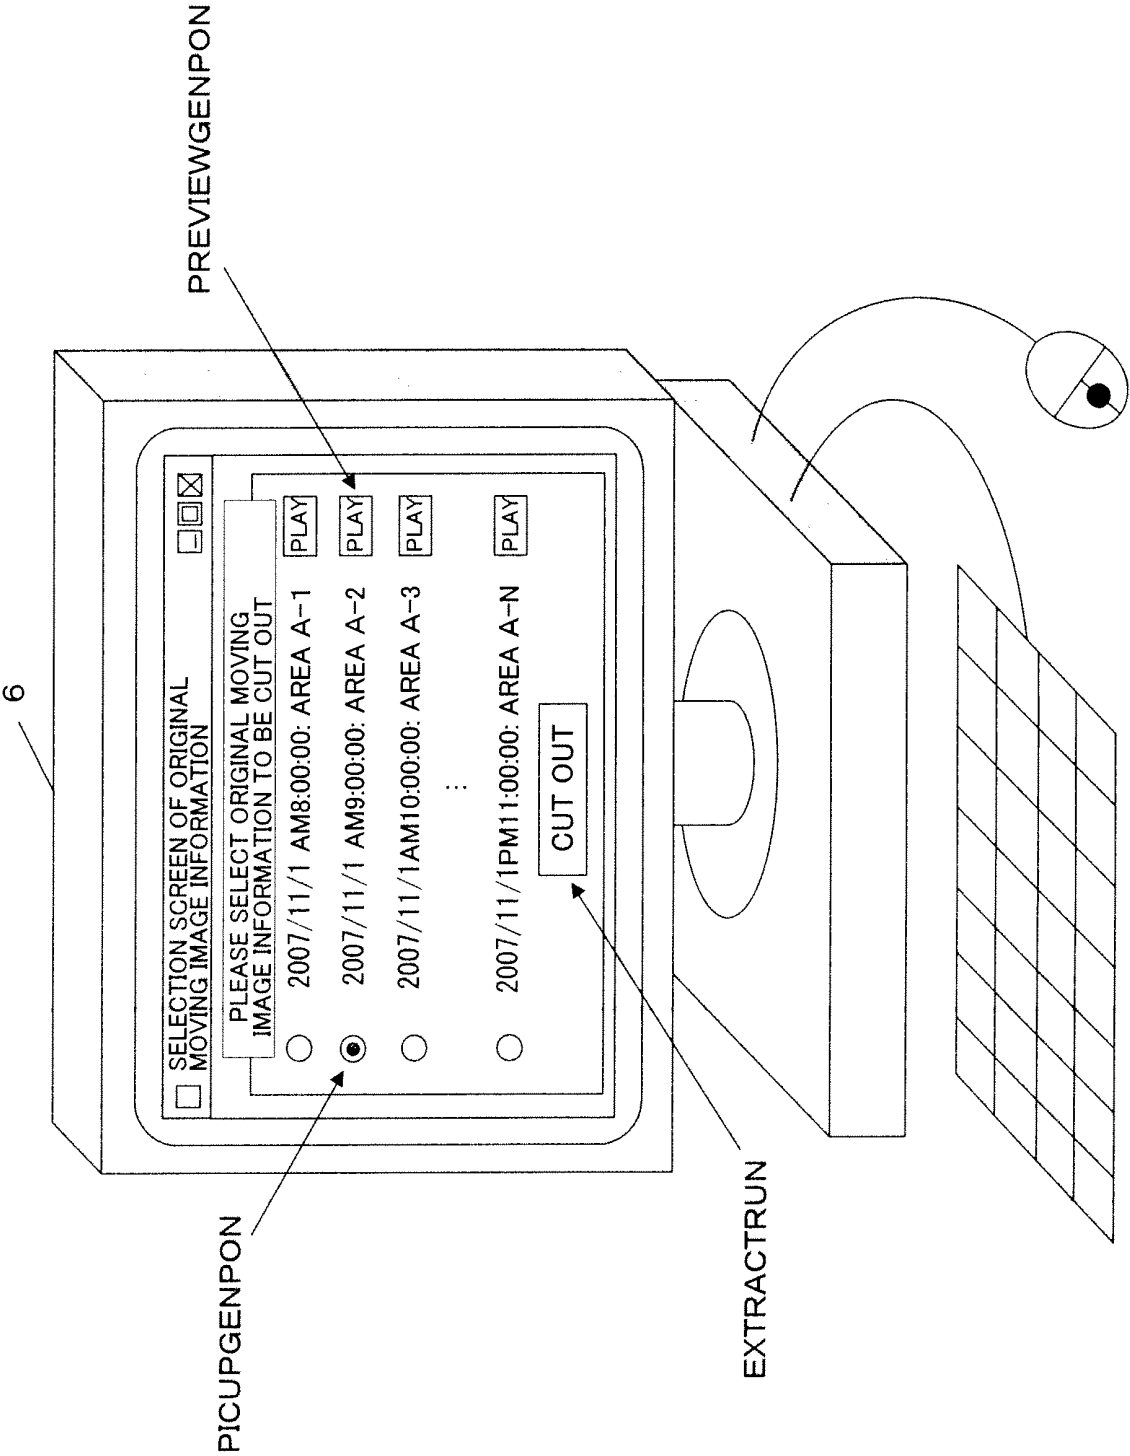


FIG. 23

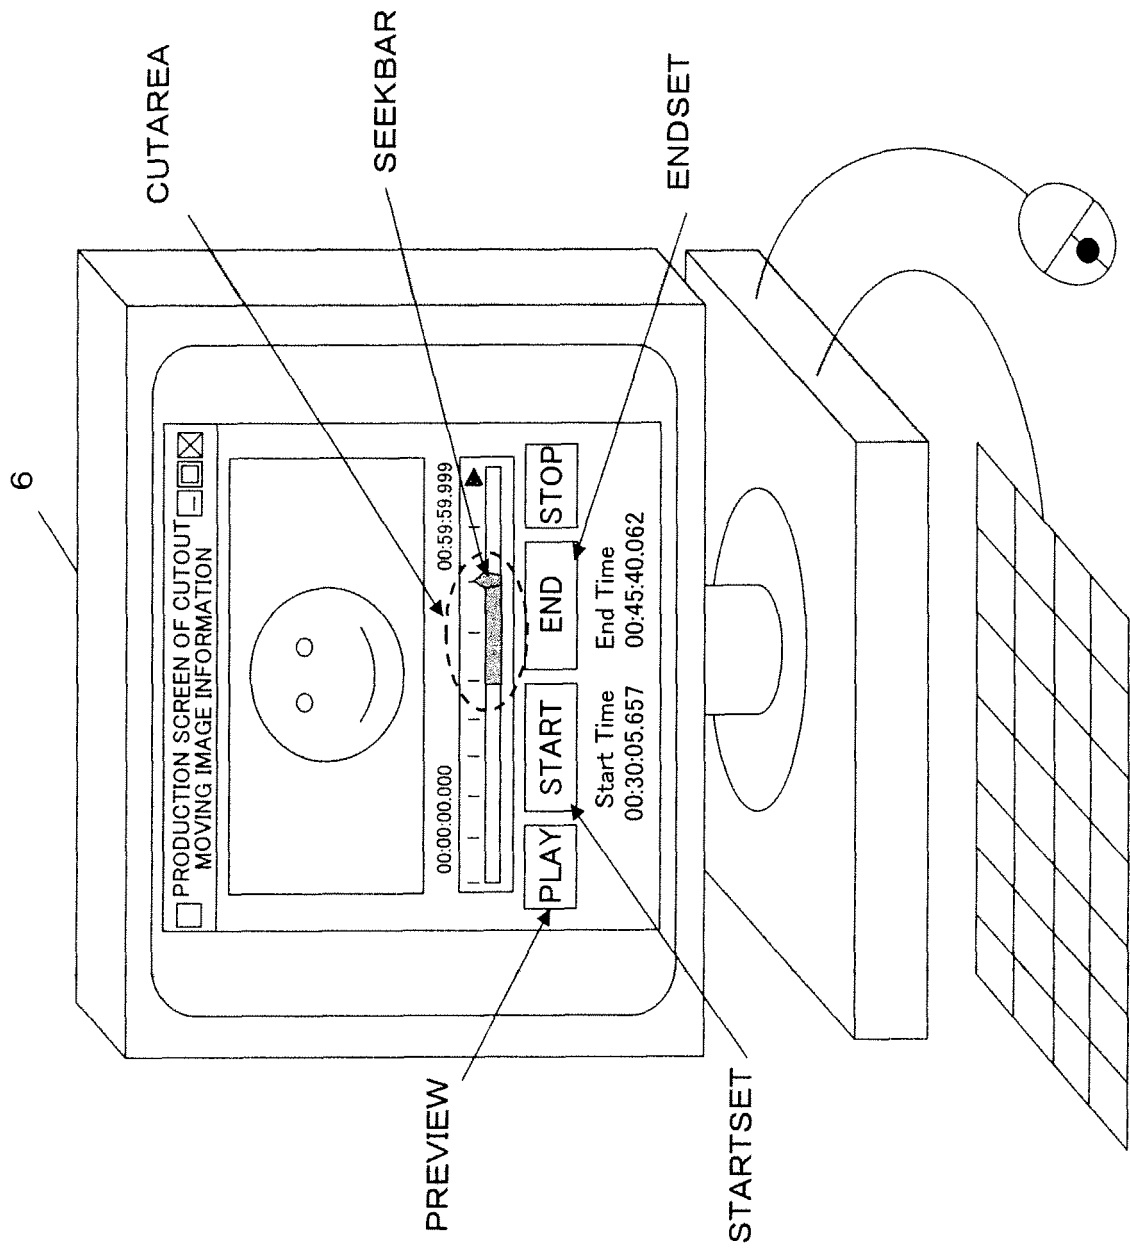


FIG. 24

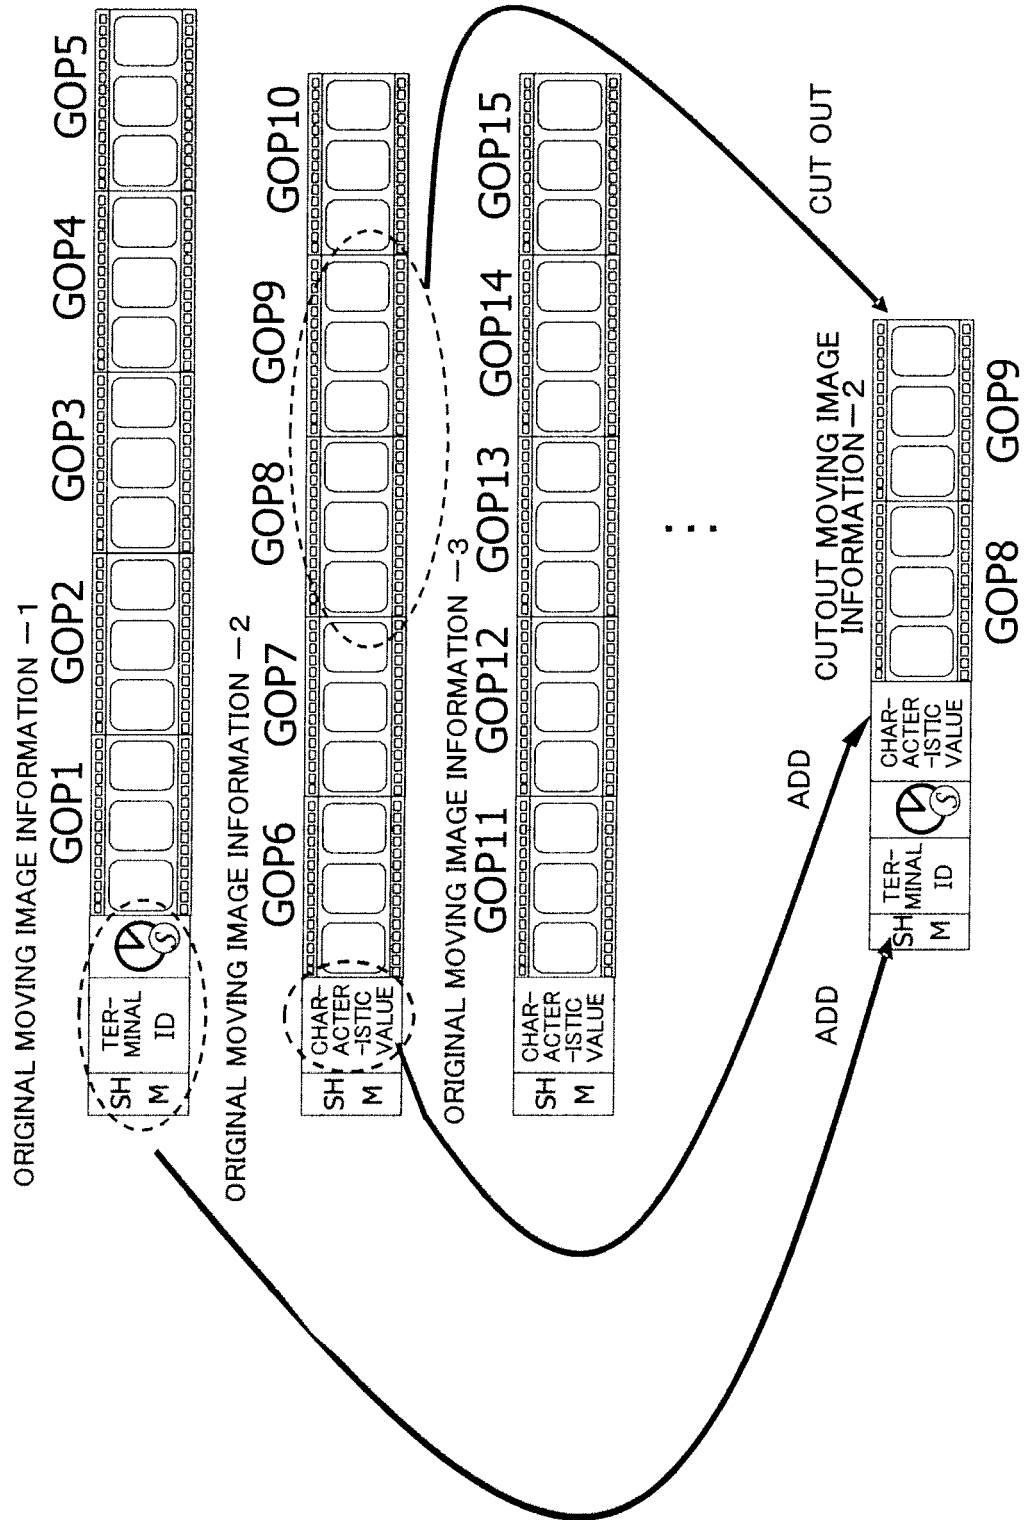


FIG. 25

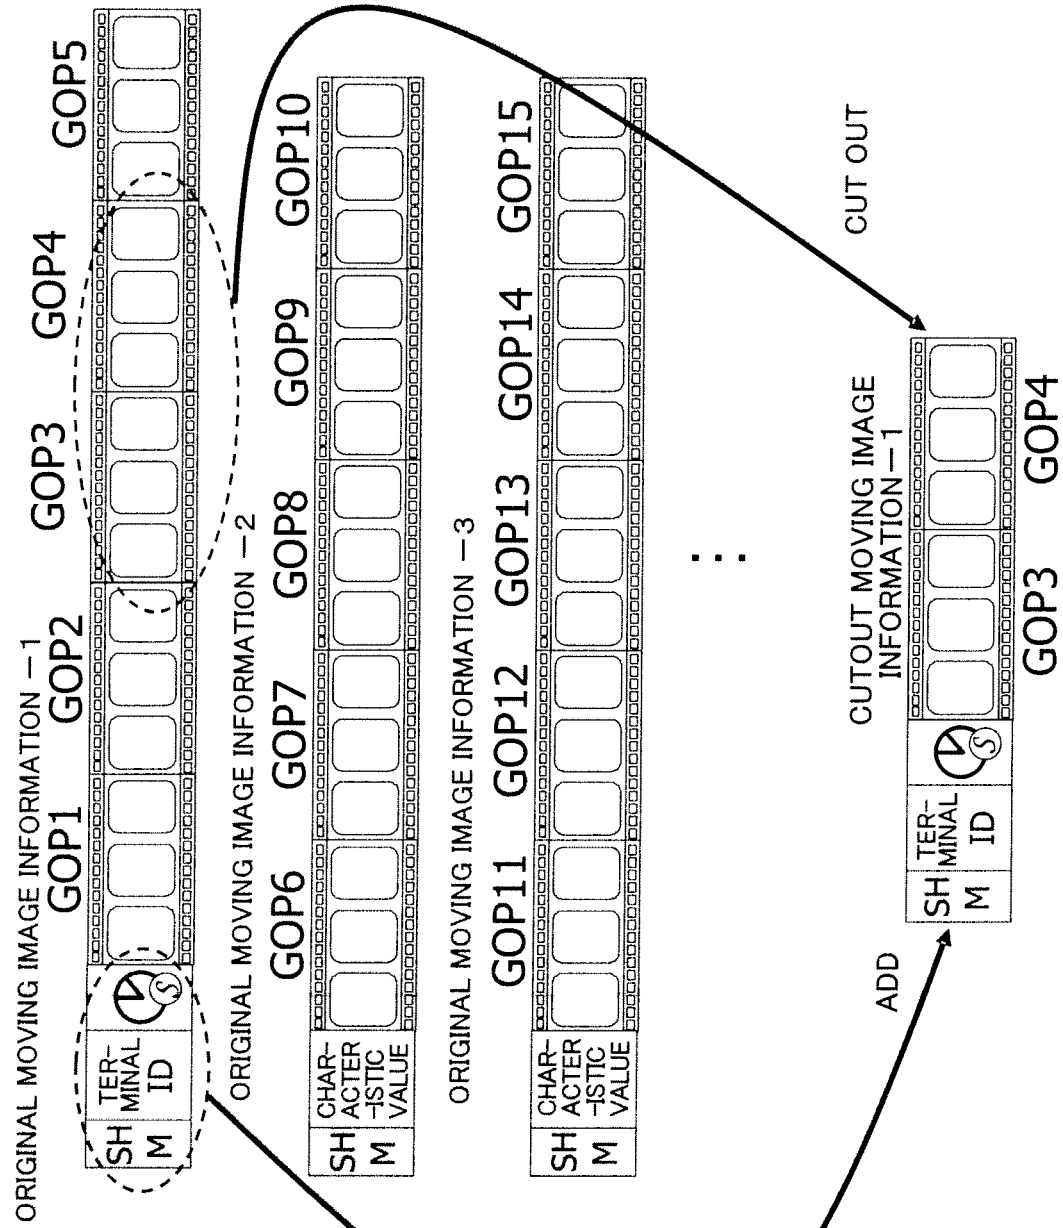


FIG. 26

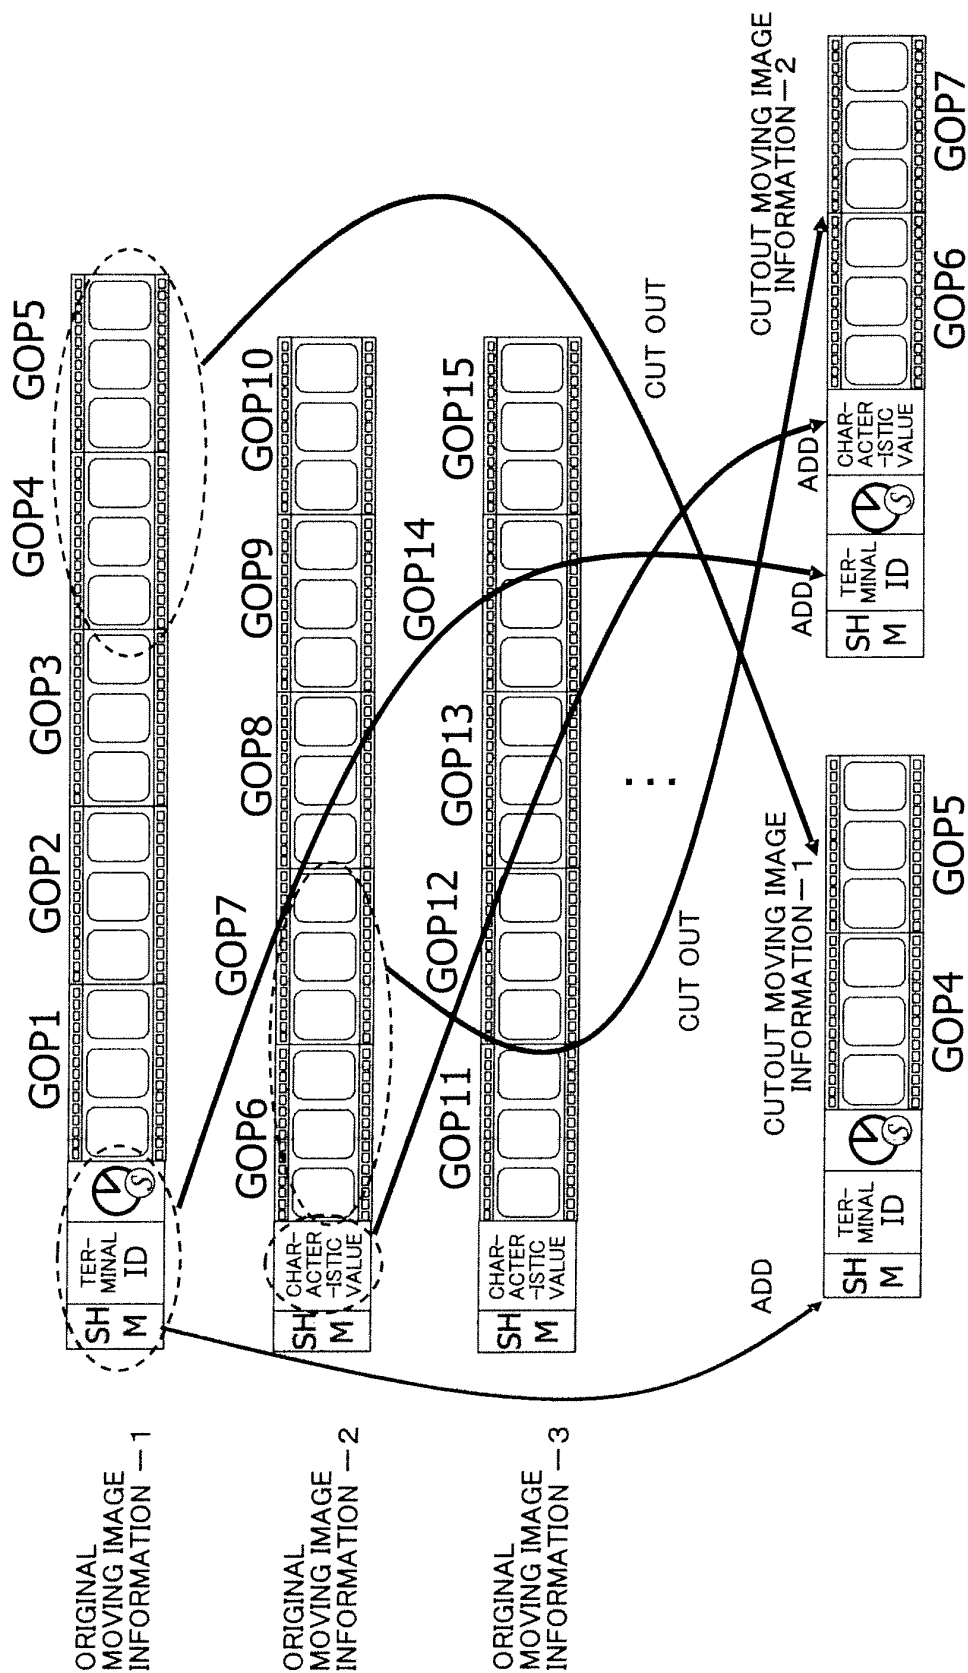


FIG. 27

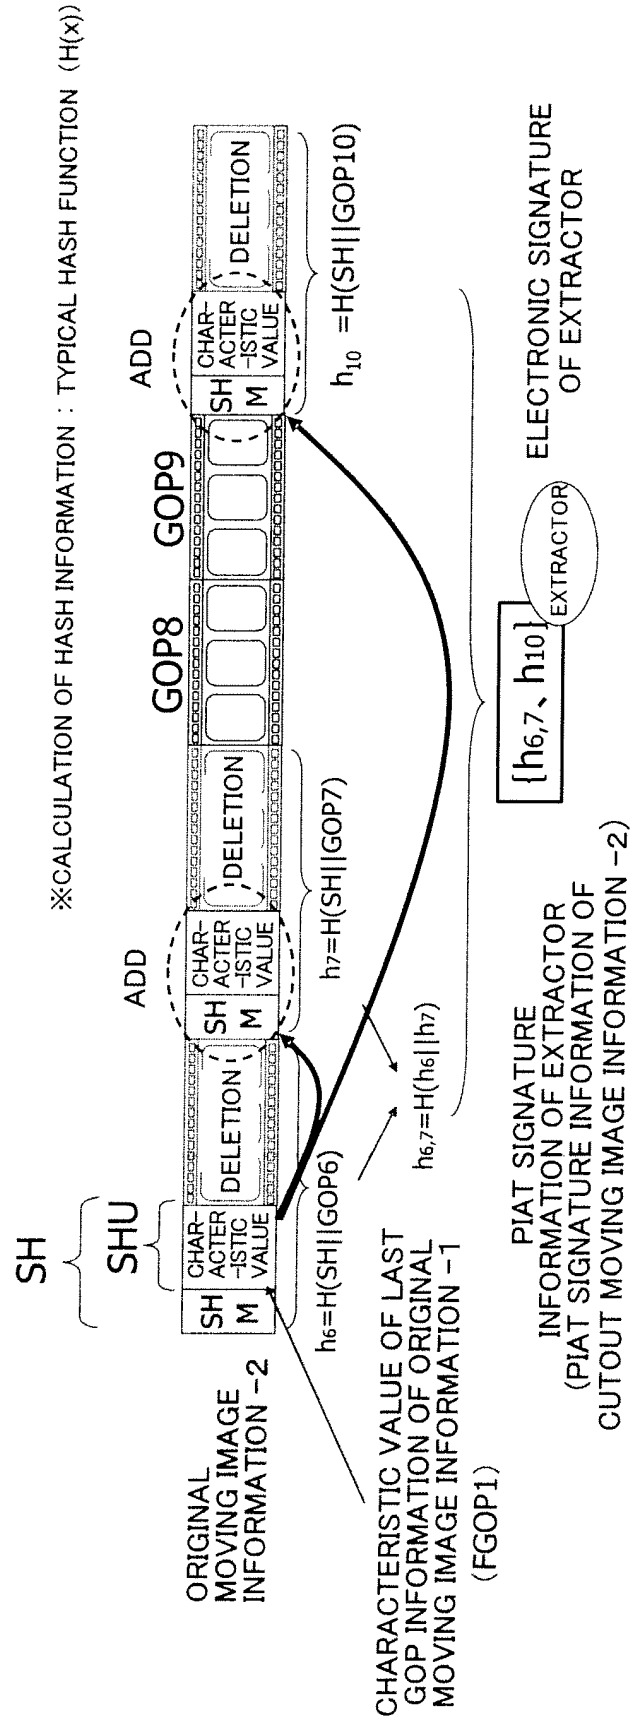


FIG. 28

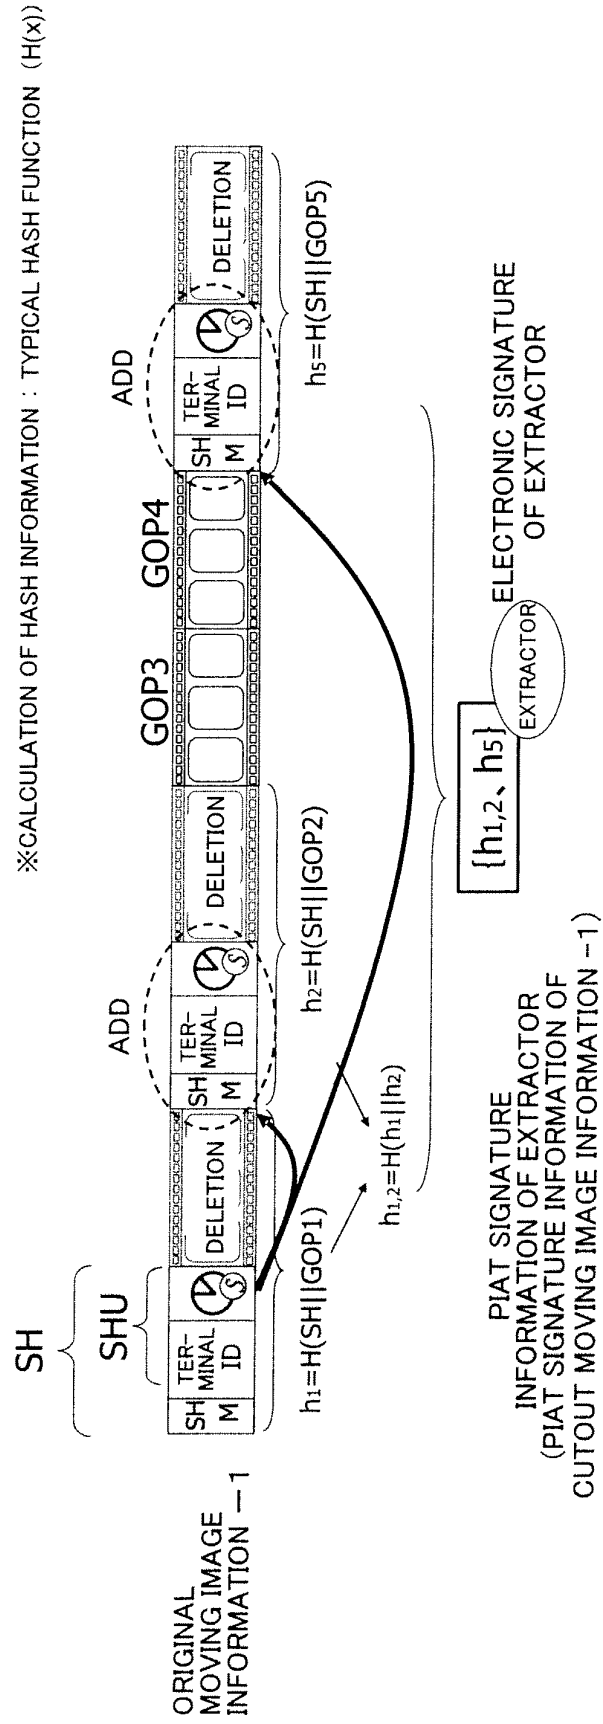


FIG. 29

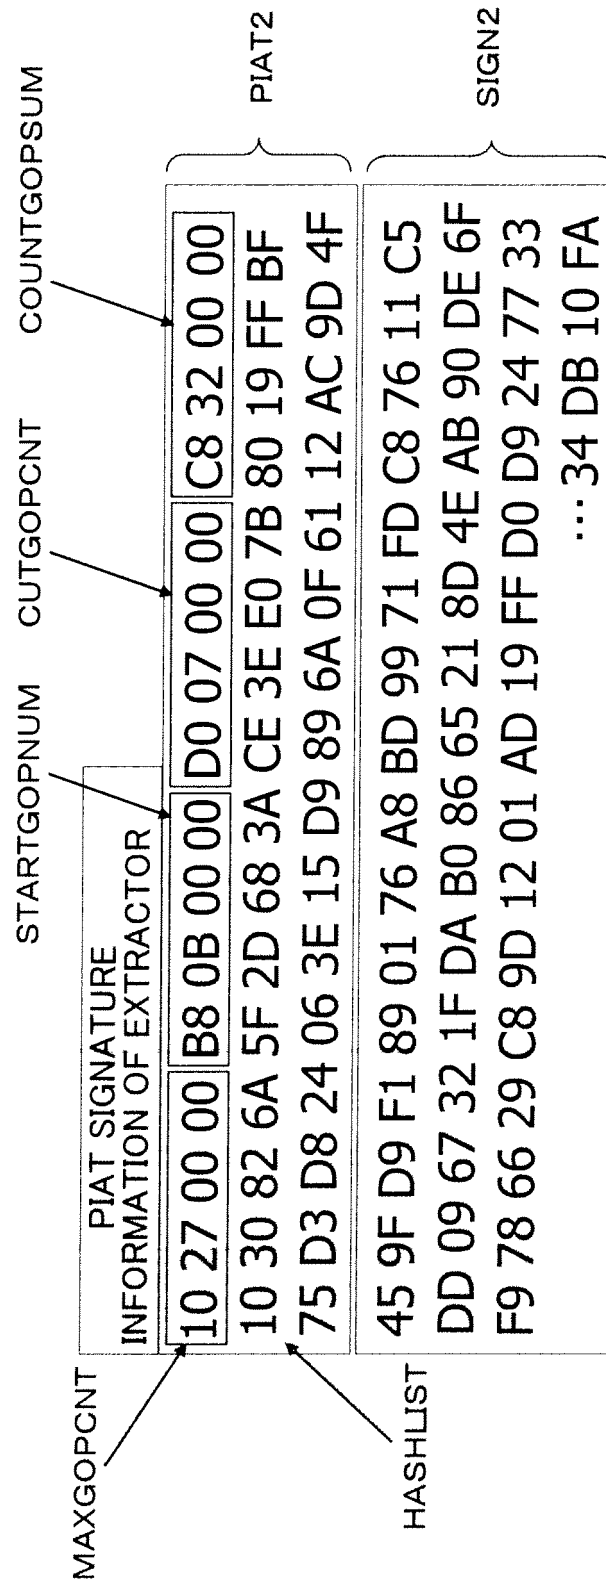


FIG. 30

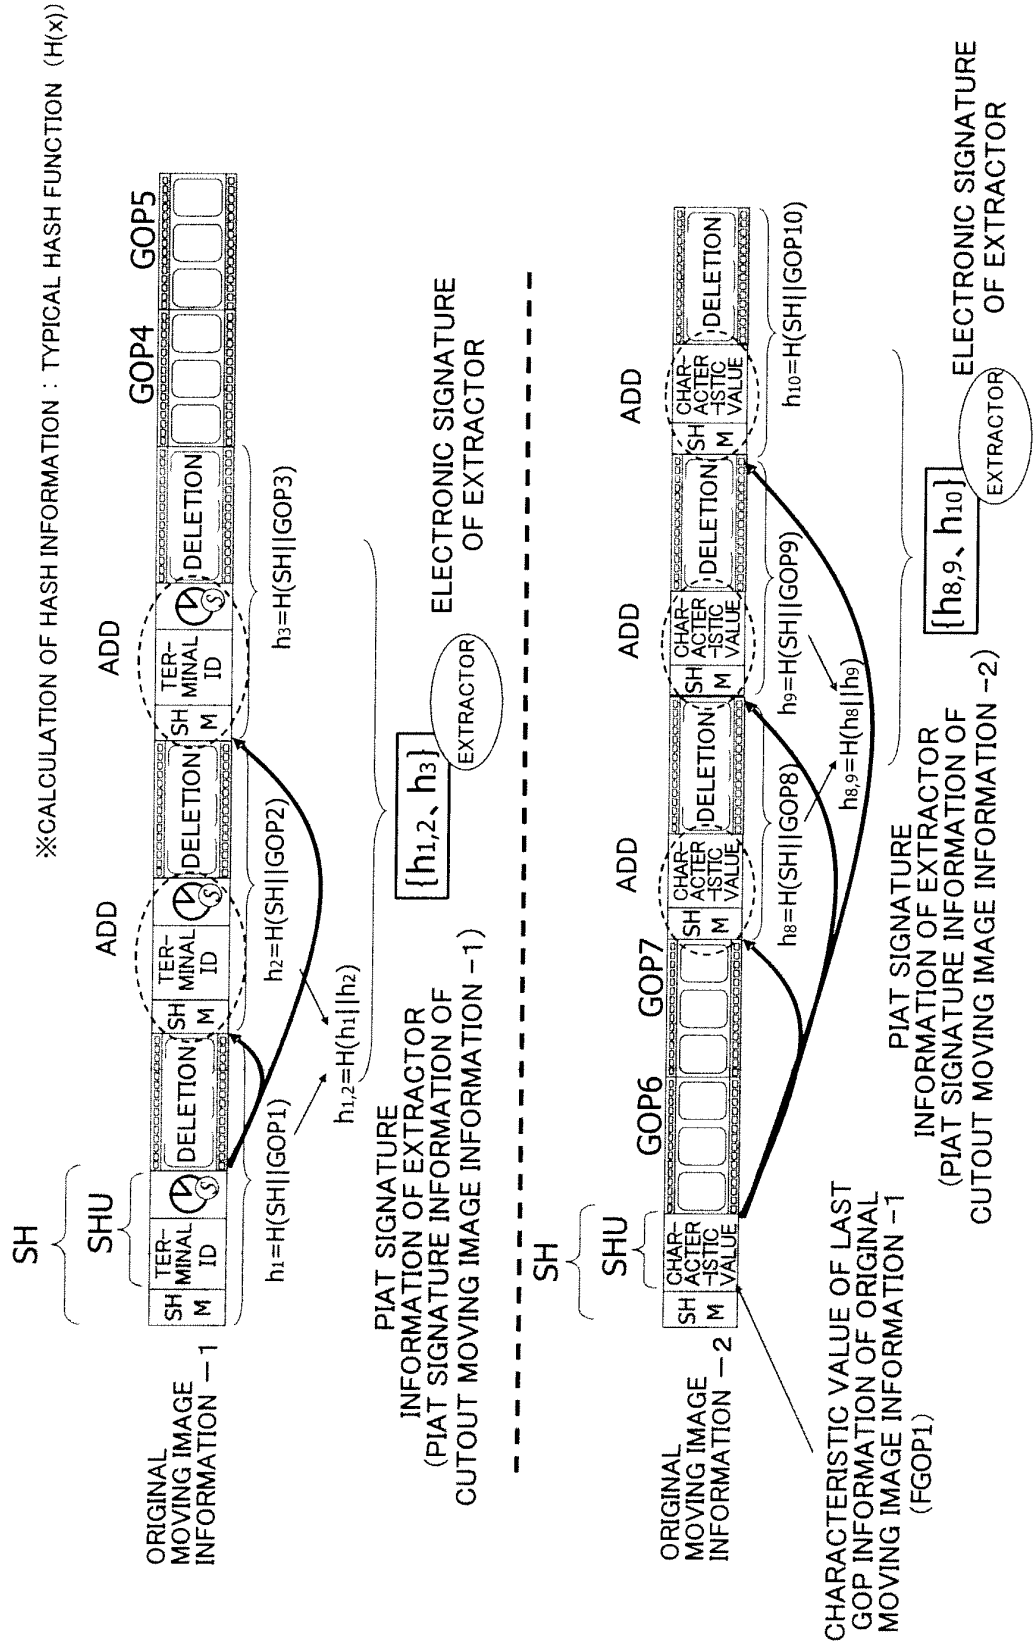


FIG. 31

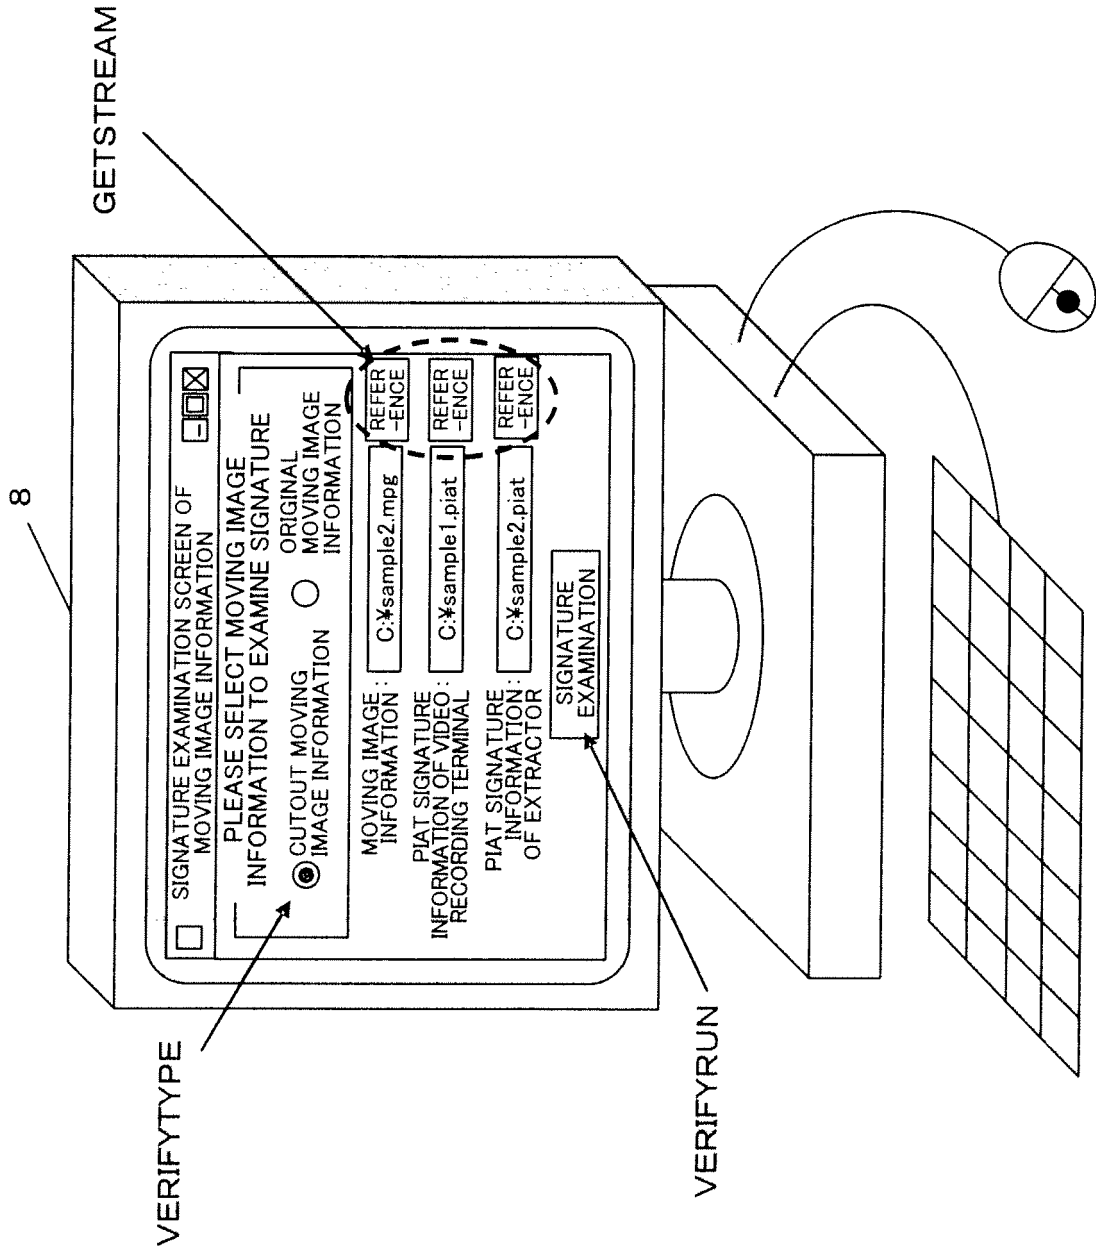


FIG. 32

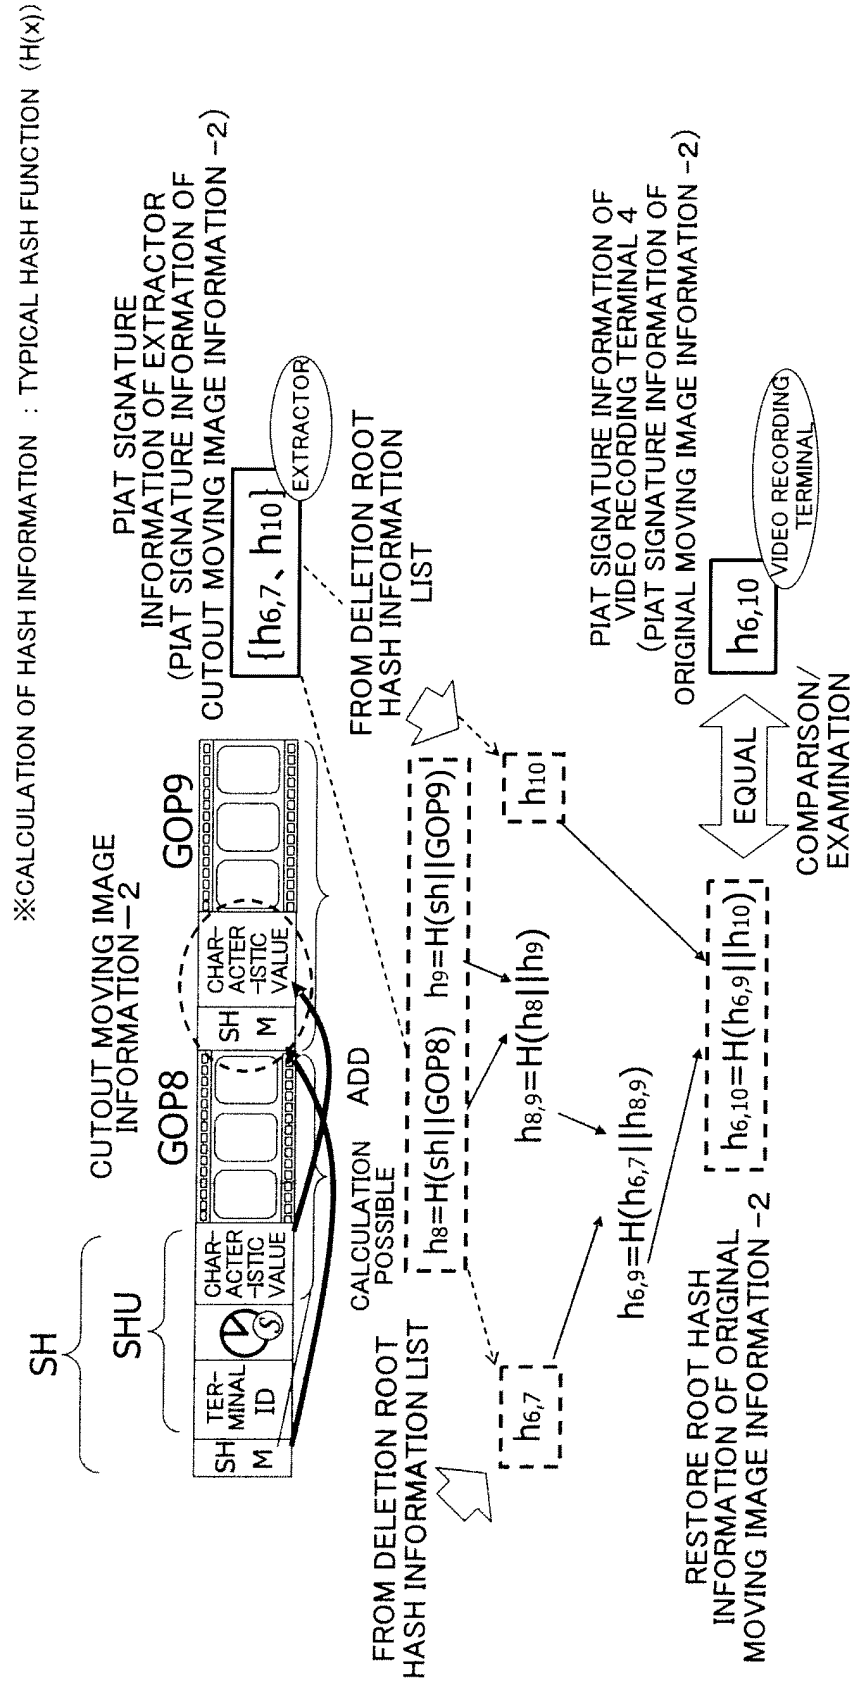


FIG. 33

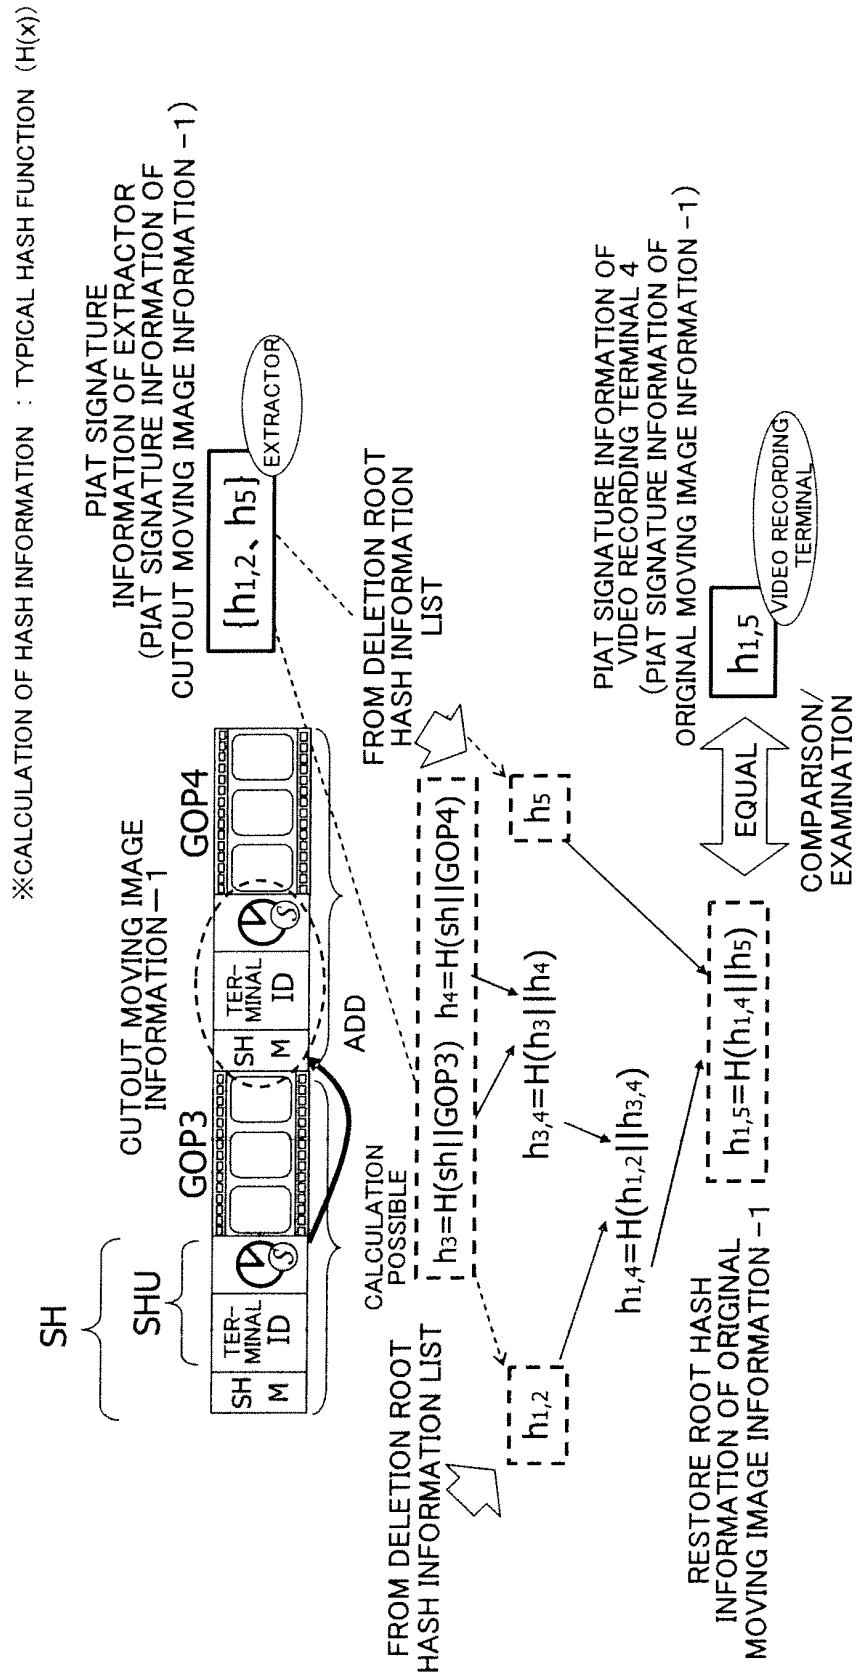


FIG. 34

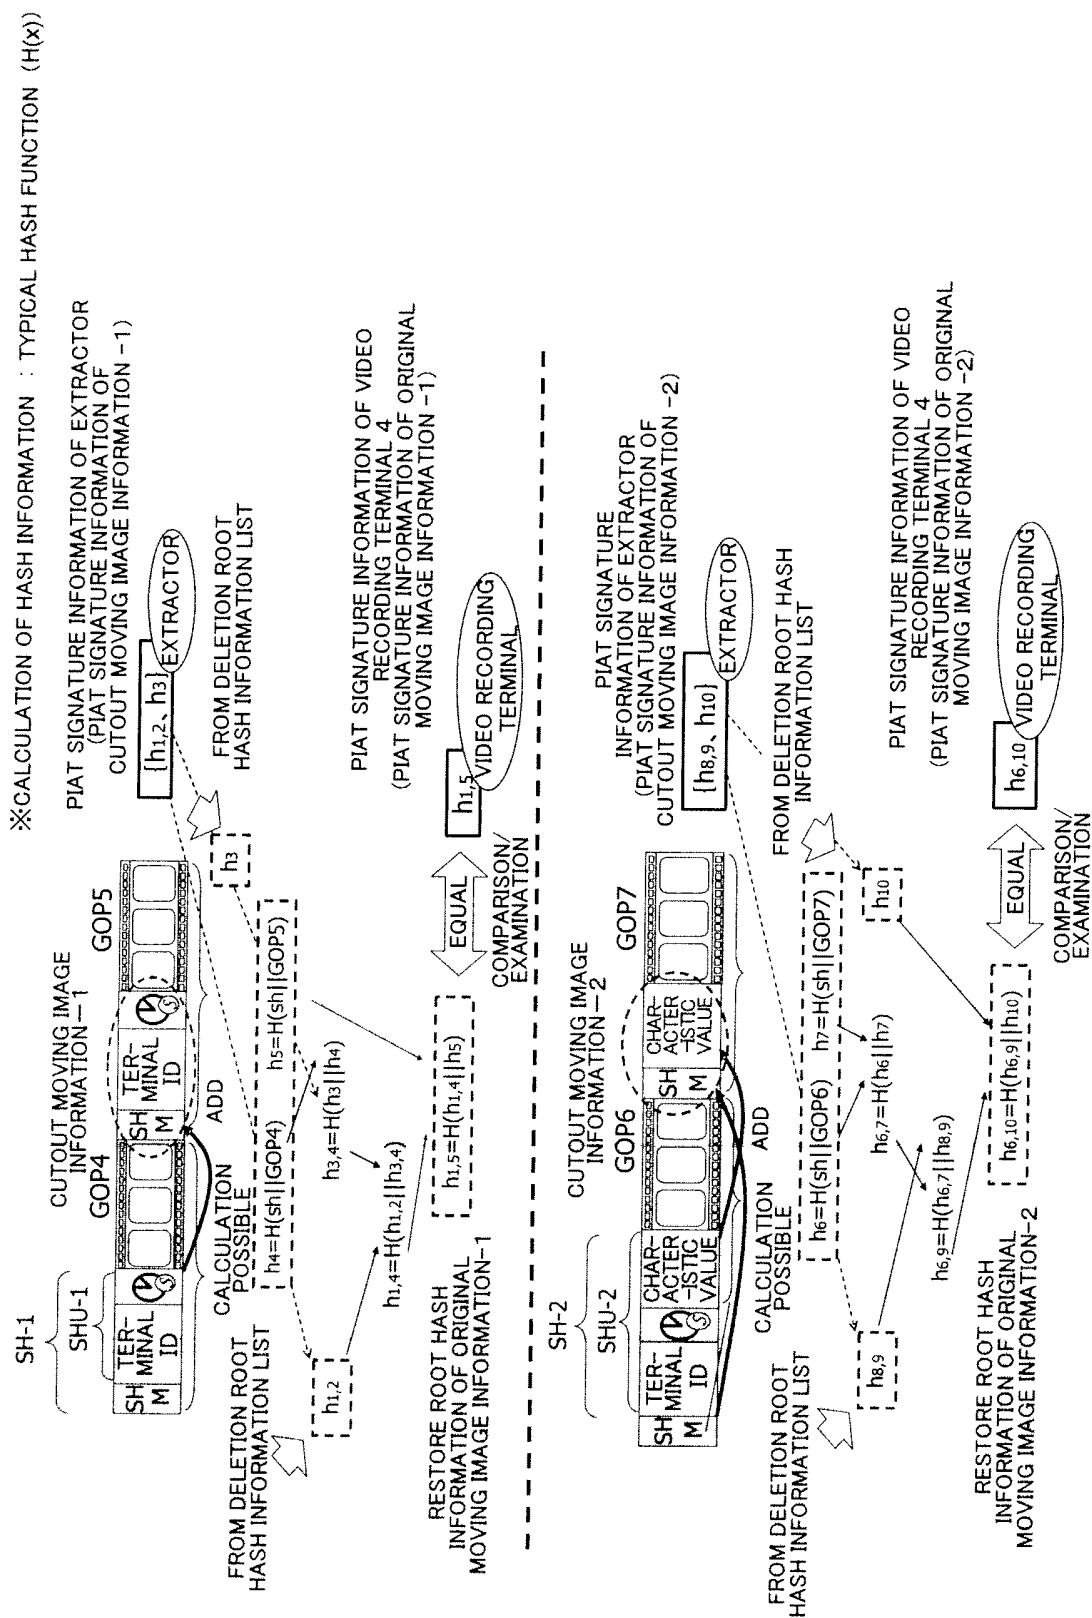


FIG. 35

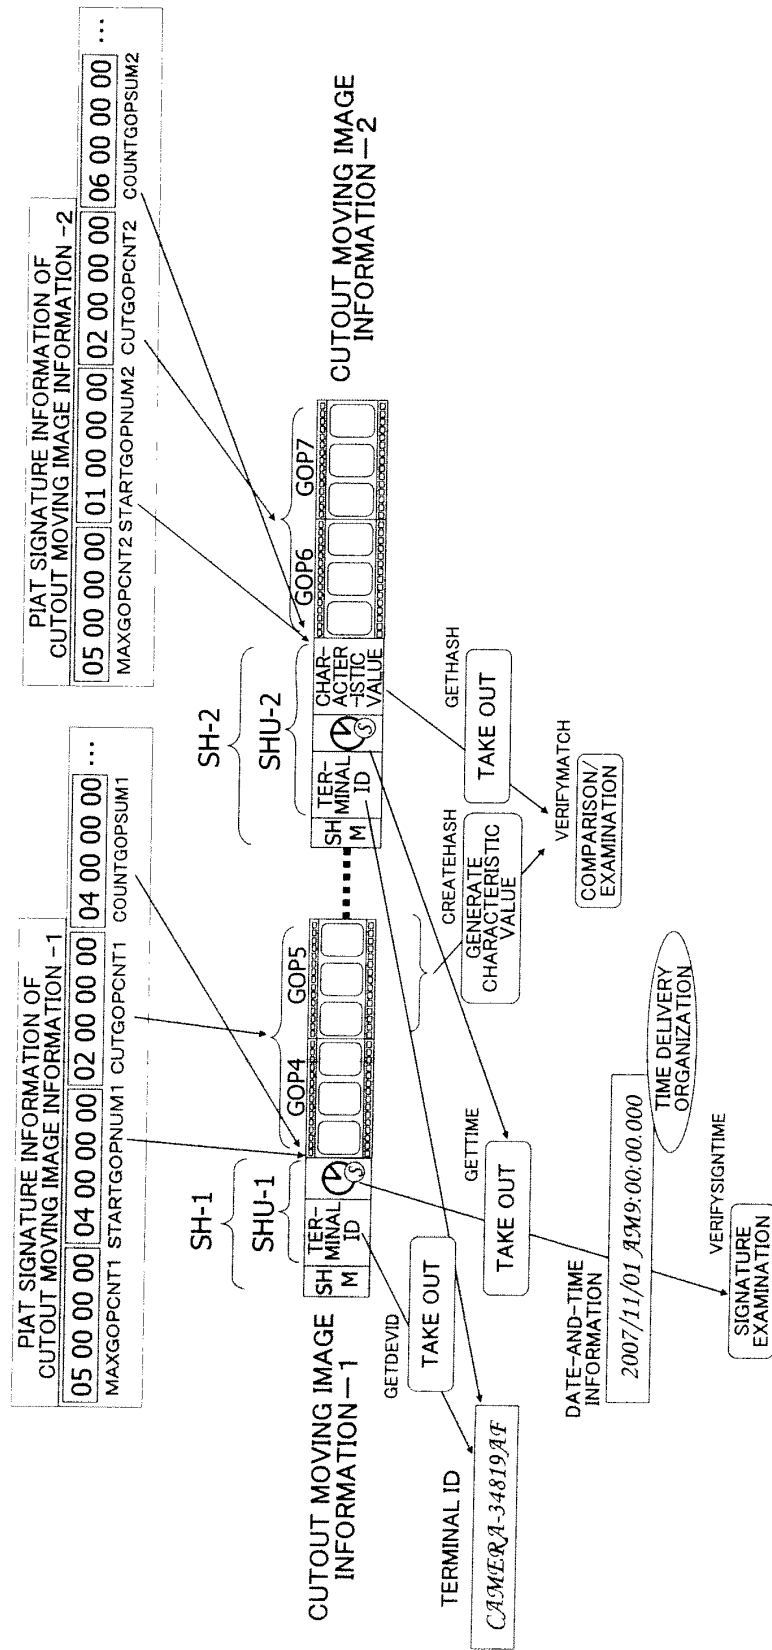


FIG. 36

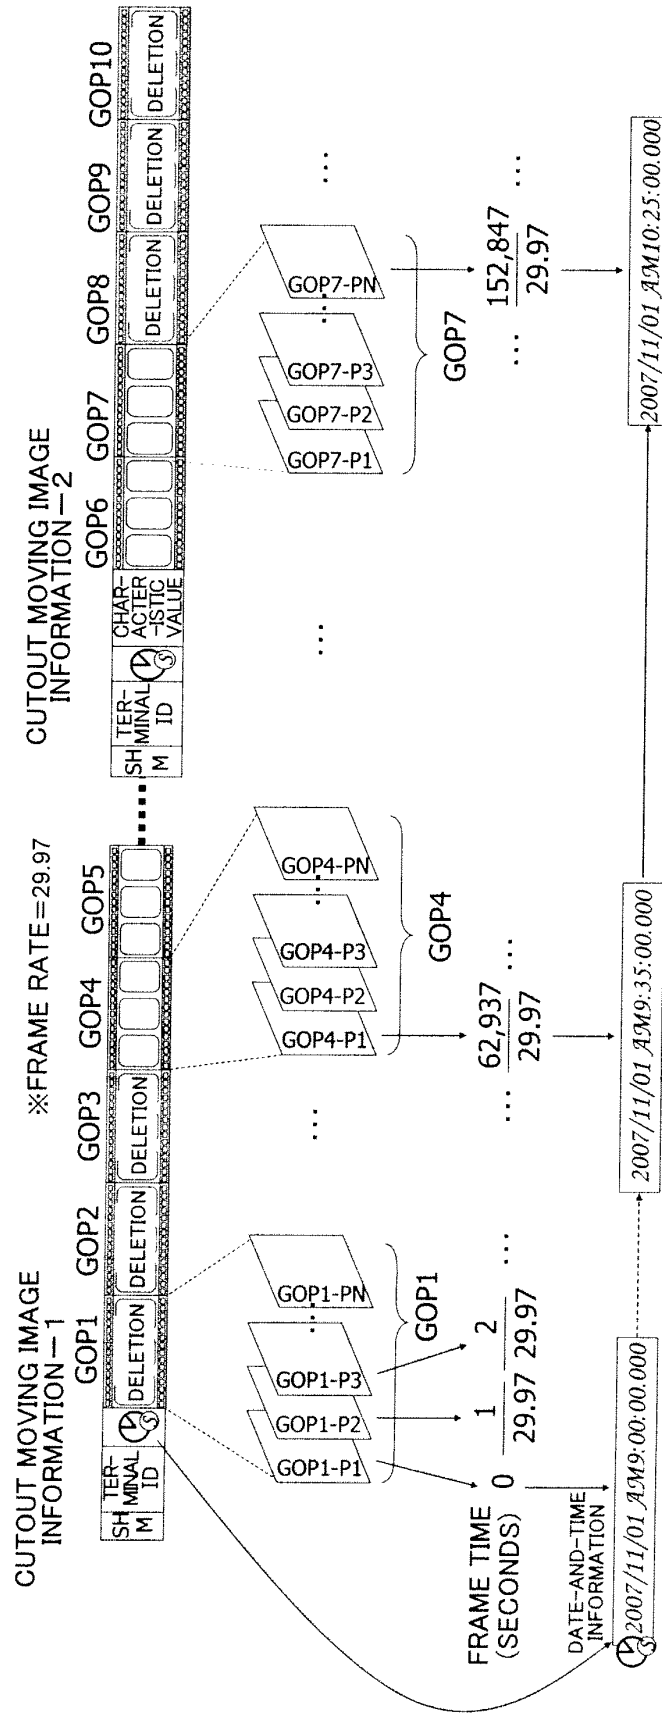


FIG. 37

GOP NUMBER	TOTAL SUM OF PICTURES RIGHT UP TO PRECEDING ONE IN GOP POSITION
1	0
2	21,578
3	43,156
4	62,936
⋮	⋮
7	107,892
8	152,848
⋮	⋮

FIG. 38


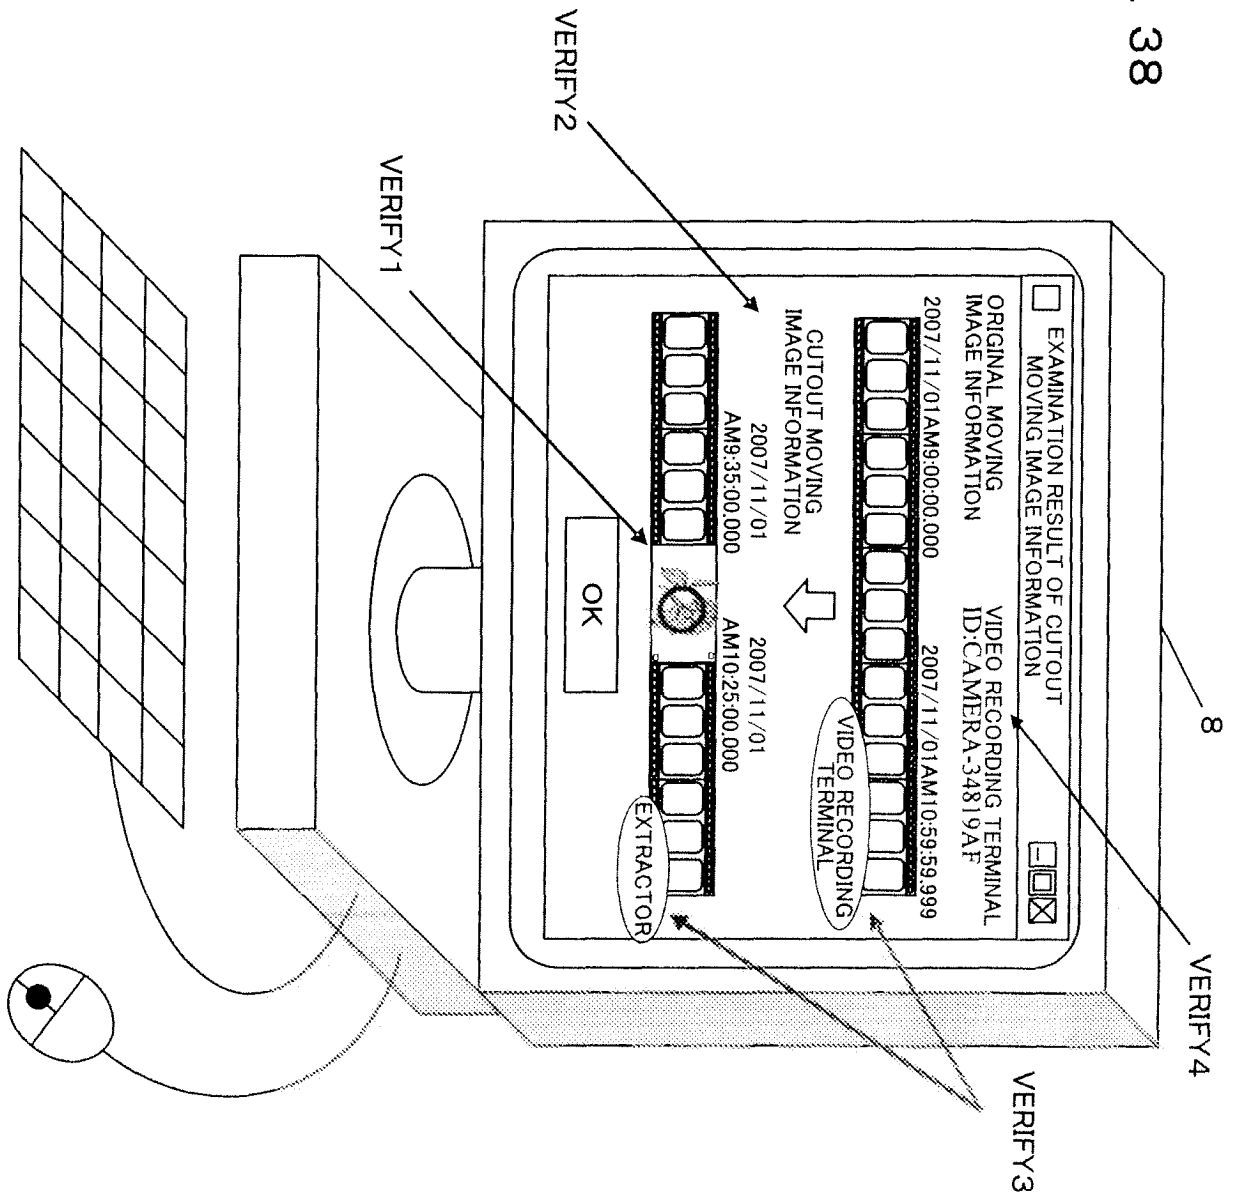


FIG. 39

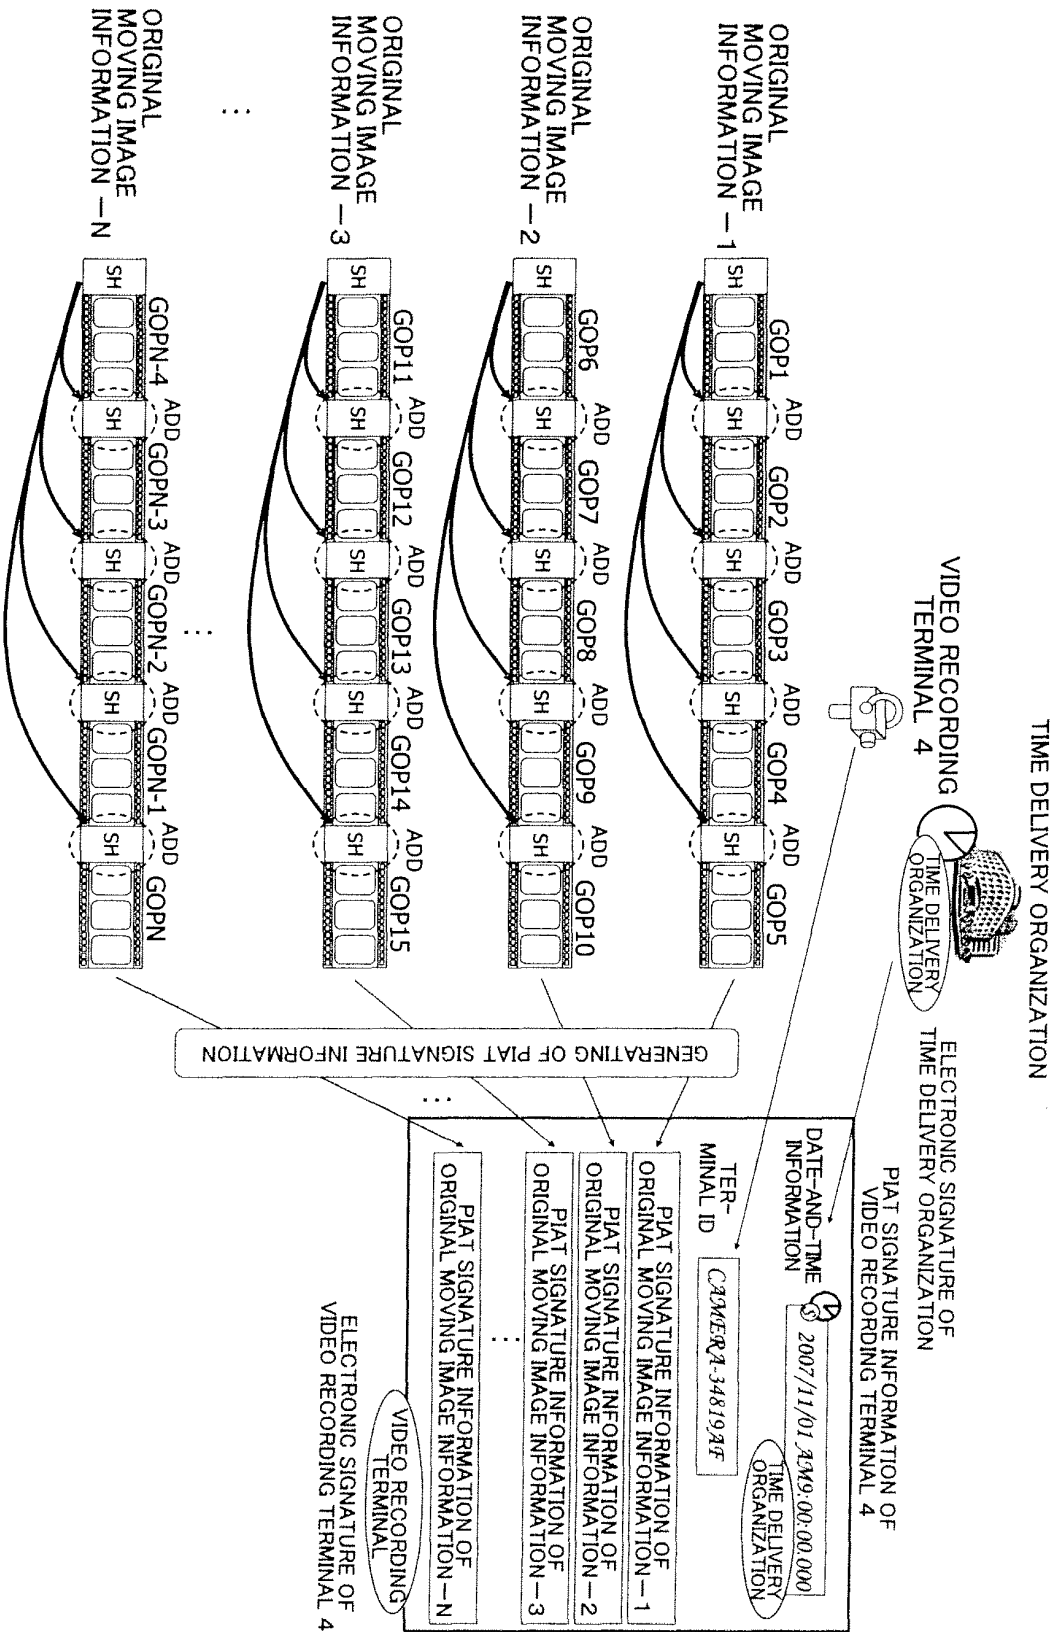

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2008/056363

A. CLASSIFICATION OF SUBJECT MATTER

H04L9/32(2006.01)i, G06F21/24(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04L9/32, G06F21/24

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho 1922-1996 Jitsuyo Shinan Toroku Koho 1996-2008

Kokai Jitsuyo Shinan Koho 1971-2008 Toroku Jitsuyo Shinan Koho 1994-2008

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

JSTPlus(JDreamII), JMEDPlus(JDreamII), JST7580(JDreamII)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	Takashi YOSHIOKA, Masahiko TAKENAKA, "Denshi Bunsho no Teisei-Ryutsu o Koryo shita Bubun Kanzensei Hosho Gijutsu no Teian", FIT2004 Dai 3 Kai Forum on Information Technology Ippan Koen Ronbunshu, 20 August, 2004 (20.08.04), Separate Vol. 4, pages 231 to 232	18
Y	Takashi YOSHIOKA, Masahiko TAKENAKA, Takato OHASHI, Kiyohide YAMASHITA, "Dogazo-Onsei Data ni Taisuru Bubun Kanzensei Hosho Gijutsu PIAT no Jitsugen", 2008 Nen Symposium on Cryptography and Information Security, 22 January, 2008 (22.01.08), 1D1 Content Hogo (1), 1D1-1, pages 1 to 6	18

☒ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search
20 June, 2008 (20.06.08)Date of mailing of the international search report
01 July, 2008 (01.07.08)Name and mailing address of the ISA/
Japanese Patent Office

Authorized officer

Facsimile No.

Telephone No.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2008/056363

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	Takashi YOSHIOKA, Masahiko TAKENAKA, Tetsuya IZU, "Bubun Kanzensei Hosho Gijutsu PIAT: Dogazo-Onsei eno Tekiyo", 2007 Nen Symposium on Cryptography and Information Security, 23 January, 2007 (23.01.07), 1B2 Content Hogo (1), 1B2-2, pages 1 to 6	18,
Y	JP 2007-27920 A (Fujitsu Ltd.), 01 February, 2007 (01.02.07), Full text; all drawings & US 2007/0192609 A1 & EP 1744277 A2 & KR 10-2007-0008461 A & CN 1897633 A	18

Form PCT/ISA/210 (continuation of second sheet) (April 2007)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2008/056363

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 1-17, 19 and 20
because they relate to subject matter not required to be searched by this Authority, namely:

See the extra sheet.
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest
the

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2008/056363

Continuation of Box No.II-1 of continuation of first sheet(2)

Since claims 1-16 and 19 are directed to a program that uses a computer as a tool to execute acts based on an artificial arrangement and claims 17 and 20 are directed to a method that is an act, itself, based on an artificial arrangement, so that both of them correspond to an execution law or a method of purely mental acts, they are subject matters that this International Searching Authority is not required to search under the provisions of PCT Article 17(2)(a)(i) and PCT Rule 39.1(v).

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2007012048 A [0008] [0012] [0073] [0125]
- JP 2007326801 A [0009] [0013]
- WO 200608847 A [0010]
- WO 2006008847 A [0125]