

(19)



(11)

EP 2 261 124 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
28.03.2018 Bulletin 2018/13

(51) Int Cl.:
B65D 1/00 (2006.01) **B32B 1/02** (2006.01)
B65D 65/40 (2006.01)

(21) Application number: **09729109.0**

(86) International application number:
PCT/JP2009/053192

(22) Date of filing: **23.02.2009**

(87) International publication number:
WO 2009/122820 (08.10.2009 Gazette 2009/41)

(54) **CONTAINER MADE OF SYNTHETIC RESIN HAVING EXCELLENT BARRIER PROPERTIES**

BEHÄLTER AUS KUNSTHARZ MIT HERVORRAGENDEN SPERREIGENSCHAFTEN

CONTENANT RÉALISÉ EN RÉSINE SYNTHÉTIQUE AYANT D'EXCELLENTE PROPRIÉTÉS DE BARRIÈRE

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK TR**

(74) Representative: **Gray, James et al**
Withers & Rogers LLP
4 More London Riverside
London SE1 2AU (GB)

(30) Priority: **31.03.2008 JP 2008093490**

(56) References cited:
EP-A1- 1 475 308 EP-A1- 1 974 901
WO-A1-2009/032596 JP-A- 9 095 532
JP-A- 11 049 941 JP-A- 2009 035 286
JP-B2- 7 005 831 US-A- 5 175 238
US-A1- 2005 009 976 US-B1- 6 410 156

(43) Date of publication of application:
15.12.2010 Bulletin 2010/50

(73) Proprietor: **Yoshino Kogyosho Co., Ltd.**
Tokyo 136-8531 (JP)

(72) Inventors:
• **SUGAI, Masahiro**
Isehara-shi
Kanagawa 259-1103 (JP)
• **SHIMURA, Hiromi**
Isehara-shi
Kanagawa 259-1103 (JP)
• **SUZUKI, Masato**
Isehara-shi
Kanagawa 259-1103 (JP)

- **Amparo López-Rubio ET AL: "Unexpected partial crystallization of an amorphous polyamide as induced by combined temperature and humidity", Journal of Applied Polymer Science, vol. 102, no. 2, 1 January 2006 (2006-01-01), pages 1516-1523, XP055224455, US ISSN: 0021-8995, DOI: 10.1002/app.24430**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 261 124 B1

DescriptionTECHNICAL FIELD

5 **[0001]** The present invention relates to a synthetic resin container with high barrier properties, which container comprises a base layer composed of a synthetic resin and a barrier layer with lower gas permeability than that of the base layers.

RELATED ART

10 **[0002]** It is known that a synthetic resin container such as a PET (polyethylene terephthalate) bottle allows a small amount of oxygen, carbon dioxide and the like to permeate it. In order to prevent the permeation, a PET bottle with base layers composed of PET resin and a gas barrier layer laminated thereon is suggested (See JP2007-8582 A.).

15 **[0003]** WO2009/032596A1, JP2009035286A, EP1974901A1, US5175283A, EP1475308A1, US6410156B1, US2005/009976A1 describe various materials usable for making bottles.

DISCLOSURE OF THE INVENTION

20 **[0004]** However, in producing such a container in the blow molding method, white opacity may be generated in a non-stretched part of the blow molding product, for example, a neck part of a bottle, if the product is stored for a long period of time. The white opacity may cause bad appearance of the container even though the intrinsic properties of the container are not suffered.

25 **[0005]** In this respect, the inventor of the present application has found out that the white opacity is caused in the gas barrier layer. If polyamide MXD6 (product of Mitsubishi Gas Chemical Company, Inc.), which is obtained by condensation polymerization of meta-xylene diamine and adipic acid, is used, the white opacity is caused by crystallization of MXD6. It is considered that the crystallization of MXD6 is enhanced by decrease in glass transition temperature and crystallization temperature caused by increase in moisture content of MXD6.

[0006] Therefore, the inventor of the present application has recognized that the generation of the white opacity in the non-stretched part may be suppressed by increasing crystallization temperature of at least the gas barrier layer.

30 **[0007]** Document 1: JP2007-8582 A

PROBLEMS TO BE SOLVED BY THE INVENTION

35 **[0008]** Thus, the problem to be solved by the invention is the white opacity which may be generated in a non-stretched part of the blow molding product when the synthetic resin container is produced in the blow molding method and stored for a long period of time. The invention aims to provide a synthetic resin container with high barrier properties, in which white opacity is not generated in the non-stretched part in spite of a long-term storage of the product.

MEANS TO SOLVE THE PROBLEMS

[0009] According to the invention, a synthetic resin container with high barrier properties, according to independent claim 1 is provided.

45 **[0010]** "Peak crystallization temperature" as used herein means a temperature calculated based on the properties of calorific value due to the crystallization measured by means of differential scanning calorimeter (DSC). In the present invention, peak crystallization temperature is obtained after heating from 20 °C to 270 °C at a rate of temperature rise of 10 °C/min and maintaining the heated state for five minutes, and then, once icking to 20 °C and again heating from 20 °C to 270 °C at a rate of temperature rise of 10 °C/min.

[0011] A more preferable range of peak crystallization temperature is 150 °C or more and 170 °C or less.

50 **[0012]** The barrier layer according to the invention contains an amorphous polyamide having meta-xylene isophthalamide structure and hexamethylene isophthalamide structure, and the content rate of the amorphous polyamide in the barrier layer is 15 weight percentage or more and 25 weight percentage or less.

55 **[0013]** In an exemplary embodiment, the barrier layer may be composed of the amorphous polyamide and a barrier material with lower gas permeability than that of the base layer, the barrier material being polyamide containing meta-xylene group. The polyamide containing meta-xylene group may be polyamide obtained by condensation polymerization of meta-xylene diamine and adipic acid.

[0014] The amorphous polyamide may include a copolyamide (MXDI/6I) of a copolymer of meta-xylene diamine and isophthalic acid (MXDI: poly meta-xylene isophthalamide) and a copolymer of hexamethylene diamine and isophthalic

acid (6I: poly hexamethylene isophthalamide). The base layer may be composed of polyethylene terephthalate.

[0015] According to the invention, a synthetic resin whose peak crystallization temperature is obtained after heating from 20 °C to 270 °C at a rate of temperature rise of 10 °C/min and maintaining the heated state for five minutes, and then, once icing to 20 °C and again heating from 20 °C to 270 °C at a rate of temperature rise of 10 °C/min, is used to suppress the white opacity at the non-stretched part.

[0016] That is, according to the present invention, gas barrier properties can be maintained over a long period of time without deteriorating good appearance. Therefore, according to the invention, a synthetic resin container with high barrier properties can be provided, in which white opacity is hardly generated even after the container is stored for a long period of time.

[0017] The invention employs, as the barrier layer, the synthetic resin which contains the amorphous polyamide having meta-xylene isophthalamide structure and hexamethylene isophthalamide structure and which has the content rate of the amorphous polyamide in the barrier layer of 15 weight percentage or more and 25 weight percentage or less to realize an effective prevention of white opacity in an easy way.

[0018] Moreover, when the barrier layer is composed of the amorphous polyamide and a barrier material with lower gas permeability than that of the base layer, the white opacity can be effectively prevented by using polyamide containing meta-xylene group as the barrier material.

[0019] Furthermore, white opacity can be further effectively prevented if the copolyamide of a copolymer of meta-xylene diamine and isophthalic acid (MXDI) and a copolymer of hexamethylene diamine and isophthalic acid (6I) is used as the amorphous polyamide according to the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] FIG. 1 is a partially cut-away side view of a PET bottle 1 according to the present invention.

REFERENCE NUMERALS

[0021]

- 1 PET bottle
- 2 mouth
- 3 neck
- 4 shoulder
- 5 barrel
- 6 bottom
- 11 base layers
- 12 gas barrier layer

BEST MODE FOR CARRYING OUT THE INVENTION

[0022] An embodiment of the present invention will be now described with reference to the accompanying drawing.

[0023] FIG. 1 is a partially cut-away side view of a PET bottle 1 according to the present invention.

[0024] The reference numeral 1 denotes a blow molding bottle (hereinafter simply referred to as "bottle"). The bottle has mouth 2, neck 3, shoulder 4, barrel 5 and bottom 6. The bottle 1 is a laminated body comprising inner and outer base layers 11 having forming the basic shape of the bottle body and a gas barrier layer 12 disposed between the base layers 11.

[0025] The base layers 11 are composed of a synthetic resin whose main component is polyethylene terephthalate resin (hereinafter referred to as "PET resin").

[0026] Used as the gas barrier layer 12 is a synthetic resin which has the peak crystallization temperature T_{pc} of 150 °C or more and 170°C or less after a first process (hereinafter referred to as "1st_Run") in which the synthetic resin is heated from 20 °C to 270 °C at a rate of temperature rise of 10 °C/min and then allowed at the heated state for a five minutes, and a second process (hereinafter referred to as "2nd_Run") in which the synthetic resin is once cooled to 20 °C with ice and again heated from 20 °C to 270 °C at a rate of temperature rise of 10 °C/min.

[0027] In an exemplary embodiment, used is a gas barrier layer which contains a barrier material with lower gas permeability than that of the base layers 11 as a main component and the amorphous polyamide having meta-xylene isophthalamide structure and hexamethylene isophthalamide structure (hereinafter referred to as "amorphous polyamide").

[0028] Furthermore, polyamide containing meta-xylene group such as a copolymer of meta-xylene diamine and adipic acid may be recited as the barrier material by way of example.

[0029] As amorphous polyamides, a copolymer of meta-xylene diamine and isophthalic acid (MXDI) and a copolymer of hexamethylene diamine and isophthalic acid (6I) may be recited by way of example.

[0030] The content rate of the amorphous polyamide in the barrier layer 12 is in the range of 15 weight percentage or more and 25 weight percentage or less. Accordingly, mixing rate (weight ratio) of barrier material and the amorphous polyamide is 85:15 to 75:25.

[0031] According to the invention, a synthetic resin having the peak crystallization temperature T_{pc} of 150 °C or more and 170 °C or less after 2nd_Run is used as the gas barrier layer 12 to suppress white opacity at the neck 3 which is the non-stretched part even after the blow molding product is stored for a long period of time.

[0032] In this way, the bottle 1 can maintain good gas barrier properties over a long period of time without deteriorating its appearance. Thus, according to the invention, it is possible to provide a synthetic resin container with high barrier properties which suppresses white opacity even after the container is stored for a long period of time.

[0033] Specifically, the embodiment employs, as the barrier layer 12, the synthetic resin which contains the amorphous polyamide having meta-xylene isophthalamide structure and hexamethylene isophthalamide structure and which has the content rate of the amorphous polyamide in the barrier layer 12 of 15 weight percentage or more and 25 weight percentage or less to realize an effective prevention of the white opacity in an easy way.

[0034] In addition, as with the embodiment, when the barrier layer 12 is composed of the amorphous polyamide and a barrier material with lower gas permeability than that of the base layers 11 (PET resin in this embodiment), the white opacity can be effectively prevented by using polyamide containing meta-xylene group.

[0035] Furthermore, white opacity can be further effectively prevented if a copolyamide of a copolymer of meta-xylene diamine and isophthalic acid (MXDI) and a copolymer of hexamethylene diamine and isophthalic acid (6I) is used as the amorphous polyamide according to the invention.

[0036] It is noted that configuration of the layers according to the invention is not limited to that of the aforementioned embodiment and at least two layers, that is a base layer 11 and a gas barrier layer 12 may be included. According to the invention, bottle 1 can be shaped with the gas barrier layer 12 alone.

EXAMPLES

[0037] Now, evaluation of the embodiments of the present invention and the comparative examples measured in a method compliant with JIS K 7121 is shown.

[0038] Samples used in the evaluation are prepared as follows: firstly, the base layers 11 are removed from the bottle 1 shown in FIG. 1, which has the total weight of 32g and the capacity of 500ml, and then, a part of the gas barrier layer 12 of the neck 3, equal to the amount of 10 mg, is used as a test piece. The differential scanning calorimeter DSC6220 (manufactured by SIINT) is used as the measuring device.

[0039] The measured values in the following Table 1 to 3 show extrapolated crystallization temperature T_{ic}, peak crystallization temperature T_{pc} and extrapolated crystallization end temperature T_{ec}, respectively, and the unit system for additive amount is wt% (weight percentage).

[0040] The respective measured values of Tables 1 to 3 are obtained after the test pieces are subjected to the "1st_Run" for heating from 20 °C to 270 °C at a rate of temperature rise of 10 °C/min and then allowing at the heated state for a five minutes, and then to the "2nd_Run" for once cooling to 20 °C with ice and again heating from 20 °C to 270 °C at a rate of temperature rise of 10 °C/min.

[0041] The barrier layer of the non-stretched part of the mouth 2 is used as a sample in Table 1. The barrier layer of the barrel 4, which is a stretched part, is used as a sample in Table 2.

Table 1

	MXD6 Mixing rate (%)	HB FE7103 rate (%)	T _{ic} (°C)	T _{pc} (°C)	T _{ec} (°C)	Temperature difference (T _{ec} -T _{ic})
Comparative Example 1	100	0	132.6	140.0	145.4	12.8
Comparative Example 2	90	10	134.3	140.1	144.3	10.0
Example 1	85	15	146.6	155.5	163.1	16.5
Example 2	80	20	151.9	160.7	168.8	16.9
Example 3	75	25	157.8	167.1	176.0	18.2

Table 2

	MXD6 Mixing rate (%)	HB FE7103 Mixing rate (%)	Tic (°C)	Tpc (°C)	Tec (°C)	Temperature difference (Tec-Tic)
Comparative Example 1	100	0	129.5	136.4	141.9	12.4
Comparative Example 2	90	10	133.3	138.7	143.3	10.0
Example 1	85	15	145.4	153.7	160.9	15.5
Example 2	80	20	152.3	161.9	171.1	18.8
Example 3	75	25	156.6	166.1	175.9	19.3

[0042] The sample in Comparative Example 1 is composed only of the barrier material of MXD6 (s0611 manufactured by Mitsubishi Gas Chemical Company, Inc.). The sample in Comparative Example 2 is a mixture of MXD6 as the barrier material and the amorphous polyamide (Grivory HB FE7103 manufactured by EMS Corp.) at the rate of 90:10.

[0043] The barrier material and the amorphous polyamide are used as a sample at the rate of 85:15, 80:20 and 75:25, respectively in Examples 1 to 3.

[0044] Comparative Examples 1, 2 and Examples 1 to 3 are stored under the condition of 23 °C - 55 % RH, filled with water, respectively. White opacity was generated on the neck 3 on the 46th day in the case of Comparative Example 1 and also on the 70th day in the case of Comparative Example 2, while white opacity is not generated in Examples 1 to 3 even after 3 months.

[0045] In comparison to this, Comparative Examples 1, 2 and Examples 1 to 3 are stored under the condition of 40 °C - 75 % RH, filled with water, respectively. White opacity on the neck 3 is generated on the 8th day and 11th day in Comparative Examples 1 and 2, respectively. Similarly, white opacity on the neck 3 is generated on the 12th day, on the 14th day, on the 14th day in Examples 1 to 3, respectively.

Table 3

	23°C -55%RH	40°C -75%RH
Comparative Example 1	White opacity on the 46th day	White opacity on the 8th day
Comparative Example 2	White opacity on the 70th day	White opacity on the 11th day
Example 1	White opacity after 3 months	White opacity on the 12th day
Example 2	White opacity after 3 months	White opacity on the 14th day
Example 3	White opacity after 3 months	White opacity on the 14th day

[0046] It is apparent from Tables 1 to 3 that the more the temperature difference between the extrapolated crystallization end temperature Tec and the extrapolated crystallization temperature Tic is, the less white opacity is generated.

[0047] The following Table 4 shows the measurement result of the midpoint glass transition temperature Tmg, the peak crystallization temperature Tpc and the peak melting temperature Tpm with respect to 1st_Run and 2nd_Run.

Table 4

		Tmg (°C)	Tpc (°C)	Tpm (°C)
Comparative Example 1	1st_Run	49.3	114.2	238.2
	2nd_Run	84.0	140.1	237.3
Example 1	1st_Run	51.7	108.3	235.7
	2nd_Run	91.3	155.3	234.5
Example 2	1st_Run	53.5	123.6	235.4
	2nd_Run	92.7	160.8	233.9

(continued)

		Tmg (°C)	Tpc (°C)	Tpm (°C)
Example 3	1st_Run	53.6	129.6	233.5
	2nd_Run	95.5	167.2	232.2

[0048] Furthermore, Table 5 shows the DSC measurement result of the midpoint glass transition temperature Tmg, the peak crystallization temperature Tpc and the peak melting temperature Tpm of a part of the test piece from the gas barrier layer 12 of the neck 3 at about 2 % of water absorption rate. The water absorption rate is measured by Karl Fischer Moisture Titrator MKC-610 at measurement temperature of 180 °C.

Table 5

	Water Absorption Rate		Tmg	Tpc	Tpm
Comparative Example 1	2.0	1st_Run	46.4	114.0	237.8
		2nd_Run	84.0	140.1	237.3
Example 1	2.2	1st_Run	51.7	108.3	235.7
		2nd_Run	91.3	155.3	234.5
Example 2	2.0	1st_Run	52.6	135.2	235.3
		2nd_Run	92.7	160.8	233.9
Example 3	1.8	1st_Run	53.4	137.5	233.9
		2nd_Run	95.5	167.2	232.2

[0049] It is apparent from the measurement result shown in Table 5 that the glass transition temperature and the crystallization temperature decrease, as the absorption rate increases. Accordingly, generation of white opacity in the non-stretched part causes the rise of crystallization temperature and it is apparent that the same applies to the glass transition temperature.

INDUSTRIAL APPLICABILITY

[0050] The container according to the present invention is not limited to a bottle and can be applied for any containers in various forms as far as they are to keep the quality of the content.

Claims

1. A synthetic resin container with high barrier properties: comprising a base layer composed of a polyethylene terephthalate and a barrier layer with lower gas permeability than that of the base layer,
characterised in that the barrier layer is composed of synthetic resin with peak crystallization temperature of 150°C or more, and
in that the barrier layer is a synthetic resin containing an amorphous polyamide having meta-xylene isophthalamide structure and hexamethylene isophthalamide structure and the content rate of the amorphous polyamide in the barrier layer is in the range of 15 weight percentage or more and 25 weight percentage or less, and
in that the peak crystallization temperature is obtained after heating from 20°C to 270°C at a rate of temperature rise of 10°C/min and maintaining the heated state for five minutes, and then, once icing to 20°C and again heating from 20°C to 270°C at a rate of temperature rise of 10°C/min.
2. The synthetic resin container according to claim 1, **characterised in that** the barrier layer is composed of the amorphous polyamide and a barrier material with lower gas permeability than that of the base layer, and the barrier material is polyamide containing meta-xylene group.
3. The synthetic resin container according to claim 1 or 2, **characterised in that** the amorphous polyamide is a copolyamide (MXDI/6I) of a copolymer of meta-xylene diamine and isophthalic acid (MXDI) and a copolymer of

hexamethylene diamine and isophthalic acid (6I).


Patentansprüche

1. Kunstharzbehälter mit guten Sperreigenschaften, eine aus Polyethylenterephthalat bestehende Grundschrift umfassend und eine Sperrschicht mit niedrigerer Gasdurchlässigkeit als der der Grundschrift, **dadurch gekennzeichnet, dass** die Sperrschicht aus einem Kunstharz mit einer Spitzenkristallisationstemperatur von 150°C oder höher besteht, und
dadurch, dass die Grundschrift ein Kunstharz ist, das ein amorphes Polyamid mit Metaxylenisophthalamid-Struktur und Hexamethylenisophthalamid-Struktur enthält, und dass der Gehalt der Sperrschicht an amorphem Polyamid in der Größenordnung von 15 Gewichtsprozent oder mehr und 25 Gewichtsprozent oder weniger liegt, und
dadurch, dass die Spitzenkristallisationstemperatur nach Erhitzung von 20°C auf 270°C mit einer Temperaturerhöhungsrate von 10°C/min und Halten im erhitzten Zustand für fünf Minuten, gefolgt von Abschrecken auf 20°C und erneute Erhitzung von 20°C auf 270°C mit einer Temperaturerhöhungsrate von 10°C/min erreicht wird.
2. Kunstharzbehälter nach Patentanspruch 1, **dadurch gekennzeichnet, dass** die Sperrschicht aus dem amorphen Polyamid und einem Sperrwerkstoff mit niedrigerer Gasdurchlässigkeit als der der Grundschrift, besteht, und der Sperrwerkstoff Polyamid ist, das eine Metaxylen-Gruppe enthält.
3. Kunstharzbehälter nach Patentanspruch 1 oder 2, **dadurch gekennzeichnet, dass** das amorphe Polyamid ein Copolyamid (MXDI/6I) aus einem Kopolymer von Metaxylen-diamin und Isophthalsäure (MXDI) und einem Kopolymer von Hexamethylen-diamin und Isophthalsäure (6I) ist.

Revendications

1. Récipient en résine synthétique présentant des propriétés de barrière élevées : comprenant une couche de base composée d'un téréphtalate de polyéthylène et une couche barrière présentant une perméabilité aux gaz inférieure à celle de la couche de base, **caractérisé en ce que** la couche barrière est composée d'une résine synthétique ayant une température de cristallisation maximale de 150 °C ou plus, et **en ce que** la couche barrière est une résine synthétique contenant un polyamide amorphe présentant une structure de type isophthalamide contenant du méta-xylène et une structure de type isophthalamide contenant de l'hexaméthylène et le taux de contenu du polyamide amorphe dans la couche barrière est dans la plage de 15 pour cent en poids ou plus et de 25 pour cent en poids ou moins, et **en ce que** la température de cristallisation maximale est obtenue après chauffage de 20 °C à 270 °C à une vitesse d'élévation de la température de 10 °C/min et maintien de l'état chauffé pendant cinq minutes, et ensuite, refroidissement à l'aide de glace une fois jusqu'à 20 °C et de nouveau chauffage de 20 °C à 270 °C à une vitesse d'élévation de la température de 10 °C/min.
2. Récipient en résine synthétique selon la revendication 1, **caractérisé en ce que** la couche barrière est composée du polyamide amorphe et d'un matériau formant barrière présentant une perméabilité aux gaz inférieure à celle de la couche de base, et le matériau formant barrière est un polyamide contenant un groupe méta-xylène.
3. Récipient en résine synthétique selon la revendication 1 ou 2, **caractérisé en ce que** le polyamide amorphe est un copolyamide (MXDI/6I) d'un copolymère de méta-xylène diamine et d'acide isophthalique (MXDI) et d'un copolymère d'hexaméthylène diamine et d'acide isophthalique (6I).

FIG. 1

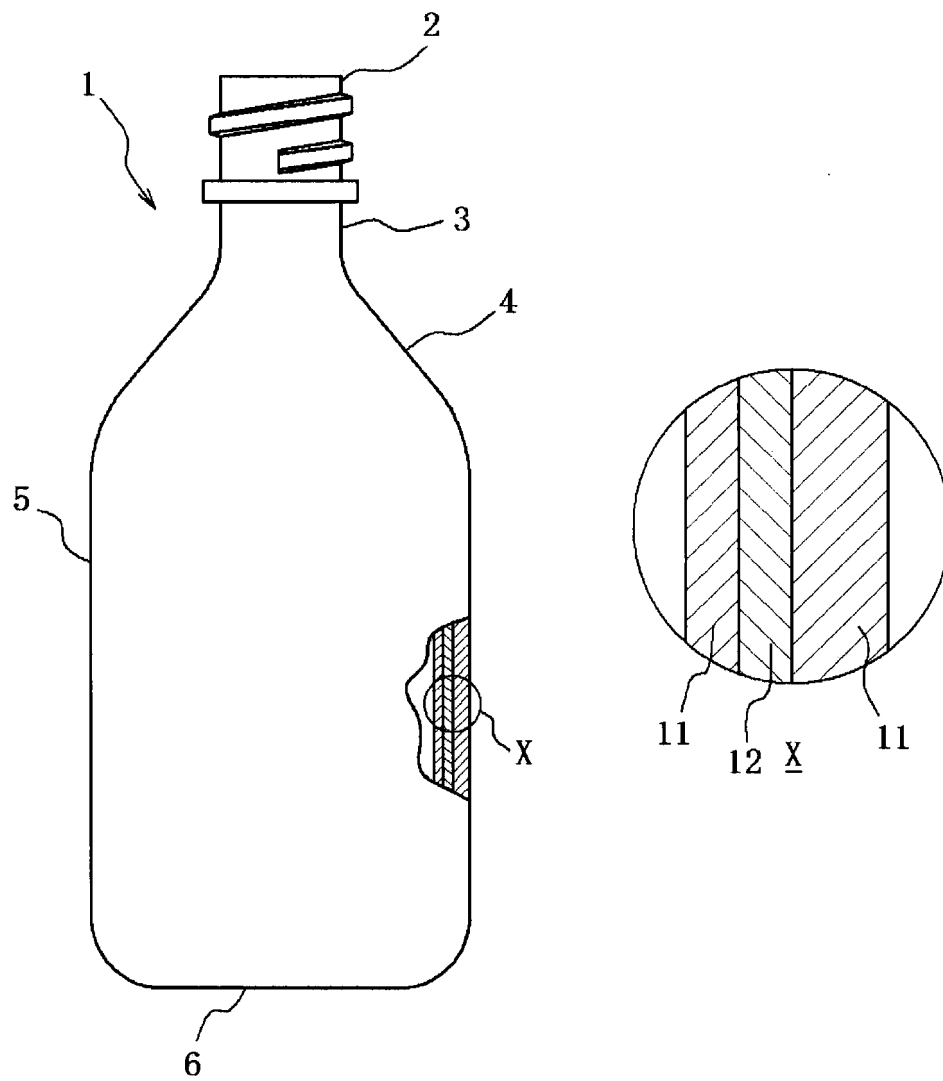

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2007008582 A [0002] [0007]
- WO 2009032596 A1 [0003]
- JP 2009035286 A [0003]
- EP 1974901 A1 [0003]
- US 5175283 A [0003]
- EP 1475308 A1 [0003]
- US 6410156 B1 [0003]
- US 2005009976 A1 [0003]