



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**15.12.2010 Bulletin 2010/50**

(51) Int Cl.:  
**F21S 8/06 (2006.01)**

(21) Application number: **09164470.8**

(22) Date of filing: **02.07.2009**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK SM TR**

(72) Inventors:  
 • **Mokhtari, Ramin Lavae**  
**14532 Kleinmachnow (DE)**  
 • **Lang, Ortwin**  
**30880 Laatzen (DE)**

(30) Priority: **10.06.2009 EP 09162466**

(74) Representative: **Kinkeldey, Daniela**  
**Bird & Bird LLP**  
**Pacellistrasse 14**  
**80333 München (DE)**

(71) Applicant: **iLEDs GmbH**  
**14532 Kleinmachnow (DE)**

(54) **Lighting unit, lighting network and method for lighting an interior**

(57) The invention relates to a lighting unit (1) for illuminating an interior comprising a housing (13) with a bottom side (2) and a top side (3), a direct illumination lighting element (4) arranged at the bottom side (2) with at least one warm light LED unit (8) providing white light with a first colour temperature and at least one cold light

LED unit (9) providing white light with a second colour temperature, an indirect illumination lighting element (5) arranged at the top side (3) comprising at least a first LED (10) and a second LED (16) having different colours and at least one amber coloured LED (11), a connection element (6) for connecting the lighting unit (1) to a control unit (7).

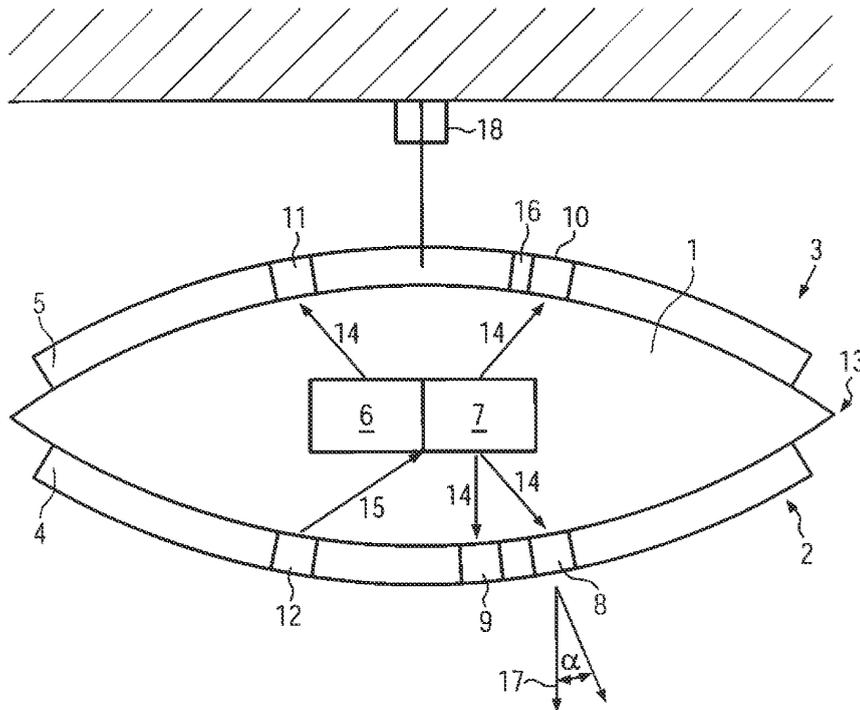


FIG. 1

## Description

**[0001]** The invention relates to a lighting unit for illuminating an interior, a network thereof and a method for lighting an interior using at least one lighting unit.

**[0002]** An effective bi-functional lighting unit provides light for working and other conditions in addition to light for situation dependent illumination of interiors. These lighting units creating the required light for a certain task on the one hand and a comfortable atmosphere on the other hand are currently discussed. In relation to effectiveness the use of LEDs (light emitting diodes) provides the possibility of a reduction of the power consumption.

**[0003]** It is therefore an object of the invention to provide a possibility for illuminating an interior effectively and situation dependent without a high power consumption.

**[0004]** This object is achieved by what is disclosed in the independent claims.

**[0005]** Preferred embodiments are:

A lighting unit for illuminating an interior, which comprises a housing with a side, the predominant direction of which is towards the bottom and a top side, the predominant direction of which is towards not the bottom, i.e. the top or ceiling of an interior or the side walls of an interior. For providing a direct illumination, a direct illumination lighting element is arranged at the bottom side. Preferably, by the direct illumination element illumination is provided predominantly without any previous reflections at elements external to the lighting unit inside the interior.

**[0006]** The direct illumination lighting element comprises at least one warm light LED unit, from which light with a warm colour temperature, preferably in the range between 1,500 and 3,500 Kelvin is emitted. Further, the direct illumination lighting element comprises at least one cold light LED unit from which light with a temperature above 3,500 Kelvin is emitted. The LED unit may comprise one or more LED contained in one or more housings.

**[0007]** A direct illumination lighting element is e.g. used to provide a working light at a desk. By mixing the light from the warm light LED unit and the cold light LED unit the desired colour temperature can be achieved in addition to setting a desired intensity.

**[0008]** Further, at the top side an indirect illumination lighting element is provided from which light is emitted towards the ceiling or side walls in order to illuminate the interior as a whole. Preferably this is achieved by at least one reflection of the emitted light e.g. at the ceiling.

**[0009]** The indirect illumination lighting element comprises at least a first LED and at least second LED, which have different colours so that particularly a white colour can be produced. Further, the indirect illumination lighting element comprises at least one amber coloured LED in order to provide a nature colour in the interior as far as possible. Preferably, the first and the at least second LED

may be contained together with the amber coloured LED in one common housing. Thus due to the small distances a good mixing can be achieved. Further, less space is required for the accommodation of the various LEDs.

5 **[0010]** Further, a connection element is provided for connecting the lighting unit to a control unit 7. This connection element may provide a wired connection or a wireless connection between lighting unit and control unit.

10 **[0011]** The lighting unit provides an effective illumination of a room in the sense that e.g. working light on the one hand and an overall illumination of a room on the other hand can be provided with a satisfying consumption of power, considerable production costs, a wide range of possibilities to adapt to requirements of different interiors, and a long lifetime.

15 **[0012]** According to an advantageous embodiment the lighting unit further comprises a control unit by which the light intensity of the lighting unit is controlled. The control unit may be positioned inside the lighting unit, e.g. in or at the housing or, in the case of suspended lamps, at a point where the lighting unit is fixed at the ceiling or at a position at the cable providing electrical current to the lighting unit.

20 **[0013]** Preferably, the control unit controls the light intensity of the lighting unit by providing an internal control signal to the direct or indirect illumination element from which it is transmitted to a subunit such as warm light LED unit, cold light LED unit, first LED, second LED or amber LED. Alternatively or additionally, the control signal is directly provided to each of these LEDs or LED units. This allows an accurate control of brightness or intensity or light colour.

25 **[0014]** For this control the lighting unit may be equipped with an electrical circuit, which provides in response to the internal control signal an adequate e.g. driving current. There may be provided one common electrical circuit for all LEDs or LED units.

30 **[0015]** Alternatively, a separate electrical circuit may be provided for individual LEDs or group of LEDs.

35 **[0016]** Instead or additionally to a wireless connection the connection element may provide a transmission interface for a connection to a DALI bus system or any other digital addressable lighting interface, across which the light intensity can be controlled.

40 **[0017]** According to another advantageous embodiment the lighting unit further comprises a movement detector which provides a signal to the connection element if a movement within a predetermined range of the lighting unit, e.g. a detection cone of the movement detector, a light cone defined by the lighting unit, is detected. This allows a further reduction of the energy consumption in that the light is switched off if no movement is detected or it is switched between different dimming levels. By placing a movement detector in or at the lighting unit, the movement is measured basically at the same position where the light is emitted. Thus, the measurement has a high relevance for controlling the light intensity. Further,

a threshold may be applied to the movement detector, thus that e.g. flying insects or movement of curtains do not lead to the movement detector providing an output signal or that the output signal is not transmitted further, e.g. from the connection element or control unit.

**[0018]** Additionally, it allows a coordinated setting of intensity of at least two lighting units, if the movement detected by at least one lighting unit is communicated to the at least other lighting unit by use of the connection element. This information may be communicated either directly between the lighting units or via a central master control unit. The central master control unit may be a separate unit or part of a lighting unit, e.g. contained in its control unit.

**[0019]** A further advantageous embodiment is a lighting network comprising at least two lighting units which are controlled by a master control unit which sends an external control signal to at least one of the control units. Such a lighting network can be used to create a predetermined illumination for an interior by setting brightness and/or the temperature to a desired value. The external control signal is preferably transmitted directly from the master control unit to the at least two lighting units. This allows a fast control.

**[0020]** Alternatively, the external control signal is transmitted from the master control unit to a neighbored lighting unit and therefrom to the next neighbored lighting unit. This allows in the case of wireless transmission a further reduction of sending power. In the case of wired transmission, a simple protocol can be used without excessive overhead data defining the modus of the transmission, i.e. the data to be transferred are essentially the load data used for the control.

**[0021]** According to another embodiment an external control signal may be provided to the control unit of a lighting unit which then provides an internal control signal to at least one of direct or/and indirect illumination lighting element or individual or groups of LEDs, such as first LED, at least second LED and amber LED. Thus the light intensity and light temperature for the direct illumination lighting element can be set on basis of the internal control signal.

**[0022]** Further, the colour of the indirect illumination lighting element can be adjusted by adjusting the intensity of the first LED, second LED and/or amber LED separately, Thereby, also the brightness of light emitted by the indirect illumination may be adjusted together with the colour.

**[0023]** According to another embodiment an overall control signal may be provided to a master control unit, which contains information on the overall illumination of an interior, e.g. a lighting scenario such as conference or desktop work. In the master control unit then an external control signal is created by using this overall control signal and the external control signal is provided to at least one of the lighting units,

**[0024]** According to another embodiment the internal control signal or the external control signal is created

using in addition or only the movement detector signal, such that an interior is illuminated only when actually a person is inside the interior.

**[0025]** Advantageous embodiments are described in the dependent claims.

**[0026]** Further aspects and advantages of the invention are disclosed in relation with the accompanying drawings of which show:

10 Figure 1: an individual lighting unit;

Figure 2: a lighting network comprising several lighting units;

15 Figure 3: a processing of a movement detector signal;

Figure 4: an embodiment of a lighting unit as a suspended lamp;

20 Figure 5: a cross section of the lighting unit of Figure 4;

25 Figure 6: a top view on an embodiment of a bottom side PCB; and

Figure 7: a top view on a top side PCB 50.

**[0027]** In Figure 1 a lighting unit 1 is depicted which is formed as a suspended lamp fixed on a ceiling. A housing 13 of the lighting unit 1 has a bottom side 2 directing towards the floor of an interior and a top side directing towards the ceiling of an interior.

**[0028]** Due to the setup of the lighting unit 1 or/and the form of the housing 13 the bottom side and the top side are defined such that the predominant direction is top or bottom, but parts of the side may be directed under an angle  $\alpha$  in relation to the vertical line 17, thus that also light is not only emitted in vertical direction, even if a spreading of light cones is neglected.

**[0029]** According to another embodiment, not shown, the bottom side is defined by the direction, where a direct illumination is to be achieved and the top side by the direction where no direct illumination is to be achieved, This may e.g. required for concert halls, where the orchestra is positioned at some elevated position.

**[0030]** On the bottom side 2 a direct illumination lighting element 4 is positioned. This direct illumination lighting element 4 may be positioned at one or various distinct areas or may be distributed over the whole bottom side. The design of the direct illumination lighting element 4 depends on the desired purpose, e.g. whether a desk is to be illuminated for computer work or e.g. a larger conference room is to be illuminated for a meeting.

**[0031]** Further, an indirect illumination lighting element 5 is positioned on the top side 3 of the lighting unit 1. The indirect illumination lighting element 5 may be positioned at one or various distinct positions or be distributed over

the whole top side. The design of the indirect illumination lighting element depends on the desired illumination, e.g. brightness, the size and also the form of the interior. The latter influences the way the light is reflected. Therefore according to an advantageous embodiment at least the indirect illumination lighting element 5 is formed such, that a major part of the emitted light hits the ceiling of side walls in a predetermined angle, preferably perpendicularly.

**[0032]** Further, a connection element 6 is provided for establishing a connection between the lighting unit 1 and a control unit 7. The connection element is preferably a wireless sending and transmitting unit or a wired connection.

**[0033]** According to a further advantageous embodiment the connection element 6 provides a connection to the control unit 7 of another lighting unit 1 or a central control unit.

**[0034]** The wireless transmission unit is a transmission unit which works in the regime around 2.4 GHz and uses an encryption of at least 8 bit. Alternatively, other frequency bands are used which are suitable in respect to range, interferences, allowed frequency bands and radiation exposure.

**[0035]** Further, the lighting unit comprises a not shown electrical circuit for driving the LEDs or groups of LEDs. This circuit is designed to run alternatively on either DC or AC power. In case of AC power input the circuit includes an AC-DC converter following by a constant current source which can comprise an electronic component for controlling the operating current of a LED or a group of LEDs by using a signal with bit angle modulation other than the pulse width modulation. This signal is e.g. the internal control signal. In case of DC power input the AC-DC converter will be by-passed, This enables the light units to be able to use both DC and AC power for example by using solar and/or wind power in parallel to the generally AC network.

**[0036]** It is possible that AC power is not needed at all when lighting units are planned to run on DC power networks. In this case there will be no need for the AC-DC converter. The solar or wind power plant may be positioned at the outside of the interior, e.g. a roof.

**[0037]** When using bit angle modulation, the LED is driven by a pulse train that is the binary word defining the value of a required intensity. Each bit of the pulse train is stretched by a ratio defined by the binary significance of each bit. Each bit of the binary word is effectively allocated a fixed range of phase angles within the drive cycle. The advantage of bit angle modulation is a simple implementation, and, as the drive signal is a multiple of the modulation frequency, a reducing of potential flicker. Also, because the LED drive signal contains a digital code of the intensity value, other devices may recover the data.

**[0038]** According to an advantageous embodiment a bit angle modulated internal control signal is provided to one or more electrical circuits which provides in response thereon a driving current to one or more LEDs.

**[0039]** The control unit 7 provides internal control signals 14 to a warm light LED unit 8 and a cold light LED unit 9 or the at least one electrical circuit for providing their driving current. The control unit is, as depicted in Figure 1, positioned within the housing 13 of the lighting unit. 1. The connection element 6 provides then a wired connection to the control unit 7.

**[0040]** Alternatively, the control unit 7 is positioned at the fixing point 18, where the lighting unit 1 is suspended at the ceiling. In this case, the connection element 6 may either provide a wired connection to the control unit 7 or transmit a signal to the control unit 7 wirelessly.

**[0041]** According to another embodiment, the control unit 7 is positioned at a predetermined position inside or outside the exterior. This allows a control of illumination e.g. from a central position for several rooms.

**[0042]** The warm light LED unit 8 comprises at least one LED providing a warm light, preferably corresponding to a temperature range between about 1500 and about 3500 Kelvin. Further, the direct illumination lighting element 4 comprises a cold light LED unit 9 with at least one LED providing cold light that is preferably in a temperature range above about 3500 Kelvin.

**[0043]** According to an embodiment, the warm light LED unit 8 comprises at least one blue LED, which is covered with a coloured element having a colour in the orange or red range. For the cold light LED unit 9 at least one blue LED is used, which is covered with a coloured element in the yellow range.

**[0044]** Alternatively, other luminescent material is used to cover an LED which can excite the luminescent material.

**[0045]** On the top side a first LED 10 is positioned as a part of the indirect illumination lighting element, closely together with at least a second LED 16. Therefore preferably an array of at least two LEDs with colours is formed such that white light can be produced. This may be a combination of a red, green and blue LED or a combination of a blue and yellow LED. By the use of a combination of a red, green and blue LED, different colours can be produced dependent on the situation for which the illumination is desired.

**[0046]** In addition, an amber coloured LED 11, possibly as a part of a multicolour LED 10, is positioned on the top side. As amber is the predominant colour of the human skin, by using amber, that is a colour between yellow and orange, the room illumination may be defined as comfortable and showing the people in an approximately natural light.

**[0047]** The LEDs of the warm light LED unit 8, the cold light LED unit 9, the first LED 10 and the amber LED 11 may be put into separate glass, plastic or other transparent housings. This allows to use cheap custom LEDs, so that the whole lighting unit 1 can be produced cheaply.

**[0048]** Alternatively, two or more LEDs may be put into a common housing, so that so called multicolour LEDs are formed. Thus, the various LED chips are contained in one component so that on the one hand less space is

needed on a printed circuit board, and on the other hand a very good mixing of various colours can be achieved. Particularly a red, green and blue LED may be contained in a common housing.

**[0049]** Additionally, a movement detector 12 may be installed on the bottom side 2 of the lighting unit 1, If a movement is determined within the sensitive area of the movement detector, e.g. a predetermined cone extending from the lighting unit 1, a movement detector signal 15 is provided to the control unit 7 via the connection element 6 or directly.

**[0050]** An internal control signal 14 for controlling the brightness of the illumination provided by the lighting unit may be sent either via the connection element 6 or directly to at least one or all of the following, the warm light LED unit 8, cold light LED unit 9, first LED 10 and amber LED 11. Thus, a desired brightness and colour of the illumination can be achieved.

**[0051]** The first LED 10 may therefore comprise at least a second LED 16, e.g. in that the at least first LED 10 is formed by an LED group or array comprising several LEDs. Particularly, the first LED 10 is a blue LED and the second LED is a yellow LED. Alternatively the at least first LED 10 and at least second LED 16 may be formed by a group of at least one red, green and blue LED. Further, the above set-ups with blue and yellow LEDs and red, green and blue LED may be used both for the indirect illumination unit, e.g. alternating. Thus the lighting unit can be optimised in regard to its function, e.g. achievable brightness, colours, life time etc, and costs.

**[0052]** In Figure 2 a lighting network 20 is depicted which comprises several lighting units 1, The control unit 7 is positioned either inside of the housing 13 of a lighting unit 1, at the fixing point 18 of a lighting unit 1 or at a position in between, e.g. along the cable for providing electrical power to the lighting unit.

**[0053]** An external control signal 23 for setting the light to a required value for a predetermined scenario, such as meeting, press conference, presentation, computer work, or cleaning the computer, is transmitted from a master control unit 21 to each lighting unit 1, e.g. to the connection unit 6, where it is received and further transferred to the control unit 7. Thus, the light intensity of each lighting unit 1 can be adapted to the required value.

**[0054]** The master control unit may be a mobile remote control unit or fixed at a certain position, e.g. at a wall of the interior, or being realised by e.g. a web server which accesses one or more lighting units e.g. via the internet as access network. Alternatively, a fixed or mobile master control unit may be accessed via the internet by a web server,

**[0055]** The external control signal 23 may therefore contain information on the brightness or light intensity of each LED or group of LEDs. According to an embodiment this is realised by prescribing the driving current for a LED or group of LEDs. Alternatively or additionally the external control signal may contain information on the brightness or light intensity or colour direct lighting element 4 or in-

direct lighting element 5. The control unit 7 of each lighting unit may then assign the individual values for a LED or group of LEDs.

**[0056]** The transmission of the external control signal 23 can be either performed in a wired or a wireless mode. The master control unit 21 may be positioned at a central position inside the interior, e.g. given at a switch unit positioned at an entry or at a switch unit also used for other purposes such as teleconference etc., or outside, e.g. at a control room.

**[0057]** An overall control signal 22, defining the light situation, such as a press conference, discussion, meeting, presentation, computer work or cleaning, is provided as the overall control signal 22 to the master control unit 21 which then splits the information such that each lamp or lighting unit adapts the required intensity and colour such that as a whole, in the interior, the desired lighting situation is created. This overall control signal may be provided by a control program, user input or e.g. by a web server or other remote control entity, e.g. by using a transmission over the internet.

**[0058]** Further in the master control unit 21 the external control signal 23 may be created on basis of the overall control signal 22. Therefore, the master control unit may use also further information, such as time or already existing brightness, e.g. due to sunshine, in the room to be illuminated. Alternatively or additionally the master control unit may use movement information as set out below:

The master control unit 21 or/and at least one of the lighting units 1 is connected to the movement detector 12. The movement detector signal 15, see Figure 3, may be combined in the master control unit 21 in order to adapt the external control signal 23.

**[0059]** Alternatively, the movement detector signal 15 may be combined in a lighting unit 1 with the internal control signal 14 such that the intensity or/and colour of the illumination is changed when a person 24 enters the detection cone 25 of a movement detector 12 positioned in or at a lighting unit 1.

**[0060]** Alternatively or additionally, a movement detector 12 in the master control unit 21 may provide a movement detector signal 15 if a person enters the predetermined range defined by the movement detector 12 and, thus, modify the external control signal 23 such that e.g. all lighting units 1 are switched on, or switched from a power safe mode, where the light is completely switched off or remains at a certain dimming level, to a full illumination mode or a brighter dimming level, e.g. when a person enters a room.

**[0061]** Thus the lighting units 7 or control entities in a network 20 of lighting units 1 include additional optional intelligence based on movement sensors which may be used to evaluate the real required light intensity.

**[0062]** In Figure 4 another embodiment of the lighting unit 1 is depicted which is also formed as a suspended lamp. In Figure 5 a cross section of the embodiment of

the lighting unit 1 depicted in Figure 4 is shown. A top side PCB (printed circuit board 50) is arranged within a top side reflector element 51. On the top side PCB 50 the LED or LED arrays forming the indirect illumination lighting element 5 are placed. At the bottom side 2 a bottom side PCB 52 is placed within a bottom side reflector element 53. Further, protection elements 54 are provided, which can additionally be used for defusing the light of the LEDs.

**[0063]** At the bottom side 2 further a movement detector 12 is placed, preferably inside the bottom side reflector element 53. Thus the detecting cone of the movement detector 12 can basically coincide with the lighting cone of the direct illumination element.

**[0064]** The movement detector 12 detects a movement and provides this information as movement detector signal 15 to the control unit 7. The control unit 7 provides an internal control signal 14 to the individual or group of LEDs placed on the PCB boards, see also Figure 1. This can be realised by providing the internal control signal to an electrical circuit externally or internally in regard to the LED or group of LEDs or LED unit. The electrical circuit then provides a corresponding driving current or driving voltage to the LED or group of LEDs or LED unit. The control unit 7 can be formed by separated sub units, e.g. of which one controls the direct illumination element 4, the other one the indirect illumination element 5.

**[0065]** Also in this embodiment the direct illumination lighting element 4 comprises a protection element 54, a warm light LED unit 8 and a cold light LED unit 9 placed on a bottom side PCB board 52.

**[0066]** The indirect illumination lighting element 5 comprises a protection element 54, a multicolour first LED 10 placed on a top side PCB 50 and a top side reflector element 51.

**[0067]** The connection element 6 is placed on a position where a good reception of external signals is ensured and short transmission paths to the control unit 7 can be ensured.

**[0068]** In Figure 6 the bottom side PCB 52 is depicted, In an alternating manner, warm light LED units 8 and cold light LED units 9 comprising each at least one LED are arranged on the bottom side PCB 52. Thus, a desired overall colour of light from the direct illumination lighting element 4 can be achieved.

**[0069]** Alternatively the arrangement of the LED units may be differently, e.g. areas on which predominantly warm light LED units 8 arranged and those with predominantly cold light LED units 9,

**[0070]** The bottom side PCB board 52 may comprise several individual PCB boards, which are connected to each other.

**[0071]** For connecting the individual PCBs with each other a PCB connector 55 is provided at an end of an individual PCB board. Further a cable connector 56 is provided for establishing electrical connections between the individual PCB boards or to a component outside the

PCB board. Preferably, the electrical connection between the individual PCB boards is established by the PCB connector 55, too, so that at least a part of the cable connector 56 is integrated in a PCB connector 55.

**[0072]** In Figure 7 the top side PCB 50 is depicted. Each of the first LEDs 10 is a LED combination of a red, green and blue LED. Added to this combination is an amber colored LED 11, either separately or within the same housing, These LED groups are arranged turned in respect to each other in order to achieve a more conform illumination of the interior with a common mixed colour. Again, the top side PCB 50 may comprise several elements, which are connected to each other by PCB connectors 55.

**[0073]** A security device 57 is provided in order to compensate a failure of one or more LED's in order to keep the lighting unit in function, when one or more of the LED is broken. Further, an array of resistors 58 is provided to adapt the top side PCB 50 or/and the bottom side PCB 51 for a position in the left side, the middle left side, the middle right side or the right side of the lighting unit. Holes 59 are provided to fix a PCB with screws or rivets in the lighting unit.

#### 25 List of reference numbers

##### [0074]

1	lighting unit
2	bottom side
3	top side
4	direct illumination lighting element
5	indirect illumination lighting element
6	connection element
7	control unit
8	warm light LED unit
9	cold light LED unit
10	multicolour LED (red, green, blue)
11	amber LED
12	movement detector
13	housing
14	internal control signal
15	movement detector signal
16	second LED
17	vertical
18	fixing point
20	lighting network
21	master control unit
22	overall control signal
23	external control signal
24	person
25	detection cone
50	top side PCB
51	top side reflector element
52	bottom side PCB
53	bottom side reflector element
54	protection elements
55	PCB connector

56 cable connector  
 57 security device  
 58 array of resistors  
 59 holes

## Claims

1. Lighting unit (1) for illuminating an interior comprising
  - a housing (13) with a bottom side (2) and a top side (3);
  - a direct illumination lighting element (4) arranged at the bottom side (2) with at least one warm light LED unit (8) providing white light with a first colour temperature and at least one cold light LED unit (9) providing white light with a second colour temperature;
  - an indirect illumination lighting element (5) arranged at the top side (3) comprising at least a first LED (10) and a second LED (16) having different colours and at least one amber coloured LED (11);
  - a connection element (6) for connecting the lighting unit (1) to a control unit (7).
2. Lighting unit (1) according to claim 1, further comprising a control unit (7) for controlling the light intensity of the lighting unit (1).
3. Lighting unit (1) according to claim 2 wherein the control unit (7) is adapted such that for controlling the light intensity of the lighting unit (1) an internal control signal (14) is provided for setting the light intensity of at least one of direct illumination element (4), warm light LED unit (8), cold light LED unit (9), indirect illumination element (5), first LED (10), second LED (16) and amber LED (11).
4. Lighting unit (1) according to any of the previous claims wherein the connection element (6) is a transmission interface for wireless transmission.
5. Lighting unit (1) according to any of the previous claims wherein the connection element (6) is a transmission interface for wired transmission, particularly for a connection to a DALI bus system,
6. Lighting unit (1) according to any of the previous claims further comprising a movement detector (12) for detecting a movement within a predetermined range of the lighting unit (1) which provides a movement detector signal (15) to the connection element (6),
7. Lighting unit (1) according to any of the previous claims, wherein the lighting unit (1) is fixed at a certain position, particularly as a suspended lamp.
8. Lighting unit (1) according to claim 7, wherein the control unit (7) is positioned inside or outside the housing (13),
9. Lighting network (20) comprising at least two lighting units (1) according to any of the previous claims and a master control unit (21) for providing an external control signal (23) to at least one of the control units (7).
10. Method for lighting an interior using at least one lighting unit (1) according to any of the claims 2 to 8 or a lighting network (20) according to claim 9 comprising the following steps
  - providing an external control signal (23) to the control unit (7);
  - providing the internal control signal (14) from the control unit (7) to the direct illumination lighting element (4) and/or the indirect illumination lighting element (5);
  - setting a light intensity and a light temperature for the direct illumination lighting element (4) on the basis of the internal control signal (14);
  - setting the colour of the indirect illumination lighting element (5) by adjusting the intensity of at least one of first LED (10) and second LED (16) and by adjusting the intensity of the amber LED (11),
11. Method according to claims 9 and 10, comprising the further steps:
  - providing an overall control signal (22) containing information on a lighting scenario;
  - creating an external control signal (23) in the master control unit (21) on basis of said overall control signal (22).
12. Method according to any of the previous claims 10 or 11 comprising the further steps:
  - receiving a movement detector signal (15);
  - creating an internal control signal (14) or an external control signal (23) using the movement detector signal

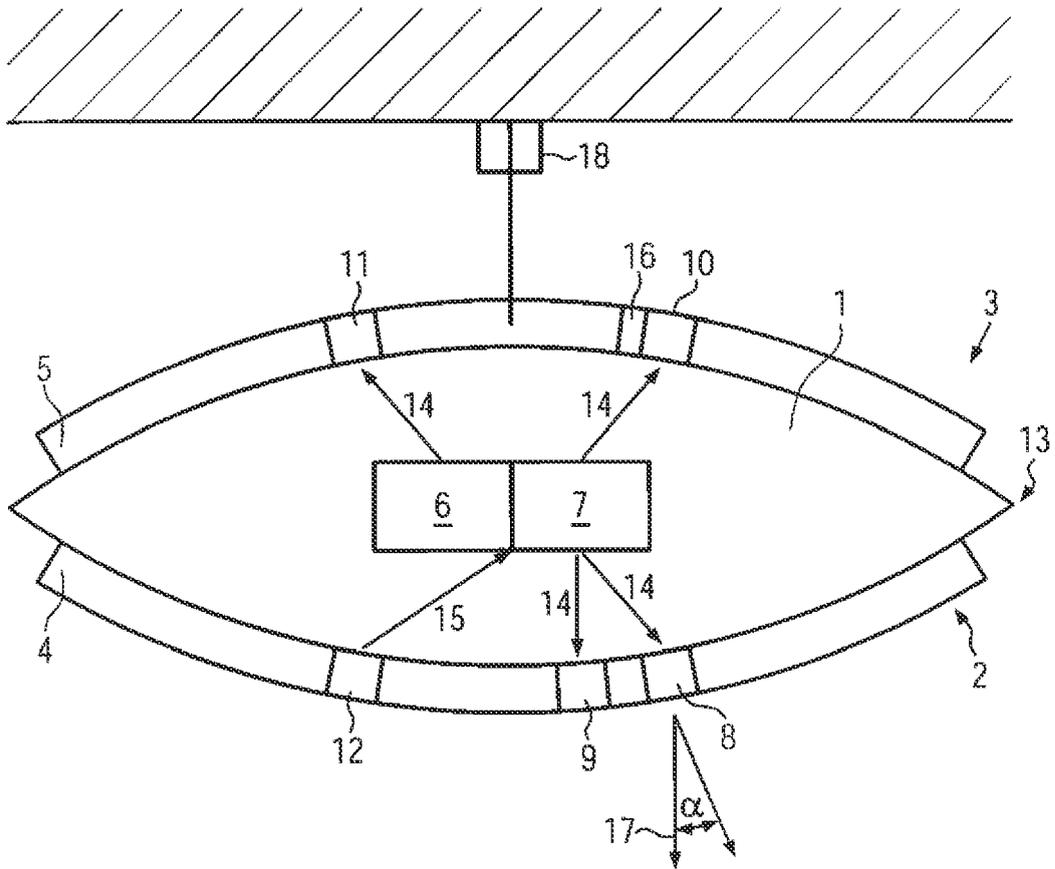


FIG. 1

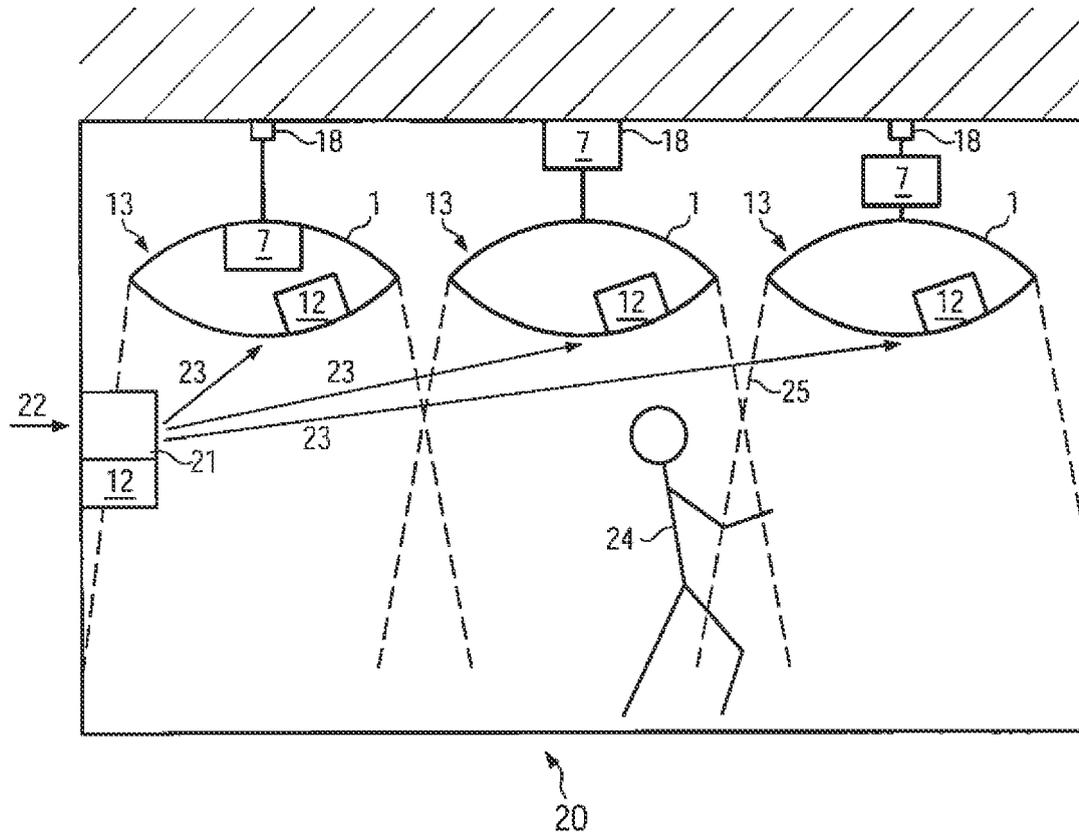


FIG. 2

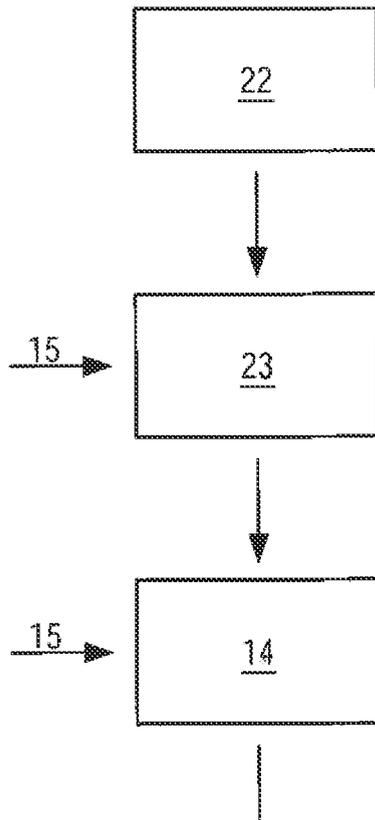


FIG. 3

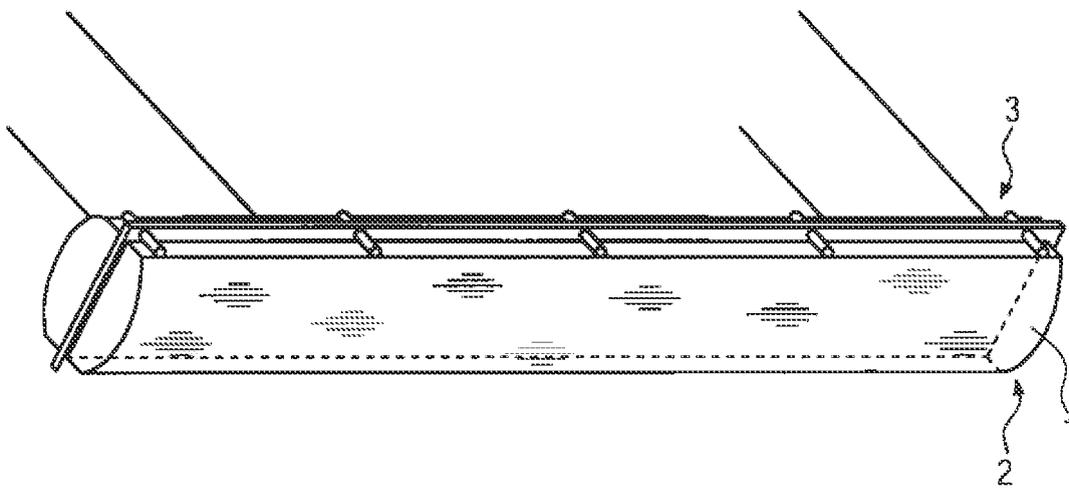


FIG. 4

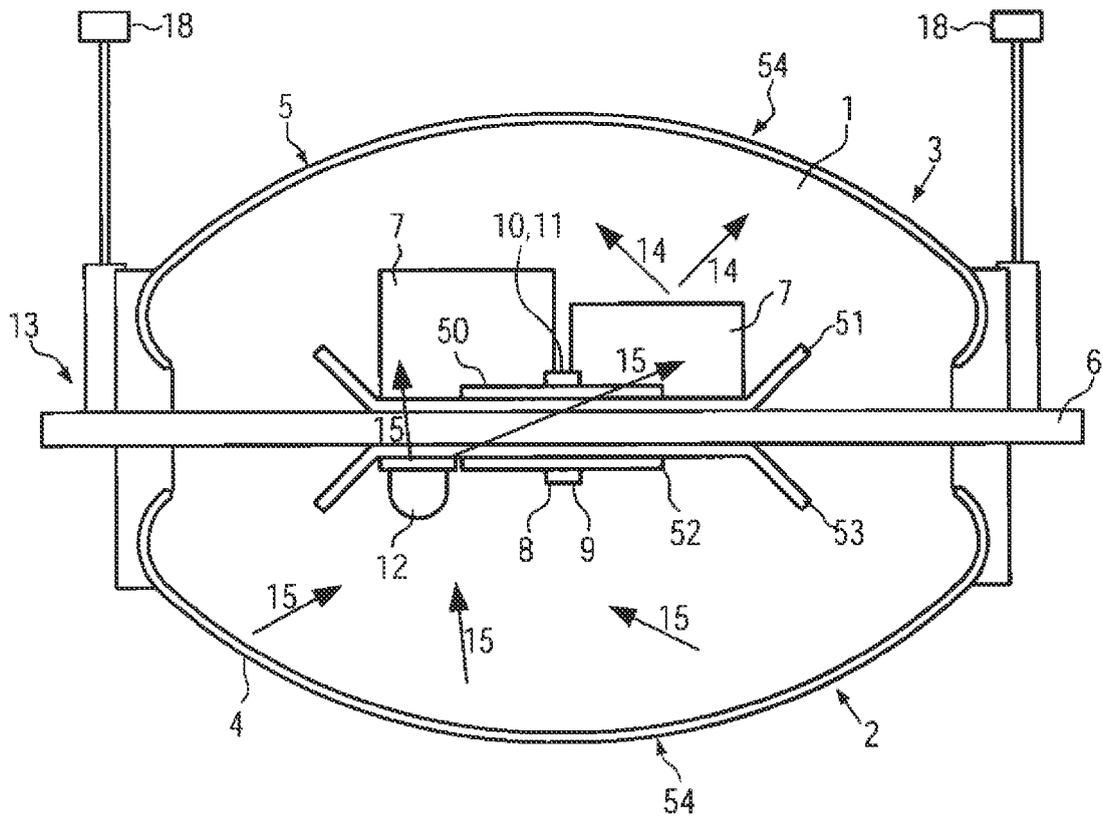


FIG. 5

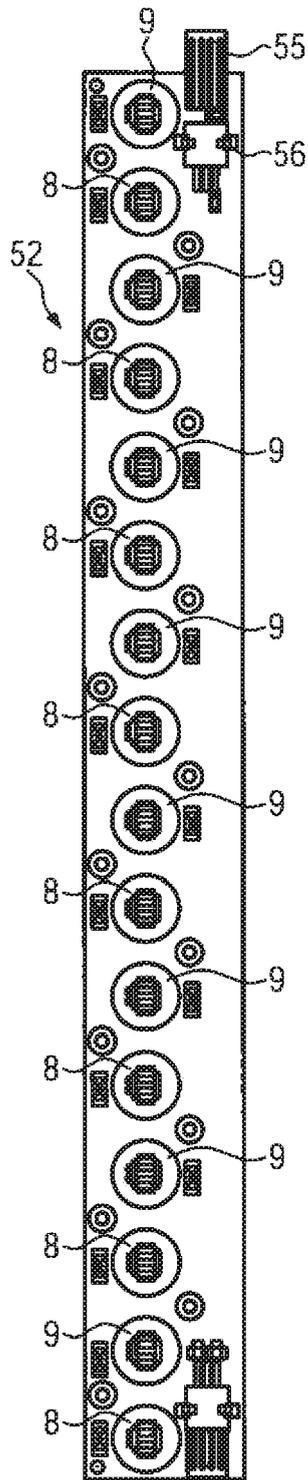


FIG. 6





EUROPEAN SEARCH REPORT

Application Number  
EP 09 16 4470

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2009/002986 A1 (MEDENDORP JR NICHOLAS W [US] ET AL) 1 January 2009 (2009-01-01) * paragraph [0055] * * figure 9 *	1-12	INV. F21S8/06
A	DE 201 05 386 U1 (INPROTEC INNOVATIVE PRODUKTION [DE]) 27 September 2001 (2001-09-27) * figure 1 *	1-12	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC) F21S
Place of search The Hague		Date of completion of the search 4 May 2010	Examiner Amerongen, Wim
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... & : member of the same patent family, corresponding document	

1  
EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 09 16 4470

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-05-2010

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2009002986 A1	01-01-2009	NONE	
-----			
DE 20105386 U1	27-09-2001	NONE	
-----			

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82