



(11) **EP 2 264 442 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
22.12.2010 Bulletin 2010/51

(51) Int Cl.:
G01N 27/403 ^(2006.01) **C12Q 1/00** ^(2006.01)
G01N 33/487 ^(2006.01)

(21) Application number: **10182091.8**

(22) Date of filing: **03.01.2003**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT SE SI SK TR**

(30) Priority: **04.01.2002 US 345743 P**

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
09075338.5 / 2 116 845
03250047.2 / 1 326 071

(71) Applicant: **Lifescan, Inc.**
Milpitas, CA 95035 (US)

(72) Inventors:
• **Hodges, Alastair M.**
Blackburn South, Victoria 3130 (AU)

• **Chambers, Gary**
Vermont, Victoria 32130 (AU)

(74) Representative: **Tunstall, Christopher Stephen**
Carpmaels & Ransford
One Southampton Row
London
WC1B 5HA (GB)

Remarks:

This application was filed on 29.09.2010 as a
divisional application to the application mentioned
under INID code 62.

(54) **Electrochemical cell connector**

(57) The present invention relates to electrochemical cells including a connector which mates with a connection device to provide electrical connection to meter circuitry.

EP 2 264 442 A1

Description

Field of the Invention

[0001] The present invention relates to electrochemical cells including a connector which mates with a meter connection device to provide electrical connection to meter circuitry.

Background of the Invention

[0002] Miniature electrochemical cells are useful in applications such as chemical sensing wherein the electrodes of a strip element interface with an electronic device. The electronic device, often termed a meter, measures the electrical response of the strip element to the sample and can also supply power to the strip element to perform a test. In order to perform these functions, the strip element electrodes must be able to make electrical connection to the meter circuitry. Such an electrical connection may be made via a connection device on the meter which mates with areas on the strip element in electrical communication with the electrochemical cell electrodes.

[0003] In configurations of electrochemical cells as disclosed in WO 98/43073, U.S. 5,437,999, EP 0 964 059 A2, WO 00/20626, an upper and a lower electrode face oppose one another with an electrically insulating layer between them. The electrodes in such a configuration are typically formed on separate substrates that are assembled during manufacture of the electrochemical cell. This configuration presents difficulties in manufacture when forming a part by which the strip element electrodes are connected to the meter circuitry, as it is different from the usual connection configuration where the connection areas are all on the same plane.

[0004] The issue of connection areas in different planes has been addressed in various ways. In WO 98/43073, a method and device are disclosed wherein cut-outs are formed in one of the electrode layers and in the insulating layer to expose an area of the underlying electrode layer which can be used as an connection area. In U.S. 5,437,999 and WO 00/20626, a method and device are disclosed wherein a flap is formed on one electrode layer with a corresponding cut-out in the other electrode layer to expose a suitable connection area. In this configuration, the insulating layer is cut short so as not interfere with the connection area.

[0005] In EP 0 964 059 A2, the insulating layer is cut short, and a hole is formed in the upper substrate in order to expose a connection area at the base of the well that is formed. The well may be filled with a conductive material and a contact made with the conductive material at the top of the filled well, thus bringing the connection areas onto one plane.

[0006] A drawback to these configurations is that they require features on more than one of the cell layers to be in registration with one another when the layers are as-

sembled into a working device. This creates difficulties in manufacturing the devices and limits the manufacturing techniques that can be used. In particular, for costs and throughput considerations, it is often desirable to manufacture the strip elements in a continuous web form. When using continuous webs it is often difficult to reliably achieve the down-web registration of repeating features formed on different layers prior to a lamination step. Often this requires expensive control systems and a relatively fragile fabrication process, if it is possible at all.

Summary of the Invention

[0007] Electrochemical cell connectors that are suitable for use in conjunction with opposing electrode electrochemical cells, and methods of forming them, that require no down-web registration steps prior to lamination of the layers are desirable. The preferred embodiments provide such electrochemical cell connectors and methods.

[0008] In a first embodiment, an electrochemical cell is provided, the electrochemical cell adapted for electrical connection with a meter, the cell including a first insulating substrate carrying a first electrically conductive coating, a second insulating substrate carrying a second electrically conductive coating, and an insulating spacer layer disposed therebetween, the electrically conductive coatings being disposed to face each other in a spaced apart relationship, wherein an edge of the first insulating substrate carrying the first electrically conductive coating extends beyond an edge of the second insulating substrate carrying the second electrically conductive coating and beyond an edge of the insulating spacer layer, and wherein the edge of the second insulating substrate carrying the second electrically conductive coating extends beyond the edge of the insulating spacer layer.

[0009] In an aspect of the first embodiment, the first insulating substrate carrying the first electrically conductive coating includes an aperture in a portion of the first insulating substrate carrying the first electrically conductive coating that extends beyond the edge of the insulating spacer, such that an area of the second electrode layer is exposed so as to provide a surface for forming an electrical connection with a meter via the aperture.

[0010] In an aspect of the first embodiment, the cell further includes an additional insulating spacer layer, the additional spacer layer disposed between the first electrically conductive coating and the second electrically conductive coating, wherein the insulating spacer layer and the additional spacer layer are situated on opposite sides of the aperture.

[0011] In a second embodiment, an electrochemical cell is provided, the electrochemical cell adapted for electrical connection with a meter, the cell including a first insulating substrate carrying a first electrically conductive coating, a second insulating substrate carrying a second electrically conductive coating, and an insulating spacer layer disposed therebetween, the electrically conductive

coatings being disposed to face each other in a spaced apart relationship, wherein an edge of the first insulating substrate carrying the first electrically conductive coating extends beyond an edge of the second insulating substrate carrying the second electrically conductive coating and beyond an edge of the insulating spacer layer, and wherein the first insulating substrate carrying the first electrically conductive coating and the insulating spacer layer include an aperture, such that an area of the second electrode layer is exposed so as to provide a surface for forming an electrical connection with a meter via the aperture.

[0012] In a third embodiment, an electrochemical cell is provided, the electrochemical cell adapted for electrical connection with a meter, the cell including a first insulating substrate carrying a first electrically conductive coating, a second insulating substrate carrying a second electrically conductive coating, and an insulating spacer layer disposed therebetween, the electrically conductive coatings being disposed to face each other in a spaced apart relationship, wherein a portion of the first insulating substrate carrying the first electrically conductive coating extends beyond an edge of the second insulating substrate carrying the second electrically conductive coating and beyond an edge of the insulating spacer layer, and wherein a portion of the first insulating substrate carrying the first electrically conductive coating and a portion of the insulating spacer are removed so as to form a notch, the notch situated adjacent to the edge of the second insulating substrate carrying the second electrically conductive coating and the edge of the insulating spacer layer, such that an area of the second electrode layer is exposed so as to provide a surface for forming an electrical connection with a meter.

[0013] In a fourth embodiment, a method for forming an electrical connection between an electrochemical cell and a meter is provided, the method including the steps of: providing an electrochemical cell, the electrochemical cell comprising a first insulating substrate carrying a first electrically conductive coating, a second insulating substrate carrying a second electrically conductive coating, and an insulating spacer layer disposed therebetween, the electrically conductive coatings being disposed to face each other in a spaced apart relationship, wherein an edge of the first insulating substrate carrying the first electrically conductive coating extends beyond an edge of the second insulating substrate carrying the second electrically conductive coating and beyond an edge of the insulating spacer layer, and wherein the edge of the second insulating substrate carrying the second electrically conductive coating extends beyond the edge of the insulating spacer layer; providing a meter, the meter including a wedge, the wedge including an upper wedge conductive surface and a lower wedge conductive surface, the conductive surfaces in electrical communication with the meter; and inserting a portion of the electrochemical cell into the meter, whereby the wedge is inserted between the portion of the first insulating substrate car-

rying the first electrically conductive coating and the portion of the second insulating substrate carrying the second electrically conductive coating that extends beyond the edge of the insulating spacer layer, whereby an electrical connection between the first electrically conductive coating and the lower wedge conductive surface is formed, and whereby an electrical connection between the second electrically conductive coating and the upper wedge conductive surface is formed.

[0014] In an aspect of the fourth embodiment, the meter further includes a pivot point, wherein the wedge is capable of rotating on the pivot point.

Brief Description of the Drawings

[0015]

Figures 1a and 1b provide schematics of an electrochemical cell wherein element **2** is offset from the corresponding edge of element **1** so as to expose the conductive coating on element **1**. Figure 1a illustrates a top view and Figure 1b a cross-section view. Figures 2a and 2b provide schematics of an electrochemical cell wherein a through hole is cut in element **1** to expose the conductive coating on element **2** for electrical connection. Figure 2a illustrates a top view and Figure 2b a cross-section view.

Figures 3a and 3b provide schematics of an electrochemical cell similar to the cell of Figure 2, except that an extra portion of element **3** has been inserted between elements **1** and **2**. Figure 3a illustrates a top view and Figure 3b a cross-section view.

Figures 4a and 4b provide schematics of an electrochemical cell wherein a slot is formed in element **1**, which gives access to an area of the conductive coating on element **2**. Figure 4a illustrates a top view and Figure 4b a cross-section view.

Figures 5a and 5b provide schematics of an electrochemical cell similar to the cell of Figure 2, except that the edge of element **3** is such that it is situated above element **4** in element **1**. Figure 5a illustrates a top view and Figure 5b a cross-section view.

Figures 6a and 6b provide schematics of an electrochemical cell similar to the cell of Figure 4, except that the edge of element **3** is such that it is at least close to the edge of element **1**. Figure 6a illustrates a top view and Figure 6b a cross-section view.

Figure 7 provides a side view illustrating the splitting of element **1** from element **2** in the connector area to allow access for a tongue connection device.

Figure 8 provides an end view illustrating the splitting of element **1** from element **2** in the connector area to allow access for a tongue connection device.

Figure 9 provides an illustration depicting a strip partially inserted into an external circuit connector.

Figure 10 provides an illustration depicting a strip fully inserted into an external circuit connector.

Figure 11 provides a side view of an external circuit

connector **100**.

Figure 12 provides an illustration depicting a strip partially inserted into an external circuit connector **100** as illustrated in Figure 11.

Figure 13 provides an illustration depicting a strip fully inserted into an external circuit connector **100** as illustrated in Figure 11.

Detailed Description of the Preferred Embodiment

[0016] The following description and examples illustrate a preferred embodiment of the present invention in detail. Those of skill in the art will recognize that there are numerous variations and modifications of this invention that are encompassed by its scope. Accordingly, the description of a preferred embodiment should not be deemed to limit the scope of the present invention.

[0017] The preferred embodiments relate to devices and methods for forming electrode connection areas in electrochemical cells with opposing electrodes. The devices and methods do not require the registration of features formed on different layers prior to the lamination of the layers. In particular, devices and methods that do not require the down-web registration of repeating features on different layers during lamination of continuous webs of devices during manufacture are provided. The preferred embodiments may be used in conjunction with any suitable fabrication process, for example, a process wherein discrete sections of the layers are laminated together and wherein it is advantageous to lessen the registration requirements and therefore the manufacturing complexity.

[0018] In another embodiment, preferred elements of the port in a meter device suitable for use with the disclosed strip connectors are provided.

[0019] The basic feature of the electrochemical cells illustrated in Figures 1-6 is that the edge of at least one electrode layer (herein termed the upper electrode layer) is offset from at least one other opposing electrode layer (here termed the lower electrode layer) such that an area of the lower electrode layer overhangs the edge of the upper electrode layer, thus exposing an area of the lower electrode layer suitable for connection to meter circuitry.

[0020] Figures 1 to 6 depict views of various preferred embodiments of electrochemical cell connectors. Figures 1a, 2a, 3a, 4a, 5a, and 6a depict top views of sections of web or card of the assembled layers for various embodiments, showing the repeating features. Figures 1b, 2b, 3b, 4b, 5b, and 6b depict the corresponding cross-sectional views.

[0021] In Figures 1 to 6, element **1** is the lower electrode layer. This layer consists of an electrically insulating substrate with an electrically conductive coating applied to its upper face, wherein the electrically conductive coating is in electrical contact with at least a first electrode of the electrochemical cell.

[0022] Element **2** is the upper electrode layer. This layer consists of an electrically insulating substrate with an

electrically conductive coating applied to its lower face, wherein the electrically conductive coating is in electrical contact with at least a second electrode of the electrochemical cell.

[0023] Element **3** is an electrically insulating layer which serves to space elements **1** and **2** apart. In preferred embodiments, the upper and lower faces of element **3** are adhesive and also serve to adhere the layers of the device together. In this preferred embodiment, element **3** may consist of a substrate coated with an adhesive. Alternatively it may consist of just an adhesive layer.

[0024] Element **4** is a cut-out feature in element **1** which, as illustrated in Figures 2 to 6, serves to give access to an exposed area of the electrically conductive coating on the lower face of element **2**.

[0025] In Figure 1, one edge of element **2** is offset from the corresponding edge of element **1**, such that an overhanging area of the conductive coating on element **1** is exposed. In a preferred embodiment, a tongue of electrically insulating substrate material with electrically conductive coatings or layers on its upper and lower faces is inserted between elements **1** and **2** to make electrical connection to the meter circuitry.

[0026] In Figure 2, a through hole is cut in element **1** to expose an area of the conductive coating on element **2** for electrical connection. This obviates the need for having a connection device inserted between the layers.

[0027] The device depicted in Figure 3 is similar to that depicted in Figure 2, except that an extra portion of element **3** has been inserted between elements **1** and **2**. This configuration is desirable if it is likely that elements **1** and **2** will be pushed together during use and thus create an electrical short-circuit between the conductive coatings on elements **1** and **2**.

[0028] Figure 4 depicts an embodiment where a slot has been formed in element **1** which gives access to an area of the conductive coating on element **2**.

[0029] Figure 5 depicts a similar embodiment to Figure 2. However in this embodiment the edge of element **3** is such that it is above element **4** in element **1**. In order for this embodiment to be operable in the preferred embodiment elements **1** and **2** must be laminated or otherwise assembled together before element **4** is formed.

[0030] Figure 6 depicts a similar embodiment to Figure 4. However in this embodiment the edge of element **3** is such that it is at least close to the edge of element **1**. In this embodiment, it is preferred that elements **1** and **2** be laminated or otherwise assembled together before element **4** is formed.

[0031] In another embodiment, methods are disclosed for forming electrical connections to some of the connection devices discussed above.

[0032] For the electrochemical cells of the preferred embodiments depicted in Figures 2 to 6, it is suitable to use parts for the connection of the conductive coatings on elements **1** and **2** to external circuitry such as those described in copending U.S. patent application

09/399,512 filed on September 20, 1999.

[0033] For the embodiment depicted in Figure 1, a different configuration for external connection is desirable. For this embodiment, it is desirable to split element **1** from element **2** in the connector area to allow easier access for a tongue connection device. According to this aspect of the embodiment, element **1** is split from element **2** during insertion of the strip connector into external circuitry connector, e.g., by a blade or wedge-shaped projection, or other suitable splitting device.

[0034] Figures 7 and 8 show a side view and end view, respectively, that illustrate the splitting of element **1** from element **2** in the connector area to allow access for a tongue connection device. Figures 9 and 10 show this embodiment with a strip partially and fully inserted, respectively, into the external circuit connector.

[0035] The external circuit connector **10**, depicted in Figures 7 to 10, contains a chamber **18**, which contains cavities **11** and **12** into which element **1** and element **2**, respectively, of the strip can be inserted. One or more wedge shaped projections **17** on the sidewalls of chamber **18** serve to separate strip elements **1** and **2** as the strip is inserted into chamber **18**. As the strip is inserted into chamber **18**, element **1** first strikes the lower face of projection **17** and is forced down. This action in concert with the insertion action serves to further separate element **1** from element **2** to allow reliable insertion of element **2** into cavity **12**.

[0036] A further wedge-shaped projection protrudes from the rear face of chamber **18**. Conducting layers are mounted on the faces **13** and **14** of this projection, wherein the two conducting layers are electrically insulated from one another. These layers make electrical contact with the conducting coatings on strip elements **1** and **2**. Electrically conducting wires or other conducting tracks **15** and **16** are electrically connected to the conducting layers on faces **13** and **14** and serve to make connection to the external circuitry. As one skilled in the art will appreciate, the device with surfaces comprising conducting layers **13** and **14** may be constructed so as to be integral with the projections **17**.

[0037] A second embodiment is depicted in Figures 11 to 13. Figure 11 shows a side view of the embodiment. Figures 12 and 13 show a side view of the embodiment with a strip partially or fully inserted respectively.

[0038] The external circuit connector **100**, depicted in Figures 11 to 13, contains a chamber **105** which contains a wedge **101** that is able to rotate within the chamber **105** around the pivot point **102**. The wedge comprises electrically conductive surfaces, **106** and **107** which are electrically connected to external connection points **103** and **104**. In its initial position, the wedge **101** is held either by gravity or a spring tensioning device (not shown) such that it is positioned as shown in Figure 11. When a strip is inserted into the chamber **105**, the lower electrode element strikes the lower surface of wedge **101** behind the pivot point **102**. This action rotates wedge **101** such that the point of the wedge **101** is positioned between the

upper and lower electrode layers of the strip. Then, as the strip is further inserted into chamber **105**, the upper wedge surface **106** is brought into contact with the conducting coating on the upper strip element. Electrical connection of the conducting coating on the upper strip element to connection point **103**, via conducting surface **106** is then achieved, as is electrical connection of the conducting coating on the lower electrode strip element to connection point **104** via conducting surface **107**.

[0039] The advantage of the embodiment shown in Figures 11 to 13 is that the point of the wedge **101** is automatically positioned between the upper and lower strip electrode elements to ensure reliable connection.

15 Electrochemical Cells

[0040] The electrochemical cell connectors of preferred embodiments are suitable for use in a variety of electrochemical cells. For example, the connectors may be used in conjunction with electrochemical cells used as amperometric sensors for the detection and quantification of analytes.

[0041] In such applications, the electrodes can be positioned such that the working electrode is isolated from the counter electrode reactions and reaction products, or positioned such that products of the counter electrode reaction diffuse to the working electrode where they react. The former type of electrochemical cell is well known in the prior art. The latter type of electrochemical cell is discussed in US 6,179,979 and US 5,942,102.

[0042] These two electrode configurations vary in that in the isolated case, the counter electrode is positioned far enough away from the working electrode such that during the time the cell is being used, products of electrochemical reactions at the counter electrode do not reach the working electrode. In practice, this is typically achieved by a separation of the working electrode from the counter electrode by at least a millimeter.

[0043] In the non-isolated configuration, the working electrode and the counter electrode are placed close enough together such that products of the electrochemical reactions at the counter electrode can diffuse to the working electrode during the time the cell is being used. These reaction products can then react at the working electrode, giving a higher current than may be present in the isolated electrode case. In the non-isolated configuration, the working electrode reactions can be described as coupled to the counter electrode reactions.

50 Fabricating the Electrochemical Cell

[0044] In certain embodiments, the electrochemical cells of preferred embodiments may be fabricated using methods similar to those disclosed in U.S. 5,942,102.

[0045] As will be recognized by one skilled in the art, the electrode layers and electrically insulating substrates may be independently selected as desired, for example, for ease of fabrication, for reducing materials costs, or to

achieve other desirable attributes of the cell or fabrication process. Likewise, the electrode layers may be applied to the layers of electrically insulating substrates in any suitable pattern, for example, a pattern that only partially covers the substrate.

[0046] In preferred embodiments, various layers in the cell may be adhered using a suitable adhesive. Suitable adhesives include, for example, heat activated adhesives, pressure sensitive adhesives, heat cured adhesives, chemically cured adhesives, hot melt adhesives, hot flow adhesives, and the like. Pressure sensitive adhesives are preferred for use in certain embodiments where simplification of fabrication is desired. However, in other embodiments the tackiness of pressure sensitive adhesives may result in fabrication tool gumming or product tackiness. In such embodiments, heat or chemically cured adhesives are generally preferred. Especially preferred are the heat-activated and heat-cured adhesives, which can be conveniently activated at the appropriate time.

[0047] In certain embodiments, it may be preferred to use a hot melt adhesive. A hot melt adhesive is a solvent-free thermoplastic material that is solid at room temperature and is applied in molten form to a surface to which it adheres when cooled to a temperature below its melting point. Hot melt adhesives are available in a variety of chemistries over a range of melting points. The hot melt adhesive can be in the form of a web, nonwoven material, woven material, powder, solution, or any other suitable form. Polyester hot melt adhesives may be preferred for certain embodiments. Such adhesives (available, for example, from Bostik Corp. of Middleton, MA) are linear saturated polyester hot melts exhibiting melting points from 65°C up to 220°C and range from completely amorphous to highly crystalline in nature. Polyamide (nylon) hot melt adhesives, also available from Bostik, may also be preferred, including both dimer-acid and nylon-type polyamide adhesives. Suitable hot melt adhesive chemistries include EVA, polyethylene, and polypropylene.

[0048] Alternatively, in certain other embodiments it may be preferred to use lamination techniques to bond certain layers together. Suitable lamination techniques are described in Application No. 09/694,106 filed October 20, 2000 and Application No. 09/694,120 filed October 20, 2000, each entitled "LAMINATES OF ASYMMETRIC MEMBRANES." The layers to be laminated are placed adjacent to each other and heat is applied, whereby a bond between the layers is formed. Pressure may also be applied to aid in forming the bond. Lamination methods may be preferred to bond any two materials capable of forming a bond under application of heat and/or pressure. Lamination is preferred to form a bond between two suitable polymeric materials.

[0049] Suitable electrically resistive materials which may be preferred as spacer layers, as supports for electrode layers, or in other layers in the cell, include, for example, materials such as polyesters, polystyrenes, polycarbonates, polyolefins, polyethylene terephthalate,

glasses, ceramics, mixtures and/or combinations thereof, and the like. Examples of electrically resistive adhesives suitable for use as spacer or support layers include, but are not limited to, polyacrylates, polymethacrylates, polyurethanes, and sulfonated polyesters.

[0050] Chemicals for use in the cell, such as redox reagents, lysing agents, buffers, inert salts, and other substances, may be supported on the cell electrodes or walls, on one or more independent supports contained within cell, or may be self supporting. If the chemicals are to be supported on the cell electrodes or walls, the chemicals may be applied by use of application techniques well known in the art, such as ink jet printing, screen printing, lithography, ultrasonic spraying, slot coating, gravure printing, and the like. Suitable independent supports may include, but are not limited to, meshes, nonwoven sheets, fibrous fillers, macroporous membranes, and sintered powders. The chemicals for use in the cell may be supported on or contained within a support.

[0051] In a preferred embodiment, the preferred materials within the cell as well as the materials from which the cell is constructed are in a form amenable to mass production, and the cells themselves are designed for a single experiment then disposed of. A disposable cell is one that is inexpensive enough to produce that it is economically acceptable only for a single test. A disposable cell is one that may conveniently only be used for a single test, namely, steps such as washing and/or reloading of reagents may need to be taken to process the cell after a single use to render it suitable for a subsequent use.

[0052] Economically acceptable in this context means that the perceived value of the result of the test to the user is the same or greater than the cost of the cell to purchase and use, the cell purchase price being set by the cost of supplying the cell to the user plus an appropriate mark up. For many applications, cells having relatively low materials costs and simple fabrication processes are preferred. For example, the electrode materials of the cells may be inexpensive, such as carbon, or may be present in sufficiently small amounts such that expensive materials may be preferred. Screen printing carbon or silver ink is a process suitable for forming electrodes with relatively inexpensive materials. However, if it is desired to use electrode materials such as platinum, palladium, gold, or iridium, methods with better material utilization, such as sputtering or evaporative vapor coating, are preferred as they may yield extremely thin films. The substrate materials for the disposable cells are also preferably inexpensive. Examples of such inexpensive materials are polymers such as polyvinylchloride, polyimide, polyester and coated papers and cardboard.

[0053] Cell assembly methods are preferably amenable to mass production. These methods include fabricating multiple cells on cards and separating the card into individual strips subsequent to the main assembly steps, and web fabrication where the cells are produced on a continuous web, which is subsequently separated into

individual strips. Card processes are most suitable when close spatial registration of multiple features is desired for the fabrication and/or when stiff cell substrate materials are preferred. Web processes are most suitable when the down web registration of features is not as critical and flexible webs may be preferred.

[0054] In certain embodiments, a convenient single use for the electrochemical cell may be desirable so that users are not tempted to try to reuse the cell and possibly obtain an inaccurate test result. Single use of the cell may be stated in user instructions accompanying the cell. More preferably, in certain embodiments where a single use is desirable the cell may be fabricated such that using the cell more than once is difficult or not possible. This may be accomplished, for example, by including reagents that are washed away or consumed during the first test and so are not functional in a second test. Alternatively, the signal of the test may be examined for indications that reagents in the cell have already reacted, such as an abnormally high initial signal, and the test aborted. Another method includes providing a means for breaking electrical connections in the cell after the first test in a cell has been completed.

The Electrodes

[0055] In a preferred embodiment wherein the electrochemical cell detects the presence and/or amount of analyte in the sample, or a substance indicative of the presence and/or amount of analyte present in the sample, at least one of the electrodes in the cell is a working electrode. When the potential of the working electrode is indicative of the level of analyte (such as in a potentiometric sensor) a second electrode acting as reference electrode is present which acts to provide a reference potential.

[0056] In the case of an amperometric sensor wherein the working electrode current is indicative of the level of an analyte, such as glucose, at least one other electrode is preferably present which functions as a counter electrode to complete the electrical circuit. This second electrode may also function as a reference electrode. Alternatively, a separate electrode may perform the function of a reference electrode.

[0057] Materials suitable for the working, counter, and reference electrodes are compatible with any reagents or substances present in the device. Compatible materials do not substantially react chemically with other substances present in the cell. Examples of such suitable materials may include, but are not limited to, carbon, carbon and an organic binder, platinum, palladium, carbon, indium oxide, tin oxide, mixed indium/tin oxides, gold, silver, iridium, and mixtures thereof. These materials may be formed into electrode structures by any suitable method, for example, by sputtering, vapor coating, screen printing, thermal evaporation, gravure printing, slot coating or lithography. In preferred embodiments, the material is sputtered or screen-printed to form the electrode structures.

[0058] Non-limiting examples of materials preferred for use in reference electrodes include metal/metal salt systems such as silver in contact with silver chloride, silver bromide or silver iodide, and mercury in contact mercurous chloride or mercurous sulfate. The metal may be deposited by any suitable method and then brought into contact with the appropriate metal salt. Suitable methods include, for example, electrolysis in a suitable salt solution or chemical oxidation. Such metal/metal salt systems provide better potential control in potentiometric measurement methods than do single metal component systems. In a preferred embodiment, the metal/metal salt electrode systems are preferred as a separate reference electrode in an amperometric sensor.

[0059] Any suitable electrode spacing may be used. In certain embodiments it may be preferred that the electrodes be separated by a distance of about 500 μm , 400 μm , 300 μm , 200 μm , 100 μm , 50 μm , 200 μm , 10 μm , or less. In other embodiments it may be preferred that the electrodes be separated by a distance of about 500 μm , 600 μm , 700 μm , 800 μm , 900 μm , 1 mm, or more.

Lysing Agents

[0060] In certain embodiments, it may be desired to include one or more lysing agents in the electrochemical cell. Suitable lysing agents include detergents, both ionic and nonionic, proteolytic enzymes, and lipases. Suitable ionic detergents include, for example, sodium dodecyl sulfate and cetyl trimethylammonium bromide. Non-limiting examples of proteolytic enzymes include trypsin, chymotrypsin, pepsin, papain, and Pronase E, a very active enzyme having broad specificity. Nonionic surfactants suitable for use include, for example, ethoxylated octylphenols, including the TRITON XTM Series available from Rohm & Haas of Philadelphia, Pennsylvania. In a preferred embodiment, saponins, namely, plant glycosides that foam in water, are preferred as the lysing agent. In a particularly preferred embodiment, alkali metal salts of deoxycholic acid, available from Sigma Aldrich Pty. Ltd. of Castle Hill, NSW, Australia, are preferred as lysing agents.

Redox Reagent

[0061] Redox reagents may also be included in the electrochemical cell in preferred embodiments. Preferred redox reagents for use in electrochemical cells for measuring glucose in blood include those which are capable of oxidizing the reduced form of enzymes that are capable of selectively oxidizing glucose. Examples of suitable enzymes include, but are not limited to, glucose oxidase dehydrogenase, PQQ dependent glucose dehydrogenase, and NAD dependent glucose dehydrogenase. Examples of redox reagents suitable for use in analyzing glucose include, but are not limited, to salts of ferricyanide, dichromate, vanadium oxides, permanganate, and electroactive organometallic complexes. Organic redox

reagents such as dichlorophenolindophenol, and quinones are also suitable. In a preferred embodiment, the redox reagent for analyzing glucose is ferricyanide.

Buffers

[0062] Optionally, a buffer may be present along with a redox reagent in dried form in the electrochemical cell. If a buffer is present, it is present in an amount such that the resulting pH level is suitable for adjusting the oxidizing potential of the redox reagent to a level suitable for oxidizing, for example, glucose but not other species that it is not desired to detect. The buffer is present in a sufficient amount so as to substantially maintain the pH of the sample at the desired level during the test. Examples of suitable buffers include phosphates, carbonates, alkali metal salts of mellitic acid, alkali metal salts of citric acid, and alkali metal salts of citraconic acid. The choice of buffer may depend, amongst other factors, on the desired pH. The buffer is selected so as not to react with the redox reagent.

Inert Salts

[0063] Inert salts preferred for use in various embodiments include salts that dissociate to form ions in the sample to be analyzed, but do not react with any of the redox reagents or other substances in the sample or in the cell, including with the cell electrodes. Examples of suitable inert salts include, but are not limited to, alkali metal chlorides, nitrates, sulfates, and phosphates.

Other Substances Present Within the Cell

[0064] In addition to redox reagents and buffers, other substances may also be present within the electrochemical cell. Such substances include, for example, viscosity enhancers and low molecular weight polymers. Hydrophilic substances may also be contained within the cell, such as polyethylene glycol, polyacrylic acid, dextran, and surfactants such as those marketed by Rohm & Haas Company of Philadelphia, Pennsylvania, under the trade name TRITON™ or by ICI Americas Inc. of Wilmington, Delaware, under the trade name TWEEN™. In a preferred embodiment Pluronic surfactants and antifoaming agents available from BASF are present. Such substances may enhance the fill rate of the cell, provide a more stable measurement, and inhibit evaporation in small volume samples.

Electrical Circuit

[0065] The electrically conductive layers are preferably connected via the connectors described herein to electrical circuits capable of applying potentials between the electrodes and measuring the resulting currents, for example, meters. Suitable meters may include one or more of a power source, circuitry for applying controlled

potentials or currents, a microprocessor control device, computer, or data storage device, a display device, an audible alarm device, or other devices or components as are known in the art. The meter may also be capable of being interfaced to a computer or data storage device. For example, a typical meter may be a hand-held device that is powered by a battery, controlled by an on-board microprocessor, and contains circuitry for applying predetermined potentials or currents between, for example, strip electrode connection pins and circuitry such as an analog-to-digital converter. In this embodiment, the analog signal from the strip may be converted to a digital signal that can be analyzed and/or stored by a microprocessor. The meter may also contain a display such as a Liquid Crystal Display and suitable associated circuitry to display the result of the test to the user. In an alternative embodiment, the meter may incorporate specialized circuitry, such as potential application and signal acquisition circuitry. Such specialized circuitry may be incorporated in a separate module that may be interfaced with a generic computing device, such as a hand-held computer or other type of computer. In such an embodiment, the generic device may perform the control, analysis, data storage, and/or display functions. Such an embodiment allows for a less expensive meter to be produced because the generic computing device may be preferred for many functions and as such is not considered as part of the cost of the electrochemical measurement system. In either of these meter embodiments, the meter or generic computing device may be capable of communication with external devices such as local computer networks or the Internet to facilitate the distribution of test results and the provision of system upgrades to the user.

[0066] The above description provides several methods and materials of the present invention. This invention is susceptible to modifications in the methods and materials, as well as alterations in the fabrication methods and equipment. Such modifications will become apparent to those skilled in the art from a consideration of this disclosure or practice of the invention provided herein. Consequently, it is not intended that this invention be limited to the specific embodiments provided herein, but that it cover all modifications and alternatives coming within the true scope and spirit, of the invention as embodied in the attached claims. All references cited herein are hereby incorporated by reference in their entireties.

[0067] The following is a non-exhaustive list of embodiments which are or may be claimed:

(A) An electrochemical cell, the electrochemical cell adapted for electrical connection with a meter, the cell comprising a first insulating substrate carrying a first electrically conductive coating, a second insulating substrate carrying a second electrically conductive coating, and an insulating spacer layer disposed therebetween, the electrically conductive coatings being disposed to face each other in a

spaced apart relationship, wherein an edge of the first insulating substrate carrying the first electrically conductive coating extends beyond an edge of the second insulating substrate carrying the second electrically conductive coating and beyond an edge of the insulating spacer layer, and wherein the edge of the second insulating substrate carrying the second electrically conductive coating extends beyond the edge of the insulating spacer layer.

(B) The electrochemical cell of embodiment (A), wherein the first insulating substrate carrying the first electrically conductive coating comprises an aperture in a portion of the first insulating substrate carrying the first electrically conductive coating that extends beyond the edge of the insulating spacer, such that an area of the second electrode layer is exposed so as to provide a surface for forming an electrical connection with a meter via the aperture.

(C) The electrochemical cell of embodiment (B), further comprising an additional insulating spacer layer, the additional spacer layer disposed between the first electrically conductive coating and the second electrically conductive coating, wherein the insulating spacer layer and the additional spacer layer are situated on opposite sides of the aperture.

(D) An electrochemical cell, the electrochemical cell adapted for electrical connection with a meter, the cell comprising a first insulating substrate carrying a first electrically conductive coating, a second insulating substrate carrying a second electrically conductive coating, and an insulating spacer layer disposed therebetween, the electrically conductive coatings being disposed to face each other in a spaced apart relationship, wherein an edge of the first insulating substrate carrying the first electrically conductive coating extends beyond an edge of the second insulating substrate carrying the second electrically conductive coating and beyond an edge of the insulating spacer layer, and wherein the first insulating substrate carrying the first electrically conductive coating and the insulating spacer layer comprise an aperture, such that an area of the second electrode layer is exposed so as to provide a surface for forming an electrical connection with a meter via the aperture.

(E) An electrochemical cell, the electrochemical cell adapted for electrical connection with a meter, the cell comprising a first insulating substrate carrying a first electrically conductive coating, a second insulating substrate carrying a second electrically conductive coating, and an insulating spacer layer disposed therebetween, the electrically conductive coatings being disposed to face each other in a spaced apart relationship, wherein a portion of the

first insulating substrate carrying the first electrically conductive coating extends beyond an edge of the second insulating substrate carrying the second electrically conductive coating and beyond an edge of the insulating spacer layer, and wherein a portion of the first insulating substrate carrying the first electrically conductive coating and a portion of the insulating spacer are removed so as to form a notch, the notch situated adjacent to the edge of the second insulating substrate carrying the second electrically conductive coating and the edge of the insulating spacer layer, such that an area of the second electrode layer is exposed so as to provide a surface for forming an electrical connection with a meter.

(F) A method for forming an electrical connection between an electrochemical cell and a meter, the method comprising the steps of:

(a) providing an electrochemical cell, the electrochemical cell comprising a first insulating substrate carrying a first electrically conductive coating, a second insulating substrate carrying a second electrically conductive coating, and an insulating spacer layer disposed therebetween, the electrically conductive coatings being disposed to face each other in a spaced apart relationship, wherein an edge of the first insulating substrate carrying the first electrically conductive coating extends beyond an edge of the second insulating substrate carrying the second electrically conductive coating and beyond an edge of the insulating spacer layer, and wherein the edge of the second insulating substrate carrying the second electrically conductive coating extends beyond the edge of the insulating spacer layer;

(b) providing a meter, the meter comprising a wedge, the wedge comprising an upper wedge conductive surface and a lower wedge conductive surface, the conductive surfaces in electrical communication with the meter; and

(c) inserting a portion of the electrochemical cell into the meter, whereby the wedge is inserted between the portion of the first insulating substrate carrying the first electrically conductive coating and the portion of the second insulating substrate carrying the second electrically conductive coating that extends beyond the edge of the insulating spacer layer, whereby an electrical connection between the first electrically conductive coating and the lower wedge conductive surface is formed, and whereby an electrical connection between the second electrically conductive coating and the upper wedge conductive surface is formed.

(G) The method of embodiment (F), the meter further

comprising a pivot point, wherein the wedge is capable of rotating on the pivot point.

Claims

5

1. An electrochemical cell, the electrochemical cell adapted for electrical connection with a meter, the cell comprising a first insulating substrate carrying a first electrically conductive coating, a second insulating substrate carrying a second electrically conductive coating, and an insulating spacer layer disposed therebetween, the first and second electrically conductive coatings being disposed to face each other, wherein a portion of the first insulating substrate extends beyond an edge of the second insulating substrate and beyond an edge of the insulating spacer layer, and wherein each of the extending portion of the first insulating substrate and a portion of the edge of the insulating spacer layer has a hole, thereby exposing an area of the second electrode layer so as to enable an electrical connection with a meter with the exposed area of the second electrode layer.

10
15
20
25

30

35

40

45

50

55

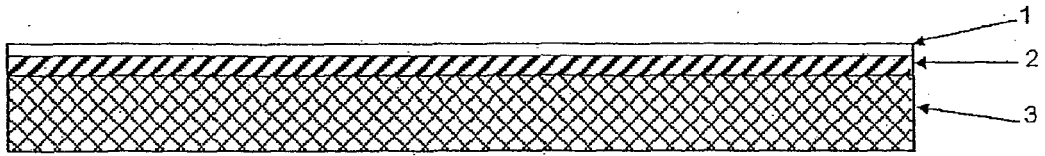


Figure 1a.

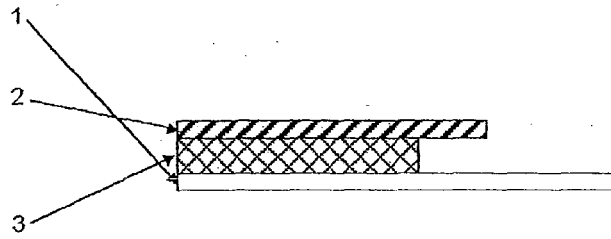


Figure 1b.

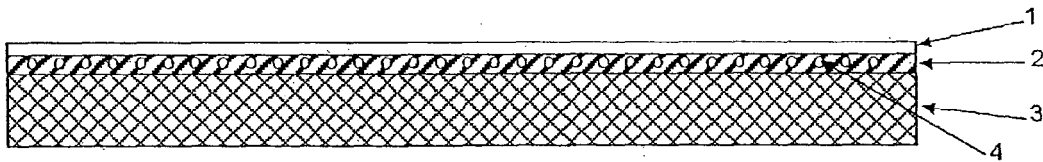


Figure 2a.

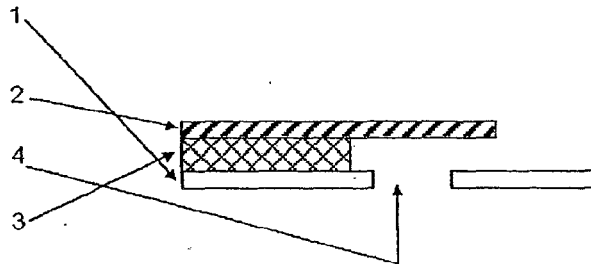


Figure 2b.

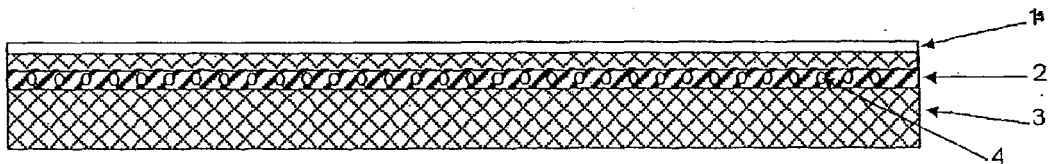


Figure 3a.

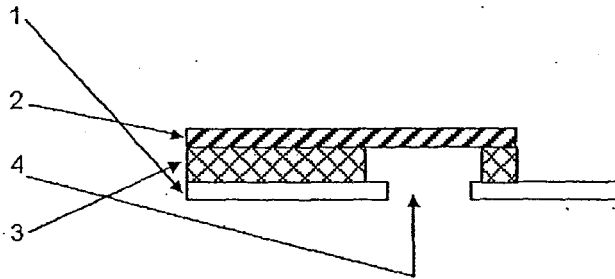


Figure 3b.

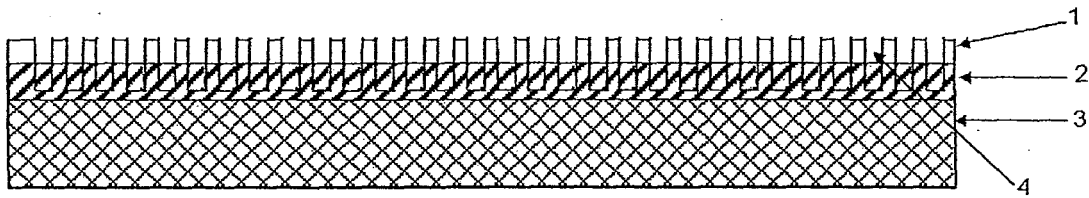


Figure 4a.

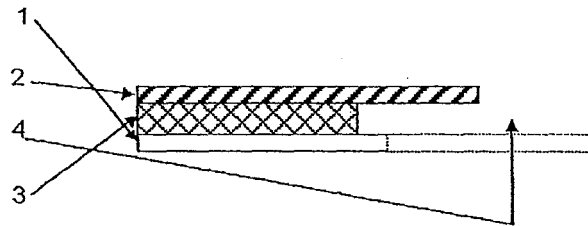


Figure 4b.

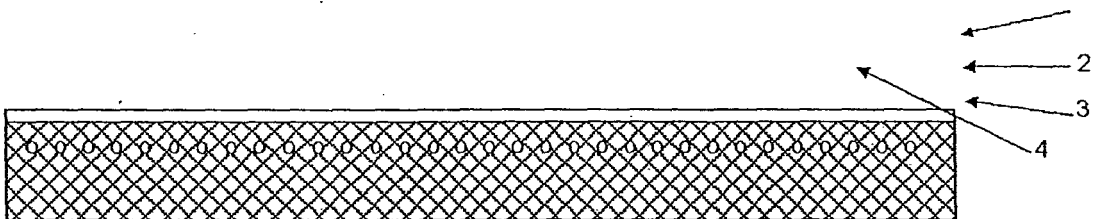


Figure 5a.

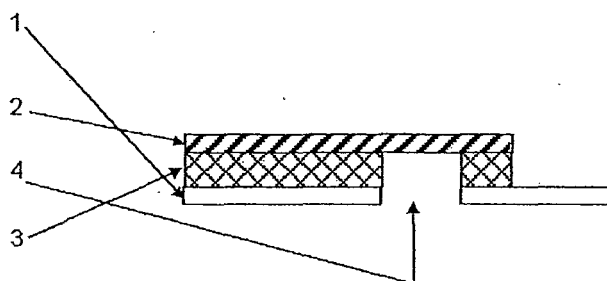


Figure 5b.

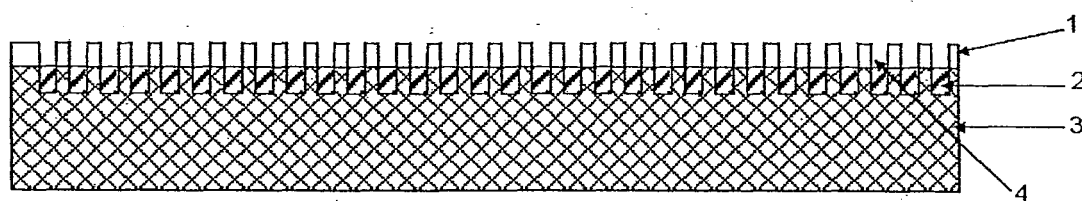


Figure 6a.

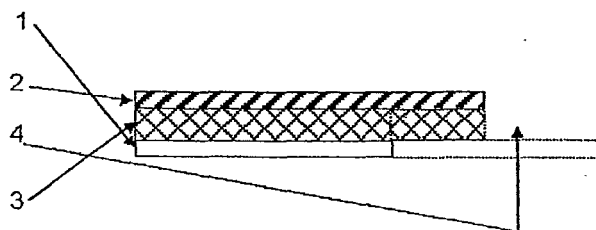


Figure 6b.

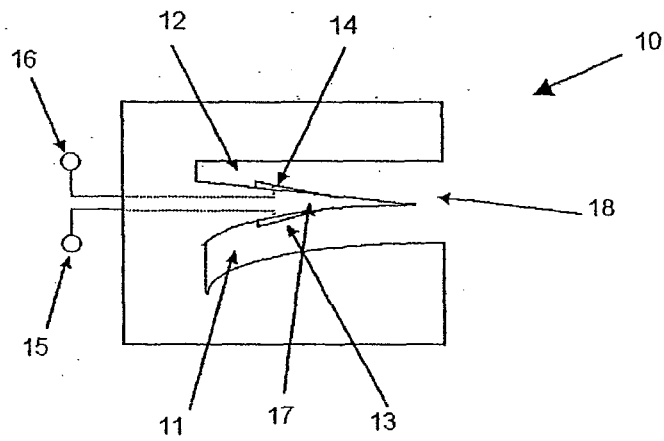


Figure 7.

Figure 8.

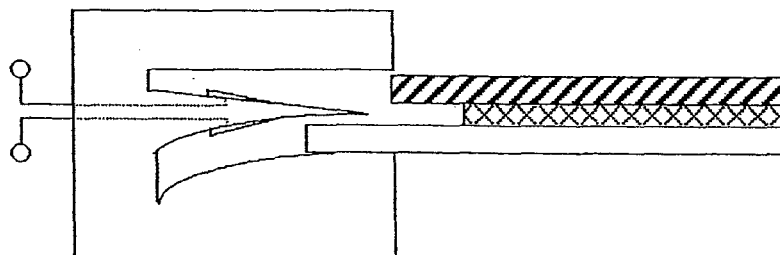
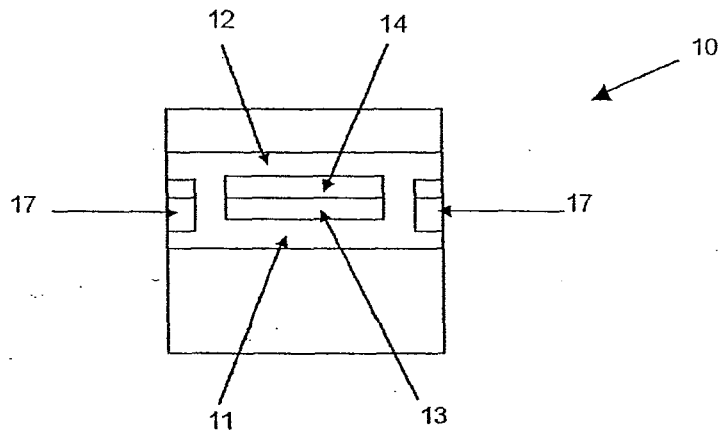


Figure 9.

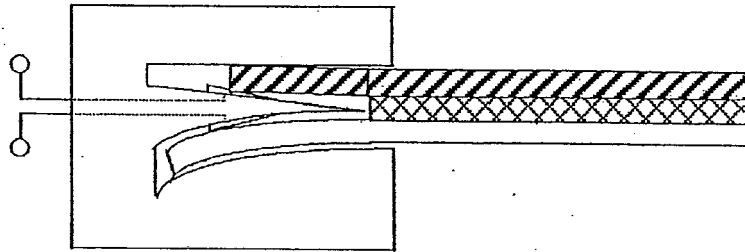


Figure 10.

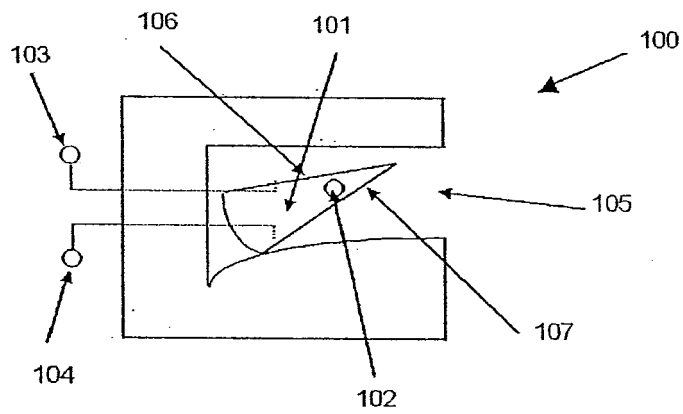


Figure 11.


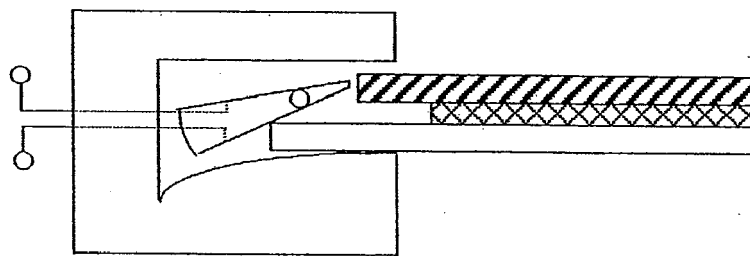


Figure 12.

Figure 13.



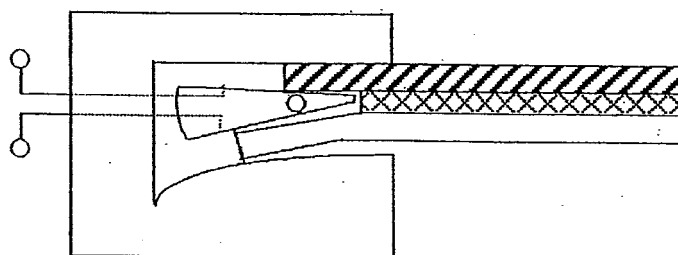

EUROPEAN SEARCH REPORT

Application Number
EP 10 18 2091

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	EP 0 790 498 A1 (BAYER AG [DE] BAYER HEALTHCARE AG [DE]) 20 August 1997 (1997-08-20) * figure 1 *	1	INV. G01N27/403 C12Q1/00 G01N33/487
A,D	EP 0 964 059 A2 (MATSUSHITA ELECTRIC IND CO LTD [JP]) 15 December 1999 (1999-12-15) * the whole document *	1	
A,D	WO 98/43073 A (BECK THOMAS WILLIAM ; HODGES ALASTAIR MCINDOE (AU); CHAMBERS GARRY (AU) 1 October 1998 (1998-10-01) * the whole document *	1	
A	US 6 258 229 B1 (WINARTA HANDANI [US] ET AL) 10 July 2001 (2001-07-10) * the whole document *	1	
A	US 6 113 762 A (KARUBE ISAO [JP] ET AL) 5 September 2000 (2000-09-05) * the whole document *	1	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
			G01N C12Q
Place of search		Date of completion of the search	Examiner
Munich		4 November 2010	Stussi, Elisa
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 10 18 2091

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-11-2010

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0790498	A1	20-08-1997	AT 325339 T	15-06-2006
			CA 2197385 A1	16-08-1997
			DE 19605583 A1	21-08-1997
			DK 0790498 T3	21-08-2006
			ES 2264149 T3	16-12-2006
			JP 9229894 A	05-09-1997
			JP 2009139388 A	25-06-2009
			US 5916156 A	29-06-1999
EP 0964059	A2	15-12-1999	CN 1243951 A	09-02-2000
			JP 3874321 B2	31-01-2007
			JP 11352093 A	24-12-1999
			US 6416641 B1	09-07-2002
WO 9843073	A	01-10-1998	AT 475881 T	15-08-2010
			AU 745740 B2	28-03-2002
			BR 9807987 A	15-02-2000
			CA 2284634 A1	01-10-1998
			CA 2550198 A1	01-10-1998
			CN 1487290 A	07-04-2004
			CN 1252869 A	10-05-2000
			CN 1769879 A	10-05-2006
			CN 1936560 A	28-03-2007
			EP 0968415 A1	05-01-2000
			HK 1064154 A1	07-04-2006
			IL 131980 A	24-06-2003
			IL 154066 A	31-10-2006
			JP 3766109 B2	12-04-2006
			JP 2001517315 T	02-10-2001
			KR 20050056269 A	14-06-2005
			RU 2213345 C2	27-09-2003
			RU 2320986 C2	27-03-2008
			US 6379513 B1	30-04-2002
US 6258229	B1	10-07-2001	AU 5176000 A	18-12-2000
			CA 2375089 A1	07-12-2000
			EP 1181539 A1	27-02-2002
			JP 2003501626 T	14-01-2003
			WO 0073778 A1	07-12-2000
US 6113762	A	05-09-2000	JP 8227408 A	03-09-1996

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 9843073 A [0003] [0004]
- US 5437999 A [0003] [0004]
- EP 0964059 A2 [0003] [0005]
- WO 0020626 A [0003] [0004]
- US 39951299 A [0032]
- US 6179979 B [0041]
- US 5942102 A [0041] [0044]
- US 09694106 B [0048]
- US 09694120 B [0048]