

(19)



(11)

EP 2 270 412 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
01.08.2012 Bulletin 2012/31

(51) Int Cl.:
F28D 9/04 ^(2006.01) **F28F 9/00** ^(2006.01)

(21) Application number: **09162467.6**

(22) Date of filing: **11.06.2009**

(54) **A spiral heat exchanger**

Spiralwärmetauscher

Échangeur thermique à spirales

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK TR**

(43) Date of publication of application:
05.01.2011 Bulletin 2011/01

(73) Proprietors:
• **Alfa Laval Corporate AB**
22100 Lund (SE)
• **Alfa Laval Spiral SNC**
58028 Nevers (FR)

(72) Inventors:
• **Oudjedi, Boualem**
58000 Nevers (FR)
• **Maure, Pascal**
58000 Nevers (FR)

(74) Representative: **von Friesendorff, Filip**
Alfa Laval Corporate AB
P.O. Box 73
221 00 Lund (SE)

(56) References cited:
EP-A- 2 071 264 DE-A1- 1 908 385
DE-A1- 2 744 002 GB-A- 776 529

EP 2 270 412 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

AREA OF INVENTION

[0001] The present invention refers generally to spiral heat exchangers allowing a heat transfer between two fluids at different temperatures for various purposes. Specifically, the invention relates to a spiral heat exchanger being so that the inlet/outlets of the spiral body on the external shell are divided.

BACKGROUND OF INVENTION

[0002] Conventionally, spiral heat exchangers are manufactured by means of a winding operation. The two sheets are welded together at a respective end, wherein the welded joint will be comprised in a center portion of the sheets. The two sheets are wound around one another by use of a retractable mandrel or the like to form the spiral element of the sheets so as to delimit two separate passages or flow channels. Distance members, having a height corresponding to the width of the flow channels, may be attached to the sheets to allow the spiral heat exchanger to withstand higher pressures.

[0003] After retraction of the mandrel, two inlet/outlet channels are formed in the center of the spiral element. The two channels are separated from each other by the center portion of the sheets. A shell is formed by the outer turn of the welded of the spiral element. The side ends of the spiral element are processed, wherein the spiral flow channels may be laterally closed at the two side ends in various ways. Typically, a cover is attached to each of the ends. One of the covers may include two connection pipes extending into the center and communicating with a respective one of the two flow channels. At the radial outer ends of the spiral flow channels a respective header is welded to the shell or the spiral element form an outlet/inlet member to the respective flow channel. Alternatively, one single sheet is used for the manufacturing of the heat exchanger.

[0004] One problem with the conventional spiral heat exchangers is that when both the flow channels for fluids end at the last turn of the spiral the flow channels needs to be sealed off from each other and to be connected to each connection. The sealing between the flow channels on the outer turn creates a half turn for a first fluid channel and another half turn for a second flow channel potentially giving balance problems. Another problem related to this is the connections that are arranged directly on the spiral body giving extra fatigue problems.

[0005] EP-2 071 264-A, which is prior art according to article 54(3) EPC, discloses a spiral heat exchanger including a spiral body formed by spiral sheets wound to form the spiral body. It includes a first spiral-shaped flow channel for a first medium and a second spiral-shaped flow channel for a second medium. The spiral body is enclosed by a cylindrical shell being provided with connecting elements communicating with the first

flow channel and the second flow channel. The shell comprises two shell parts that are flexibly attached to a flange on the outer peripheral surface of the spiral body.

DISCLOSURE OF INVENTION

[0006] The object of the present invention is to overcome the problems mentioned above with the prior art spiral heat exchangers. More specifically, it is aimed at a spiral heat exchanger which is better balanced and more resistant to thermal fatigue, flexible to different applications and where the parts of the spiral heat exchanger can be manufactured in parallel.

[0007] This object is achieved by a spiral heat exchanger according to claim 1.

[0008] According a further aspect of the invention the divider is a flange arranged on the outer periphery of the spiral body.

[0009] According a further aspect of the invention the flange of the spiral body is symmetrically arranged at the centre of the spiral body having an equal distance to the ends of the spiral body from the at least one flange.

[0010] According another aspect of the invention the flange of the spiral body is asymmetrically arranged on the peripheral of the spiral body having a different distance to the ends of the spiral body from the at least one flange.

[0011] The at least one flange of the spiral body divides the outermost space of the spiral heat exchanger into at least two spaces, the outer most spaces being defined by the outer peripheral of the spiral body and the at least two shell parts at the location of the flange in respect of the ends of the spiral body.

[0012] The location of the flange along the peripheral of the spiral body allows control of the velocity of the mediums of the spiral heat exchanger.

[0013] According another aspect of the invention each shell is provided two connecting elements communicating with one of the two flow channels, and each shell is provided with one connecting element on its peripheral surface and with one connecting element arranged on one of its end surfaces for communication with one of the two flow channels.

[0014] According to the invention the at least two shell parts are each provided with a lid arranged at an open end of the at least two shell parts for closing the spiral heat exchanger.

[0015] Further aspects of the invention is apparent from the dependent claims and the description

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] The following detailed description of several embodiments of the invention with reference to the drawings is here given:

Fig. 1 is an exploded view of a spiral heat exchanger according to the present invention;

Fig. 2 is a cross sectional view of a spiral heat exchanger according to the present invention;
 Fig. 3 shows a spiral heat exchanger according to the present invention being vertically mounted; and
 Fig. 4 shows a spiral heat exchanger according to the present invention being horizontally mounted.

DETAILED DESCRIPTION OF EMBODIMENTS

[0017] A spiral heat exchanger includes at least two spiral sheets extending along a respective spiral-shaped path around a common centre axis and forming at least two spiral-shaped flow channels, which are substantially parallel to each other, wherein each flow channel includes a radially outer orifice, which enables communication between the respective flow channel and a respective outlet/inlet conduit and which is located at a radially outer part of the respective flow channel with respect to the centre axis, and a radially inner orifice, which enables communication between the respective flow channel and a respective inlet/outlet chamber, so that each flow channel permits a heat exchange fluid to flow in a substantially tangential direction with respect to the centre axis, wherein the centre axis extends through the inlet/outlet chambers at the radially inner orifice. Distance members, having a height corresponding to the width of the flow channels, may be attached to the sheets to enable the spiral heat exchanger to operate with higher pressure of the working fluids.

[0018] In Fig. 1 is shown an exploded view of a spiral heat exchanger 1 according to the present invention. The spiral heat exchanger 1 includes a spiral body 2, formed in a conventional way by winding two sheets of metal around a retractable mandrel, but it can also be formed in other ways. The sheets may be provided with studs or distance member (not shown) attached to the sheets or formed in the surface of the sheets. The studs or distance members serve to form the flow channels between the sheets and have a height corresponding to the width of the flow channels. In the drawing the spiral body 2 only has been schematically shown with a number of wounds, but it is obvious that it may include further wounds and that the wounds are formed from the centre of the spiral body 2 all the way out to the peripheral of the spiral body 2. Onto a central or middle portion of an outer peripheral of the spiral body 2 a flange 3 has been attached. The spiral body 2 is enclosed by a shell 4, which comprises two separate shell part 4a and 4b, and two covers 7a, 7b. Each of the shell parts 4a and 4b encloses one half of the spiral body 2. The covers 7a, 7b, which are flexibly mounted on the shell parts 4a, 4b, seal off the open ends of the spiral body 2. The flange 3 is typically a divider ring attached to the spiral body 2 by welding, by other means are also possible.

[0019] The shell part 4a is formed as a cylinder having an first end 5a, the first end 5a being provided with a flange 6a corresponding to the flange 3 of the spiral body 2 and enabling the shell part 4a to be attached to the

flange 3. The second end portion 17a of the shell parts 4a is closed by the cover 7a having a first connection element 8a centrally attached. To the mantle of the shell part 4a is attached a second connection element 9a. The shell part 4b is substantially identical to the shell part 4a having a first end 5b with a flange 6b, a second end portion 17b closed by the cover 7a having a first connection element 8b and a second connection element 9b attached to the mantle of the shell part 4b. The connection elements 8a-b and 9a-9b are typically welded to the shell parts and are all provided with a flange for connecting the spiral heat exchanger 1 to a piping arrangement of the system of which the spiral heat exchanger 1 is a part of.

[0020] The spiral heat exchanger 1 is further provided with gaskets 10a, 10b, each gasket being arranged between the end portions 11a, 11b of the spiral body 2 and the inner surface of the covers 7a, 7b, respectively, to seal off from external leakage and bypass between different turns of the same flow channel. The gasket 10a, 10b, can be formed as a spiral similar to the spiral of the spiral body 2, is then squeezed onto each wound of the spiral body 2. Alternatively the gaskets 10a, 10b are squeezed between the spiral body 2 and the inner surface of the covers 7a, 7b. The gaskets can also be configured in other ways as long as the sealing effect is achieved.

[0021] The lids or end covers 7a, 7b are normally removably attached to the spiral heat exchanger 1 by hook bolts or similar, but they can also be fixedly attached by e.g. welding.

[0022] In Fig. 2 a cross sectional view of the spiral heat exchanger 1 according to the invention is shown.

[0023] The flange 3 enables that each of the flow channels encircles the outer turn of the spiral body 2, thus avoiding balance problems, and the flange 3 prevents mixing of the fluids in the flow channels.

[0024] If the spiral heat exchanger 1 is vertically mounted, i.e. covers 7a, 7b are directed upwards and downwards, respectively, and where the inlet A1, B1 and outlet A2, B2 to each flow channel are located on different sides in respect of flange 3 of the shell 4 (see Fig. 3), closing plates 12 are added to totally close the outer turn of the spiral body 2. The closing plates are located at the end of the spiral body 2, adjacent to the covers 7a, 7b, respectively. To also seal off the other wounds of the flow channels from each other the outermost edges of the spiral body 2 are folded or bent so that every second wound opening is closed and that the fold or bent is welded to secure the closure. This is done alternately on the two ends of the spiral body 2.

[0025] In horizontally mounted spiral heat exchanger 1, there is no need for closing plates since the inlet A1, B1 and outlet A2, B2 connections are arranged on the same side in respect of flange 3 of the shell 4 (see Fig. 4).

[0026] Although it has not been mentioned expressly it is clear for a man skilled in the art that the outer surface of the spiral body may be provided with studs or distance members (not shown) that supports against the inner sur-

face of the shell to resist the pressure of the working fluids of the spiral heat exchanger. Depending on the pressure differential between the two fluids one or both halves of the spiral body can be provided with studs.

[0027] The functionality of the spiral heat exchanger 1 of Fig. 2 is as follows: A first medium enters the spiral heat exchanger 1 through the first connection element 8a formed as an inlet and where first connection element 8a is connected to a piping arrangement. The first connection element 8a communicates with a first flow channel of the spiral body 2 and the first medium is transported through the first flow channel to the second connection element 9a formed as an outlet, where the first medium leaves the spiral heat exchanger 1. The second connection element 9a is connected to a piping arrangement for further transportation of the first medium.

[0028] A second medium enters spiral heat exchanger 1 through the second connection element 9b formed as an inlet, the second connection element 9b being connected to a piping arrangement. The second connection element 9b communicates with a second flow channel of the spiral body 2 and the first medium is transported through the second flow channel to the first connection element 8b formed as an outlet, where the second medium leaves the spiral heat exchanger 1. The first connection element 8b is connected to a piping arrangement for further transportation of the second medium.

[0029] Inside the spiral body 2 a heat exchange will occur between the first and second medium, so that one medium is heated and the other medium is cooled. Depending on the specific use of the spiral heat exchanger 1 the selection of the two mediums will vary. In the above it has been described as the two mediums circulate in opposite directions through the spiral heat exchanger 1, but it is apparent that they may also circulate parallel directions.

[0030] As shown by Figs. 3-4 the spiral heat exchanger 1 according to the present invention can be set up differently depending on the specific application (vertically or horizontally mounted) of the spiral heat exchanger 1.

[0031] As the flange 3 divides the outer surface or peripheral of the spiral body 2 into two separate chambers the distribution of the medium will be improved as the medium will only need to distribute on the half of the length of the spiral body 2.

[0032] Since the shell 4 of the spiral heat exchanger 1 according to the invention is provided as two separate and independent shell parts 4a, 4b it is possible to using different materials for the two shell parts 4a, 4b.

[0033] An advantage by having the connection elements only attached to the shell 4 and not being in contact with the spiral body 2, which otherwise is the normal construction of spiral heat exchangers, is that the thermal fatigue or stress is significantly reduced.

[0034] The spiral heat exchanger according to the present invention benefits among many things in that it has better balance, the distribution is improved, the thermal fatigue is reduced and the manufacturing of the spiral

heat exchanger is faster and cheaper since the shell and spiral body can be manufactured in parallel.

[0035] In the above description the term connecting element has been used as an element connected to spiral heat exchanger and more specifically to the flow channels of the spiral heat exchanger, but it should be understood that the connecting element is a connection pipe or similar that typically are welded onto the spiral heat exchanger and may include means for connecting further piping arrangements to the connecting element.

[0036] The invention is not limited to the embodiments described above and shown on the drawings, but can be supplemented and modified in any manner within the scope of the invention as defined by the enclosed claims.

Claims

1. A spiral heat exchanger (1) including a spiral body (2) formed by at least one spiral sheet wound to form the spiral body (2) forming at least a first spiral-shaped flow channel for a first medium and a second spiral-shaped flow channel for a second medium, wherein the spiral body (2) is enclosed by a substantially cylindrical shell (4) having at least two shell parts (4a, 4b) being provided with connecting elements (8a, 8b, 9a, 9b) communicating with the first flow channel and the second flow channel, where the spiral body (2) is provided with at least one fixedly attached divider (3) on its outer peripheral surface, whereupon the at least two shell parts (4a, 4b) are fixedly attached, where the at least one fixedly attached divider (3) creates two separate flow channels between the outer peripheral surface of the spiral body (2) and the substantially cylindrical shell (4), and wherein the at least two shell parts (4a, 4b) are each provided with a lid (7a, 7b) arranged at an open end (17a, 17b) of the at least two shell parts (4a, 4b) for closing the spiral heat exchanger (1).
2. A spiral heat exchanger (1) according to claim 1, wherein the divider is a flange (3) arranged on the outer periphery of the spiral body (2).
3. A spiral heat exchanger (1) according to claim 2, wherein the flange (3) of the spiral body (2) is symmetrically arranged at the centre of the spiral body (2) having an equal distance to the ends (11a, 11b) of the spiral body (2) from the at least one flange (3).
4. A spiral heat exchanger (1) according to claim 2, wherein the flange (3) of the spiral body (2) is asymmetrically arranged on the peripheral of the spiral body (2) having a different distance to the ends (11a, 11b) of the spiral body (2) from the at least one flange (3).

5. A spiral heat exchanger (1) according to any of claims 3 or 4, wherein the at least one flange (3) of the spiral body (2) divides the outermost space of the spiral heat exchanger (1) into at least two spaces, the outer most spaces being defined by the outer peripheral of the spiral body (2) and the at least two shell parts (4a, 4b).
6. A spiral heat exchanger (1) according to claim 5, wherein each shell (4a, 4b) is provided with one connecting element (9a, 9b) on its peripheral surface and with one connecting element (8a, 8b) arranged on the lids (7a, 7b) for communication with one of the two flow channels.
7. A spiral heat exchanger (1) according to claim 6, wherein the outer turn of the spiral heat exchanger (1) are closed by closing plates (12) towards the respectively open end (17a, 17b) of the spiral body.

Patentansprüche

1. Spiralwärmetauscher (1), der einen Spiralkörper (2) aufweist, der von mindestens einem Spiralblech gebildet ist, das gewickelt ist, um den Spiralkörper (2) zu bilden und mindestens einen ersten spiralförmigen Strömungskanal für ein erstes Medium und einen zweiten spiralförmigen Strömungskanal für ein zweites Medium bildet, wobei der Spiralkörper (2) von einem im Wesentlichen zylindrischen Gehäuse (4) umschlossen ist, das mindestens zwei Gehäuseteile (4a, 4b) aufweist, die mit Verbindungselementen (8a, 8b, 9a, 9b) versehen sind, die mit dem ersten Strömungskanal und dem zweiten Strömungskanal in Verbindung stehen, wo der Spiralkörper (2) mit mindestens einem fest angebrachten Teiler (3) an seiner äußeren Umfangsfläche versehen ist, an dem die mindestens zwei Gehäuseteile (4a, 4b) fest angebracht sind, wo der mindestens eine fest angebrachte Teiler (3) zwei getrennte Strömungskanäle zwischen der äußeren Umfangsfläche des Spiralkörpers (2) und dem im Wesentlichen zylindrischen Gehäuse (4) erzeugt, und wobei die mindestens zwei Gehäuseteile (4a, 4b) jeweils mit einem Deckel (7a, 7b) versehen sind, der an einem offenen Ende (17a, 17b) der mindestens zwei Gehäuseteile (4a, 4b) angeordnet ist, um den Spiralwärmetauscher (1) zu verschließen.
2. Spiralwärmetauscher (1) nach Anspruch 1, wobei der Teiler ein Flansch (3) ist, der am Außenumfang des Spiralkörpers (2) angeordnet ist.
3. Spiralwärmetauscher (1) nach Anspruch 2, wobei der Flansch (3) des Spiralkörpers (2) symmetrisch in der Mitte des Spiralkörpers (2) angeordnet ist und

denselben Abstand zu den Enden (11 a, 11b) des Spiralkörpers (2) von dem mindestens einen Flansch (3) aus aufweist.

4. Spiralwärmetauscher (1) nach Anspruch 2, wobei der Flansch (3) des Spiralkörpers (2) asymmetrisch am Umfang des Spiralkörpers (2) angeordnet ist und einen unterschiedlichen Abstand zu den Enden (11a, 11b) des Spiralkörpers (2) von dem mindestens einen Flansch (3) aus aufweist.
5. Spiralwärmetauscher (1) nach einem der Ansprüche 3 oder 4, wobei der mindestens eine Flansch (3) des Spiralkörpers (2) den äußersten Raum des Spiralwärmetauschers (1) in mindestens zwei Räume unterteilt, wobei die äußersten Räume durch den Außenumfang des Spiralkörpers (2) und die mindestens zwei Gehäusenhälften (4a, 4b) definiert sind.
6. Spiralwärmetauscher (1) nach Anspruch 5, wobei jedes Gehäuse (4a, 4b) mit einem Verbindungselement (9a, 9b) an seiner Umfangsfläche versehen ist und mit einem Verbindungselement (8a, 8b), das an den Deckeln (7a, 7b) angeordnet ist, um mit einem der beiden Strömungskanäle zu kommunizieren.
7. Spiralwärmetauscher (1) nach Anspruch 6, wobei die äußeren Wicklungen des Spiralwärmetauschers (1) mit Verschlussplatten (12) in Richtung des jeweils offenen Endes (17a, 17b) des Spiralkörpers verschlossen sind.

Revendications

1. Échangeur thermique à spirales (1) comprenant un corps à spirales (2) formé par au moins une tôle spiralee enroulée pour former le corps à spirales (2) formant au moins un premier canal d'écoulement en forme de spirale pour un premier milieu et un second canal d'écoulement en forme de spirale pour un second milieu, dans lequel le corps à spirales (2) est entouré d'une enveloppe (4) sensiblement cylindrique présentant au moins deux parties d'enveloppe (4a, 4b) qui sont dotées d'éléments de connexion (8a, 8b, 9a, 9b) communiquant avec le premier canal d'écoulement et le second canal d'écoulement, le corps à spirales (2) étant doté d'au moins un diviseur (3) attaché fixement sur sa surface périphérique extérieure, sur lequel les au moins deux parties d'enveloppe (4a, 4b) sont attachées fixement, le au moins un diviseur (3) attaché fixement créant deux canaux d'écoulement séparés entre la surface périphérique extérieure du corps à spirales (2) et l'enveloppe (4) sensiblement cylindrique, et dans lequel les au moins deux parties d'enveloppe (4a, 4b) sont chacune dotées d'un couvercle (7a, 7b) agencé à une extrémité ouverte (17a, 17b) des au moins deux

parties d'enveloppe (4a, 4b) pour fermer l'échangeur thermique à spirales (1).

2. Échangeur thermique à spirales (1) selon la revendication 1, dans lequel le diviseur est une bride (3) agencée sur la périphérie extérieure du corps à spirales (2). 5

3. Échangeur thermique à spirales (1) selon la revendication 2, dans lequel la bride (3) du corps à spirales (2) est agencée symétriquement au centre du corps à spirales (2) présentant une distance égale aux extrémités (11a, 11 b) du corps à spirales (2) à partir de la au moins une bride (3). 10
15

4. Échangeur thermique à spirales (1) selon la revendication 2, dans lequel la bride (3) du corps à spirales (2) est agencée de manière asymétrique sur la périphérie du corps à spirales (2) présentant une distance différente aux extrémités (11a, 11b) du corps à spirales (2) à partir de la au moins une bride (3). 20

5. Échangeur thermique à spirales (1) selon l'une quelconque des revendications 3 ou 4, dans lequel la au moins une bride (3) du corps à spirales (2) divise l'espace le plus à l'extérieur de l'échangeur thermique à spirales (1) en au moins deux espaces, les espaces les plus à l'extérieur étant définis par la périphérie extérieure du corps à spirales (2) et les au moins deux parties d'enveloppe (4a, 4b). 25
30

6. Échangeur thermique à spirales (1) selon la revendication 5, dans lequel chaque enveloppe (4a, 4b) est pourvue d'un élément de connexion (9a, 9b) sur sa surface périphérique et d'un élément de connexion (8a, 8b) agencé sur les couvercles (7a, 7b) pour la communication avec l'un des deux canaux d'écoulement. 35

7. Échangeur thermique à spirales (1) selon la revendication 6, dans lequel les spires extérieures de l'échangeur thermique à spirales (1) sont fermées par des plaques de fermeture (12) vers l'extrémité respectivement ouverte (17a, 17b) du corps à spirales. 40
45

50

55

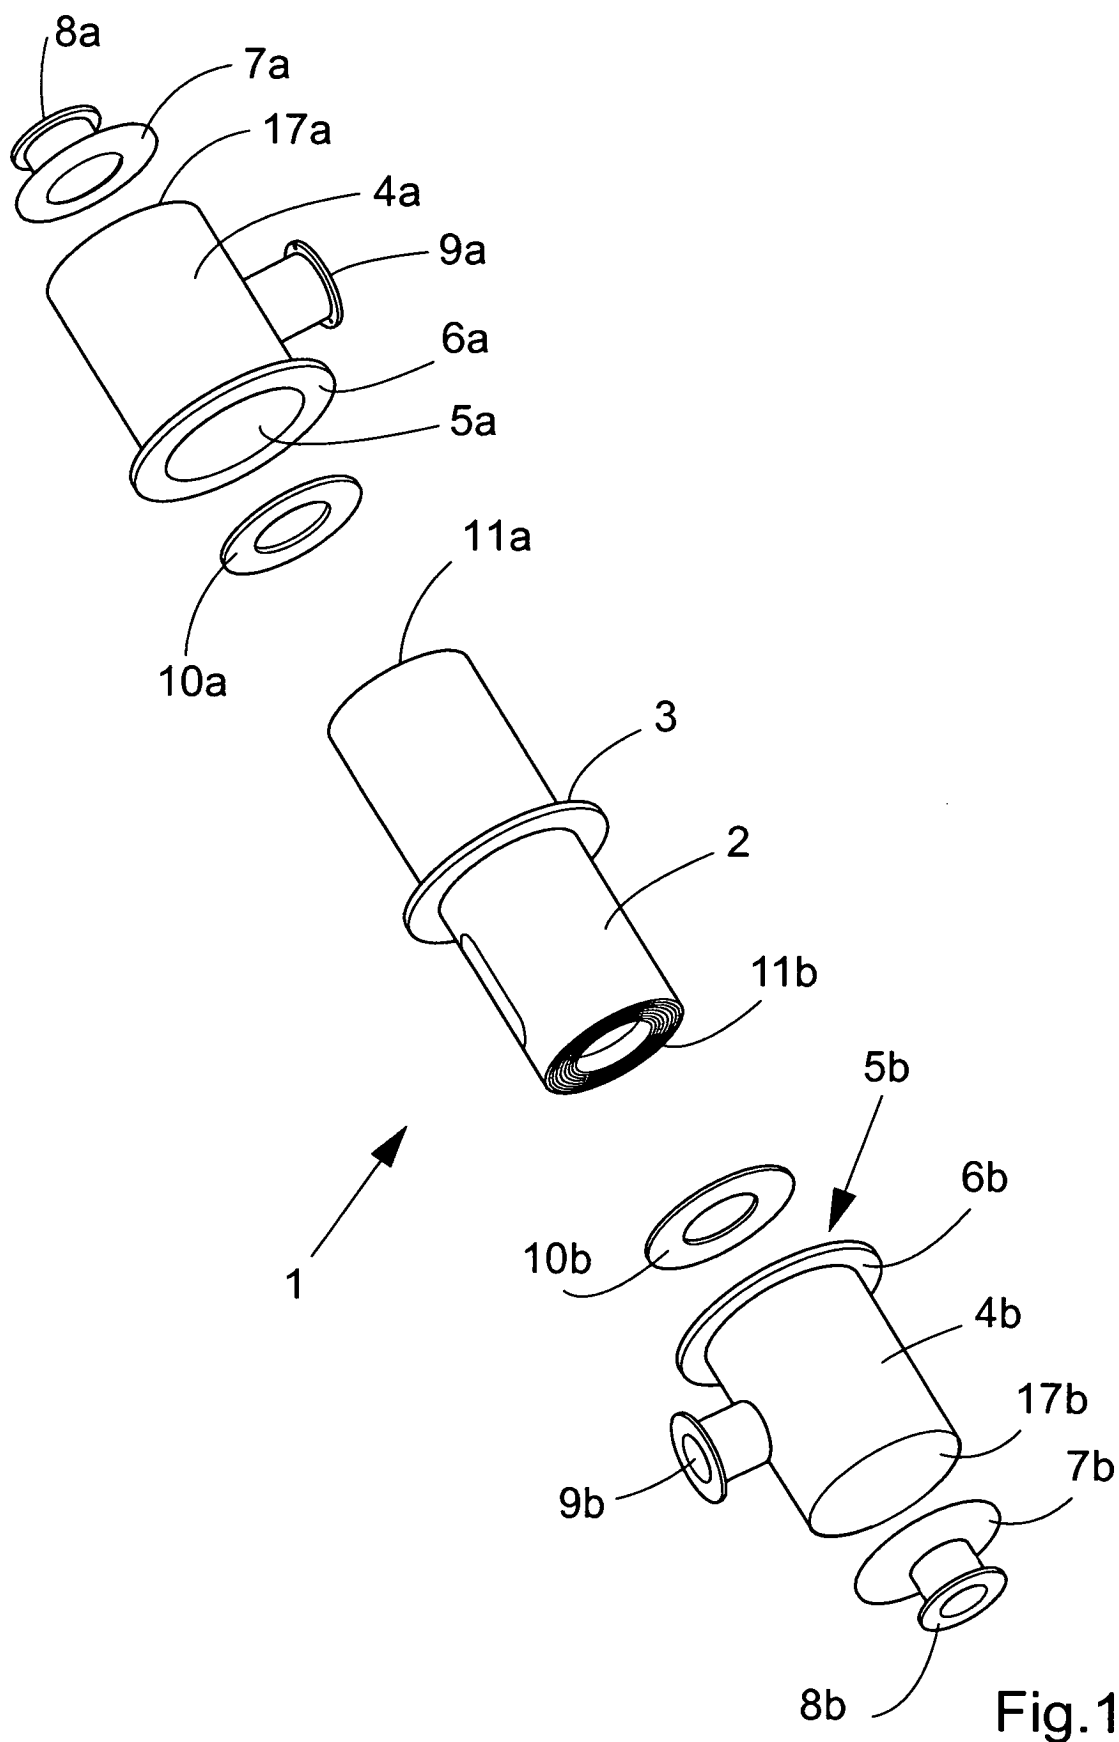


Fig.1

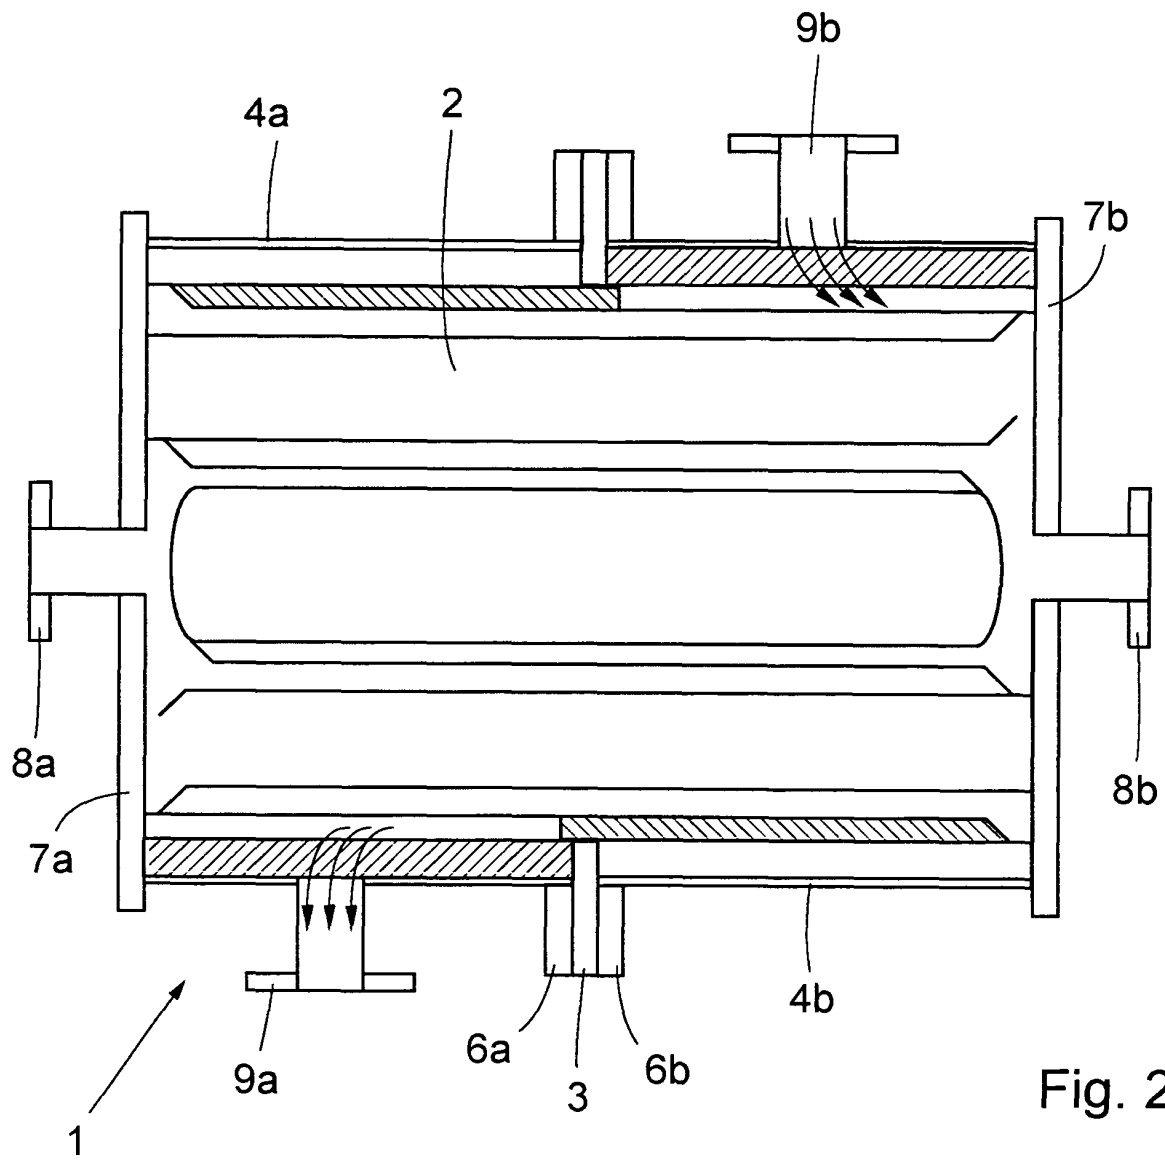


Fig. 2


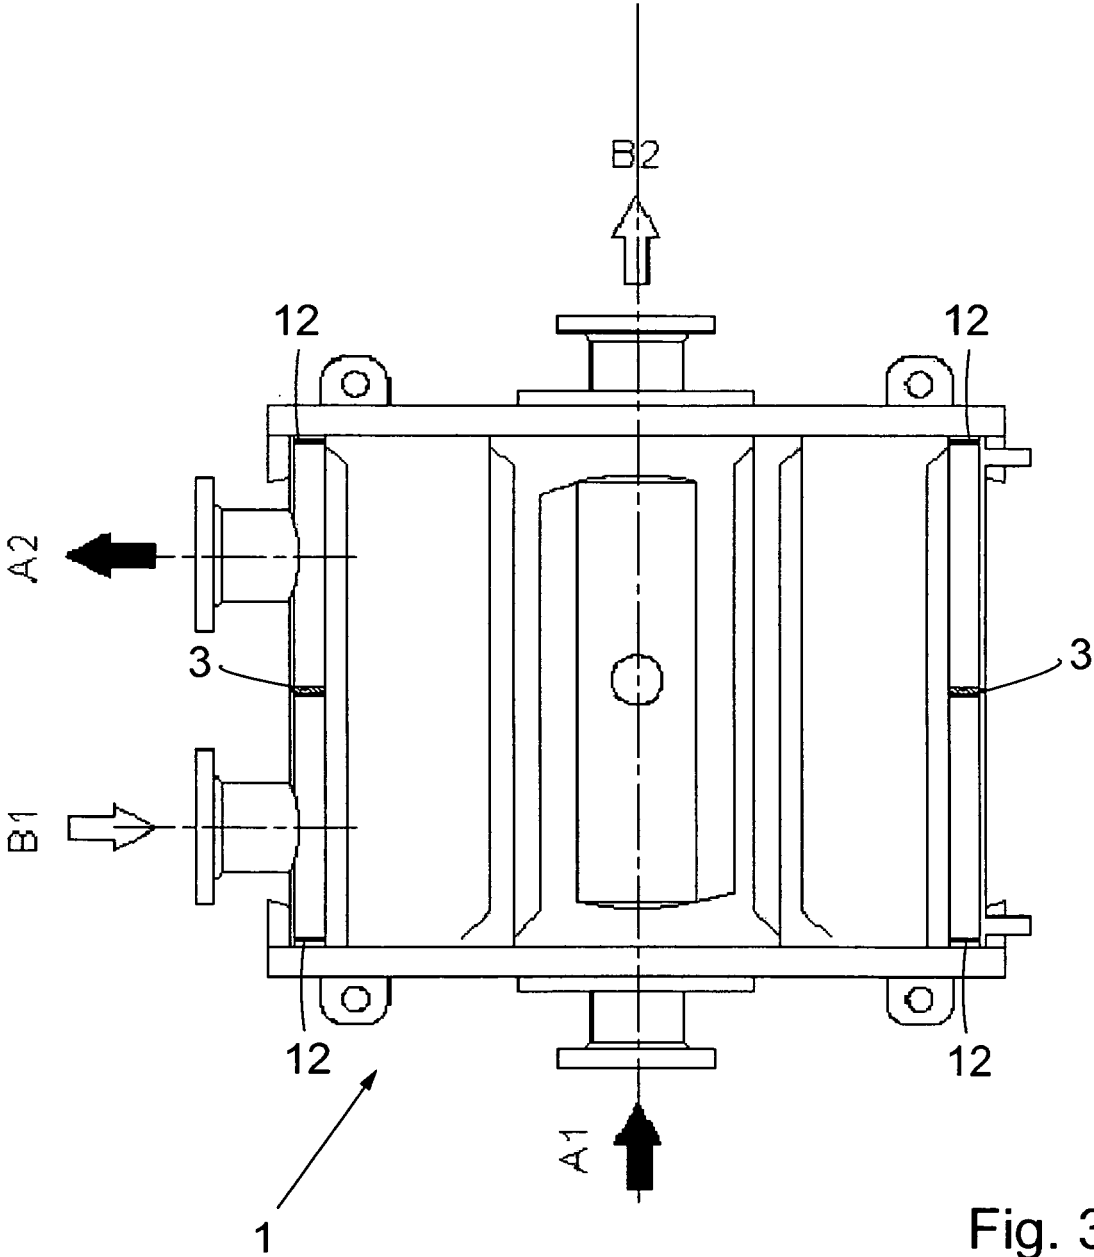


Fig. 3

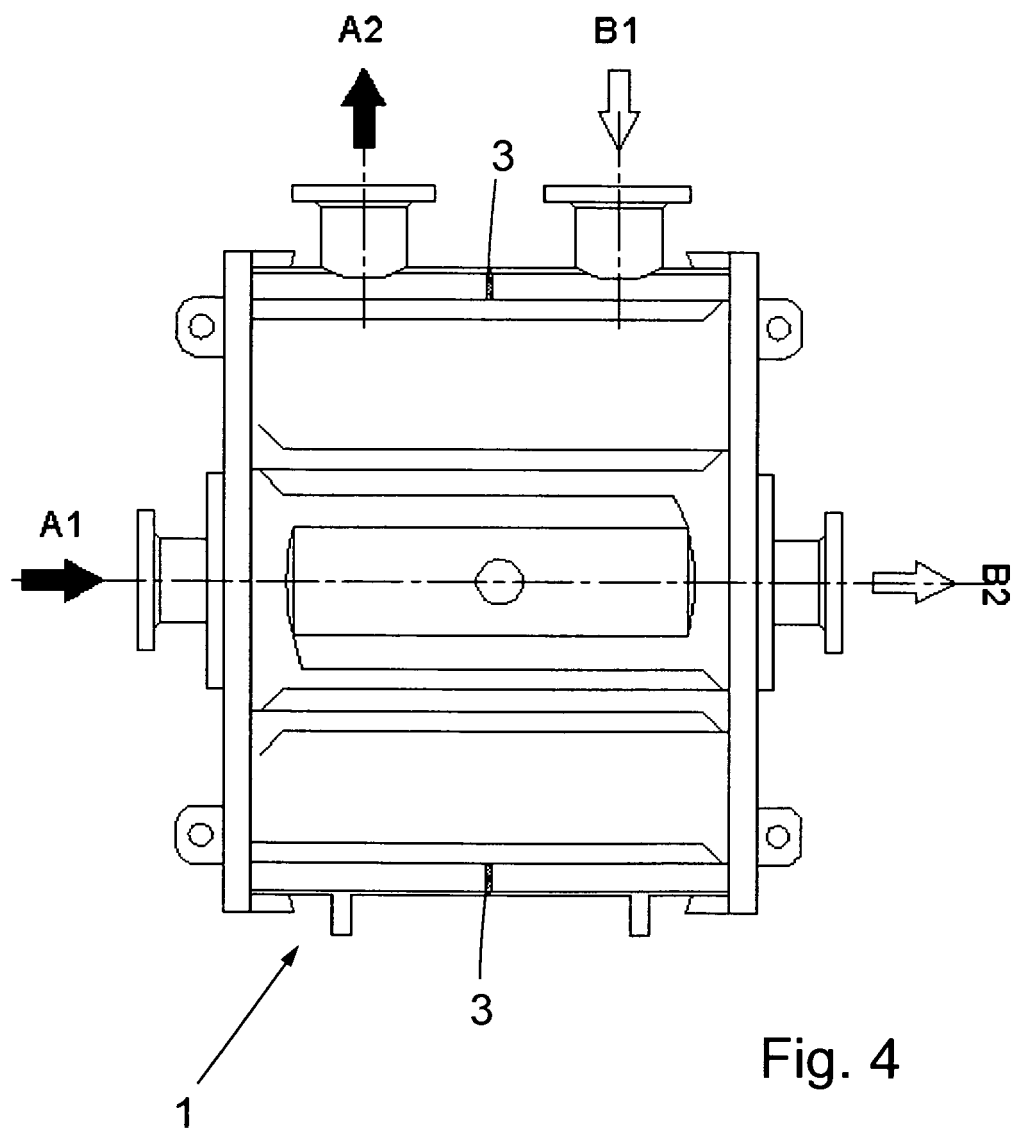

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 2071264 A [0005]