



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**26.01.2011 Bulletin 2011/04**

(51) Int Cl.:  
**B21B 31/02 (2006.01)**

(21) Application number: **10007223.0**

(22) Date of filing: **13.07.2010**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK SM TR**  
 Designated Extension States:  
**BA ME RS**

(71) Applicant: **Mitsubishi-Hitachi Metals Machinery, Inc.**  
**Tokyo 108-0014 (JP)**

(72) Inventor: **Norikura, Takashi**  
**Minato-ku, Tokyo (JP)**

(30) Priority: **22.07.2009 JP 2009170816**


(74) Representative: **Strehl Schübel-Hopf & Partner**  
**Maximilianstrasse 54**  
**80538 München (DE)**

(54) **Rolling mill and tandem rolling mill having the same**

(57) A rolling mill includes paired upper and lower work rolls (2) for rolling a strip (1), paired upper and lower intermediate rolls (3) for supporting the paired upper and lower work rolls, and paired upper and lower back-up rolls (4) for supporting the paired upper and lower intermediate rolls. In the rolling mill, the paired upper and

lower work rolls (2) each have two bearing housings (13a, 13e, 13b, 13f, 13c, 13g, 13d, 13h) mounted on each side, and the bearings are restrained in the horizontal direction by backlash elimination cylinders (18a, 18e, 18b, 18f, 18c, 18g, 18d, 18h). The work rolls have a small diameter, and use a material having a high modulus of longitudinal elasticity, such as a cemented carbide or a ceramic.

**Fig. 1**

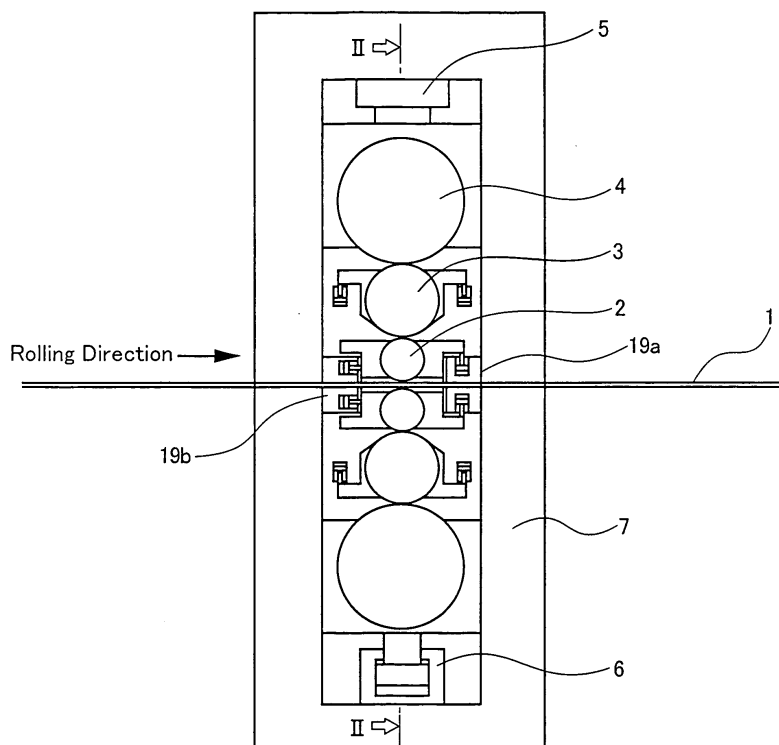

**Description**

[Technical Field]

5 **[0001]** This invention relates to a rolling mill, which can render the diameter of work rolls small, and a tandem rolling mill equipped with the rolling mill.

[Background Art]

10 **[0002]** In a conventional so-called intermediate roll-drive six-high rolling mill (hereinafter referred to as a six-high mill), the minimum value of the work roll diameter is determined by the flexural rigidity value of the work rolls, which withstands the tangential force of the intermediate roll drive, if there are no support (supporting) rolls inside and outside the rollable strip width of the work rolls. According to Non-Patent Document 1, for example, this value is 180 mm to 380 mm in the case of a 4-feet width material upon the intermediate roll drive.

15 **[0003]** With work roll drive, the above-mentioned tangential force does not act, but differential tension, or a tension difference, between the inlet side and the outlet side of the rolling mill works. Within the range of the permissible strength of the drive system, therefore, the minimum value of the work roll diameter is determined by the flexural rigidity value of the work rolls, which withstands the differential tension, and at least the work roll diameter comparable to that mentioned above is feasible. With the work roll drive, moreover, at least the work roll diameter comparable to the above one can be achieved from this point of view, even in a four-high rolling mill (hereinafter referred to as a four-high mill).

20 **[0004]** A conventional six-high mill may have support rolls inside the rollable strip width of the work rolls. Further, a six-high mill, which has support bearings provided outside the rollable strip width of the work rolls, and applies horizontal bending to the work rolls via these support bearings, is disclosed in Patent Document 1.

25 [Citation List]

[Patent Literature]

**[0005]**

30

[Patent Document 1] JP-A-5-50109  
[Patent Document 2] JP-A-2008-126295  
[Patent Document 3] JP-A-60-238021  
[Non-Patent Literature]

35

**[0006]**

[Non-Patent Document 1] "Industrial Machinery", May Issue, 1991 (pp. 56-60)

40 [Summary of Invention]

[Technical Problem]

45 **[0007]** To meet recent needs, an attempt has been made to roll a special steel, such as a harder stainless steel, by a six-high mill or four-high mill having no support rolls inside the rollable strip width of the work rolls. This attempt has posed a problem such that the aforementioned work roll diameter is too large and imposes a heavy load, thus failing to ensure a necessary reduction in thickness by rolling, and a problem such as poor gloss.

**[0008]** On the other hand, a six-high mill having support rolls inside the rollable strip width of the work rolls has involved the following problems: A space for the support roll portion is so small that sufficient strength and rigidity are difficult to ensure. Since there are support bearings for supporting the support rolls inside the rollable strip width of the work rolls, moreover, marks of the support bearings are transferred to or produced in the plate via the support rolls and the work rolls, depending on their material.

50 **[0009]** The present invention has been proposed in the light of these circumstances. It is an object of the present invention to provide a rolling mill, which can render work rolls of a smaller diameter usable for the purpose of rolling a hard material, and can thereby obtain a strip with high productivity and of high product quality, and a tandem rolling mill equipped with the rolling mill.

55

[Solution to Problem]

**[0010]** To solve the above-mentioned problems, the present invention provides a six-high rolling mill including upper and lower work rolls as a pair for rolling a metal strip, upper and lower intermediate rolls as a pair for supporting the work rolls, and upper and lower back-up rolls as a pair for supporting the upper and lower intermediate rolls as the pair, the six-high rolling mill having no supporting rolls inside a rollable strip width of the work rolls, **characterized in that** at least two bearings are provided on each of an operating side and a drive side of each of the paired upper and lower work rolls, and

restraining means for restraining the bearings are provided on an inlet side, or an outlet side, or both of the inlet side and the outlet side, of the bearings to restrain a horizontal displacement of each of the bearings.

**[0011]** To solve the above-mentioned problems, the present invention also provides a four-high rolling mill including upper and lower work rolls as a pair for rolling a metal strip, and upper and lower back-up rolls as a pair for supporting the work rolls, the four-high rolling mill having no supporting rolls inside a rollable plate width of the work rolls, **characterized in that**

at least two bearings are provided on each of an operating side and a drive side of each of the paired upper and lower work rolls, and

restraining means for restraining the bearings are provided on an inlet side, or an outlet side, or both of the inlet side and the outlet side, of the bearings to restrain a horizontal displacement of each of the bearings.

**[0012]** The six- or four-high rolling mill is **characterized in that**

a minimum roll diameter of the work roll is intermediate between a minimum diameter upper limit  $D_{max1}$  and a minimum diameter lower limit  $D_{min1}$ , which are expressed by the following equations:

$$\text{Minimum diameter upper limit } D_{max1} = D_{4max} \times B/5^{(1/4)}$$

where  $D_{4max}$  is a minimum diameter upper limit of a conventional work roll with a strip width of 1,300 mm: 380 mm, and  $B$  is a strip width (mm)/1,300 mm.

$$\text{Minimum diameter lower limit } D_{min1} = D_{4min} \times B/5^{(1/4)}$$

where  $D_{4min}$  is a minimum diameter lower limit of the conventional work roll with the strip width of 1,300 mm: 180 mm.

**[0013]** The six- or four-high rolling mill is also **characterized in that**

a material having a high modulus of longitudinal elasticity is used for the work roll, and

a minimum roll diameter of the work roll is intermediate between a minimum diameter upper limit  $D_{max2}$  and a minimum diameter lower limit  $D_{min2}$ , which are expressed by the following equations:

$$\text{Minimum diameter upper limit } D_{max2} = D_{4max} \times B/(5 \times K)^{(1/4)}$$

where  $D_{4max}$  is a minimum diameter upper limit of a conventional work roll with a strip width of 1,300 mm: 380 mm

$B$  is a strip width (mm)/1,300 mm, and

$K$  is a ratio of the high longitudinal modulus material to a conventional material (modulus of longitudinal elasticity of the high longitudinal modulus material/modulus of longitudinal elasticity of the conventional material (21,000 kg/mm<sup>2</sup>)).

$$\text{Minimum diameter lower limit } D_{min2} = D_{4min} \times B/(5 \times K)^{(1/4)}$$

where  $D_{4min}$  is a minimum diameter lower limit of the conventional work roll with the strip width of 1,300 mm: 180 mm.

**[0014]** The six- or four-high rolling mill is also **characterized in that** the ratio of the high longitudinal modulus material to the conventional material (longitudinal modulus ratio),  $K$ , is 1.2 to 3.0. If the work roll is a composite material roll, an equivalent modulus of longitudinal elasticity is preferably used as the modulus of longitudinal elasticity.

**[0015]** To solve the above-mentioned problems, the present invention further provides a tandem rolling mill including a plurality of rolling mill stands arranged therein, **characterized in that** the six-high rolling mill or the four-high rolling

mill is provided as at least one of the stands.

[Advantageous Effects of Invention]

5 **[0016]** According to the features of the present invention, in order that the support for both ends of the work roll will be changed from simple support to a manner corresponding to fixed support, the at least two bearings are provided on each of the operating side and the drive side of each of the paired upper and lower work rolls, and the restraining means for restraining the bearings are provided on the inlet side, or the outlet side, or both of the inlet side and the outlet side, of the bearings to restrain the horizontal displacement of each of the bearings. By so doing, deflection of the work roll, which occurs under the tangential force of the intermediate roll drive or the differential tension between tensions on the inlet side and the outlet side upon the work roll drive, can be suppressed. As a result, the diameter of the work roll can be rendered small, so that edge drops can be reduced, and surface gloss can be improved. The rolling mill and the tandem rolling mill with these features are preferred particularly for cold rolling.

10 **[0017]** By using the work roll composed of a cemented carbide or a ceramic material as a high longitudinal modulus material, the diameter of the work roll can be rendered even smaller.

[Brief Description of Drawings]

**[0018]**

20 [Fig. 1] Fig. 1 is a front sectional view of a six-high mill showing Embodiment 1 of the present invention.  
 [Fig. 2] Fig. 2 is a sectional view taken along line II-II in Fig. 1.  
 [Fig. 3] Fig. 3 is a sectional view taken along line III-III in Fig. 2.  
 [Fig. 4] Fig. 4 is an explanation drawing of a taper wedge liner.  
 25 [Fig. 5] Fig. 5 is an explanation drawing of a composite roll.  
 [Fig. 6] Fig. 6 is an explanation drawing of inlet side-outlet side differential tension.  
 [Fig. 7A] Fig. 7A is an explanation drawing of the deflection of a work roll.  
 [Fig. 7B] Fig. 7B is an explanation drawing of the deflection of the work roll.  
 [Fig. 8] Fig. 8 is a graph showing a comparison between the work roll minimum diameter upper limits  $D_{max}$ 's in Embodiments 1, 2 and a conventional example.  
 30 [Fig. 9] Fig. 9 is a graph showing a comparison between the work roll minimum diameter lower limits  $D_{min}$ 's in them.  
 [Fig. 10] Fig. 10 is an explanation drawing of the tangential force of drive.  
 [Fig. 11A] Fig. 11A is an explanation drawing of a work roll offset showing an applied example of Embodiments 1, 2.  
 [Fig. 11B] Fig. 11B is an explanation drawing of load imposed on the work roll in the applied example.  
 35 [Fig. 12A] Fig. 12A is an explanation drawing of an intermediate roll offset showing another applied example of Embodiments 1, 2.  
 [Fig. 12B] Fig. 12B is an explanation drawing of load imposed on the work roll in the another applied example.  
 [Fig. 13] Fig. 13 is an explanation drawing of a work roll shift of a six-high mill showing still another applied example of Embodiments 1, 2.  
 40 [Fig. 14] Fig. 14 is a front sectional view of a four-high mill showing Embodiment 3 of the present invention.  
 [Fig. 15] Fig. 15 is a sectional view taken along line XV-XV in Fig. 14.  
 [Fig. 16] Fig. 16 is an explanation drawing of a work roll shift of a four-high mill showing an applied example of Embodiment 3.  
 [Fig. 17] Fig. 17 is an explanation drawing of the application of the present invention to a tandem rolling mill.

[Description of Embodiments]

50 **[0019]** A rolling mill and a tandem rolling mill equipped therewith, according to the present invention, will be described in detail by the following embodiments using drawings.

[Embodiment 1]

55 **[0020]** Fig. 1 is a front sectional view of a six-high mill showing Embodiment 1 of the present invention. Fig. 2 is a sectional view taken along line II-II in Fig. 1. Fig. 3 is a sectional view taken along line III-III in Fig. 2. Fig. 4 is an explanation drawing of a taper wedge liner.

**[0021]** As shown in these drawings, a strip 1, which is a material to be rolled, is rolled by upper and lower work rolls 2 as a pair. These paired upper and lower work rolls 2 are in contact with, and supported by, upper and lower intermediate rolls 3 as a pair. These paired upper and lower intermediate rolls 3 are in contact with, and supported by, upper and

lower back-up rolls 4 as a pair.

[0022] The upper back-up roll 4 is supported by bearing housings 17a, 17c via bearings (not shown), and these bearing housings 17a, 17c are supported by housings 7a, 7b via pass line adjusting devices 5a, 5b such as worm jacks or taper wedges and stepped rocker plates. Here, load cells may be incorporated inside the pass line adjusting devices 5a, 5b to measure a rolling load.

[0023] The lower back-up roll 4 is supported by bearing housings 17b, 17d via bearings (not shown), and these bearing housings 17b, 17d are supported by the housings 7a, 7b via hydraulic cylinders 6a, 6b.

[0024] Bearing housings 13a to 13d and 13e to 13h are mounted on roll neck portions of the paired upper and lower work rolls 2 via bearings (not shown). These bearing housings 13a to 13h are pressed against projection blocks 19a, 19c on their outlet side by backlash elimination cylinders 18a to 18d and 18e to 18h provided on projection blocks 19b, 19d on the inlet side of the bearing housings 13a to 13h, whereby the horizontal displacement of each of the bearings is restrained.

[0025] The projection blocks 19a, 19b, 19c, 19d are equipped with bending cylinders 14a to 14d and 14e to 14h for imparting roll bending. Thus, roll bending is imparted to the work rolls 2 to make the modification of the strip shape possible. In the present embodiment, the backlash elimination cylinders 18a to 18d and 18e to 18h are provided on the inlet side, but may be provided on the outlet side or on both of the inlet side and the outlet side.

[0026] In the present embodiment, the backlash elimination cylinders 18a to 18d and 18e to 18h are shown, but worm jacks or taper wedge lines for operating taper wedges by hydraulic cylinders, etc. may be used. The motions of the taper wedge liner will be described by reference to Fig. 4. When a taper wedge 21 is pushed in horizontally leftwardly in the drawing by a hydraulic cylinder 20, a taper liner 22 slides over the wedge portion, because its horizontal movement is restrained by a stopper 23. As a result, the taper liner 22 moves vertically. By this action, the bearing housings 13a to 13d and 13e to 13h can be restrained.

[0027] Here, rolling load is imparted by the hydraulic cylinders 6a, 6b, and rolling torque is transmitted to the work rolls 2 by spindles (not shown). The paired upper and lower intermediate rolls 3 have roll shoulders 3a, whose roll diameter decreases, at the positions of the roll barrel ends in vertical point symmetry with respect to the center of the plate width of the strip 1. In the case of intermediate roll drive, rolling torque is transmitted to the work rolls 2 by the spindles (not shown) via the intermediate rolls 3.

[0028] The paired upper and lower intermediate rolls 3 are supported by bearing housings 15a to 15d via bearings (not shown). The paired upper and lower intermediate rolls 3 are axially movable by shifting devices (not shown) via the drive-side bearing housings 15c, 15d. Further, these bearing housings 15a to 15d are furnished with bending cylinders 16a to 16d for imparting roll bending. By so doing, roll bending is imparted to the intermediate rolls 3.

[0029] In the present embodiment, as shown above, two of the bearing housings, 13a to 13d and 13e to 13h, are mounted on each of the roll neck portions of the paired upper and lower work rolls 2. These bearing housings 13a to 13h are pressed against the outlet-side projection blocks 19a, 19c by the inlet-side backlash elimination cylinders 18a to 18h, whereby the horizontal displacement of each of the bearings is restrained. Thus, deflection of the work roll 2, which occurs under the tangential force of the intermediate roll drive or the inlet side-outlet side differential tension of the work roll drive, can be suppressed. As a result, the diameter of the work roll can be rendered small.

[0030] Consequently, the work rolls 2 of a smaller diameter can be rendered usable for the purpose of rolling a hard material. Thus, edge drops can be reduced, surface gloss can be improved, and the strip 1 with high productivity and of high product quality can be obtained.

[Embodiment 2]

[0031] Next, Embodiment 2 of the present invention will be described.

[0032] The present embodiment is **characterized in that** a material having a high modulus of longitudinal elasticity is used for the paired upper and lower work rolls 2 in the above-described Embodiment 1. An example of the material having the high modulus of longitudinal elasticity is a cemented carbide such as tungsten carbide (modulus of longitudinal elasticity: 53,000 kg/mm<sup>2</sup>), or a ceramic (modulus of longitudinal elasticity: 31,000 kg/mm<sup>2</sup>). Special forged steel (modulus of longitudinal elasticity: 21,000 kg/mm<sup>2</sup>) or the like has been used as a conventional material.

[0033] It is preferred that the ratio of the high longitudinal modulus material to the conventional material (longitudinal modulus ratio), K, be set at 1.2 to 3.0.

[0034] As shown in Fig. 5, moreover, a roll composite material using a high longitudinal modulus material as a roll surface layer material 2A and a conventional material as a roll internal layer material 2B may be used for the paired upper and lower work rolls 2. The modulus of longitudinal elasticity used in this case is an equivalent modulus of longitudinal elasticity shown below.

[0035] The equivalent modulus of longitudinal elasticity, Ee, is expressed by the following equation (1)

$$Ee = (d1^4 + (d2^4 - d1^4) \times E2/E1) / d2^4 \quad \text{Equation (1)}$$

5 where d2 is the outer diameter of the roll surface layer material 2A, E2 is the modulus of longitudinal elasticity of the roll surface layer material 2A, d1 is the outer diameter of the roll internal layer material 2B, and E1 is the modulus of longitudinal elasticity of the roll internal layer material 2B.

10 **[0036]** In the present embodiment, as described above, two of the bearing housings, 13a to 13h, are mounted on each of the roll neck portions of the paired upper and lower work rolls 2. The respective two of the bearing housings 13a to 13h are restrained by the backlash elimination cylinders 18a to 18h from being displaced in the horizontal direction. Moreover, the work roll 2 of the material having a high modulus of longitudinal elasticity, such as a cemented carbide or a ceramic material, is used. Thus, the diameter of the work roll can be rendered further smaller, and the strip 1 with high productivity and of high product quality can be obtained in the rolling of a hard material.

15 **[0037]** In connection with Embodiment 1, deflection of the work roll by the rolling mill inlet side-outlet side differential tension will be described using Fig. 6 and Figs. 7A, 7B.

20 **[0038]** As shown in Fig. 6, if the inlet-side tension of the rolling mill is designated as Tb, and the outlet-side tension of the rolling mill is designated as Tf, differential tension which is the difference between Tb and Tf is exerted on the work rolls 2. Since the number of the bearings for the work roll is one each on the operating side and on the drive side, the supporting conditions for simple support shown in Fig. 7A apply. Horizontal deflection δs of the work roll in this case is expressed by the following equation (2), where F represents the differential tension per unit length, L represents the support spacing, Dc represents the diameter of the conventional work roll 2, Ic represents the second moment of area of the conventional work roll diameter, and Ec represents the modulus of longitudinal elasticity (21,000 kg/mm<sup>2</sup>) of the material (special forged steel) for the conventional work roll:

$$25 \quad \delta s = 5 \times F \times L^4 / (384 \times Ec \times Ic) \quad \dots \dots \text{Equation (2)}$$

where

$$30 \quad Ic = \pi \times Dc^4 / 64$$

$$35 \quad F = (Tf - Tb) / L / 2$$

40 **[0039]** Similarly, with Embodiment 1, two of the bearing housings, 13a to 13h, are mounted on each of the roll neck portions of the paired upper and lower work rolls. The respective two of the bearing housings 13a to 13h are restrained by the backlash elimination cylinders 18a to 18h from being displaced in the horizontal direction. Thus, the supporting conditions for fixed support shown in Fig. 7B apply. Deflection δf in the horizontal direction of the work roll in this case is expressed by the following equation (3), where Df represents the diameter of the work roll of Embodiment 1, and If represents the second moment of area of the diameter of the work roll of Embodiment 1.

$$45 \quad \delta f = F \times L^4 / (384 \times Ec \times If) \quad \dots \dots \text{Equation (3)}$$

where

$$50 \quad If = \pi \times Df^4 / 64$$

Assuming that δf = δs, Df is expressed by the following equation (4):

$$55 \quad Df = Dc / 5^{(1/4)} \quad \dots \dots \dots \text{Equation (4)}$$

[0040] Patent Document 2 describes a method of pressing only one each of the bearings on the operating side and the drive side by pressing cylinders. According to this method, only the one bearing is pressed. Thus, the supporting conditions for fixed support for the roll ends, shown in Fig. 7B, are not established. The supporting conditions for simple support for the roll ends, shown in Fig. 7A, apply.

5 [0041] On the other hand, the minimum roll diameter of the work roll is intermediate between the minimum diameter upper limit Dmax1 and the minimum diameter lower limit Dmin1, which are expressed by the following equations based on the above equation (4):

10 Minimum diameter upper limit  $D_{max1} = D_{4max} \times B/5^{(1/4)}$  Equation (5)

where D4max is a minimum diameter upper limit of a conventional work roll with a strip width of 1,300 mm: 380 mm, and B is a plate width (mm)/1,300 mm.

15 The minimum diameter upper limit Dmax1 per strip width in Embodiment 1 is shown in Fig. 8.

20 Minimum diameter lower limit  $D_{min1} = D_{4min} \times B/5^{(1/4)}$  Equation (6)

where D4min is a minimum diameter lower limit of the conventional work roll with the strip width of 1,300 mm: 180 mm. The minimum diameter lower limit Dmin1 per strip width in Embodiment 1 is shown in Fig. 9.

[0042] With Embodiment 2, two of the bearing housings, 13a to 13h, are mounted on each of the roll neck portions of the paired upper and lower work rolls. The respective two of the bearing housings 13a to 13h are restrained by the backlash elimination cylinders 18a to 18h from being displaced in the horizontal direction. Thus, the supporting conditions for fixed support shown in Fig. 7B apply. Furthermore, the material having the high modulus of longitudinal elasticity is used for the paired upper and lower work rolls 2. An example of the material having the high modulus of longitudinal elasticity is a cemented carbide or a ceramic. Deflection  $\delta_{fr}$  in the horizontal direction of the work roll 2 in this case is expressed by the following equation (7), where Dfr represents the diameter of the work roll 2 of Embodiment 2, Ifr represents the second moment of area of the diameter of the work roll of Embodiment 2, and Er represents the modulus of longitudinal elasticity of the material for the work roll of Embodiment 2.

35  $\delta_{fr} = F \times L^4 / (384 \times E_r \times I_{fr}) \dots \dots \dots$  Equation (7)

where  $I_{fr} = \pi \times D_{fr}^4 / 64$

Assuming that  $\delta_{fr} = \delta_s$ , Dfr is expressed by the following equation (8):

40  $D_{fr} = D_c / (5 \times K)^{(1/4)} \dots \dots \dots$  Equation (8)

[0043] On the other hand, the minimum roll diameter of the work roll is intermediate between the minimum diameter upper limit Dmax2 and the minimum diameter lower limit Dmin2, which are expressed by the following equations:

45 Minimum diameter upper limit  $D_{max2} = D_{4max} \times B / (5 \times K)^{(1/4)} \dots$  Equation (9)

50 where D4max is a minimum diameter upper limit of a conventional work roll with a strip width of 1,300 mm: 380 mm, B is a strip width (mm)/1,300 mm, and K is a ratio of the high longitudinal modulus material to a conventional material (modulus of longitudinal elasticity of the high longitudinal modulus material/modulus of longitudinal elasticity of the conventional material (21,000 kg/mm<sup>2</sup>))  
 55 The minimum diameter upper limit Dmax2 per strip width in Embodiment 2 is shown in Fig. 8. K=2.5, provided that the material for the work roll was a cemented carbide.

Minimum diameter lower limit  $D_{min2} = D_{4min} \times B / (5 \times K)^{(1/4)} \dots$  Equation (10)

5 where  $D_{4min}$  is a minimum diameter lower limit of the conventional work roll with the strip width of 1,300 mm: 180 mm  
The minimum diameter lower limit  $D_{min2}$  per strip width in Embodiment 2 is shown in Fig. 9.  $K=2.5$ , provided that the material for the work roll was the cemented carbide.

10 **[0044]** In the foregoing, the example of the work roll drive has been described. In the case of intermediate roll drive shown in Fig. 10, the aforementioned parameter  $F$  is expressed by the following equation (11), with a drive tangential force  $F_d$  being taken into consideration:

$$F = (T_f - T_b) / L - F_d / L \dots \dots \text{Equation (11)}$$

15 However, the results are the same as those in the aforementioned example of the work roll drive.

**[0045]** As shown in Figs. 11A and 11B, the work rolls 2 may be offset variably, according to the magnitude of the inlet side-outlet side differential tension  $(T_f - T_b)/2$ , toward the inlet side in the rolling direction in the horizontal direction (see an offset amount  $\alpha$  in Fig. 11A). By so doing, the inlet side-outlet side differential tension  $(T_f - T_b)/2$  is decreased by the offset horizontal component force  $F_a$  of the rolling load  $Q$ , so that the total force in the horizontal direction exerted on the work roll 2 is decreased. In Fig. 11B,  $F_b$  represents the offset vertical component force of the rolling load  $Q$ .

20 **[0046]** As a result, the advantage that the deflection of the work roll 2 can be further diminished is produced. The total force  $F_w$  in the horizontal direction exerted on the work roll 2 is expressed by the following equation (12):

$$F_w = (T_f - T_b) / 2 - Q \times \alpha / ((D_w + D_I) / 2) \dots \dots \text{Equation (12)}$$

where  $D_w$  represents the diameter of the work roll, and  $D_I$  represents the diameter of the intermediate roll.

30 **[0047]** As shown in Figs. 12A and 12B, the intermediate rolls 3 may be offset variably, according to the magnitude of the inlet side-outlet side differential tension  $(T_f - T_b)/2$ , toward the outlet side in the rolling direction in the horizontal direction (see an offset amount  $\beta$  in Fig. 12A). By so doing, the inlet side-outlet side differential tension  $(T_f - T_b)/2$  is decreased by the offset horizontal component force  $F_a$  of the rolling load  $Q$ , so that the total force in the horizontal direction exerted on the work roll 2 of the high longitudinal modulus material is decreased. In Fig. 12B,  $F_b$  represents the offset vertical component force of the rolling load  $Q$ .

35 **[0048]** As a result, the advantage is produced that the deflection of the work roll 2 can be further diminished. The total force  $F_w$  in the horizontal direction exerted on the work roll 2 is expressed by the following equation (13):

$$F_w = (T_f - T_b) / 2 - Q \times \beta / ((D_w + D_I) / 2) \dots \dots \text{Equation (13)}$$

where  $D_w$  represents the diameter of the work roll, and  $D_I$  represents the diameter of the intermediate roll.

45 **[0049]** In Embodiments 1 and 2, the paired upper and lower work rolls 2 do not show a structure for shift in the axial direction. As will be described below, however, the work roll 2 may have a structure in which it can be shifted in the axial direction. The shift structure for the work roll is, for example, a structure as shown in Patent Document 3.

**[0050]** As shown in Fig. 13, the paired upper and lower work rolls 2 have roll shoulders 2a, which taper, at the positions of the roll barrel ends in vertical point symmetry with respect to the center of the strip width of the strip 1. The roll neck portions of the paired upper and lower work rolls 2 are mounted with two bearings each (not shown) on the operating side and on the drive side. The paired upper and lower work rolls 2 are movable in the axial direction by shift cylinders (not shown) via the drive-side bearings (not shown).

50 **[0051]** Next, an explanation will be offered for a method of decreasing edge drops by the shift of the work roll 2 having the tapered roll shoulder 2a. The work rolls 2 are provided with the tapered roll shoulders 2a in vertical point symmetry, and the distances from the positions of the roll shoulders to the plate ends are designated as  $\delta_w$  and  $\delta_d$ . A strip thickness gauge (not shown) is provided for measuring the strip thickness at one point or a plurality of points in the vicinity of strip edge portions on the operating side and the drive side on the outlet side of the rolling mill.

55 **[0052]** If the strip thickness at the one point or the plurality of points in the vicinity of the strip edge portion, which has been measured on the operating side, is smaller than a predetermined strip thickness, the upper work roll 2 is shifted



in the direction of the roll shaft width narrowing. That is, the upper work roll 2 is shifted in a direction in which  $\delta w$  is increased. Conversely, if the measured strip thickness at the site in the vicinity of the strip edge portion is larger than the predetermined strip thickness, the upper work roll 2 is shifted in the direction of the roll shaft width broadening. That is, the upper work roll 2 is shifted in a direction in which  $\delta w$  is decreased.

5 **[0053]** If the strip thickness at the one point or the plurality of points in the vicinity of the strip end portion, which has been measured on the drive side, is different from the predetermined strip thickness, the lower work roll 2 is similarly shifted so that the above strip thickness equals the predetermined strip thickness. Essentially, the work roll diameter can be rendered small by applying the work roll 2 of the high longitudinal modulus material. Thus, the rolling load can be decreased in conformity with the small diameter. This makes it possible to curtail a sharp decrease in thickness at the strip edge portion, which is called an edge drop becoming the cause of a decreased yield.

10 **[0054]** The combined use of the small-diameter work roll and the work roll shift mentioned above can minimize the tapered roll shoulder 2a or minimize the shift distance  $\delta w$  or  $\delta d$ . This technology is preferred, in particular, for rolling of a brittle material, such as an electromagnetic steel sheet, which is susceptible to these values and is apt to splinter. Fig. 13 describes the mill of Fig. 1 as a representative, but the mill with the variably offset work rolls in Figs. 11A, 11B or the mill with the variably offset intermediate rolls in Figs. 12A, 12B may be used.

15 **[0055]** Embodiments 1 and 2 show an example in which the paired upper and lower intermediate rolls 3 have the roll shoulders 3a, which decrease in roll diameter, at the positions of the roll barrel ends in vertical point symmetry with respect to the center of the strip width of the strip 1. However, the paired upper and lower intermediate rolls 3 may be structured to have S-curved roll crowns in vertical point symmetry with respect to the center of the strip width of the strip 1, and to be shifted in the axial direction, as shown in Non-Patent Document 1. In this case, the ability at shape control is lower than in the six-high mill having the roll shoulders 3a, but is higher than in the four-high mill. Moreover, the aforementioned work roll shift shown in Fig. 13 may be applied to this mill.

[Embodiment 3]

25 **[0056]** Fig. 14 is a front sectional view of a four-high mill showing Embodiment 3 of the present invention. Fig. 15 is a sectional view taken along line XV-XV in Fig. 14. Fig. 16 is an explanation drawing of a work roll shift of a four-high mill showing an applied example of Embodiment 3.

30 **[0057]** The rolling mill of the present embodiment is a four-high rolling mill, and is configured to remove the set of the paired upper and lower intermediate rolls 3, the bearing housings 15a to 15d, and the bending cylinders 16a to 16d from the six-high rolling mill which represents Embodiments 1 and 2, as shown in Figs. 14 and 15. In this case, the strip shape control ability declines greatly, but the structure is further simplified.

35 **[0058]** In the present embodiment, the paired upper and lower work rolls 2 do not show a structure for shift in the axial direction. As shown in Fig. 16, however, the work rolls 2 may be structured to have roll shoulders 2a, which taper, at the positions of the roll barrel ends in vertical point symmetry with respect to the center of the strip width of the strip 1, and to be shiftable in the axial direction. According to this configuration, edge drops can be decreased using a simpler structure.

40 **[0059]** The above-mentioned applied example is an example of the structure in which the paired upper and lower work rolls 2 have the tapered roll shoulders 2a at the positions of the roll barrel ends in vertical point symmetry with respect to the center of the strip width of the strip 1, and are shiftable in the axial direction. However, the paired upper and lower work rolls 2 may be structured to have S-curved roll crowns in vertical point symmetry with respect to the center of the strip width of the strip 1, and to be shifted in the axial direction, as shown in Non-Patent Document 1. In this case, the ability at shape control is higher than in the four-high mill shown in Fig. 16.

45 **[0060]** If the rolling mill with the small-diameter work rolls according to the present invention is applied to a tandem rolling mill, its application to No. 1 stand, as shown in Fig. 17, enables the small-diameter work rolls of the high longitudinal modulus material to impart a great reduction in thickness. When it is applied to the final stand, i.e., No. 4 stand in the drawing, a thinner strip can be rolled by the small-diameter work rolls of the high longitudinal modulus material. It goes without saying that the rolling mills with the small-diameter work rolls according to the present invention may be applied to all of No. 1 stand to No. 4 stand. This makes it possible to roll a thinner, harder material. Fig. 17 illustrates the six-high mill as a representative of the rolling mill with the small-diameter work rolls according to the present invention, but a four-high mill can be applied similarly.

[Reference Signs List]

55 **[0061]**

- 1 Strip
- 2 Work roll

3	Intermediate roll	
4	Back-up roll	
5	5a, 5b	Pass line adjusting device
	6a, 6b	Hydraulic cylinder
	7a, 7b	Housing
10	13a to 13d and 13e to 13h	Work roll bearing housing
	14a to 14d	Work roll bending cylinder
15	15a to 15d	Intermediate roll bearing housing
	16a to 16d	Intermediate roll bending cylinder
	17a to 17d	Back-up roll bearing housing
20	18a to 18d and 18e to 18h	Backlash elimination cylinder
	19a to 19d	Projection block

25

**Claims**

1. A six-high rolling mill including upper and lower work rolls (2) as a pair for rolling a metal strip (1), upper and lower intermediate rolls (3) as a pair for supporting the work rolls, and upper and lower back-up rolls (4) as a pair for supporting the upper and lower intermediate rolls as the pair, the six-high rolling mill having no supporting rolls inside a rollable strip width of the work rolls, **characterized in that** at least two bearings (13a, 13e, 13b, 13f, 13c, 13g, 13d, 13h) are provided on each of an operating side and a drive side of each of the paired upper and lower work rolls, and restraining means (18a, 18e, 18b, 18f, 18c, 18g, 18d, 18h) for restraining the bearings are provided on an inlet side, or an outlet side, or both of the inlet side and the outlet side, of the bearings to restrain a horizontal displacement of each of the bearings.
2. A four-high rolling mill including upper and lower work rolls (2) as a pair for rolling a metal strip (1), and upper and lower back-up rolls (4) as a pair for supporting the work rolls, the four-high rolling mill having no supporting rolls inside a rollable strip width of the work rolls, **characterized in that** at least two bearings (13a, 13e, 13b, 13f, 13c, 13g, 13d, 13h) are provided on each of an operating side and a drive side of each of the paired upper and lower work rolls, and restraining means (18a, 18e, 18b, 18f, 18c, 18g, 18d, 18h) for restraining the bearings are provided on an inlet side, or an outlet side, or both of the inlet side and the outlet side, of the bearings to restrain a horizontal displacement of each of the bearings.
3. The rolling mill according to claim 1 or 2, **characterized in that** a minimum roll diameter of the work roll is intermediate between a minimum diameter upper limit  $D_{max1}$  and a minimum diameter lower limit  $D_{min1}$ , which are expressed by the following equations:

$$\text{Minimum diameter upper limit } D_{max1} = D_{4max} \times B/5^{(1/4)}$$

where  $D_{4max}$  is a minimum diameter upper limit of a conventional work roll with a strip width of 1,300 mm: 380 mm, and B is a plate width (mm)/1,300 mm.

$$\text{Minimum diameter lower limit } D_{\min 1} = D_{4\min} \times B/5^{(1/4)}$$

5 where  $D_{4\min}$  is a minimum diameter lower limit of the conventional work roll with the strip width of 1,300 mm: 180 mm.

4. The rolling mill according to claim 1 or 2, **characterized in that**  
a material having a high modulus of longitudinal elasticity is used for the work roll, and  
a minimum roll diameter of the work roll is intermediate between a minimum diameter upper limit  $D_{\max 2}$  and a  
10 minimum diameter lower limit  $D_{\min 2}$ , which are expressed by the following equations:

$$\text{Minimum diameter upper limit } D_{\max 2} = D_{4\max} \times B/(5 \times K)^{(1/4)}$$

15 where  $D_{4\max}$  is a minimum diameter upper limit of a conventional work roll with a strip width of 1,300 mm: 380 mm,  
 $B$  is a strip width (mm)/1,300 mm, and  
 $K$  is a ratio of the high longitudinal modulus material to a conventional material (modulus of longitudinal elasticity of  
the high longitudinal modulus material/modulus of longitudinal elasticity of the conventional material (21,000  
20 kg/mm<sup>2</sup>)).

$$\text{Minimum diameter lower limit } D_{\min 2} = D_{4\min} \times B/(5 \times K)^{(1/4)}$$

25 where  $D_{4\min}$  is a minimum diameter lower limit of the conventional work roll with the strip width of 1,300 mm: 180 mm.

5. The rolling mill according to claim 4, **characterized in that**  
the ratio of the high longitudinal modulus material to the conventional material (longitudinal modulus ratio),  $K$ , is 1.2  
30 to 3.0.
6. A tandem rolling mill including a plurality of rolling mill stands arranged therein, **characterized in that**  
the rolling mill according to any one of claims 1 to 5 is provided as at least one of the stands.

35

40

45

50

55

Fig. 1

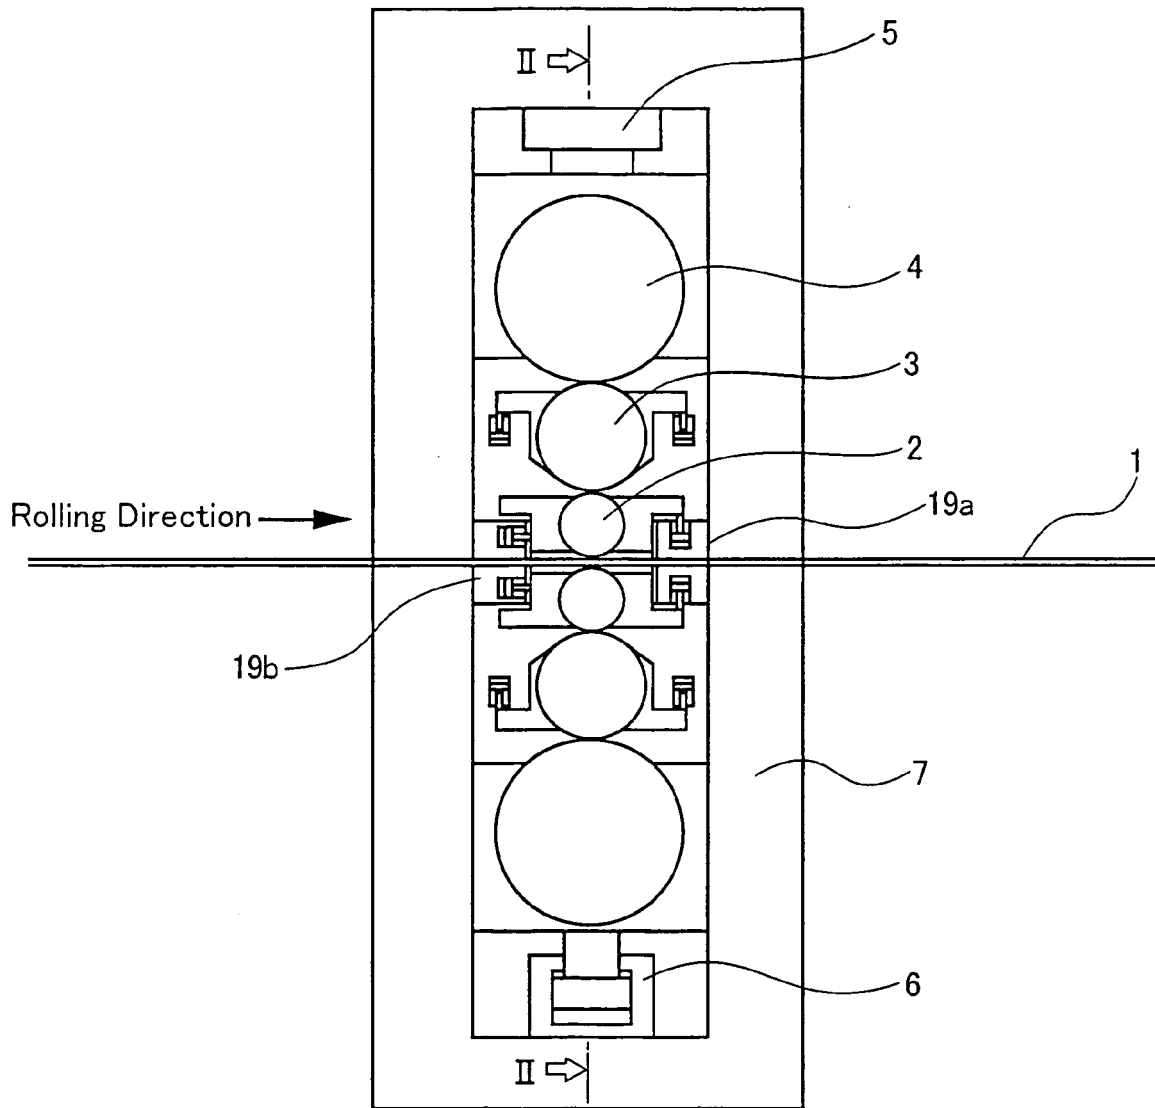


Fig. 2

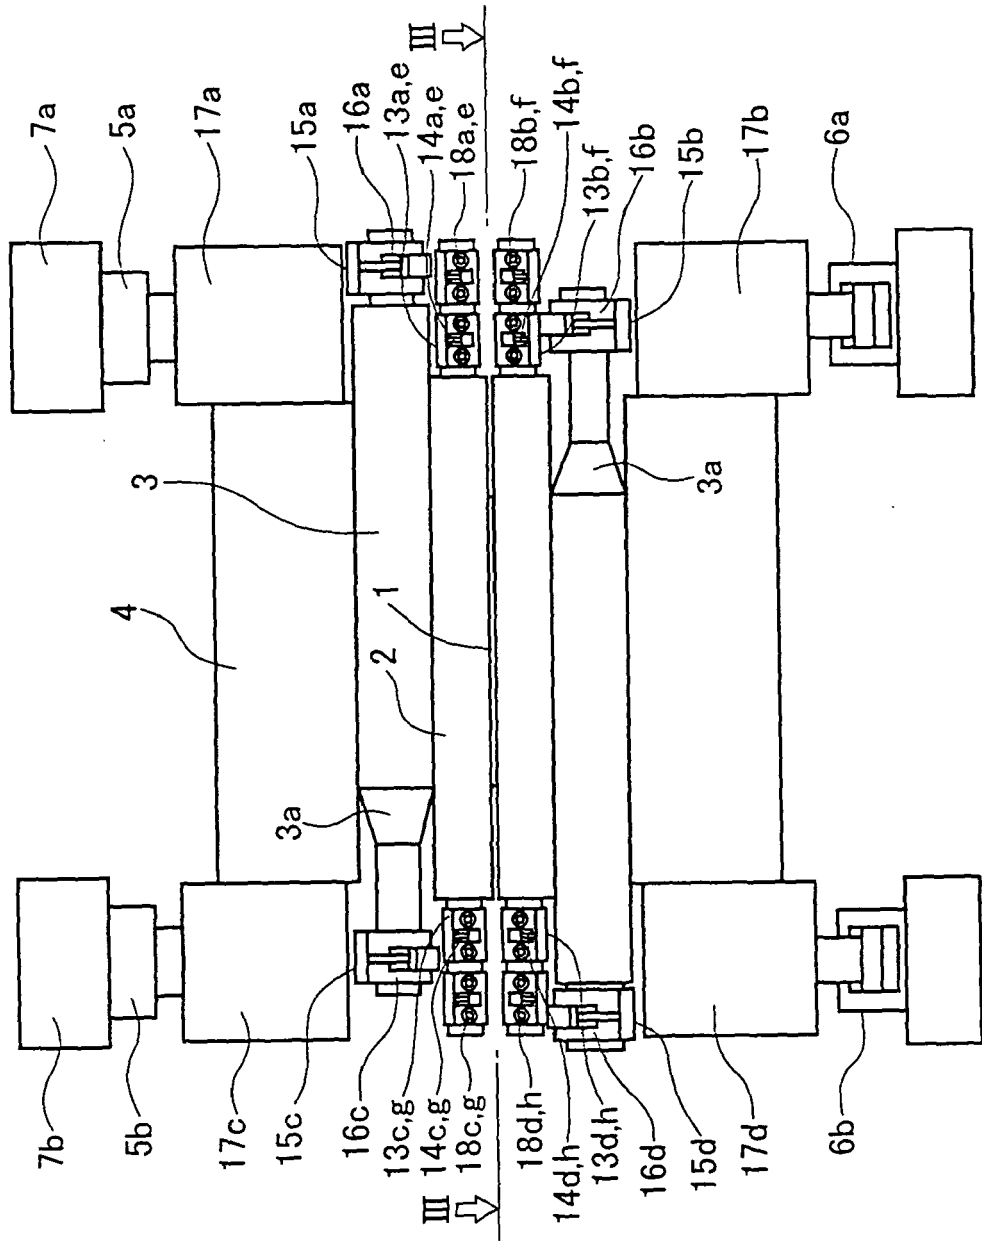


Fig. 3

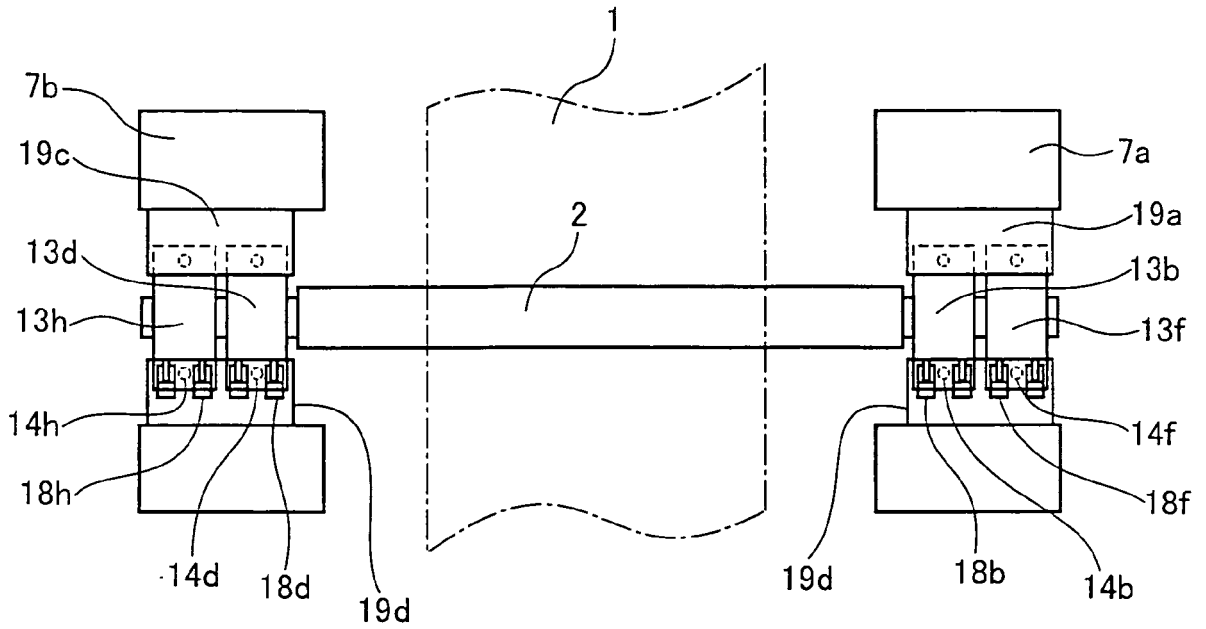


Fig. 4

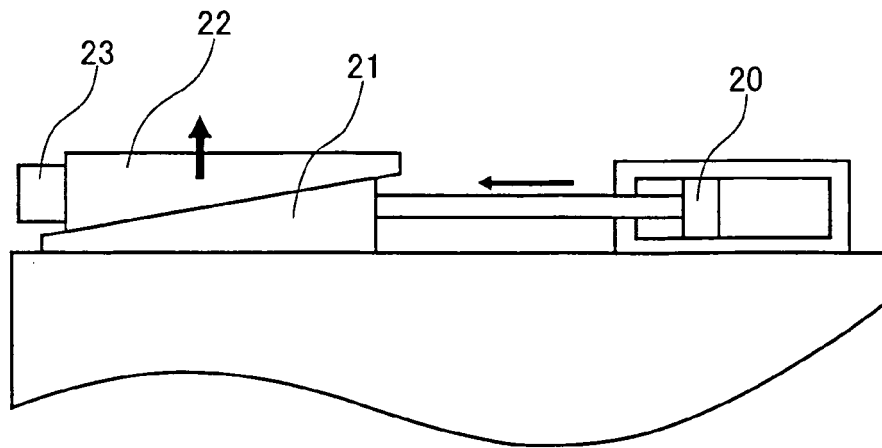


Fig. 5

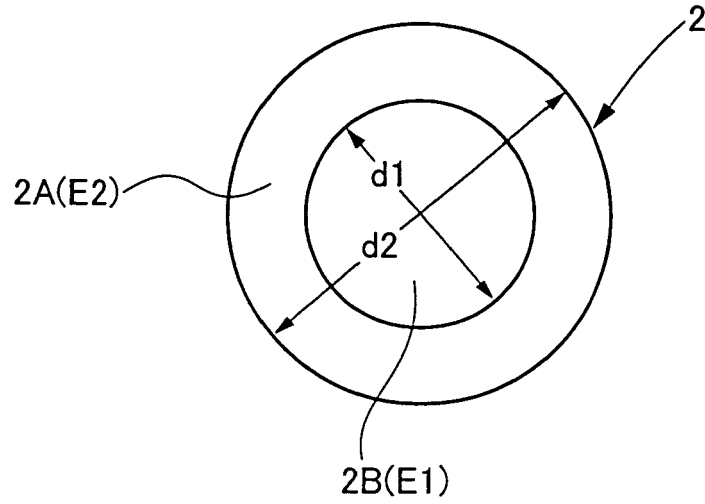


Fig. 6

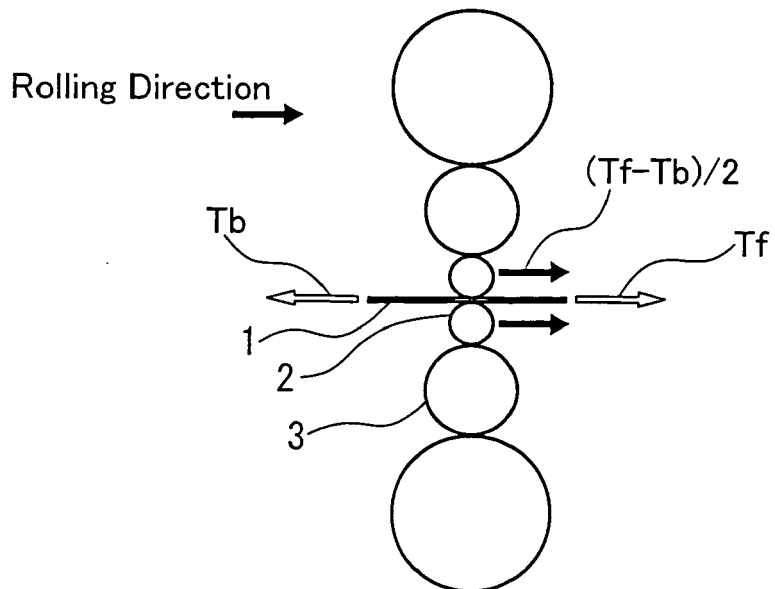


Fig. 7A

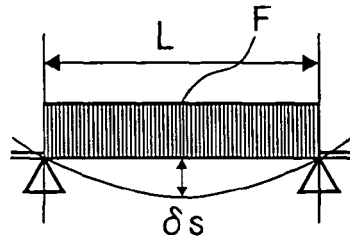


Fig. 7B

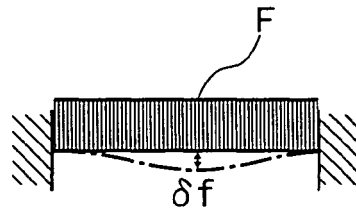


Fig. 8

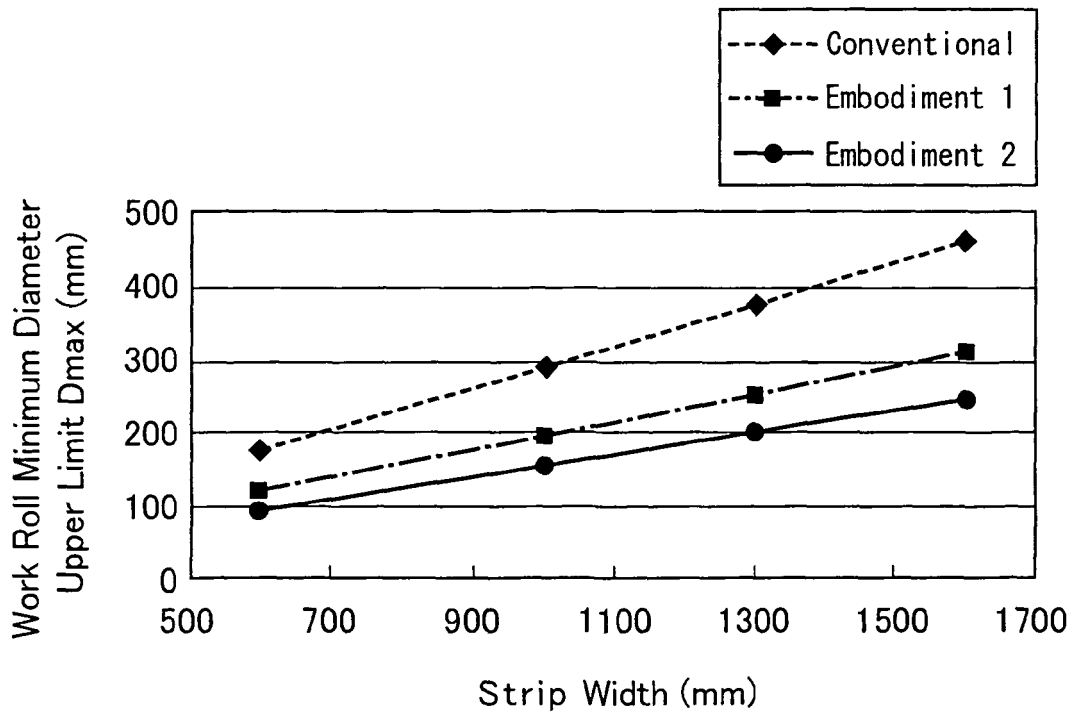




Fig. 9

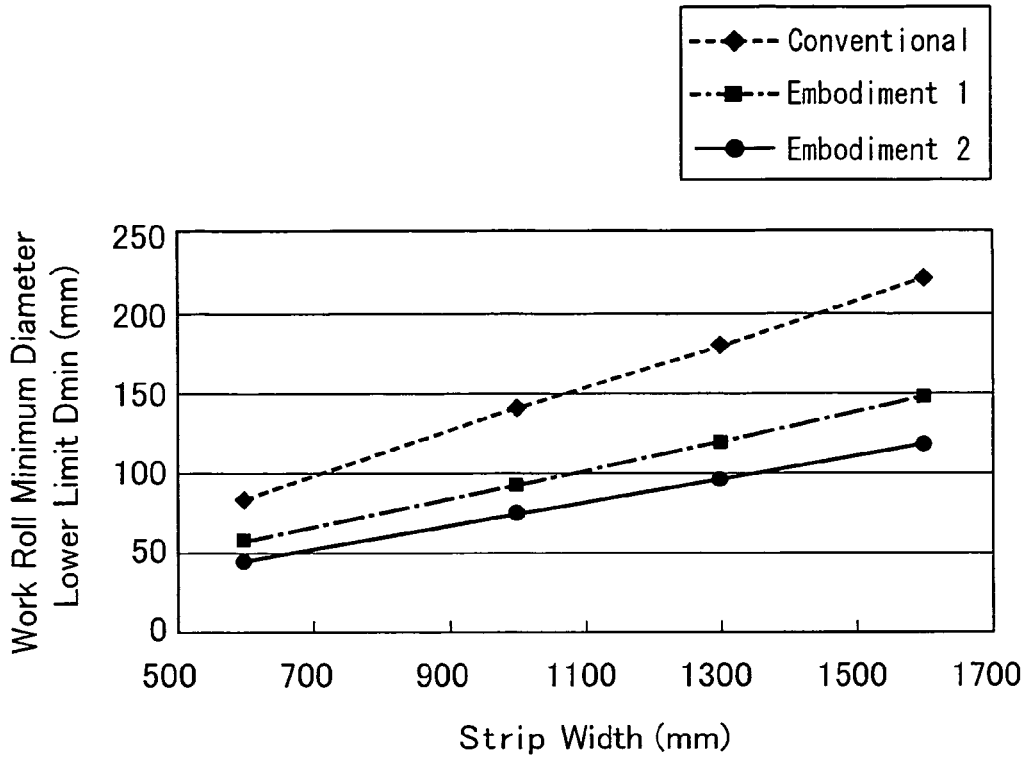


Fig. 10

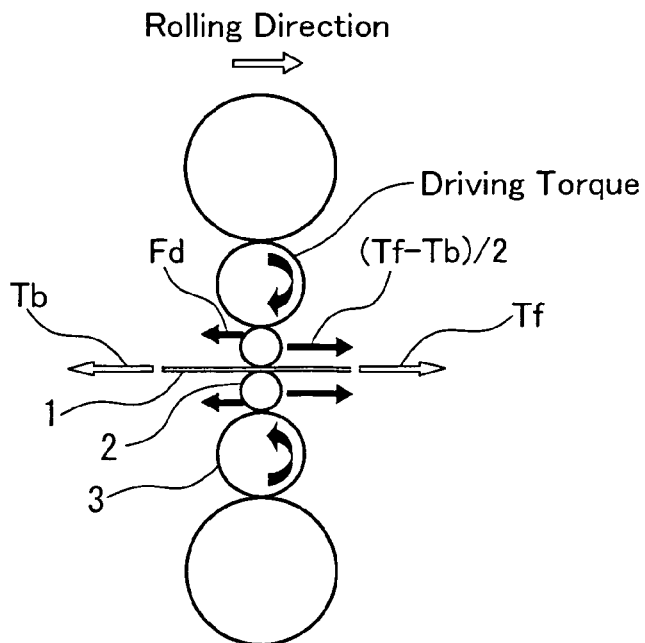


Fig. 11A

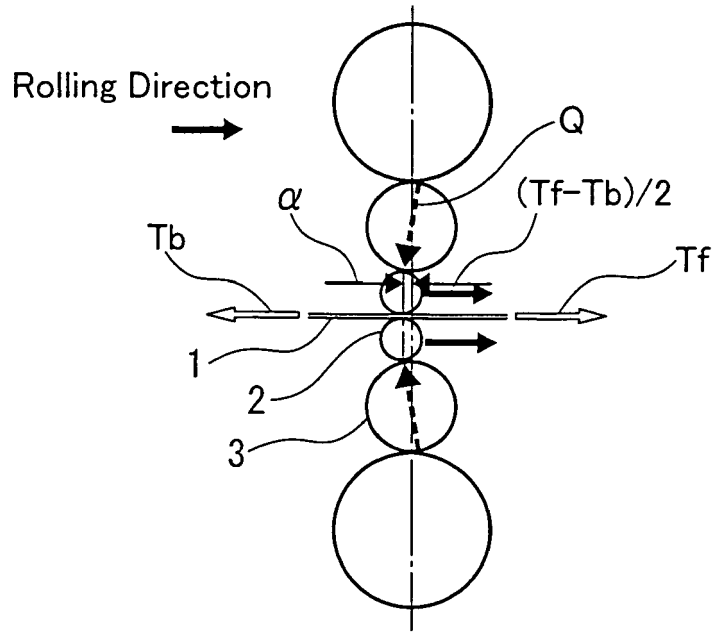


Fig. 11B

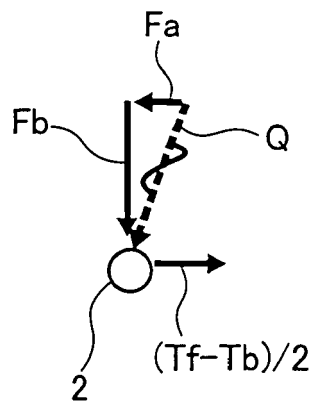


Fig. 12A

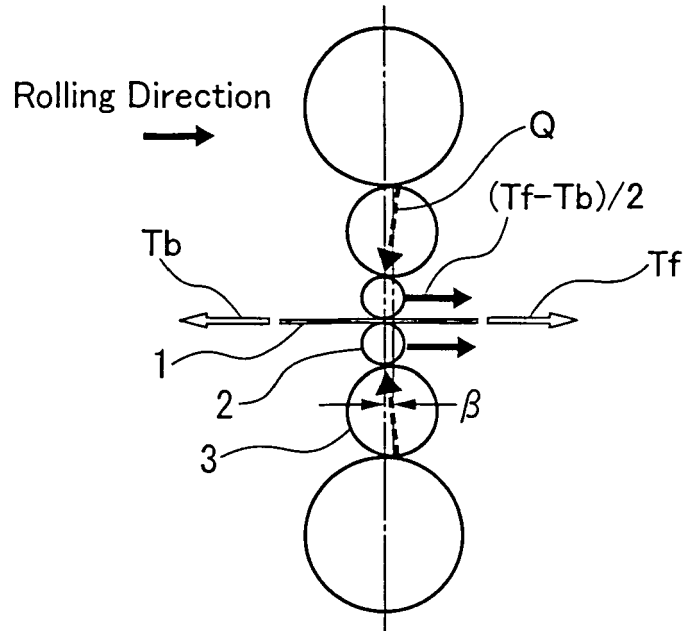


Fig. 12B

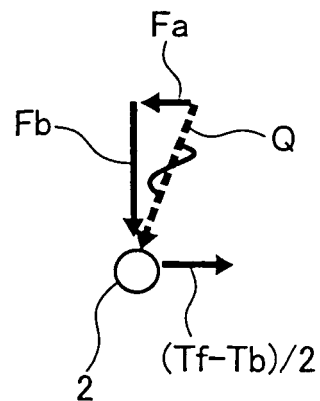


Fig. 13

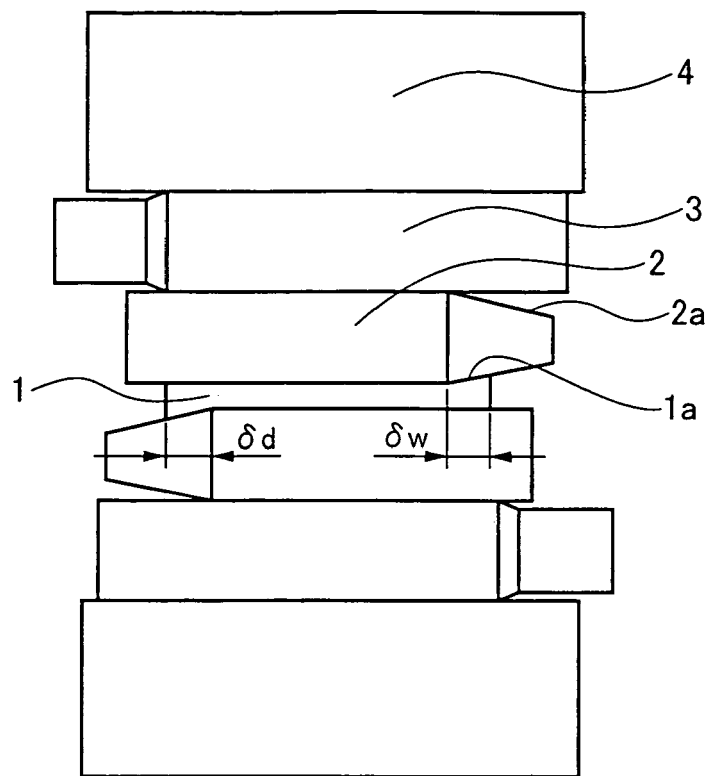


Fig. 14

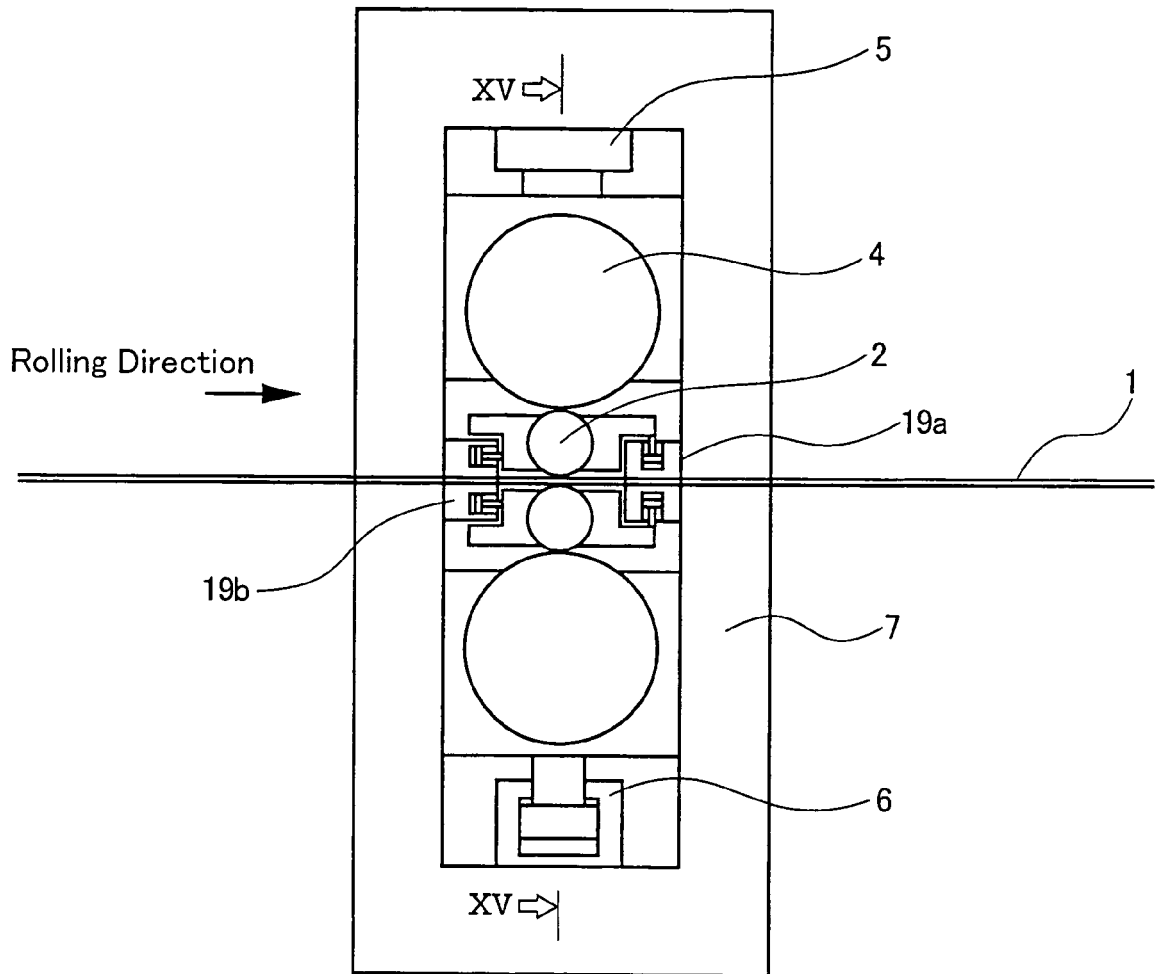


Fig. 15

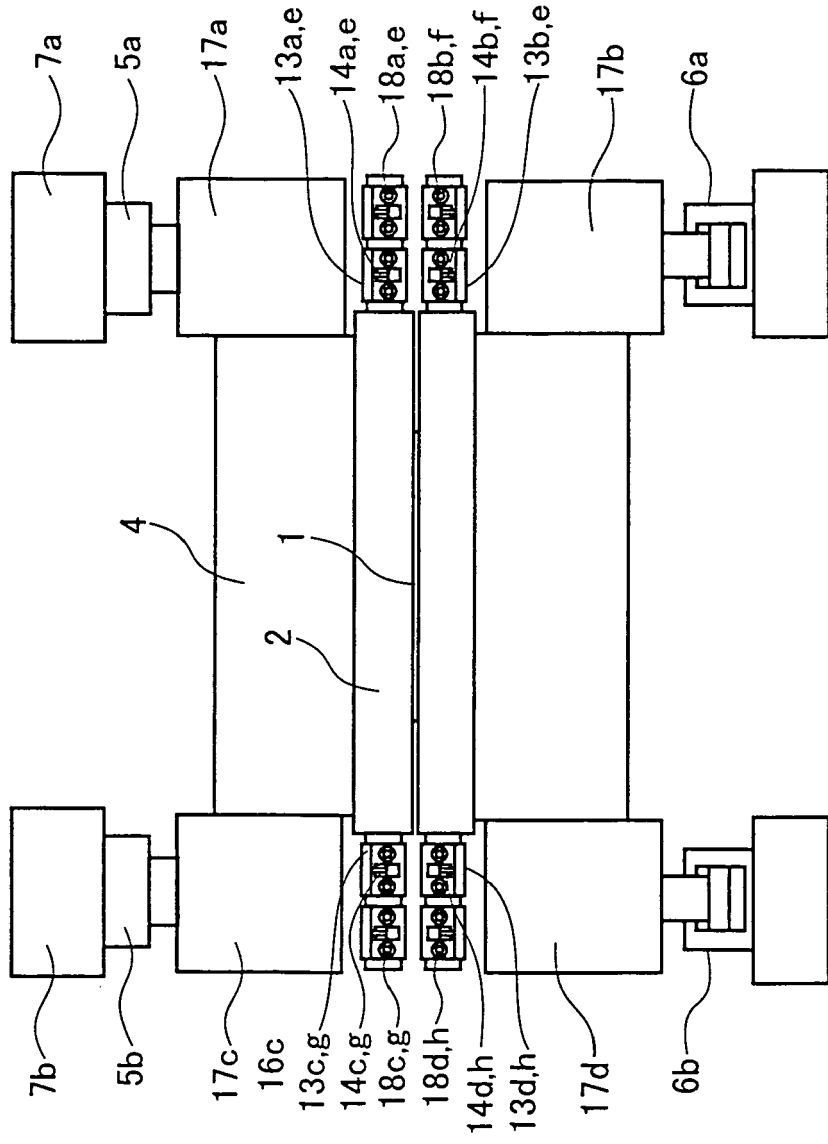


Fig. 16


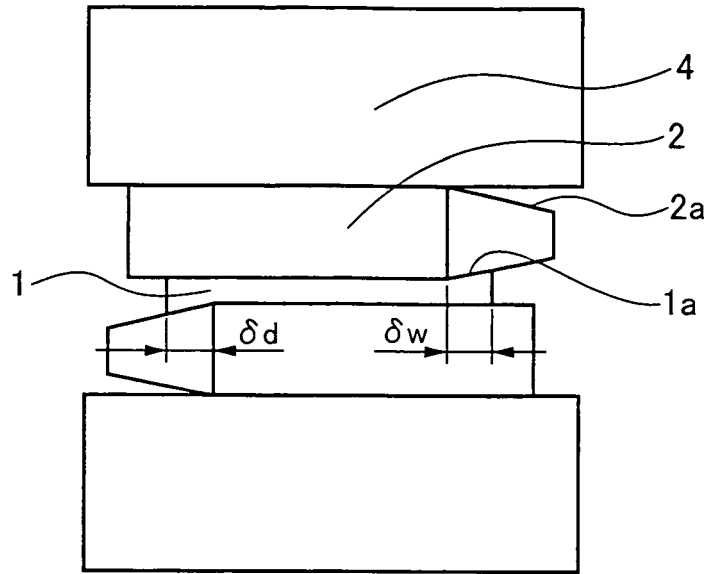


Fig. 17



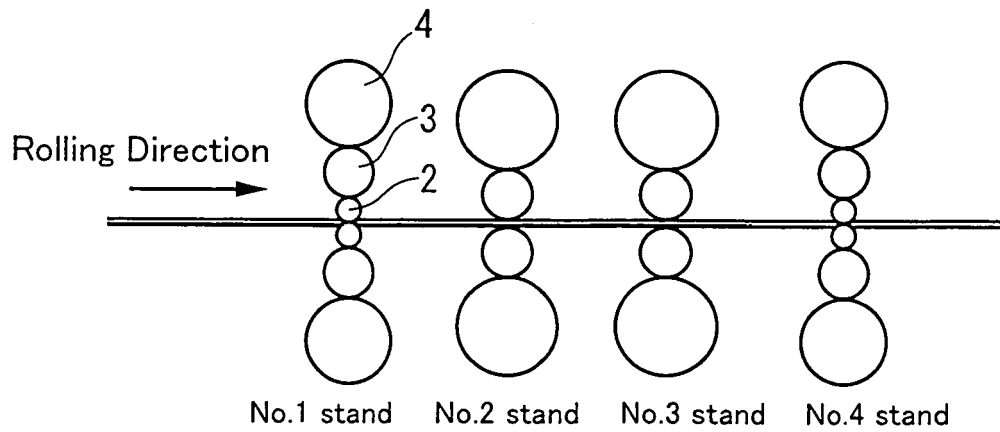

EUROPEAN SEARCH REPORT

Application Number  
EP 10 00 7223

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	DE 103 56 591 A1 (FIGGE DIETER [DE]) 7 July 2005 (2005-07-07) * claim 1; figures 1a,1b,2a,2b,3a,3b,4 *	1-6	INV. B21B31/02
X,D	JP 2008 126295 A (MITSUBISHI HITACHI METALS) 5 June 2008 (2008-06-05) * abstract *	1-6	
A	EP 0 534 602 A2 (HITACHI LTD [JP]; HITACHI NUCLEAR ENG [JP]) 31 March 1993 (1993-03-31) * claim 1; figures 1-3 *	1	
A	JP 2000 343111 A (KOYO SEIKO CO; KAWASAKI STEEL CO) 12 December 2000 (2000-12-12) * abstract *	1	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
			B21B
Place of search		Date of completion of the search	Examiner
Munich		9 November 2010	Forciniti, Marco
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... & : member of the same patent family, corresponding document	

3  
EPO FORM 1503 03/82 (P04/C01)



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 10 00 7223

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09-11-2010

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 10356591	A1	07-07-2005	NONE	
-----				
JP 2008126295	A	05-06-2008	NONE	
-----				
EP 0534602	A2	31-03-1993	DE 69227431 D1	03-12-1998
			DE 69227431 T2	01-07-1999
			JP 2972401 B2	08-11-1999
			JP 5050109 A	02-03-1993
			US 5406817 A	18-04-1995
-----				
JP 2000343111	A	12-12-2000	JP 3690640 B2	31-08-2005
-----				

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- JP 5050109 A [0005]
- JP 2008126295 A [0005]
- JP 60238021 A [0005]

**Non-patent literature cited in the description**

- *Industrial Machinery*, May 1991, 56-60 [0006]