(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 2 284 829 A1

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
16.02.2011 Bulletin 2011/07

(21) Application number: **10015233.9**

(22) Date of filing: **13.08.2007**

(51) Int Cl.:
G09G 3/36 (2006.01)
G02F 1/1343 (2006.01)
G02F 1/133 (2006.01)
G09G 3/20 (2006.01)

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE SI SK TR
Designated Extension States:
AL BA HR MK RS

(30) Priority: **24.08.2006 JP 2006228476**

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
07792475.1 / 2 056 286

(71) Applicant: **Sharp Kabushiki Kaisha**
Osaka-shi, Osaka 545-8522 (JP)

(72) Inventors:
- **Shimoshikiryoh, Fumikazu**
Matsusaka-shi
Mie 515-0043 (JP)
- **Kitayama, Masae**
Tsu-shi
Mie 514-0063 (JP)
- **Irie, Kentaro**
Tsu-shi
Mie 514-0112 (JP)

(74) Representative: **Müller - Hoffmann & Partner Patentanwälte**
Innere Wiener Strasse 17
81667 München (DE)

Remarks:
This application was filed on 02-12-2010 as a divisional application to the application mentioned under INID code 62.

(54) Liquid crystal display device

(57) A liquid crystal display device according to the present invention includes a plurality of pixels, each including first and second subpixels. When a predetermined grayscale tone is displayed continuously through four or more consecutive even number of vertical scanning periods, the first and second subpixels have different luminances in at least two of the even number of vertical scanning periods, first polarity periods that are included in the vertical scanning periods and that maintain a first polarity are as long as second polarity periods that are also included in the vertical scanning periods and that maintain a second polarity for each of the first and second subpixels, and in each of the first and second polarity periods, the difference between the average of effective voltages applied to the liquid crystal layer of the first subpixel and that of effective voltages applied to the liquid crystal layer of the second subpixel is substantially equal to zero.

FIG. 6

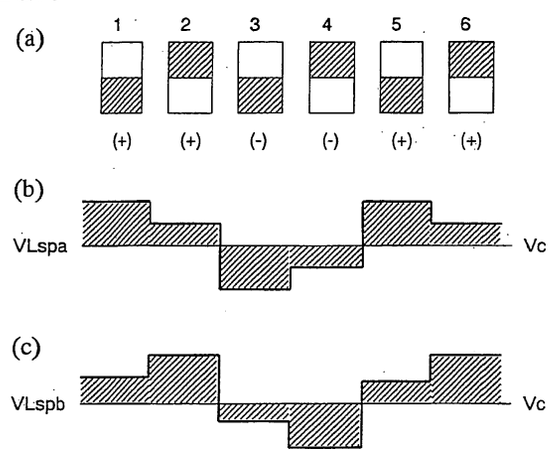

EP 2 284 829 A1

Description

TECHNICAL FIELD

[0001] The present invention relates to a liquid crystal display device and more particularly relates to a liquid crystal display device that can reduce the viewing angle dependence of the γ characteristic thereof.

BACKGROUND ART

[0002] A liquid crystal display (LCD) is a flat-panel display that has a number of advantageous features including high resolution, drastically reduced thickness and weight, and low power dissipation. The LCD market has been rapidly expanding recently as a result of tremendous improvements in its display performance, significant increases in its productivity, and a noticeable rise in its cost effectiveness over competing technologies.

[0003] A twisted-nematic (TN) mode liquid crystal display device, which used to be used extensively in the past, is subjected to an alignment treatment such that the major axes of its liquid crystal molecules, exhibiting positive dielectric anisotropy, are substantially parallel to the respective principal surfaces of upper and lower substrates and are twisted by about 90 degrees in the thickness direction of the liquid crystal layer between the upper and lower substrates. When a voltage is applied to the liquid crystal layer, the liquid crystal molecules change their orientation directions into a direction that is parallel to the electric field applied. As a result, the twisted orientation disappears. The TN mode liquid crystal display device utilizes variation in the optical rotatory characteristic of its liquid crystal layer due to the change of orientation directions of the liquid crystal molecules in response to the voltage applied, thereby controlling the quantity of light transmitted.

[0004] The TN mode liquid crystal display device allows a broad enough manufacturing margin and achieves high productivity. However, the display performance (e.g., the viewing angle characteristic, in particular) thereof is not fully satisfactory. More specifically, when an image on the screen of the TN mode liquid crystal display device is viewed obliquely, the contrast ratio of the image decreases significantly. In that case, even an image, of which the grayscales ranging from black to white are clearly observable when the image is viewed straightforward, loses much of the difference in luminance between those grayscales when viewed obliquely. Furthermore, the grayscale characteristic of the image being displayed thereon may sometimes invert itself. That is to say, a portion of an image, which looks darker when viewed straight, may look brighter when viewed obliquely. This is a so-called "grayscale inversion phenomenon".

[0005] To improve the viewing angle characteristic of such a TN mode liquid crystal display device, an inplane switching (IPS) mode liquid crystal display device, a multi-domain vertical aligned (MVA) mode liquid crystal display device, an axisymmetric aligned (ASM) mode liquid crystal display device, and other types of liquid crystal display devices were developed recently. Liquid crystal displays employing any of the novel modes described above (wide viewing angle modes) solve the concrete problems with viewing angle characteristics, specifically, the problems that the display contrast ratio decreases considerably or the grayscales invert when the display surface of the display is viewed obliquely.

[0006] Although the display qualities of LCDs have been further improved nowadays, a viewing angle characteristic problem in a different phase has arisen just recently. Specifically, the r characteristic of LCDs would vary with the viewing angle. That is to say, the γ characteristic when an image on the screen is viewed straight is different from the characteristic when it is viewed obliquely. As used herein, the "γ characteristic" refers to the grayscale dependence of display luminance. That is why if the γ characteristic when the image is viewed straight is different from the characteristic when the same image is viewed obliquely, then it means that the grayscale display state changes according to the viewing direction. This is a serious problem particularly when a still picture such as a photo is presented or when a TV program is displayed.

[0007] According to a known method, such viewing angle dependence of the γ characteristic can be reduced by providing two or more subpixels for each single pixel and by making the luminance of one of the two subpixels different from that of the other when a moderate luminance is displayed (see Patent Documents Nos. 1 and 2, for example).

[0008] Specifically, the liquid crystal display device disclosed in Patent Document No. 1 applies a different effective voltage to the liquid crystal layer of a second subpixel from the one applied to the liquid crystal layer of a first subpixel when a moderate luminance is displayed, thereby making the luminances of the first and second subpixels different from each other and reducing the viewing angle dependence of the γ characteristic. The transmittance of the liquid crystal layer changes with the absolute value of the effective voltage irrespective of the direction of the electric field applied to the liquid crystal layer (i.e., the direction of the electric line of force). Thus, the liquid crystal display device disclosed in Patent Document No. 1 inverts the direction of the electric field applied to the liquid crystal layer alternately every vertical scanning period, thereby flattening the uneven distribution of DC levels and overcoming residual image and other reliability-related problems.

[0009] Meanwhile, the liquid crystal display device disclosed in Patent Document No. 2 inverts the brightness levels of first and second subpixels every vertical scanning period (e.g., makes the luminance of the first subpixel higher than that of the second subpixel in a first vertical scanning period but makes the luminance of the second subpixel higher

than that of the first subpixel in a second vertical scanning period). In addition, the device also inverts the direction of the electric field applied to the liquid crystal layer every vertical scanning period, too. If one of multiple subpixels were always bright, then the image on the screen would look non-smooth. However, the liquid crystal display device disclosed in Patent Document No. 2 minimizes such non-smoothness of the image on the screen by inverting the brightness levels of the first and second subpixels one vertical scanning period after another.

[0010] It should be noted that such a display or driving method that reduces the viewing angle dependence of the γ characteristic by making the luminances of multiple subpixels different from each other will be referred to herein as a "multi-pixel display", a "multi-pixel drive", an "area grayscale display" or an "area grayscale drive".

Patent Document No. 1: Japanese Patent Application Laid-Open Publication No. 2004-62146
Patent Document No. 2: Japanese Patent Application Laid-Open Publication No. 2003-295160 (corresponding to United States Patent No. 6,958,791)

DISCLOSURE OF INVENTION

PROBLEMS TO BE SOLVED BY THE INVENTION

[0011] In the liquid crystal display device disclosed in Patent Document No. 1, as the luminance of the first subpixel is always higher than that of the second subpixel when a moderate luminance is displayed, the difference in brightness level between those subpixels may be quite sensible and the image presented may sometimes look non-smooth.

[0012] On the other hand, in the liquid crystal display device disclosed in Patent Document No. 2, as the direction of the electric field applied to the liquid crystal layer and the brightness levels of the subpixels are inverted every vertical scanning period, the direction of the electric field applied to the liquid crystal layer is always the same when one of the two subpixels is brighter than the other subpixel.

[0013] For example, in the liquid crystal display device disclosed in Patent Document No. 2, if the absolute value of the effective voltage applied to the first subpixel is greater than that of the effective voltage applied to the second subpixel to make the first subpixel look brighter than the second one in a vertical scanning period, the electric field applied to the liquid crystal layer is directed from a subpixel electrode toward a counter electrode. The electric field with such a direction is supposed to have a first polarity. In the next vertical scanning period, as the absolute value of the effective voltage applied to the second subpixel becomes greater than that of the effective voltage applied to the first subpixel to make the second subpixel look brighter than the first one, the electric field applied to the liquid crystal layer is directed from the counter electrode toward the subpixel electrode. The electric field with such a direction is supposed to have a second polarity. In the next vertical scanning period, as the absolute value of the effective voltage applied to the first subpixel becomes greater than that of the effective voltage applied to the second subpixel to make the first subpixel look brighter than the second subpixel, the electric field has the first polarity. And in the next vertical scanning period, as the absolute value of the effective voltage applied to the second subpixel becomes greater than that of the effective voltage applied to the first subpixel to make the second subpixel look brighter than the first one, the electric field has the second polarity.

[0014] In this manner, in the liquid crystal display device disclosed in Patent Document No. 2, the electric field always has the first polarity when the effective voltage applied to the first subpixel has the greater absolute value and always has the second polarity when the effective voltage applied to the second subpixel has the greater absolute value. That is why the average effective voltages applied to the first and second subpixels have the first and second polarities, respectively.

[0015] In a normal liquid crystal display device, if the same image continues to be presented for a long time with the average of the voltages applied to a pixel kept unequal to zero (i.e., with a DC voltage component left in the voltage applied to the pixel), then that image that has been presented for a long time will still remain on the screen even when the images on the screen are changed after that. That is to say, a so-called "residual image" phenomenon will occur. To avoid such a residual image phenomenon, a normal liquid crystal display device performs an AC drive on (i.e., applies voltages with two different polarities but with the same absolute value to) pixels, thereby making the average of the voltages applied to the liquid crystal layer equal to zero. Furthermore, if the average of the voltages applied does not become equal to zero even by the AC drive, then the normal liquid crystal display device further regulates the counter voltage, thereby setting the average voltage equal to zero.

[0016] In the liquid crystal display device disclosed in Patent Document No. 2, however, the respective effective voltages applied to the first and second subpixels have mutually different averages. That is why even if the counter voltage is regulated, only the average voltage applied to one of the two subpixels can be made equal to zero and the average voltage applied to the other subpixel cannot be zero. In that case, the residual image phenomenon will occur in the subpixel with the non-zero average voltage. As a result, the residual image phenomenon cannot be eliminated from the overall display device. Consequently, in the liquid crystal display device disclosed in Patent Document No. 2, not both of the average voltages applied to the first and second subpixels can be equal to zero, and therefore, the

residual image and other reliability-related problems should arise.

[0017] In order to overcome the problems described above, the present invention has an object of providing a liquid crystal display device that can resolve those reliability-related problems such as non-smoothness of the image on the screen and the residual image phenomenon.

MEANS FOR SOLVING THE PROBLEMS

[0018] A liquid crystal display device according to the present invention includes a plurality of pixels, each including a first subpixel and a second subpixel. Each of the first and second subpixels includes: a counter electrode; a subpixel electrode; and a liquid crystal layer interposed between the counter electrode and the subpixel electrode. The subpixel electrodes of the first and second subpixels are provided separately from each other as first and second subpixel electrodes, respectively, while the first and second subpixels share the same counter electrode with each other. When a predetermined grayscale tone is displayed continuously through four or more consecutive even number of vertical scanning periods, the first and second subpixels have mutually different luminances in at least two of the even number of vertical scanning periods, first polarity periods that are included in the even number of vertical scanning periods and that maintain a first polarity are as long as second polarity periods that are also included in the even number of vertical scanning periods and that maintain a second polarity for each of the first and second subpixels, and in each of the first and second polarity periods, the difference between the average of effective voltages applied to the liquid crystal layer of the first subpixel and that of effective voltages applied to the liquid crystal layer of the second subpixel is substantially equal to zero.

[0019] In one preferred embodiment, if the effective voltages applied to the respective liquid crystal layers of the first and second subpixels of each said pixel are represented by VLspa and VLspb, respectively, then two of the four consecutive vertical scanning periods are the first polarity periods and the other two vertical scanning periods are the second polarity periods. In at least one of the first polarity periods and the second polarity periods, one of the two vertical scanning periods thereof satisfies | VLspa | > | VLspb | and the other vertical scanning period satisfies | VLspa | < | VLspb |.

[0020] In another preferred embodiment, if the effective voltages applied to the respective liquid crystal layers of the first and second subpixels of each said pixel are represented by VLspa and VLspb, respectively, then two of the four consecutive vertical scanning periods are the first polarity periods and the other two vertical scanning periods are the second polarity periods. In at least one of the first polarity periods and the second polarity periods, the | VLspa | and | VLspb | values of one of the two vertical scanning periods thereof are equal to those of the other vertical scanning period.

[0021] In this particular preferred embodiment, of the four vertical scanning periods, the number of vertical scanning periods that satisfy | VLspa | > | VLspb | is equal to that of vertical scanning periods that satisfy | VLspb | < | VLspb |.

[0022] In still another preferred embodiment, the plurality of the pixels are arranged in column and row directions so as to form a matrix pattern, and in each of the plurality of the pixels, the first and second subpixels are arranged in the column direction.

[0023] In yet another preferred embodiment, in each of the plurality of the pixels, voltages applied to the first and second subpixel electrodes change as voltages on their associated storage capacitor lines vary.

[0024] In this particular preferred embodiment, in each of the plurality of the pixels, a voltage on a storage capacitor line associated with the first subpixel electrode and a voltage on a storage capacitor line associated with the second subpixel electrode change mutually differently.

[0025] In yet another preferred embodiment, a voltage applied to the second subpixel electrode of a particular one of the plurality of the pixels and a voltage applied to the first subpixel electrode of another pixel that is adjacent to the particular pixel in the column direction change as the voltage on their common storage capacitor line varies.

[0026] In an alternative preferred embodiment, a voltage applied to the second subpixel electrode of a particular one of the plurality of the pixels and a voltage applied to the first subpixel electrode of another pixel that is adjacent to the particular pixel in the column direction change as voltages on their associated storage capacitor lines vary.

[0027] In yet another preferred embodiment, in each of the plurality of the pixels, the first and second subpixel electrodes are connected to the same signal line by way of their associated switching element.

[0028] In yet another preferred embodiment, in each of the plurality of the pixels, the first and second subpixel electrodes are respectively connected to first and second signal lines by way of first and second switching elements, respectively.

[0029] In yet another preferred embodiment, in each of the first and second polarity periods, one of the two vertical scanning periods satisfies | VLspa | > | VLspb | and the other vertical scanning period satisfies | VLspb | < | VLspb |.

[0030] In yet another preferred embodiment, in each of the plurality of the pixels, | VLspa | and | VLspb | switch their magnitudes every vertical scanning period and the polarities of the first and second subpixels are inverted every other vertical scanning period.

[0031] In yet another preferred embodiment, the frame frequency is 60 Hz.

[0032] In yet another preferred embodiment, in each of the plurality of the pixels, | VLspa | and | VLspb | switch their magnitudes every other vertical scanning period and the polarities of the first and second subpixels are inverted every

vertical scanning period.

[0033] In yet another preferred embodiment, the frame frequency is 120 Hz.

[0034] In yet another preferred embodiment, in each of the plurality of the pixels, | VLspb | and | VLspb | switch their magnitudes every other vertical scanning period and the polarities of the first and second subpixels are inverted every other vertical scanning period. | VLspa | and | VLspb | switch their magnitudes non-synchronously with the inversion of the polarities of the first and second subpixels.

[0035] In yet another preferred embodiment, in either the first polarity periods or the second polarity periods, one of the two vertical scanning periods satisfies | VLspa | > | VLspb | and the other vertical scanning period satisfies | VLspa | < | VLspb |. In the other polarity periods, VLspa is equal to VLspb in each of the two vertical scanning periods.

[0036] In this particular preferred embodiment, voltages on storage capacitor lines associated with the first and second subpixel electrodes change between a first level, a second level that is higher than the first level, and a third level that is higher than the second level.

[0037] In yet another preferred embodiment, the first and second subpixel electrodes have the same display area.

EFFECTS OF THE INVENTION

[0038] The present invention provides a liquid crystal display device that can minimize the occurrence of reliability problems such as non-smoothness of image displayed or residual images.

BRIEF DESCRIPTION OF DRAWINGS

[0039]

FIG. **1** is a schematic representation illustrating the structure of a liquid crystal display device as a first preferred embodiment of the present invention.

FIG. **2** is a schematic block diagram illustrating a liquid crystal panel for the liquid crystal display device of the first preferred embodiment.

FIG. **3(a)** is a schematic plan view illustrating a single pixel in the liquid crystal display device of the first preferred embodiment and FIG. **3(b)** is a schematic cross-sectional view illustrating a single subpixel thereof.

FIG. **4** schematically shows how first and second subpixels change their brightness levels, polarities and effective voltages in a conventional liquid crystal display device, wherein portion **(a)** schematically shows how the first and second subpixels change their brightness levels and polarities and portions **(b)** and **(c)** schematically show how the effective voltages applied to the respective liquid crystal layers of the first and second subpixels change.

FIG. **5** schematically shows how first and second subpixels change their brightness levels, polarities and effective voltages in another conventional liquid crystal display device, wherein portion **(a)** schematically shows how the first and second subpixels change their brightness levels and polarities and portions **(b)** and **(c)** schematically show how the effective voltages applied to the respective liquid crystal layers of the first and second subpixels change.

FIG. **6** schematically shows how first and second subpixels change their brightness levels, polarities and effective voltages in the liquid crystal display device as the first preferred embodiment of the present invention, wherein portion **(a)** schematically shows how the first and second subpixels change their brightness levels and polarities and portions **(b)** and **(c)** schematically show how the effective voltages applied to the respective liquid crystal layers of the first and second subpixels change.

FIG. **7** is a schematic representation illustrating an exemplary pixel structure for the liquid crystal display device of the first preferred embodiment.

FIG. **8** is an equivalent circuit diagram of a single pixel in the liquid crystal display device of the first preferred embodiment.

FIG. **9** shows exemplary waveforms of voltages that are applied to drive the liquid crystal display device of the first preferred embodiment.

FIG. **10** shows a relation between the effective voltages applied to the respective liquid crystal layers of subpixels in the liquid crystal display device of the first preferred embodiment.

FIGS. **11(a)** and **11(b)** show the γ characteristics of the liquid crystal display device of the first preferred embodiment at a right 60 degree viewing angle and at an upper right 60 degree viewing angle, respectively.

FIG. **12** shows exemplary waveforms of various voltages to be applied over a number of vertical scanning periods to the liquid crystal display device of the first preferred embodiment.

FIG. **13** shows an exemplary equivalent circuit diagram of the liquid crystal display device of the first preferred embodiment.

FIG. **14** is a schematic representation illustrating the arrangement, brightness levels and polarities of multiple subpixels in the liquid crystal display device of the first preferred embodiment.

FIG. **15** shows exemplary waveforms of various voltages to be applied to the liquid crystal display device of the first preferred embodiment.

FIG. **16** shows exemplary waveforms of various voltages to be applied over a number of vertical scanning periods to the liquid crystal display device of the first preferred embodiment.

FIG. **17** is a schematic representation illustrating the brightness levels and polarities of respective subpixels and the first change of storage capacitor voltages in respective vertical scanning periods of each subpixel in the liquid crystal display device of the first preferred embodiment.

Portions **(a)** and **(b)** of FIG. **18** show exemplary waveforms of various voltages to be applied over a number of vertical scanning periods to the liquid crystal display device of the first preferred embodiment.

Portions **(a)** to **(c)** of FIG. **19** show exemplary waveforms of various voltages to be applied over a number of vertical scanning periods to the liquid crystal display device of the first preferred embodiment.

FIG. **20** shows exemplary waveforms of various voltages to be applied over a number of vertical scanning periods to the liquid crystal display device of the first preferred embodiment.

FIG. **21** shows exemplary waveforms of various voltages to be applied over a number of vertical scanning periods to the liquid crystal display device of the first preferred embodiment.

FIG. **22** is a schematic representation illustrating the brightness levels and polarities of respective subpixels and the first change of storage capacitor voltages in respective vertical scanning periods of each subpixel in the liquid crystal display device of the first preferred embodiment.

FIG. **23** shows an exemplary equivalent circuit diagram of the liquid crystal display device of the first preferred embodiment.

FIG. **24** shows exemplary waveforms of various voltages to be applied to the liquid crystal display device of the first preferred embodiment.

FIG. **25** is a schematic representation illustrating an exemplary pixel structure for the liquid crystal display device of the first preferred embodiment.

FIG. **26** schematically shows how first and second subpixels change their brightness levels, polarities and effective voltages in a liquid crystal display device as a second preferred embodiment of the present invention, wherein portion **(a)** schematically shows how the first and second subpixels change their brightness levels and polarities and portions **(b)** and **(c)** schematically show how the effective voltages applied to the respective liquid crystal layers of the first and second subpixels change.

FIG. **27** is a schematic representation illustrating the brightness levels and polarities of respective subpixels and the first change of storage capacitor voltages in respective vertical scanning periods of each subpixel in the liquid crystal display device of the second preferred embodiment.

FIG. **28** schematically shows how first and second subpixels change their brightness levels, polarities and effective voltages in a liquid crystal display device as a third preferred embodiment of the present invention, wherein portion **(a)** schematically shows how the first and second subpixels change their brightness levels and polarities and portions **(b)** and **(c)** schematically show how the effective voltages applied to the respective liquid crystal layers of the first and second subpixels change.

FIG. **29** shows exemplary waveforms of various voltages to be applied to the liquid crystal display device of the third preferred embodiment.

FIG. **30** is a schematic representation illustrating the brightness levels and polarities of respective subpixels and the first change of storage capacitor voltages in respective vertical scanning periods of each subpixel in the liquid crystal display device of the third preferred embodiment.

FIG. **31** schematically shows how first and second subpixels change their brightness levels, polarities and effective voltages in a liquid crystal display device as a fourth preferred embodiment of the present invention, wherein portion **(a)** schematically shows how the first and second subpixels change their brightness levels and polarities and portions **(b)** and **(c)** schematically show how the effective voltages applied to the respective liquid crystal layers of the first and second subpixels change.

FIG. **32** is a schematic representation illustrating the brightness levels and polarities of respective subpixels and the first change of storage capacitor voltages in respective vertical scanning periods of each subpixel in the liquid crystal display device of the fourth preferred embodiment.

FIG. **33** schematically shows how first and second subpixels change their brightness levels, polarities and effective voltages in a liquid crystal display device as a fifth preferred embodiment of the present invention, wherein portion **(a)** schematically shows how the first and second subpixels change their brightness levels and polarities and portions **(b)** and **(c)** schematically show how the effective voltages applied to the respective liquid crystal layers of the first and second subpixels change.

FIG. **34** shows exemplary waveforms of various voltages to be applied to the liquid crystal display device of the fifth preferred embodiment.

FIG. **35** is a schematic representation illustrating the brightness levels and polarities of respective subpixels and

the first change of storage capacitor voltages in respective vertical scanning periods of each subpixel in the liquid crystal display device of the fifth preferred embodiment.

FIG. **36** schematically shows how first and second subpixels change their brightness levels, polarities and effective voltages in a liquid crystal display device as a sixth preferred embodiment of the present invention, wherein portion **(a)** schematically shows how the first and second subpixels change their brightness levels and polarities and portions **(b)** and **(c)** schematically show how the effective voltages applied to the respective liquid crystal layers of the first and second subpixels change.

FIG. **37** is a schematic representation illustrating the brightness levels and polarities of respective subpixels and the first change of storage capacitor voltages in respective vertical scanning periods of each subpixel in the liquid crystal display device of the sixth preferred embodiment.

FIG. **38** schematically shows how first and second subpixels change their brightness levels, polarities and effective voltages in a liquid crystal display device as a seventh preferred embodiment of the present invention, wherein portion **(a)** schematically shows how the first and second subpixels change their brightness levels and polarities and portions **(b)** and **(c)** schematically show how the effective voltages applied to the respective liquid crystal layers of the first and second subpixels change.

FIG. **39A** is a schematic representation illustrating the brightness levels and polarities of respective subpixels and the first change of storage capacitor voltages in respective vertical scanning periods of each subpixel in one frame for the liquid crystal display device of the seventh preferred embodiment.

FIG. **39B** is a schematic representation illustrating the brightness levels and polarities of respective subpixels and the first change of storage capacitor voltages in respective vertical scanning periods of each subpixel in the next frame for the liquid crystal display device of the seventh preferred embodiment.

FIG. **40** shows exemplary waveforms of various voltages to be applied to the liquid crystal display device of the seventh preferred embodiment.

DESCRIPTION OF REFERENCE NUMERALS

[0040]

10	pixel
10a, 10b	subpixel
13	liquid crystal layer
17	counter electrode
18a, 18b	subpixel electrode
100	liquid crystal display device
100A	liquid crystal panel

BEST MODE FOR CARRYING OUT THE INVENTION

EMBODIMENT 1

[0041] Hereinafter, a first preferred embodiment of a liquid crystal display device according to the present invention will be described with reference to the accompanying drawings.

[0042] First of all, the configuration of a liquid crystal display device **100** as the first preferred embodiment of the present invention will be outlined with reference to FIGS. **1** to **3.** FIG. **1** illustrates the liquid crystal display device **100** of this preferred embodiment. The liquid crystal panel **100A** of the liquid crystal display device **100** includes a display section **110** in which a number of pixels are arranged in columns and rows to define a matrix pattern and a driver **120** for driving the display section **110** as shown in FIG. **2.** In the display section **110,** each pixel includes a liquid crystal layer and a plurality of electrodes for applying a voltage to the liquid crystal layer. The driver **120** generates a drive signal based on an input video signal.

[0043] FIG. **3(a)** is a schematic plan view illustrating the electrode structure of a single pixel, while FIG. **3(b)** is a schematic cross-sectional view of a single subpixel as viewed on the plane **3B-3B'** shown in FIG. **3(a).** As shown in FIG. **3(a),** each pixel **10** includes first and second subpixels **10a** and **10b** that are arranged in the column direction. As shown in FIG. **3(b),** the first subpixel **10a** includes a liquid crystal layer **13,** a first subpixel electrode **18a,** and a counter electrode **17** that faces the first subpixel electrode **18a** with the liquid crystal layer **13** interposed between them. Although FIG. **3(b)** illustrates the configuration of only the first subpixel **10a,** the second subpixel **10b** has the same configuration as the one illustrated in FIG. **3(b).** The counter electrode **17** is typically provided as a single common electrode for every pixel **10.** In the liquid crystal display device **100** of this preferred embodiment, mutually different voltages are applicable to the first and second subpixel electrodes **18a** and **18b,** thus making the effective voltage applied to the liquid crystal

layer of the first subpixel **10a** different from the one applied to that of the second subpixel **10b.**

[0044] Next, it will be described with reference to FIGS. **4** through **6** and in comparison with the liquid crystal display devices disclosed in Patent Documents Nos. 1 and 2 how the brightness levels of the subpixels and the directions of the electric field (or electric line of force) change in the liquid crystal display device **100** of this preferred embodiment. In the following description, each pixel is supposed to display a predetermined grayscale tone for several frames on end for the sake of simplicity.

[0045] First of all, it will be described with reference to FIG. **4** how the brightness levels of the subpixels and the directions of the electric field change and how the effective voltages applied to the respective liquid crystal layers of the first and second subpixels change in the liquid crystal display device disclosed in Patent Document No. 1. In portion **(a)** of FIG. **4,** the reference numerals **1** through **6** denote respective vertical scanning periods. As used herein, one "vertical scanning period" is defined to be an interval between a point in time when one scan line is selected to write a display signal voltage and a point in time when that scan line is selected to write the next display signal voltage. Also, each of one frame period of a non-interlaced drive input video signal and one field period of an interlaced drive input video signal will be referred to herein as "one vertical scanning period of the input video signal". Normally, one vertical scanning period of a liquid crystal display device corresponds to one vertical scanning period of the input video signal. In the example to be described below, one vertical scanning period of the liquid crystal panel is supposed to correspond to that of the input video signal for the sake of simplicity. However, the present invention is in no way limited to that specific preferred embodiment. The present invention is also applicable to a so-called "2x drive" with a vertical scanning frequency of 120 Hz in which two vertical scanning periods of the liquid crystal panel (that lasts $2\times1/120$ sec, for example) are allocated to one vertical scanning period of the input video signal (that lasts 1/60 sec, for example). Also, in this example, the lengths of the respective vertical scanning periods are supposed to be equal to each other. Furthermore, in each vertical scanning period, the interval between a point in time when one scan line is selected and a point in time when the next scan line is selected will be referred to herein as one horizontal scanning period (1H).

[0046] In portion **(a)** of FIG. **4,** the upper and lower rectangles represent the first and second subpixels, respectively. Of these two subpixels, the one with the higher luminance is plain, while the other with the lower luminance is shadowed. Also, in portion **(a)** of FIG. **4,** "+" and "-" represent the polarities of the display signal voltages when the associated scan line is selected with respect to the common voltage applied to the counter electrode. In this case, "+" indicates that the potential at the first and second subpixel electrodes is higher than the one at the counter electrode and that the electric field is directed from the subpixel electrodes toward the counter electrode. On the other hand, "-" indicates that the potential at the first and second subpixel electrodes is lower than the one at the counter electrode and that the electric field is directed from the counter electrode toward the subpixel electrodes. In the following description, "+" and "-" will be referred to herein as a "first polarity" and a "second polarity", respectively, and will also be collectively referred to herein as "polarities". Also, a period with the "+" polarity and a period with the "-" polarity will be referred to herein as a "first polarity period" and a "second polarity period", respectively.

[0047] As shown in portion **(a)** of.FIG. **4,** the first, third and fifth periods are first polarity periods, the second, fourth and sixth periods are second polarity periods, and the polarity inverts every vertical scanning period in the liquid crystal display device disclosed in Patent Document **No. 1.** As also shown in portion **(a)** of FIG. **4,** in any of the first through sixth periods, the first subpixel has a higher luminance than the second subpixel in the device of Patent Document No. 1.

[0048] Portions **(b)** and **(c)** of FIG. **4** show the effective voltages **VLspa** and **VLspb** that are applied to the respective liquid crystal layers of the first and second subpixels in the respective vertical scanning periods in the liquid crystal display device of Patent Document No. 1. The levels of these voltages are indicated by the bold lines. The effective voltages **VLspa** and **VLspb** applied to the respective liquid crystal layers of the first and second subpixels are the effective values of the differences between the voltages applied to the first and second subpixel electrodes and the voltage **Vc** applied to the counter electrode. In this example, the voltage **Vc** applied to the counter electrode is shown as being constant. Although not shown in portions **(b)** and **(c)** of FIG. **4,** the voltages applied to the respective liquid crystal layers of the first and second subpixels may also be changed within the same vertical scanning period by varying the voltage on the storage capacitor line as disclosed in Patent Document No. 1.

[0049] In the first period, the voltages applied to the first and second subpixel electrodes are higher than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the first subpixel is greater than that of the effective voltage applied to that of the second subpixel ($|VLspa| > |VLspb|$). For that reason, as shown in portion **(a)** of FIG. **4,** the first period is a first polarity period and the first subpixel is brighter than the second subpixel. However, on the transition from the first period into the second period, the effective voltages **VLspa** and **VLspb** applied to the respective liquid crystal layers of the first and second subpixels change. In the second period, the voltages applied to the first and second subpixel electrodes are lower than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the first subpixel is greater than that of the effective voltage applied to that of the second subpixel ($|VLspb| > |VLspb|$). For that reason, as shown in portion **(a)** of FIG. **4,** the second period is a second polarity period and the first subpixel is brighter than the second subpixel.

[0050] From the third period on, the same brightness levels and polarities of the first and second subpixels as those of the first and second periods just appear repeatedly. Consequently, in the liquid crystal display device disclosed in Patent Document No. 1, the luminance of the first subpixel is always higher than that of the second subpixel, the difference in brightness level between those subpixels is quite sensible, and the image on the screen looks non-smooth as can be seen from portion **(a)** of FIG. **4.**

[0051] Next, it will be described with reference to FIG. **5** how the brightness levels of the subpixels, the directions of the electric field, and the effective voltages applied to the respective liquid crystal layers of the first and second subpixel change in the liquid crystal display device disclosed in Patent Document No. 2.

[0052] As shown in portion **(a)** of FIG. **5,** in the liquid crystal display device disclosed in Patent Document No. 2, the first, third and fifth periods are also first polarity periods, the second, fourth and sixth periods are second polarity periods, and the polarity inverts every vertical scanning period. Meanwhile, in the liquid crystal display device of Patent Document No. 2, the luminance of the first subpixel is higher than that of the second subpixel in the first, third and fifth periods but the luminance of the second subpixel is higher than that of the first subpixel in the second, fourth and sixth periods.

[0053] Portions **(b)** and **(c)** of FIG. **5** show the effective voltages **VLspa** and **VLspb** that are applied to the respective liquid crystal layers of the first and second subpixels in the respective vertical scanning periods. The levels of these voltages are indicated by the bold lines. Although not shown in portions **(b)** and **(c)** of FIG. **5,** the voltages applied to the respective liquid crystal layers of the first and second subpixels may also be changed within the same vertical scanning period by varying the voltage on the storage capacitor line as disclosed in Patent Document No. 1.

[0054] In the first period, the voltages applied to the first and second subpixel electrodes are higher than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the first subpixel is greater than that of the effective voltage applied to that of the second subpixel (| VLspa | > | VLspb |). For that reason, as shown in portion **(a)** of FIG. **5,** the first period is a first polarity period and the first subpixel is brighter than the second subpixel. However, on the transition from the first period into the second period, the effective voltages **VLspa** and **VLspb** applied to the respective liquid crystal layers of the first and second subpixels change. In the second period, the voltages applied to the first and second subpixel electrodes are lower than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the second subpixel is greater than that of the effective voltage applied to that of the first subpixel (| VLspa | < | VLspb |). For that reason, as shown in portion **(a)** of FIG. **5,** the second period is a second polarity period and the second subpixel is brighter than the first subpixel.

[0055] From the third period on, the same brightness levels and polarities of the first and second subpixels as those of the first and second periods just appear repeatedly. In the liquid crystal display device disclosed in Patent Document No. 2, since not only the polarity but also the brightness levels of the subpixels are inverted every vertical scanning period, the first subpixel is sometimes brighter, but sometimes less bright, than the second subpixel unlike the liquid crystal display device disclosed in Patent Document No. 1. Consequently, the degree of non-smoothness on the screen can be reduced. In the liquid crystal display device disclosed in Patent Document No. 2, however, the period in which the first subpixel is brighter than the second subpixel is always the first polarity period and the period in which the second subpixel is brighter than the first subpixel is always the second polarity period. That is why as can be seen from portions **(b)** and **(c)** of FIGS. **5,** the average of the effective voltages **VLspa** applied to the liquid crystal layer of the first subpixel over multiple vertical scanning periods (e.g., the first through fourth periods) is higher than the voltage **Vc** applied to the counter electrode, and the average of the effective voltages **VLspb** applied to the liquid crystal layer of the second subpixel over multiple vertical scanning periods (e.g., the first through fourth periods) is lower than the voltage **Vc** applied to the counter electrode. Thus, in the liquid crystal display device disclosed in Patent Document No. 2, the uneven distribution of DC levels among the respective subpixels still remains to produce residual image and other reliability-related problems.

[0056] Next, it will be described with reference to FIG. **6** how the brightness levels of the subpixels, the directions of the electric field, and the effective voltages applied to the respective liquid crystal layers of the first and second subpixel change in the liquid crystal display device **100** of this preferred embodiment.

[0057] As shown in portion **(a)** of FIG. **6,** in the liquid crystal display device **100** of this preferred embodiment, the first, second, fifth and sixth periods are first polarity periods, while the third and fourth periods are second polarity periods. As described above, the first polarity period is a period in which the voltages applied to the first and second subpixel electrodes are higher than the one applied to the counter electrode, while the second polarity period is a period in which the voltages applied to the first and second subpixel electrodes are lower than the one applied to the counter electrode. Look at four consecutive vertical scanning periods, and it can be seen that two out of the four periods are first polarity periods and the other two are second polarity periods. For example, in the first through fourth periods shown in portion **(a)** of FIG. **6,** the first and second periods are first polarity periods and the third and fourth periods are second polarity periods.

[0058] Portions **(b)** and **(c)** of FIG. **6** show the effective voltages **VLspa** and **VLspb** that are applied to the respective liquid crystal layers of the first and second subpixels in the respective vertical scanning periods. The levels of these

voltages are indicated by the bold lines. In this preferred embodiment, the voltages applied to the respective liquid crystal layers of the first and second subpixels may also be changed within the same vertical scanning period by varying the voltage on the storage capacitor line just as disclosed in Patent Documents Nos. 1 and 2. Also, since the voltage **Vc** applied to the counter electrode is used as a reference voltage in portions **(b)** and **(c)** of FIG. **6,** the voltage **Vc** applied to the counter electrode is illustrated as being constant irrespective of time. However, the voltage **Vc** applied to the counter electrode may also vary with time.

[0059] In the first period, the voltages applied to the first and second subpixel electrodes are higher than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the first subpixel is greater than that of the effective voltage applied to that of the second subpixel (| VLspb | > | VLspb |). For that reason, as shown in portion **(a)** of FIG. **6,** the first period is a first polarity period and the first subpixel is brighter than the second subpixel.

[0060] However, on the transition from the first period into the second period, the effective voltages **VLspa** and **VLspb** applied to the respective liquid crystal layers of the first and second subpixels change. In the second period, the voltages applied to the first and second subpixel electrodes are higher than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the second subpixel is greater than that of the effective voltage applied to that of the first subpixel (| VLspa | < | VLspb |). For that reason, as shown in portion **(a)** of FIG. **6,** the second period is a first polarity period and the second subpixel is brighter than the first subpixel.

[0061] In the third period, the voltages applied to the first and second subpixel electrodes are lower than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the first subpixel is greater than that of the effective voltage applied to that of the second subpixel (| VLspa | > | VLspb |). For that reason, as shown in portion **(a)** of FIG. **6,** the third period is a second polarity period and the first subpixel is brighter than the second subpixel.

[0062] In the fourth period, the voltages applied to the first and second subpixel electrodes are lower than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the second subpixel is greater than that of the effective voltage applied to that of the first subpixel (| VLspa | < | VLspb |). For that reason, as shown in portion **(a)** of FIG. **6,** the fourth period is a second polarity period and the second subpixel is brighter than the first subpixel. After that, from the fifth period on, the brightness levels and polarities of the first and second subpixels just repeat those of the first and second subpixels in the first through fourth periods.

[0063] As described above, in the liquid crystal display device **100** of this preferred embodiment, two out of four consecutive vertical scanning periods are first polarity periods, one of which satisfies | VLspa | > | VLspb | (e.g., the first period) and the other of which satisfies | VLspb | < | VLspb | (e.g., the second period). The two other ones of the four consecutive vertical scanning periods are second polarity periods, one of which satisfies | VLspa | > | VLspb | (e.g., the third period) and the other of which satisfies | VLspa | < | VLspb | (e.g., the fourth period). As can be seen from portion **(a)** of FIG. **6,** in the liquid crystal display device **100** of this preferred embodiment, the brightness levels of the subpixels are inverted every vertical scanning period and the polarity is inverted every other vertical scanning period. Specifically, the (brightness, polarity) combination of the first subpixel changes in the order of (B(right), +), (D(ark), +), (B, -) and (D, -), while the (brightness, polarity) combination of the second subpixel changes in the order of (D, +), (B, +), (D, -) and (B, -), where "B" indicates that the pixel is brighter than the other pixel and "D" indicates that the pixel is darker than the other. Since the effective voltages of the subpixels change in this manner, the difference between the average of the effective voltage applied to the liquid crystal layer of the first subpixel and that of the effective voltages applied to that of the second subpixel in each of the first and second polarity periods becomes substantially equal to zero.

[0064] Unlike the liquid crystal display device of Patent Document No. 1, the liquid crystal display device **100** of this preferred embodiment inverts the brightness levels of the subpixels every vertical scanning period, thus minimizing the degree of non-smoothness of the image on the screen. Also, in the liquid crystal display device **100** of this preferred embodiment, each pair of first and second polarity periods has a period that satisfies | VLspb | > | VLspb | and a period that satisfies | VLspa | < | VLspb | unlike the liquid crystal display device disclosed in Patent Document No. 2. Thus, as can be seen from portions **(b)** and **(c)** of FIG. **6,** the average of the effective voltages **VLspa** and that of the effective voltages **VLspb** over multiple vertical scanning periods (e.g., the first through fourth periods) can be both equal to zero. Furthermore, even if the averages of the effective voltages **VLspa** and **VLspb** do not become equal to zero, the averages of the effective voltages **VLspa** and **VLspb** can be both controlled to zero by adjusting the counter voltage because the average of the effective voltages **VLspa** is approximately equal to that of the effective voltages **VLspb.** By controlling the averages of the effective voltages to zero in this manner, the residual image and other reliability-related problems can be overcome. It should be noted that various configurations could be used to apply mutually different voltages to the respective liquid crystal layers of the first and second subpixels such that the relations described above are satisfied.

[0065] This preferred embodiment is preferably applied to a liquid crystal display device that uses a vertical alignment liquid crystal layer including a nematic liquid crystal material with negative dielectric anisotropy. Specifically, the liquid crystal layer of each subpixel preferably has four domains in which the liquid crystal molecules tilt in respective azimuth directions that are different from each other by approximately 90 degrees under a voltage applied (i.e., may operate in

the MVA mode). Alternatively, the liquid crystal layer of each subpixel may also have axisymmetric alignment at least when a voltage is applied thereto (i.e., may operate in the ASM mode).

[0066] Hereinafter, an MVA mode liquid crystal display device **100** according to this preferred embodiment will be described in further detail.

[0067] As shown in FIG. **1,** the liquid crystal display device **100** includes a liquid crystal panel **100A,** a pair of phase compensators (typically phase plates) **20a** and **20b** arranged on both sides of the liquid crystal panel **100A,** a pair of polarizers **30a** and **30b** arranged to sandwich these members between them, and a backlight **40.** The polarizers **30a** and **30b** are arranged as crossed Nicols such that their axes of transmission (which will also be referred to herein as "axes of polarization") cross each other at right angles. While no voltage is applied to the liquid crystal layer **13** of the liquid crystal panel **100A** (see FIG. **3(b)),** i.e., in a vertical alignment state, this device conducts black display. That is to say, this liquid crystal display device **100** is a normally black mode liquid crystal display device. The phase compensators **20a** and **20b** are provided to improve the viewing angle characteristic of the liquid crystal display device and may be designed as best ones by known technologies. Specifically, the phase compensators **20a** and **20b** may be optimized such that the difference in luminance between when the image is viewed obliquely and when the image is viewed straight in the black display mode (i.e., the difference in black luminance) is minimized in every azimuth direction.

[0068] As shown in FIG. **3(a),** a scan line **12** is arranged between the first and second subpixel electrodes **18a** and **18b.** Naturally, scan lines **12,** signal lines, TFTs (not shown in FIG. **3)** and circuits for driving them are arranged on the substrate **11a** to apply predetermined voltages to the first and second subpixel electrodes **18a** and **18b** at prescribed timings. On the other substrate **11b,** color filters and other members are arranged as needed.

[0069] Next, the structure of a single pixel in the MVA mode liquid crystal display device **100** will be described with reference to FIGS. **3(a)** and **3(b).** The basic configuration and operation of an MVA mode liquid crystal display device are disclosed in Japanese Patent Application Laid-Open Publication No. 11-242225.

[0070] As shown in FIG. **3(b),** the subpixel electrode **18a** on the glass substrate **11a** has a slit **18s,** and the subpixel electrode **18a** and the counter electrode **17** together generate an oblique electric field in the liquid crystal layer **13.** On the other hand, on the surface of the glass substrate **11b** with the counter electrode **17,** arranged are ribs **19** that protrude toward the liquid crystal layer **13,** which is made of a nematic liquid crystal material with negative dielectric anisotropy. And by providing a vertical alignment film (not shown) that covers the counter electrode **17,** the ribs **19** and the subpixel electrodes **18a** and **18b,** the liquid crystal layer **13** exhibits a substantially vertically aligned state when no voltages are applied thereto. That is to say, the vertically aligned liquid crystal molecules can be tilted toward a predetermined direction with stability by using the sloped side surfaces of the ribs **19** and the oblique electric field in combination.

[0071] As shown in FIG. **3(b),** the ribs **19** have sloped side surfaces that are raised toward their center, and the liquid crystal molecules are aligned substantially perpendicularly to those tilted side surfaces. Consequently, the ribs **19** produce a distribution of tilt angles of the liquid crystal molecules. As used herein, the tilt angle of a liquid crystal molecule means the angle defined by the long axis of the molecules with respect to the surface of the substrate. Also, the slit **18s** changes the directions of the electric field applied to the liquid crystal layer regularly. Due to the combined effects of these ribs **19** and the slit **18s,** when an electric field is applied, the liquid crystal molecules are aligned in the four directions indicated by the arrows in FIG. **3(a),** i.e., upper rightward, upper leftward, lower rightward and lower leftward. As a result, a good viewing angle characteristic that is symmetrical both vertically and horizontally is realized. The rectangular display area of the liquid crystal panel **100A** is typically arranged such that its longitudinal direction is defined horizontally and the transmission axis of the polarizer **30a** is defined to be parallel to the longitudinal direction. On the other hand, the pixels **10** are arranged such that the longitudinal direction of the pixels **10** intersects with that of the liquid crystal panel **100A** at right angles.

[0072] As shown in FIG. **3(a),** the first and second subpixels **10a** and **10b** preferably have the same area. Each of these subpixels preferably has a first rib that runs in a first direction and a second rib that runs in a second direction that intersects with the first direction substantially at right angles, and the first and second ribs are preferably arranged symmetrically to each other within each subpixel with respect to a centerline that is defined parallel to the scan line **12.** And the arrangement of the ribs in one of the two subpixels and that of the ribs in the other subpixel are preferably symmetrical to each other with respect to a centerline that is drawn perpendicularly to the scan line **12.** By adopting such an arrangement, the liquid crystal molecules are aligned upper rightward, upper leftward, lower rightward and lower leftward within each subpixel and the respective liquid crystal domains come to have substantially the same area in the entire pixel including the first and second subpixels. As a result, a good viewing angle characteristic that is symmetrical both vertically and horizontally is realized. This effect is achieved particularly significantly when a pixel has a small area. Furthermore, it is preferred to adopt a configuration in which the interval between the respective centerlines of the two subpixels that are drawn parallel to the scan line is approximately equal to a half of the arrangement pitch of the scan lines.

[0073] Next, the specific structure of each pixel **10** in the liquid crystal display device **100** of this preferred embodiment and application of mutually different voltages to the respective liquid crystal layers of the two subpixels **10a** and **10b** included in this pixel **10** will be described with reference to FIGS. **7** through **9.**

[0074] As shown in FIG. **7,** the pixel **10** includes two subpixels **10a** and **10b.** To the subpixel electrodes **18a** and **18b**

of the subpixels **10a** and **10b,** connected are their associated TFTs **16a** and **16b** and their associated storage capacitors (CS) **22a** and **22b,** respectively. The gate electrodes of the TFTs **16a** and **16b** are both connected to the same scan line **12.** And the source electrodes of the TFTs **16a** and **16b** are connected to the same signal line **14.** The storage capacitors **22a** and **22b** are connected to their associated storage capacitor lines (CS bus lines) **24a** and **24b,** respectively. The storage capacitor **22a** includes a storage capacitor electrode that is electrically connected to the subpixel electrode **18a,** a storage capacitor counter electrode that is electrically connected to the storage capacitor line **24a,** and an insulating layer (not shown) arranged between the electrodes. The storage capacitor **22b** includes a storage capacitor electrode that is electrically connected to the subpixel electrode **18b,** a storage capacitor counter electrode that is electrically connected to the storage capacitor line **24b,** and an insulating layer (not shown) arranged between the electrodes. The respective storage capacitor counter electrodes of the storage capacitors **22a** and **22b** are independent of each other and can receive mutually different storage capacitor counter voltages from the storage capacitor lines **24a** and **24b,** respectively.

[0075] FIG. **8** schematically shows the equivalent circuit of one pixel **10** of the liquid crystal display device **100.** In this electrical equivalent circuit, the liquid crystal layers of the subpixels **10a** and **10b** are identified by the reference numerals **13a** and **13b,** respectively. A liquid crystal capacitor formed of the subpixel electrode **18a,** the liquid crystal layer **13a,** and the counter electrode **17** will be identified by Clca. On the other hand, a liquid crystal capacitor formed of the subpixel electrode **18b,** the liquid crystal layer **13b,** and the counter electrode **17** will be identified by Clcb. The same counter electrode **17** is shared by these two subpixels **10a** and **10b.** The liquid crystal capacitors **Clca** and **Clcb** are supposed to have the same electrostatic capacitance **CLC** (V). The value of CLC (V) depends on the effective voltages (V) applied to the liquid crystal layers of the respective subpixels **10a** and **10b.** Also, the storage capacitors **22a** and **22b** that are connected independently of each other to the liquid crystal capacitors of the respective subpixels **10a** and **10b** will be identified herein by Ccsa and Ccsb, respectively, which are supposed to have the same electrostatic capacitance **CCS.**

[0076] In the subpixel **10a,** one electrode of the liquid crystal capacitor **Clca** and one electrode of the storage capacitor **Ccsa** are connected to the drain electrode of the TFT **16a,** which functions as a switching element for the subpixel **10a.** The other electrode of the liquid crystal capacitor **Clca** is connected to the counter electrode **17.** And the other electrode of the storage capacitor **Ccsa** is connected to the storage capacitor line **24a.** In the subpixel **10b,** one electrode of the liquid crystal capacitor **Clcb** and one electrode of the storage capacitor **Ccsb** are connected to the drain electrode of the TFT **16b,** which functions as a switching element for the subpixel **10b.** The other electrode of the liquid crystal capacitor **Clcb** is connected to the counter electrode **17.** And the other electrode of the storage capacitor **Ccsb** is connected to the storage capacitor line **24b.** The gate electrodes of the TFTs **16a** and **16b** are both connected to the scan line **12** and the source electrodes thereof are both connected to the signal line **14.**

[0077] FIG. **9** schematically shows how the respective voltages that are applied to drive the liquid crystal display device **100** of this preferred embodiment vary within a vertical scanning period. Specifically, in FIG. **9,** Vs represents the voltage on the signal line **14;** Vcsa represents the voltage on the storage capacitor line **24a;** Vcsb represents the voltage on the storage capacitor line **24b;** Vg represents the voltage on the scan line **12;** Vlca represents the voltage to the first subpixel electrode **18a;** and Vlcb represents the voltage to the second subpixel electrode **18b.** In FIG. **9,** the dashed line indicates the voltage **COMMON** (Vc) to the counter electrode **17.** The voltage **Vcsa** on the storage capacitor line **24a** varies periodically within the range of Vc - Vad to Vc + Vad. Likewise, the voltage **Vcsb** on the storage capacitor line **24b** also varies periodically within the range of Vc - Vad to Vc+ Vad. The waveform of the voltage **Vcsb** on the storage capacitor line **24b** has a phase that is different by 180 degrees from that of the voltage **Vcsa** on the storage capacitor line **24a.**

[0078] Hereinafter, it will be described with reference to FIG. **9** how the equivalent circuit shown in FIG. **8** operates.

[0079] First, at a time **T1,** the voltage **Vg** on the scan line **12** rises from VgL to VgH to turn the TFTs **16a** and **16b** ON simultaneously. As a result, the voltage **Vs** on the signal line **14** is transmitted to the subpixel electrodes **18a** and **18b** of the subpixels **10a** and **10b** to charge the liquid crystal capacitors **Clca** and **Clcb** of the subpixels **10a** and **10b.** In the same way, the storage capacitors **Csa** and **Csb** of the respective subpixels are also charged with the voltage on the signal line **14.**

[0080] Next, at a time **T2,** the voltage **Vg** on the scan line **12** falls from VgH to VgL to turn the TFTs **16a** and **16b** OFF simultaneously and electrically isolate the liquid crystal capacitors **Clca** and **Clcb** of the subpixels **10a** and **10b** and the storage capacitors **Ccsa** and **Ccsb** from the signal line **14.** It should be noted that immediately after that, due to the feedthrough phenomenon caused by a parasitic capacitance of the TFTs **16a** and **16b,** for example, the voltages **Vlca** and **Vlcb** applied to the first and second subpixel electrodes **18a** and **18b** decrease by approximately the same voltage **Vd** to:

$$Vlca = Vs - Vd$$

$$Vlcb=Vs-Vd$$

respectively. Also, in this case, the voltages **Vcsa** and **Vcsb** on the storage capacitor lines are:

$$Vcsa=Vc-Vad$$

$$Vcsb=Vc+Vad$$

respectively.

[0081] Next, at a time **T3,** the voltage **Vcsa** on the storage capacitor line **24a** connected to the storage capacitor **Ccsa** rises from Vc - Vad to Vc+Vad and the voltage **Vcsb** on the storage capacitor line **24b** connected to the storage capacitor **Ccsb** falls from Vc+Vad to Vc - Vad. That is to say, these voltages **Vcsa** and **Vcsb** both change twice as much as Vad. As the voltages on the storage capacitor lines **24a** and **24b** change in this manner, the voltages **Vlca** and **Vlcb** applied to the first and second subpixel electrodes change into:

$$Vlca=Vs-Vd+2\times K\times Vad$$

$$Vlcb=Vs-Vd-2\times K\times Vad$$

respectively, where K=CCS/ (CLC (V) +CCS).

[0082] Next, at a time **T4,** the voltage **Vcsa** on the storage capacitor line **24a** falls from Vc+Vad to Vc - Vad and the voltage **Vcsb** on the storage capacitor line **24b** rises from VcVad to Vc+Vad. That is to say, these voltages **Vcsa** and **Vcsb** both change twice as much as Vad again. In this case, the voltages **Vlca** and **Vlcb** applied to the first and second subpixel electrodes also change from

$$Vlca=Vs-Vd+2\times K\times Vad$$

$$Vlcb=Vs-Vd-2\times K\times Vad$$

into

$$Vlca=Vs-Vd$$

$$Vlcb = Vs - Vd$$

respectively.

[0083] Next, at a time **T5,** the voltage **Vcsa** on the storage capacitor line **24a** rises from Vc - Vad to Vc + Vad and the voltage **Vcsb** on the storage capacitor line **24b** falls from Vc + Vad to Vc - Vad. That is to say, these voltages **Vcsa** and **Vcsb** both change twice as much as Vad again. In this case, the voltages **Vlca** and **Vlcb** applied to the first and second subpixel electrodes also change from

$$Vlca = Vs - Vd$$

$$Vlcb = Vs - Vd$$

into

$$Vlca = Vs - Vd + 2 \times K \times Vad$$

$$Vlcb = Vs - Vd - 2 \times K \times Vad$$

respectively.

[0084] After that, every time a period of time that is an integral number of times as long as one horizontal scanning period 1H has passed, the voltages **Vcsa, Vcsb, Vlca** and **Vlcb** alternate their levels at the times **T4** and **T5.** The alternation interval between T4 and T5 may be appropriately determined to be one, two, three or more times as long as 1H according to the driving method of the liquid crystal display device (such as the polarity inversion method) or the display state (such as the degree of flicker or non-smoothness of the image displayed). This alternation is continued until the pixel **10** is rewritten next time, i.e., until the current time becomes equivalent to T1. Consequently, the average voltages **Vlca** and **Vlcb** applied to the first and second subpixel electrodes become:

$$Vlca = Vs - Vd + K \times Vad$$

$$Vlcb = Vs - Vd - K \times Vad$$

respectively.

[0085] Therefore, the effective voltages **V1** (=VLspa) and V2 (= VLspb) applied to the liquid crystal layers **13a** and **13b** of the subpixels **10a** and **10b** become the difference between the voltage at the first subpixel electrode **18a** and the voltage at the counter electrode **17** and the difference between the voltage at the second subpixel electrode **18b** and the voltage at the counter electrode **17.** That is to say,

$$V1 = VLspa = Vlca - Vcom$$

$$V2 = VLspb = Vlcb - Vcom$$

That is to say,

$$V1 = Vs - Vd + K \times Vad - Vc$$

$$V2 = Vs - Vd - K \times Vad - Vc$$

respectively. As a result, the difference Δ**V** (= V1-V2) between the effective voltages applied to the liquid crystal layers **13a** and **13b** of the subpixels **10a** and **10b** becomes $\Delta V = 2 \times K \times Vad$ (where K = CCS/(CLC(V) + CCS)). Thus, mutually different voltages can be applied to the liquid crystal layers **13a** and **13b.**

[0086] FIG. **10** schematically shows the relation between V1 and V2 in the liquid crystal display device **100** of this preferred embodiment. As can be seen from FIG. **10,** the smaller the V1 value, the bigger ΔV in the liquid crystal display device **100** of this preferred embodiment. The Δ V value varies with V1 or V2 because the static capacitance CLC(V) of the liquid crystal capacitor varies with the voltage.

[0087] FIG. **11(a)** shows the γ characteristic of the liquid crystal display device **100** of this preferred embodiment at a right 60 degree viewing angle, and FIG. **11(b)** shows the γ characteristic of the liquid crystal display device **100** of this preferred embodiment at an upper right 60 degree viewing angle. FIGS. **11(a)** and **11(b)** also show the γ characteristics that were observed when the same voltage was applied to the subpixels **10a** and **10b** for the purpose of comparison. As can be seen from FIGS. **11(a)** and **11(b),** the grayscale characteristic of the liquid crystal display device **100** of this preferred embodiment is closer to the grayscale characteristic in the frontal viewing direction in which the ordinate is equal to the abscissa (and in which γ=2.2) than the situation where the same voltage was applied to the two subpixel electrodes. That is to say, the γ characteristic is improved by this preferred embodiment. As described above, by varying the respective voltages as shown in FIG. **9** within a single vertical scanning period, mutually different effective voltages are applicable to the respective liquid crystal layers of different subpixels, and the γ characteristic in an oblique viewing direction is improved as a result.

[0088] Hereinafter, it will be described with reference to FIG. **12** how the voltage applied to the single pixel **10** that has already been described with reference to FIGS. **7** and **8** changes through a number of vertical scanning periods.

[0089] In FIG. **12,** Vg represents the voltage on the scan line **12,** Vcsa and Vcsb represent the voltages on the first and second storage capacitor lines **24a** and **24b,** respectively, and VLspa and VLspb represent the effective voltages applied to the respective liquid crystal layers **13a** and **13b** of the first and second subpixel electrodes **10a** and **10b.** As described above, one vertical scanning period is an interval between a point in time when a scan line is selected and a point in time when the next scan line is selected, and is represented by V-Total in FIG. **12.** It should be noted that the variation in the voltage **Vd** caused by the feedthrough phenomenon that has already been described with reference to FIG. **9** is not shown in FIG. **12.**

[0090] Also, the voltages **Vcsa** and **Vcsb** on the first and second storage capacitor lines each have display periods **AH** and regulation periods **BH.** Each of these voltages **Vcsa** and **Vcsb** on the first and second storage capacitor lines varies periodically in different cycles through the display and regulation periods **AH** and **BH.** In this example, the voltages **Vcsa** and **Vcsb** vary in regular cycles of 20H through the display periods **AH** and in different regular cycles of either 36H or 26H through the regulation periods **BH.** The sum of one display period **AH** and one regulation period **BH** is equal to one vertical scanning period (V-Total). Furthermore, in this example, the display period **AH** begins when the voltages **Vcsa** and **Vcsb** on the first and second storage capacitor lines change after a vertical scanning period for a certain frame has started. On the other hand, the regulation period **BH** ends when the voltages **Vcsa** and **Vcsb** on the first and second storage capacitor lines change after the vertical scanning period for that frame has terminated. In this preferred embodiment, the frame frequency may be 60 Hz, for example.

[0091] FIG. **12** shows how the voltages change through four vertical scanning periods. In the following description,

those four vertical scanning periods will be referred to herein as first, second, third and fourth vertical scanning periods, respectively, and the display periods **AH** and regulation periods **BH** associated with those vertical scanning periods will be referred to herein as first, second, third and fourth display periods **AH** and first, second, third and fourth regulation periods **BH,** respectively. Also, in this example, when the voltage **Vcsa** on the storage capacitor line **24a** rises to a higher voltage **VcH,** the voltage **Vcsb** on the storage capacitor line **24b** falls to a lower voltage **VcL.** Conversely, when Vcsa falls to a lower voltage **VcL,** Vcsb rises to a higher voltage **VcH.** The difference between VcH and VcL is equal to 2 × Vad that has already been described with reference to FIG. **9.**

[0092] At a time when the voltage **Vcsa** on the first storage capacitor line **24a** is VcL and when the voltage **Vcsb** on the second storage capacitor line **24b** is VcH, the voltage **Vg** on the scan line **12** changes from VgL into VgH. In response to the change of the voltage **Vg** into VgH, the first vertical scanning period begins and the first and second subpixel electrodes **18a** and **18b** are charged. While the voltage **Vg** on the scan line **12** is VgH, the voltage **Vs** on the signal line **14** is higher than the voltage **Vc** at the counter electrode **17.** That is why as a result of the charge, the voltages at the first and second subpixel electrodes **18a** and **18b** become higher than the voltage **Vc** at the counter electrode **17.** Thereafter, when the voltage **Vg** on the scan line **12** falls from VgH to VgL again, the first and second subpixel electrodes **18a** and **18b** finish being charged.

[0093] After that, the voltage **Vcsa** on the first storage capacitor line **24a** rises to VcH and the voltage **Vcsb** on the second storage capacitor line **24b** falls to VcL. In this example, it is when the voltage **Vcsa** on the first storage capacitor line **24a** increases and the voltage **Vcsb** on the second storage capacitor line **24b** decreases that the first display period **AH** begins. Through the first display period **AH,** the voltages **Vcsa** and **Vcsb** on the first and second storage capacitor lines **24a** and **24b** increase or decrease every 10H period and vary periodically in regular cycles of 20H. When the first display period **AH** ends, the first regulation period **BH** begins. Through the first regulation period **BH;** the voltages **Vcsa** and **Vcsb** on the first and second storage capacitor lines **24a** and **24b** increase or decrease every 18H period. The voltages at the first and second subpixel electrodes **18a** and **18b** change as the voltages **Vcsa** and **Vcsb** on the first and second storage capacitor lines **24a** and **24b** vary. That is why in the first vertical scanning period, the absolute value of the effective voltage applied to the liquid crystal layer **13a** of the first subpixel **10a** becomes greater than that of the effective voltage applied to the liquid crystal layer **13b** of the second subpixel **10b** and the first subpixel **10a** becomes brighter than the second subpixel **10b.**

[0094] In the first regulation period **BH,** at a time when the voltage **Vcsa** on the first storage capacitor line **24a** is VcH and when the voltage **Vcsb** on the second storage capacitor line **24b** is VcL, the voltage **Vg** on the scan line **12** changes from VgL into VgH. In response to the change of the voltage **Vg** into VgH, the first vertical scanning period ends and the second vertical scanning period begins and the first and second subpixel electrodes **18a** and **18b** are charged. While the voltage **Vg** on the scan line **12** is VgH, the voltage **Vs** on the signal line **14** is higher than the voltage **Vc** at the counter electrode **17.** That is why as a result of the charge, the voltages at the first and second subpixel electrodes **18a** and **18b** become higher than the voltage **Vc** at the counter electrode **17.** Thereafter, when the voltage **Vg** on the scan line **12** falls from VgH to VgL again, the first and second subpixel electrodes **18a** and **18b** finish being charged.

[0095] After that, the voltage **Vcsa** on the first storage capacitor line **24a** falls to VcL and the voltage **Vcsb** on the second storage capacitor line **24b** rises to VcH. In this example, it is when the voltage **Vcsa** on the first storage capacitor line **24a** decreases and the voltage **Vcsb** on the second storage capacitor line **24b** increases that the first regulation period ends and the second display period **AH** begins. Through the second display period **AH,** the voltages **Vcsa** and **Vcsb** on the first and second storage capacitor lines **24a** and **24b** also increase or decrease every 10H period and vary periodically in regular cycles of 20H. And through the second regulation period **BH,** the voltages **Vcsa** and **Vcsb** on the first and second storage capacitor lines **24a** and **24b** will increase or decrease every 13H period. The voltages at the first and second subpixel electrodes **18a** and **18b** change as the voltages **Vcsa** and **Vcsb** on the first and second storage capacitor lines **24a** and **24b** vary. That is why in the second vertical scanning period, the absolute value of the effective voltage applied to the liquid crystal layer **13b** of the second subpixel **10b** becomes greater than that of the effective voltage applied to the liquid crystal layer **13a** of the first subpixel **10a** and the second subpixel **10b** becomes brighter than the first subpixel **10a.**

[0096] Next, in the second regulation period **BH,** at a time when the voltage **Vcsa** on the first storage capacitor line **24a** is VcH and when the voltage **Vcsb** on the second storage capacitor line **24b** is VcL, the voltage **Vg** on the scan line **12** changes from VgL into VgH. In response to the change of the voltage **Vg** into VgH, the second vertical scanning period ends and the third vertical scanning period begins and the first and second subpixel electrodes **18a** and **18b** are charged. While the voltage **Vg** on the scan line **12** is VgH, the voltage **Vs** on the signal line **14** is lower than the voltage **Vc** at the counter electrode **17.** That is why as a result of the charge, the voltages at the first and second subpixel electrodes **18a** and **18b** become lower than the voltage **Vc** at the counter electrode **17.** Thereafter, when the voltage **Vg** on the scan line **12** falls from VgH to VgL again, the first and second subpixel electrodes **18a** and **18b** finish being charged.

[0097] After that, the voltage **Vcsa** on the first storage capacitor line **24a** falls to VcL and the voltage **Vcsb** on the second storage capacitor line **24b** rises to VcH. In this example, it is when the voltage **Vcsa** on the first storage capacitor

line **24a** decreases and the voltage **Vcsb** on the second storage capacitor line **24b** increases that the second regulation period **BH** ends and the third display period **AH** begins. Through the third display period **AH,** the voltages **Vcsa** and **Vcsb** on the first and second storage capacitor lines **24a** and **24b** also increase or decrease every 10H period and vary periodically in regular cycles of 20H. And through the third regulation period **BH,** the voltages **Vcsa** and **Vcsb** on the first and second storage capacitor lines **24a** and **24b** will increase or decrease every 18H period. The voltages at the first and second subpixel electrodes **18a** and **18b** change as the voltages **Vcsa** and **Vcsb** on the first and second storage capacitor lines **24a** and **24b** vary. That is why in the third vertical scanning period, the absolute value of the effective voltage applied to the liquid crystal layer **13a** of the first subpixel **10a** becomes greater than that of the effective voltage applied to the liquid crystal layer **13b** of the second subpixel **10b** and the first subpixel **10a** becomes brighter than the second subpixel **10b.**

[0098] Next, in the third regulation period **BH,** at a time when the voltage **Vcsa** on the first storage capacitor line **24a** is VcL and when the voltage **Vcsb** on the second storage capacitor line **24b** is VcH, the voltage **Vg** on the scan line **12** changes from VgL into VgH. In response to the change of the voltage **Vg** into VgH, the third vertical scanning period ends and the fourth vertical scanning period begins and the first and second subpixel electrodes **18a** and **18b** are charged. While the voltage **Vg** on the scan line **12** is VgH, the voltage **Vs** on the signal line **14** is lower than the voltage **Vc** at the counter electrode **17.** That is why as a result of the charge, the voltages at the first and second subpixel electrodes **18a** and **18b** become lower than the voltage **Vc** at the counter electrode **17.** Thereafter, when the voltage **Vg** on the scan line **12** falls from VgH to VgL again, the first and second subpixel electrodes **18a** and **18b** finish being charged.

[0099] After that, the voltage **Vcsa** on the first storage capacitor line **24a** rises to VcH and the voltage **Vcsb** on the second storage capacitor line **24b** falls to VcL. In this example, it is when the voltage **Vcsa** on the first storage capacitor line **24a** increases and the voltage **Vcsb** on the second storage capacitor line **24b** decreases that the third regulation period **BH** ends and the fourth display period **AH** begins. Through the fourth display period **AH,** the voltages **Vcsa** and **Vcsb** on the first and second storage capacitor lines **24a** and **24b** also increase or decrease every 10H period and vary periodically in regular cycles of 20H. And through the fourth regulation period **BH,** the voltages **Vcsa** and **Vcsb** on the first and second storage capacitor lines **24a** and **24b** will increase or decrease every 13H period. The voltages at the first and second subpixel electrodes **18a** and **18b** change as the voltages **Vcsa** and **Vcsb** on the first and second storage capacitor lines **24a** and **24b** vary. That is why in the fourth vertical scanning period, the absolute value of the effective voltage applied to the liquid crystal layer **13b** of the second subpixel **10b** becomes greater than that of the effective voltage applied to the liquid crystal layer **13a** of the first subpixel **10a** and the second subpixel **10b** becomes brighter than the first subpixel **10a.** From the fifth vertical scanning period on, the respective voltages will vary in quite the same way as in the first through fourth vertical scanning periods shown in FIG. **12.**

[0100] As described above, the (brightness, polarity) combination of the first subpixel changes in the order of (B, +), (D, +), (B, -) and (D, -), while the (brightness, polarity) combination of the second subpixel changes in the order of (D, +), (B, +), (D, -) and (B, -). That is to say, the brightness levels and polarities of the first and second subpixels change just as shown in portion **(a)** of FIG. **6.** By changing the voltages **Vcsa** and **Vcsb** on the first and second storage capacitor lines in this manner, the deterioration of display quality can be minimized in a liquid crystal display device, of which the γ characteristic has reduced viewing angle dependence.

[0101] As described above, the liquid crystal display device of this preferred embodiment is designed such that the potentials at the pixel electrode and at the counter electrode switch their levels at regular intervals and that the direction of the electric field applied to the liquid crystal layer is also inverted at regular intervals. In this case, in a typical liquid crystal display device including a counter electrode and pixel electrodes on two different substrates, the directions of the electric field applied to the liquid crystal layer change from toward the light source side into toward the viewer side, and vice versa. Such a drive method that sets an alternating current voltage is called an "AC drive method". In the liquid crystal display device of this preferred embodiment, the inversion interval of the direction of the electric field applied to the liquid crystal layer may be 66.667 ms, which is twice as long as two frame periods of 33.333 ms, for example. That is to say, in the liquid crystal display device of this preferred embodiment, the direction of the electric field applied to the liquid crystal layer is inverted every time two frame pictures are presented. That is why in presenting a still picture, unless the electric field strengths (i.e., the magnitudes of applied voltages) exactly matched with each other in respective electric field directions (i.e., if the electric field intensities changed every time the directions of the electric field change), the pixel luminances would change and a flicker would be produced on the screen whenever the electric field intensities change.

[0102] To eliminate such a flicker, the electric field intensities (or the magnitudes of applied voltages) in the respective electric field directions need to be exactly matched with each other. In liquid crystal display devices that are manufactured on an industrial basis, however, it is difficult to exactly match the electric field intensities with each other in respective electric field directions. That is why the flicker is reduced by arranging pixels with mutually different electric field directions adjacent to each other within a display area and spatially averaging the luminances of those pixels. Such a method is generally called either a "dot inversion" or a "line inversion". It should be noted that there are various "inversion drive" methods that include not just a method in which the polarities of those pixels are inverted in a checkered pattern on a

pixel-by-pixel basis (i.e., the polarities are inverted both every row and every column, which is a so-called "dot inversion drive") and a method in which the polarities are inverted on a line-by-line basis (i.e., the polarities are inverted every row, which is a so-called "line inversion drive") but also a method in which the polarities are inverted every other row and every column (which is a so-called "two-row, one-column dot inversion drive"). And an appropriate one of those methods is selected as needed.

[0103] In view of these considerations, to avoid the flicker, the following three conditions are preferably satisfied:

[0104] First of all, in respective electric field directions (and in both of the two polarities of respective applied voltages), the absolute values of the effective voltages applied to the liquid crystal layer should agree with each other as closely as possible. That is to say, as in resolving the reliability-related problem described above, the average of the voltages applied to the liquid crystal layer should be as close to zero as possible.

[0105] Secondly, pixels, among which the electric field is applied to the liquid crystal layer in respectively different directions in each frame period, should be arranged adjacent to each other.

[0106] And a third condition is that one type of subpixels that are brighter than subpixels of the other type be arranged as randomly as possible within the same frame. To achieve the maximum display effect on the screen, those subpixels are preferably arranged such that the one type of subpixels, which are brighter than the subpixels of the other type, are adjacent to each other in neither the column direction nor the row direction. In other words, the one type of subpixels that are brighter than the other type are preferably arranged in a checkered pattern.

[0107] Hereinafter, it will be described how and why the liquid crystal display device of this preferred embodiment satisfies these three conditions. But before describing exactly how the device satisfies those conditions, it will be described with reference to FIGS. **13** and **14** that the liquid crystal display device **100** of this preferred embodiment has a pixel arrangement that can be used effectively to get the one-dot inversion drive done with those conditions satisfied.

[0108] FIG. **13** illustrates an equivalent circuit of the liquid crystal display device **100.** In FIG. **13,** each pixel is supposed to have the structure shown in FIGS. **7** and **8.** Those pixels are arranged in a matrix pattern. In the following description, a pixel located at an nth row and an mth column will be referred to herein as "pixel **n-m**" and the two subpixels that form the pixel **n-m** will be referred to herein as "subpixel **n-m-A"** and "subpixel **n-m-B**", respectively.

[0109] The liquid crystal display device **100** includes ten storage capacitor trunks **CS1** through **CS10,** and each subpixel is connected to one of those storage capacitor trunks **CS1** through **CS10** by way of a storage capacitor line (CS bus line). For example, the storage capacitor trunk **CS2** is connected to subpixels **1-a-B, 1-b-B, 1-c-B,** etc. on the first pixel row and to subpixels **2-a-A, 2-b-A, 2-c-A,** etc. on the second pixel row. In this configuration, each subpixel and another subpixel included in a different pixel that is adjacent to the former subpixel are connected to the same storage capacitor trunk by way of the same storage capacitor line.

[0110] Hereinafter, the configurations of first and second subpixels **1-a-A** and **1-a-B** included in a pixel **1-a** that is specified by a scan line **G1** and a signal line **Sa** will be described. The first and second subpixels **1-a-A** and **1-a-B** include liquid crystal capacitors **CLC1-a-A** and **CLC1-a-B** and storage capacitors **CCS1-a-A** and **CCS1-a-B,** respectively. Each of the liquid crystal capacitors is formed by a subpixel electrode, the counter electrode **ComLC** and the liquid crystal layer interposed between them. Each of the storage capacitors is formed by a storage capacitor electrode, an insulating film and a storage capacitor counter electrode **ComCS1** or **ComCS2.**

[0111] The first and second subpixels **1-a-A** and **1-a-B** are connected in common to the same signal line **Sa** by way of their associated TFTs **1-a-A** and **1-a-B,** respectively. The TFTs **1-a-A** and **1-a-B** have their ON/OFF states controlled with a voltage supplied onto their common signal line **G1.** And when these two TFTs are ON, voltages are applied through the same signal line **Sa** to the respective subpixel electrodes and respective storage capacitor electrodes of the first and second subpixels **1-a-A** and **1-a-B.** The storage capacitor counter electrode of the subpixel **1-a-A** is connected to the storage capacitor trunk **CS1** by way of its associated storage capacitor line (CS bus line) **CS1.** Meanwhile, the storage capacitor counter electrode of the subpixel **1-a-B** is connected to the storage capacitor trunk **CS2** by way of its associated storage capacitor line (CS bus line) **CS2.** In this manner, the configuration shown in FIG. **13,** either a single storage capacitor line or a single scan line is shared by two subpixels, thus increasing the aperture ratio of each pixel, which is beneficial.

[0112] FIG. **14** shows the brightness levels and polarities of respective subpixels that have changed within the effective scanning period of a certain frame. Specifically, in FIG. **14,** illustrated are pixels on the first through twelfth rows and the ath through , f^{th} columns. FIG. **15** shows the waveforms of respective voltages (or signals) to drive a liquid crystal display device with the configuration shown in FIG. **13.** In FIG. **15,** Vsa and Vsb represent the voltages on the signal lines **Sa** and **Sb,** Vg1 through Vg12 represent the voltages on the scan lines **G1** through **G12,** Vcs1 through Vcs10 represent the voltages on the storage capacitor trunks **CS1** through **CS10** and VLsp1-a-A through VLsp2-b-B represent the effective voltages applied to the liquid crystal layer of associated subpixels, respectively. What is shown in FIG. **15** is voltage waveforms within one vertical scanning period.

[0113] The liquid crystal display device with the configuration shown in FIG. 13 is driven with voltages having the waveforms shown in FIG. **15.** In the following description, every pixel is supposed to display the same grayscale tone to avoid complicating the description excessively. In a situation where every pixel displays the same grayscale tone, the

voltages **Vsa** and **Vsb** on the signal lines **Sa** and **Sb** oscillate in regular cycles and with a predetermined amplitude as shown in FIG. **15.** One cycle time of oscillation of these voltages **Vsa** and **Vsb** is two horizontal scanning periods (2H). Specifically, the voltage **Vsb** on the signal line **Sb** varies with a phase difference of 180 degrees with respect to the voltage **Vsa** on the signal line **Sa.** In FIG. **15,** a period in which the voltage **Vsa** or **Vsb** is higher than the voltage at the counter electrode is identified by "+" and a period in which the former is lower than the latter is identified by "-". As already described with reference to FIG. **9,** in a liquid crystal display device that uses TFTs, a voltage on a signal line is transmitted to a subpixel electrode by way of one of the TFTs and then changes due to a variation in the voltage **Vg** on a scan line, thus producing a feedthrough phenomenon. The voltage at the counter electrode is determined in view of this feedthrough phenomenon. Also, although not shown in FIG. **15,** the voltages on other signal lines **Sc** and **Se** also vary in the same way as the voltage **Vsa** on the signal line **Sa** and the voltages on other signal lines **Sd** and **Sf** also vary in the same way as the voltage **Vsb** on the signal line **Sb.** Furthermore, as described above, an interval between a point in time when a voltage **Vg** on a certain scan line rises from Low level (VgL) to High level (VgH) and a point in time when the voltage **Vg** on the next scan line rises from VgL to VgH is one horizontal scanning period (1H).

[0114] As shown in FIG. **15,** the voltages **Vcs1** through **Vcs10** on the storage capacitor trunks **CS1** through **CS10** oscillate with the same amplitude and in the same regular cycles. In this example, one oscillation cycle time is 20 H. For example, the voltages **Vcs1** and **Vcs2** have such a relation that if one of these two voltages changes into VcH, the other voltage will change into VcL and that if one of these two voltages changes into VcL, the other voltage will change into VcH. The other four pairs of voltages **Vcs3** and **Vcs4, Vcs5** and **Vcs6, Vcs7** and **Vcs8,** and **Vcs9** and **Vcs10** too have the same relation as that pair of voltages **Vcs1** and **Vcs2.** Also, the voltages **Vcs3** and **Vcs4** change 2H after the voltages **Vcs1** and **Vcs2** have changed. In the same way, there is a time lag of 2H between the changes of the voltages **Vcs5** and **Vcs6,** the voltages **Vcs7** and **Vcs8** and the voltages **Vcs9** and **Vcs10.**

[0115] When a voltage **Vg** on a scan line changes from VgL into VgH, the TFTs that are connected to that scan line are turned ON and a voltage **Vs** on the associated scan line is applied to the subpixels that are connected to those TFTs. Next, after the voltage on the scan line changes into VgL, the voltages on the storage capacitor trunks will vary. And the magnitudes of the changes in voltages on those storage capacitor trunks (including the directions and signs of the changes) are different from each other between the respective subpixels. As a result, the effective voltages applied to the respective liquid crystal layers of those subpixels become different from each other.

[0116] Hereinafter, it will be described how the voltages at the subpixels **1-a-A** and **1-a-B** change as an example. When the voltage **Vg1** on the scan line **G1** changes from VgL into VgH, the liquid crystal capacitors **CLC1-a-A** and **CLC1-a-B** of the subpixels **1-a-A** and **1-a-B** are charged. If the voltage **Vg1** on the scan line **G1** is VgH, the voltage **Vsa** on the signal line **Sa** is positive "+" and the liquid crystal capacitors **CLC1-a-A** and **CLC1-a-B** of the subpixels **1-a-A** and **1-a-B** are charged to a higher potential level than the one at the counter electrode. Thereafter, when the voltage **Vg1** on the scan line **G1** changes from VgH into VgL, the liquid crystal capacitors **CLC1-a-A** and **CLC1-a-B** of the subpixels **1-a-A** and **1-a-B** get electrically isolated from the signal line **Sa** and finish being charged. After the voltage **Vg1** on the scan line **G1** has changed from VgH into VgL, the first change of the voltage **Vcs1** on the storage capacitor trunk **CS1** is increase but the first change of the voltage **Vcs2** on the storage capacitor trunk **CS2** is decrease. After that, these voltages **Vcs1** and **Vcs2** will alternately increase and decrease a number of times on a 10H basis. Consequently, in the pixel **1-a** specified by the scan line **G1** and the signal line **Sa,** the absolute value of the effective voltage applied to the liquid crystal layer of the subpixel **1-a-A** that is electrically connected to the storage capacitor trunk **CS1** becomes greater than that of the effective voltage applied to that of the subpixel **1-a-B** that is electrically connected to the storage capacitor trunk **CS2.**

[0117] As described above, if the first change in voltage on a storage capacitor trunk associated with a given subpixel is increase after the voltage on its associated scan line has changed from VgH into VgL, the effective voltage applied to the liquid crystal layer of that subpixel becomes higher than the voltage on its associated signal line when the voltage on its associated scan line is VgH. On the other hand, if the first change in voltage on its associated storage capacitor trunk is decrease, the effective voltage applied to the liquid crystal layer of that subpixel becomes lower than the voltage on its associated signal line when the voltage on its associated scan line is VgH. Consequently, if the sign of the voltage on the signal line when the associated scan line is selected is positive "+" and if the variation in the voltage on the storage capacitor trunk is increase, then the absolute value of the effective voltage applied to the liquid crystal layer increases compared to a situation where the voltage variation is decrease. On the other hand, if the sign of the voltage on the signal line when the associated scan line is selected is negative "-" and if the variation in the voltage on the storage capacitor trunk is increase, then the absolute value of the effective voltage applied to the liquid crystal layer decreases compared to a situation where the voltage variation is decrease.

[0118] As described above, FIG. **14** shows the brightness levels and polarities of subpixels that have changed during the effective scanning period of a certain frame. In FIG. **14,** the sign "B" indicates that the given subpixel is brighter than the other subpixel (i.e., the absolute value of the effective voltage applied to the liquid crystal layer of that subpixel is greater than that of the effective voltage applied to the liquid crystal layer of the other). On the other hand, the sign "D" indicates that the given subpixel is darker than the other subpixel (i.e., the absolute value of the effective voltage applied

to the liquid crystal layer of that subpixel is smaller than that of the effective voltage applied to that of the other). In FIG. **14,** the sign "+" also indicates that the voltage at the subpixel electrode is higher than the one at the counter electrode and the sign "-" also indicates that the voltage at the subpixel electrode is lower than the one at the counter electrode. Two subpixels included in each pixel are adjacent to a pixel with a smaller row number and a pixel with a bigger row number. In this example, of the two subpixels included in a single pixel, the subpixel adjacent to the pixel with the smaller row number will be identified herein by "A" and the subpixel adjacent to the pixel with the bigger row number will be identified herein by "B".

[0119] Hereinafter, the brightness levels and polarities of respective subpixels will be described with reference to FIG. **14** and **15.**

[0120] First of all, the brightness levels and polarities of the subpixels **1-a-A** and **1-a-B** included in the pixel **1-a** will be described. As can be seen from FIG. **15,** while the voltage **Vg1** on the scan line **G1** is VgH, the voltage **Vsa** on the signal line **Sa** is higher than the voltage at the counter electrode. Therefore, the polarities of the subpixels **1-a-A** and **1-a-B** are both positive "+". On the other hand, when the voltage **Vg1** on the scan line **G1** changes from VgH into VgL, the voltages **Vcs1** and **Vcs2** on the storage capacitor trunks **CS1** and **CS2** associated with the respective subpixels are as indicated by the leftmost arrows in FIG. **15.** That is why as can be seen from FIG. **15,** after the voltage **Vg1** on the scan line **G1** has changed from VgH into VgL, the first change in the voltage **Vcs1** associated with the subpixel **1-a-A** is increase as indicated by "U" in FIG. **15** and the first change in the voltage **Vcs2** on the storage capacitor trunk **CS2** associated with the subpixel **1-a-B** is decrease as indicated by "D" in FIG. **15.** Consequently, the effective voltage applied to the subpixel **1-a-A** increases, the one applied to the subpixel **1-a-B** decreases, and the subpixel **1-a-A** becomes brighter than the subpixel **1-a-B.**

[0121] Next, the brightness levels and polarities of subpixels **2-a-A** and **2-a-B** included in the pixel **2-a** will be described. As can be seen from FIG. **15,** while the voltage **Vg2** on the scan line **G2** is VgH, the voltage **Vsa** on the signal line Sa is lower than the voltage at the counter electrode. Thus, the polarities of the subpixels **2-a-A** and **2-a-B** are both negative "-". On the other hand, when the voltage **Vg2** on the scan line **G2** changes from VgH into VgL, the voltages **Vcs2** and **Vcs3** on the storage capacitor trunks **CS2** and **CS3** associated with the respective subpixels **2-a-A** and **2-a-B** are as indicated by the second leftmost arrows in FIG. **15.** That is why as can be seen from FIG. **15,** after the voltage **Vg1** on the scan line **G1** has changed from VgH into VgL, the first change in the voltage **Vcs2** on the storage capacitor trunk **CS2** associated with the subpixel **2-a-A** is decrease as indicated by "D" in FIG. **15** and the first change in the voltage **Vcs3** on the storage capacitor trunk **CS3** associated with the subpixel **2-a-B** is increase as indicated by "U" in FIG. **15.** Consequently, the effective voltage applied to the subpixel **2-a-A** increases, the one applied to the subpixel **2-a-B** decreases, and the subpixel **2-a-A** becomes brighter than the subpixel **2-a-B.**

[0122] Next, the brightness levels and polarities of subpixels **1-b-A** and **1-b-B** included in the pixel **1-b** will be described. While the voltage **Vg1** on the scan line **G1** is VgH, the voltage **Vsb** on the signal line **Sb** is lower than the voltage at the counter electrode. Thus, the polarities of the subpixels **1-b-A** and **1-b-B** are both negative "-". On the other hand, when the voltage **Vg1** on the scan line **G1** changes from VgH into VgL, the voltages **Vcs1** and **Vcs2** on the storage capacitor trunks **CS1** and **CS2** associated with the respective subpixels **1-b-A** and **1-b-B** are as indicated by the leftmost arrows in FIG. **15.** That is why as can be seen from FIG. **15,** after the voltage **Vg1** on the scan line **G1** has changed from VgH into VgL, the first change in the voltage on the storage capacitor trunk **CS1** associated with the subpixel **1-b-A** is increase as indicated by "U" in FIG. **15** and the first change in the voltage **Vcs2** on the storage capacitor trunk **CS2** associated with the subpixel **1-b-B** is decrease as indicated by "D" in FIG. **15.** Consequently, the effective voltage applied to the liquid crystal layer of the subpixel **1-b-A** decreases, the one applied to the subpixel **1-b-B** increases, and the subpixel **1-b-B** becomes brighter than the subpixel **1-b-A.**

[0123] Next, the brightness levels and polarities of subpixels **2-b-A** and **2-b-B** included in the pixel **2-b** will be described. As can be seen from FIG. **15,** while the voltage **Vg2** on the scan line **G2** is VgH, the voltage **Vsb** on the signal line **Sb** is higher than the voltage at the counter electrode. Thus, the polarities of the subpixels **2-b-A** and **2-b-B** are both positive "+". On the other hand, when the voltage **Vg2** on the scan line **G2** changes from VgH into VgL, the voltages **Vcs2** and **Vcs3** on the storage capacitor trunks **CS2** and **CS3** associated with the respective subpixels **2-b-A** and **2-b-B** are as indicated by the second leftmost arrows in FIG. **15.** That is why as can be seen from FIG. **15,** after the voltage **Vg1** on the scan line **G1** has changed from VgH into VgL, the first change in the voltage **Vcs2** on the storage capacitor trunk **CS2** associated with the subpixel **2-b-A** is decrease as indicated by "D" in FIG. **15** and the first change in the voltage **Vcs3** on the storage capacitor trunk **CS3** associated with the subpixel **2-b-B** is increase as indicated by "U" in FIG. **15.** Consequently, the effective voltage applied to the subpixel **2-b-A** decreases, the one applied to the subpixel **2-b-B** increases, and the subpixel **2-b-B** becomes brighter than the subpixel **2-b-A.** As a result, the brightness levels and polarities of the respective subpixels become as shown in FIG. **14.**

[0124] Hereinafter, it will be described how and why the liquid crystal display device of this preferred embodiment satisfies the three conditions mentioned above. First of all, the liquid crystal display device of this preferred embodiment satisfies the first condition for the following reasons.

[0125] At first, it will be described that the liquid crystal display device of this preferred embodiment satisfies the first

condition, i.e., the absolute values of the effective voltages applied to the liquid crystal layers of respective subpixels agree with each other in respective electric field directions. In the liquid crystal display device of this preferred embodiment, each pixel includes two subpixels, of which the liquid crystal layers are supplied with mutually different effective voltages. However, it is the brighter subpixel (i.e., the subpixel marked "B" in FIG. **14)** that will have a decisive effect on the display quality such a flicker on the screen. For that reason, this first condition is imposed on the subpixels marked "B", in particular.

[0126] The first condition will be discussed with reference to the respective voltage waveforms shown in FIG. **15,** which shows the voltages **VLsp1-a-A** and **VLsp2-a-A** to be applied to the liquid crystal layers of the "B" subpixels **1-a-A** and **2-a-A** with mutually different electric field directions (or polarities). In VLsp1-a-A and VLsp2-a-A shown in FIG. **15,** the solid line represents the voltages applied to the subpixel electrodes of the subpixels **1-a-A** and **2-a-A** and the dashed line represents the voltage applied to the counter electrode. The effective voltage applied to the liquid crystal layer is a difference between the voltages represented by the solid and dashed lines. That is why if the effective voltages applied to the liquid crystal layer in respective electric field directions (or the quantities of charge stored in the liquid crystal capacitors) are matched with each other as closely as possible by appropriately defining the voltage applied to the counter electrode, the first condition can be satisfied.

[0127] Next, it will be described that the liquid crystal display device of this preferred embodiment satisfies the second condition, i.e., pixels with mutually different polarities are arranged adjacent to each other in each frame period. In the liquid crystal display device of this preferred embodiment, however, each pixel includes two subpixels, of which the liquid crystal layers are supplied with different effective voltages. That is why this second condition is imposed on not only on each pixel but also subpixels with the same effective voltage as well. Among other things, it is particularly important for bright subpixels, i.e., the subpixels marked "B" in FIG. **14,** to satisfy this second condition as in the first condition described above.

[0128] As shown in FIG. **14,** the signs "+" and "-" representing the polarities (or electric field directions) of respective subpixels are inverted every other pixel (i.e., every second column) in the row direction (i.e., in the horizontal direction) in the order of (+, -), (+, -), (+, -), and so on, and also inverted every other pixel (i.e., every second row) in the column direction (i.e., in the vertical direction) in the order of (+, -), (+, -), (+, -), (+, -), and so on. That is to say, looking on a pixel-by-pixel basis, this device achieves the so-called "dot inversion" state, and therefore, satisfies the second condition.

[0129] Next, the bright subpixels, i.e., the subpixels marked "B" in FIG. **14,** will be checked out. As shown in FIG. **14,** looking at subpixels on the same row (e.g., the subpixels **1-a-A, 1-b-A, 1-c-A,** etc., on the first row), it can be seen that the polarity of every "B" subpixel is positive "+". However, looking at subpixels on the same column (e.g., the subpixels **1-a-A, 1-a-B, 2-a-A, 2-a-B, 3-a-A, 3-a-B,** etc., on the first column), it can be seen that the polarities of the "B" subpixels are inverted every other pixel (i.e., every second row) in the order of "+", "-", "+", "-" and so on. That is to say, looking at subpixels with high-order luminances, which are particularly important ones, this device achieve the so-called "line inversion" state, and therefore, satisfies the second condition. Likewise, the "D" subpixels are also arranged with the same regularity, thus satisfying the second condition, too.

[0130] Next, it will be described how the device of this preferred embodiment satisfies the third condition. To satisfy the third condition, multiple subpixels, of which the luminance levels are intentionally different from each other, should be arranged such that subpixels with the same luminance level are adjacent to each other at as small a number of locations as possible. In FIG. **14,** looking at a total of four subpixels that are arranged on two rows and two columns (e.g., the subpixels **1-a-A, 1-a-B, 1-b-A** and **1-b-B),** it can be seen that "B" and "D" subpixels are arranged in this order along the first column and then "D" and "B" subpixels are arranged in this order along the next column. Supposing these four subpixels form a "group of subpixels", the subpixels are arranged such that the entire screen is filled with such groups of subpixels with no gap left at all. That is to say, the "B" and "D" signs are arranged in a checkered pattern on a subpixel-by-subpixel basis as shown in FIG. **14.** Consequently, it can be seen that this device satisfies the third condition, too.

[0131] As described above, the liquid crystal display device of this preferred embodiment that has just been described with reference to FIGS. **14** and **15** satisfies all of the three conditions mentioned above, and therefore, realizes a display of quality images with a flicker eliminated.

[0132] The brightness levels and polarities of subpixels that have changed within the effective scanning period of a certain frame and the voltage waveforms are shown in FIGS. **14** and **15.** In the next frame, however, the voltages on the signal lines change according to the waveforms shown in FIG. **15** with respect to the voltages on the scan lines but the voltages on the storage capacitor trunks change inversely to the waveforms shown in FIG. **15.** That is why in that frame, the polarities of the respective subpixels are the same as those of the subpixels shown in FIG. **14** but the brightness levels of the respective subpixels are inverted compared to the counterparts shown in FIG. **14.**

[0133] In the frame after that next frame, with respect to the voltages on the scan lines, not only the voltages on the signal lines but also the voltages on the storage capacitor trunks change in the patterns opposite to the waveforms shown in FIG. **15.** Consequently, in that frame, the brightness levels of the respective subpixels are the same as those of the subpixels shown in FIG. **14** but the polarities of the respective subpixels are inverted compared to the counterparts shown in FIG. **14.**

[0134] And in the frame next to that frame, with respect to the voltages on the scan lines, the voltages on the signal lines change in the patterns opposite to the waveforms shown in FIG. **15** but the voltages on the storage capacitor trunks change according to the waveforms shown in FIG. **15.** Consequently, in that frame, the brightness levels and polarities of the respective subpixels are inverted compared to the counterparts shown in FIG. **14.**

[0135] Next, it will be described with reference to FIG. **16** how the voltages change in multiple pixels of the liquid crystal display device of this preferred embodiment. In FIG. **16,** Vcs1 through Vcs6 represent the voltages on the storage capacitor trunks **CS1** through **CS6,** Vg1 through Vg3 represent the voltages on the scan lines **G1** through **G3,** and VLsp1-a-A through VLsp3-a-B represent the effective voltages applied to the respective liquid crystal layers of the subpixels **1-a-A** through **3-a-B.** In the following example, the four consecutive frames will be identified herein by n, n+1, n+2 and n+3, respectively.

[0136] FIG. **16** also shows vertical scanning periods of an input video signal. Each vertical scanning period of the input video signal consists of an effective scanning period **V-Disp** during which pixels in the liquid crystal panel **100A** (see FIG. **1)** are selected on a row-by-row basis and a vertical-blanking interval **V-Blank** during which no pixels in the liquid crystal panel **100A** are selected at all. The duration of the effective scanning period is determined by the display area (or the number of rows of effective pixels) of the liquid crystal panel **100A.**

[0137] In this description, when simply a "vertical scanning period" is mentioned, the "vertical scanning period" refers to a "vertical scanning period of a liquid crystal panel". That is to say, a "vertical scanning period" (i.e., a "vertical scanning period of the liquid crystal panel") is used herein in a different sense from a "vertical scanning period of an input video signal". A "vertical scanning period of an input video signal" is either a one-frame period or a one-field period, which begins and ends simultaneously for every pixel. On the other hand, a "vertical scanning period" means an interval between a point in time when a scan line is selected to write a display signal voltage and a point in time when that scan line is selected to write the next display signal voltage as described above. The vertical scanning periods start at different timing and end at different timing according to the associated scan line.

[0138] In FIG. **16,** the oblique lines indicate that the start and end times of a vertical scanning period change according to the row of pixels selected. As can be seen from FIG. **16,** within each frame, scan lines are sequentially selected one after another from the first one. And when a scan line is selected, a voltage applied to its associated subpixel electrode changes to start a vertical scanning period for that subpixel. As described above, one vertical scanning period of an input video signal consists of an effective scanning period **V-Disp** and a vertical-blanking interval **V-Blank.** However, the vertical scanning period of a certain subpixel begins in the middle of the effective scanning period of a frame n, continues through the vertical-blanking interval, and then ends halfway through the effective scanning period of the next frame n+1. After that, when its associated scan line is selected next time, the next vertical scanning period will begin for that subpixel. It should be noted that in any pixel, the length of the "vertical scanning period" is equal to that of the "vertical scanning period of the input video signal".

[0139] As can be seen from FIG. **16,** in the frames n to n+3, the (brightness, polarity) combinations of the subpixel **1-a-A** change in the order of (B, +), (D, +), (B, -), and (D, -); the (brightness, polarity) combinations of the subpixel **1-a-B** change in the order of (D, +), (B, +), (D, -), and (B, -); the (brightness, polarity) combinations of the subpixel **2-a-A** change in the order of (B, -), (D, -), (B, +), and (D, +); and the (brightness, polarity) combinations of the subpixel **2-a-B** change in the order of (D, -), (B, -), (D, +), and (B, +) .

[0140] FIG. **17** shows the brightness levels and polarities of the subpixels 1-a-A and **1-a-B** and the first change of voltages on the storage capacitor lines at the vertical scanning period of the subpixels **1-a-A** and **1-a-B.** As shown in FIG. **17,** in frame **n,** the polarity of the subpixels **1-a-A** and **1-a-B** is positive "+", the first change of voltages on the storage capacitor line at the vertical scanning period of the subpixel 1-a-A is increase "↑", and the first change of voltages on the storage capacitor line at the vertical scanning period of the subpixel **1-a-B** is decrease "↓". In the next frame **n+1,** the polarity of the subpixels **1-a-A** and 1-**a-B** is positive "+", the first change of voltages on the storage capacitor line at the vertical scanning period of the subpixel **1-a-A** is decrease "↓", and the first change of voltages on the storage capacitor line at the vertical scanning period of the subpixel **1-a-B** is increase "↑".

[0141] In the frame **n+2,** the polarity of the subpixels **1-a-A** and **1-a-B** is negative "-", the first change of voltages on the storage capacitor line at the vertical scanning period of the subpixel **1-a-A** is decrease "↓", and the first change of voltages on the storage capacitor line at the vertical scanning period of the subpixel **1-a-B** is increase "↑". In the next frame **n+3,** the polarity of the subpixels **1-a-A** and **1-a-B** is negative "-", the first change of voltages on the storage capacitor line at the vertical scanning period of the subpixel **1-a-A** is increase "↑", and the first change of voltages on the storage capacitor line at the vertical scanning period of the subpixel **1-a-B** is decrease "↓".

[0142] As described above, the (polarity, first change of voltages on storage capacitor line) combinations of the subpixel **1-a-A** from frame n through frame **n+3** change (+, ↑), (+, ↓), (-, ↓) and (-, ↑) in this order. That is to say, mutually different combinations appear one after another. On the other hand, the (polarity, first change of voltages on storage capacitor line) combinations of the subpixel **1-a-B** from frame n through frame **n+3** change (+, ↓), (+, ↑), (-, ↑) and (-, ↓) in this order. That is to say, these combinations of the subpixel **1-a-B** have the same polarity change pattern as, but a different storage capacitor line voltage variation pattern from, those of the subpixel **1-a-A.**

[0143] In the preferred embodiment described above, the voltage on each storage capacitor line is supposed to change periodically in regular cycles of 20H during the display period. However, the present invention is in no way limited to that specific preferred embodiment. The voltage on each storage capacitor line may also change in regular cycles of 16H during the display period as shown in portion **(a)** of FIG. **18.** In that case, the storage capacitor line voltage changes every 13H in the first and third regulation periods **BH** but changes every 9H in the second and fourth regulation periods **BH,** for example. Alternatively, the storage capacitor line voltage may also change in regular cycles of 24H during the display period as shown in portion **(b)** of FIG. **18.** In that case, the storage capacitor line voltage changes every 15H in the first and third regulation periods **BH** but changes every 21H in the second and fourth regulation periods **BH,** for example. The intervals of the variation in storage capacitor line voltage during the BH period may be appropriately changed according to the V-total value.

[0144] Also, in the preferred embodiment described above, the voltage on each storage capacitor line is supposed to complete one cycle of change during each regulation period. However, the present invention is in no way limited to that specific preferred embodiment. The voltage on each storage capacitor line may also change periodically during each regulation period either in a cycle time of 2H as shown in portion **(a)** of FIG. **19** or in a cycle time of 1H as shown in portion **(b)** of FIG. **19.** Alternatively, the voltage on each storage capacitor line may also be maintained at the average of VcH and VcL during each regulation period as shown in portion **(c)** of FIG. **19.**

[0145] Furthermore, in the preferred embodiment described above, one regulation period is supposed to be included in each vertical scanning period for one frame. However, the present invention is in no way limited to that specific preferred embodiment. One regulation period may be provided for every two vertical scanning periods for two frames as shown in FIG. **20.** In the example illustrated in FIG. **20,** each vertical scanning period has a duration of 810H and the storage capacitor voltages Vcs1 through **Vcs3** change periodically in regular cycles of 20H during the display period but changes every 5H during the regulation period. If two vertical scanning periods (e.g., 810H×2=1,620H in this example) are an integral number of times as long as one cycle time (e.g., 20H in this example) of the display period in this manner, then a half-cycle period may be provided as a regulation period for the storage capacitor line voltage and the polarity may be inverted every other vertical scanning period. Then, as already described with reference to FIG. **17,** the first change of storage capacitor voltages at the beginning of the third vertical scanning period can be different from the first change of storage capacitor voltages at the beginning of the first vertical scanning period. As a result, the brightness levels and polarities of subpixels can be changed as shown in portion **(a)** of FIG. **6.**

[0146] Furthermore, in the preferred embodiment described above, each regulation period is supposed to be an even number of times as long as one horizontal scanning period. However, the present invention is in no way limited to that specific preferred embodiment. Each regulation period may also be an odd number of times as long as one horizontal scanning period. Even if the first and third regulation periods have a cycle time of 37H and if the second and fourth regulation periods have a cycle time of 27H as shown in FIG. **21,** the degree of non-smoothness of the image on the screen can also be reduced by inverting the brightness levels and polarities of respective subpixels as in a situation where each regulation period is an even number of times as long as one horizontal scanning period.

[0147] Furthermore, in the preferred embodiment described above, the same storage capacitor line is supposed to be connected to two subpixels belonging to two different adjacent pixels. However, the present invention is in no way limited to that specific preferred embodiment. Two different storage capacitor lines may also be provided for two subpixels belonging to two different adjacent pixels and the voltages on those two storage capacitor lines may be changed independently of each other.

[0148] FIG. **22** shows the brightness levels and polarities of respective subpixels that have changed within the effective scanning period of a certain frame. Specifically, in FIG. **22,** illustrated are pixels on the first through sixth rows and the ath through f^{th} columns. In this example, the liquid crystal display device **100** also has ten storage capacitor trunks **CS1** through **CS10.** As shown in FIG. **22,** the storage capacitor trunk **CS1** is connected to subpixels **1-a-A, 1-b-A**, **1-c-A;** etc. on the first row of pixels and to subpixels **6-a-A, 6-b-A, 6-c-A,** etc. on the sixth row of pixels. The storage capacitor trunk **CS2** is connected to subpixels **1-a-B, 1-b-B, 1-c-B,** etc. on the first row of pixels and to subpixels **6-a-B, 6-b-B, 6-c-B,** etc. on the sixth row of pixels. And the storage capacitor trunk **CS3** is connected to subpixels **2-a-A,** 2-b-A, **2-c-A,** etc. on the second row of pixels. In this manner, in the liquid crystal display device **100** with the configuration shown in FIG. **22,** a given subpixel and a subpixel belonging to another pixel adjacent to the former subpixel are connected to two different storage capacitor trunks and are electrically independent of each other.

[0149] FIG. **23** illustrates an equivalent circuit of the liquid crystal display device **100** with the configuration shown in FIG. **22.** And FIG. **24** shows the waveforms of various voltages (or signals) to drive the liquid crystal display device. In FIG. **24,** Vsa and Vsb represent the voltages on the signal lines Sa and Sb, Vg1 through Vg12 represent the voltages on the scan lines **G1** through **G12,** Vcs1 through Vcs10 represent the voltages on the storage capacitor trunks **CS1** through **CS10** and VLsp1-a-A through VLsp2-b-B represent the effective voltages applied to the liquid crystal layers of the subpixels **1-a-A** through **2-b-B,** respectively. What is shown in FIG. **24** is voltage waveforms within one vertical scanning period.

[0150] As shown in FIG. **24,** the voltages Vcs1 through Vcs10 on the storage capacitor trunks **CS1** through **CS10**

oscillate with the same amplitude and in the same regular cycles. In this example, one oscillation cycle time is 10 H. For example, the voltages **Vcs1** and **Vcs2** have such a relation that if one of these two voltages changes into VcH, the other voltage will change into VcL and that if one of these two voltages changes into VcL, the other voltage will change into VcH. The other four pairs of voltages **Vcs3** and **Vcs4, Vcs5** and **Vcs6, Vcs7** and **Vcs8,** and **Vcs9** and **Vcs10** too have the same relation as that pair of voltages **Vcs1** and **Vcs2.** As can be seen from FIG. **24,** after the voltage **Vg1** on the scan line **G1** has become VgL, the voltage **Vcs1** increases (↑) and the voltage **Vcs2** decreases (↓). As also can be seen from FIG. **24,** after the voltage **Vg2** on the scan line **G2** has become VgL, the voltage **Vcs3** decreases (↓) and the voltage **Vcs4** increases (↑).

[0151] In the configuration shown in FIG. **22,** subpixels belonging to two different rows are connected to mutually different storage capacitor trunks, and therefore, in each of multiple pixels, the voltages applied to the liquid crystal layer of the subpixels can be increased or decreased at the same time. In this case, all of the three conditions mentioned above can be satisfied by driving the liquid crystal display device having the configuration shown in FIG. **22** with the voltage waveforms shown in FIG. **24.** As a result, a display of a quality image is realized with a flicker eliminated.

[0152] The brightness levels and polarities of subpixels that have changed within the effective scanning period of a certain frame and the voltage waveforms have been described with reference to FIGS. **22** to **24.** In the next frame, however, the voltages on the signal lines change according to the waveforms shown in FIG. **24** with respect to the voltages on the scan lines but the voltages on the storage capacitor trunks change inversely to the waveforms shown in FIG. **24.** That is why in that frame, the polarities of the respective subpixels are the same as those of the subpixels shown in FIG. **22** but the brightness levels of the respective subpixels are inverted compared to the counterparts shown in FIG. **22.**

[0153] In the frame after that next frame, with respect to the voltages on the scan lines, not only the voltages on the signal lines but also the voltages on the storage capacitor trunks change in the patterns opposite to the waveforms shown in FIG. **24.** Consequently, in that frame, the brightness levels of the respective subpixels are the same as those of the subpixels shown in FIG. **22** but the polarities of the respective subpixels are inverted compared to the counterparts shown in FIG. **22.**

[0154] And in the frame next to that frame, with respect to the voltages on the scan lines, the voltages on the signal lines change in the patterns opposite to the waveforms shown in FIG. **24** but the voltages on the storage capacitor trunks change according to the waveforms shown in FIG. **24.** Consequently, in that frame, the brightness levels and polarities of the respective subpixels are inverted compared to the counterparts shown in FIG. **22.** In this manner, the liquid crystal display device with the configuration shown in FIG. **22** can also reduce the viewing angle dependence of the r characteristic and minimize the deterioration of display quality.

[0155] Furthermore, in the preferred embodiment described above, a single signal line **14** is provided as a common line for two subpixels **10a** and **10b** included in the same pixel **10** as shown in FIG. **8.** However, the present invention is in no way limited to that specific preferred embodiment. Two different signal lines may also be provided for two subpixels included in the same pixel. In that case, even if the voltages on storage capacitor lines are not changed subpixel by subpixel, mutually different effective voltages can also be applied to the liquid crystal layers of subpixels by varying the voltages on the signal lines.

[0156] FIG. **25** illustrates a pixel **10,** of which the two subpixels **10a** and **10b** are provided with signal lines **14a** and **14b,** respectively. As shown in FIG. **25,** the pixel **10** includes two subpixel electrodes **18a** and **18b** that are connected to the two different signal lines **14a** and **14b** via their associated TFTs **16a** and **16b,** respectively. As these two subpixels **10a** and **10b** form one pixel **10,** the TFTs **16a** and **16b** have their gates connected to the same scan line (i.e., gate bus line) **12** in common and have their ON/OFF states controlled using the same scan signal. On the other hand, signal voltages (or grayscale voltages) are supplied to the signal lines (i.e., source bus lines) **14a** and **14b** so as to satisfy the relation described above. It is preferred that the gates of the TFTs **16a** and **16b** be used in common.

[0157] In the above description, the voltage applied to the counter electrode is shown to be constant. However, the present invention is in no way limited to that specific preferred embodiment. The voltage applied to the counter electrode may be changed with time.

[0158] Furthermore, FIG. **10** shows that the effective voltages applied to the first and second subpixels are different from each other in a broad grayscale range. However, the present invention is in no way limited to that specific preferred embodiment. The effective voltages applied to the subpixels could be different from each other only in a particular grayscale range (e.g., in the range of 36th through 128th grayscales in a 256 grayscale display in which the grayscale range from black to white is divided into 256 levels consisting of 0th through 255th grayscales).

[0159] Furthermore, although it has been described how effectively the present invention contributes to improving the display quality of a normally black mode liquid crystal display device (e.g., an MVA mode LCD, among other things), the present invention is in no way limited to that specific preferred embodiment. If necessary, this invention is also applicable for use in an IPS mode liquid crystal display device. The viewing angle dependence of the r characteristic is more significant in the MVA and ASM modes than in the IPS mode. In the IPS mode, however, it is more difficult to manufacture panels that can have a high contrast ratio in the frontal viewing direction than in the MVA and ASM modes.

In view of these considerations, it can be seen that it is a more urgent task to overcome the viewing angle dependence problem of the γ characteristic of the MVA and ASM mode liquid crystal display devices.

EMBODIMENT 2

[0160] Hereinafter, a second preferred embodiment of a liquid crystal display device **100** according to the present invention will be described. The liquid crystal display device **100** of this preferred embodiment is different from the counterpart of the first preferred embodiment described above in the brightness levels and polarities of subpixels and the order of change of the effective voltages in the four consecutive vertical scanning periods. In the following description, the similar description as that of the Embodiment 1 is omitted for avoiding redundancy.

[0161] It will be described with reference to FIG. **26** how the brightness levels and electric field directions change in the subpixels and how the effective voltages applied to the liquid crystal layers of the first and second subpixels change in the liquid crystal display device **100** of this preferred embodiment.

[0162] As shown in portion **(a)** of FIG. **26,** the first, fourth and fifth periods are first polarity periods, while the second, third and sixth periods are second polarity periods. Looking at any series of four vertical scanning periods, it can be seen that two out of the four are first polarity periods and the rest is second polarity periods. For example, in the first through fourth periods shown in portion **(a)** of FIG. **26,** the first and fourth periods are first polarity periods and the second and third periods are second polarity periods. In the liquid crystal display device **100** of this preferred embodiment, however, the first polarity periods include a period that satisfies | VLspa | > | VLspb | (e.g., the first period in this example) and a. period that satisfies | VLspa | < | VLspb | (e.g., the fourth period in this example). Also, in this liquid crystal display device **100,** the second polarity periods include a period that satisfies | VLspa | > | VLspb | (e.g., the third period in this example) and a period that satisfies | VLspa | < | VLspb | (e.g., the second period in this example).

[0163] Portions **(b)** and **(c)** of FIG. **26** show the effective voltages **VLspa** and **VLspb** that are applied to the respective liquid crystal layers of the first and second subpixels in the respective vertical scanning periods. The levels of these voltages are indicated by the bold lines. The effective voltages **VLspa** and **VLspb** applied to the respective liquid crystal layers of the first and second subpixels are the effective values of the differences between the voltages applied to the first and second subpixel electrodes and the voltage **Vc** applied to the counter electrode. In this example, the voltage **Vc** applied to the counter electrode is shown as being constant.

[0164] In the first period, the voltages applied to the first and second subpixel electrodes are higher than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the first subpixel is greater than that of the effective voltage applied to that of the second subpixel (| VLspa | > | VLspb |). For that reason, as shown in portion **(a)** of FIG. **26,** the first period is a first polarity period and the first subpixel is brighter than the second subpixel.

[0165] In the second period, the voltages applied to the first and second subpixel electrodes are lower than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the second subpixel is greater than that of the effective voltage applied to that of the first subpixel (| VLspa | < | VLspb |). For that reason, as shown in portion **(a)** of FIG. **26,** the second period is a second polarity period and the second subpixel is brighter than the first subpixel.

[0166] In the third period, the voltages applied to the first and second subpixel electrodes are lower than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the first subpixel is greater than that of the effective voltage applied to that of the second subpixel (| VLspa | > | VLspb |). For that reason, as shown in portion **(a)** of FIG. **26,** the third period is a second polarity period and the first subpixel is brighter than the second subpixel.

[0167] In the fourth period, the voltages applied to the first and second subpixel electrodes are higher than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the second subpixel is greater than that of the effective voltage applied to that of the first subpixel (| VLspa | < | VLspb |). For that reason, as shown in portion **(a)** of FIG. **26,** the fourth period is a first polarity period and the second subpixel is brighter than the first subpixel. From the fifth period on, the brightness levels and polarities of the first and second subpixels will vary in quite the same pattern as the first and second subpixels in the first through fourth periods.

[0168] Thus, the (brightness, polarity) combination of the first subpixel changes in the order of (B, +), (D, -), (B, -) and (D, +), while the (brightness, polarity) combination of the second subpixel changes in the order of (D, +), (B, -), (D, -) and (B, +) as shown in portion **(a)** of FIG. **26.** In this manner, the liquid crystal display device of this preferred embodiment inverts the brightness levels of the subpixels every vertical scanning period and also inverts their polarities every other vertical scanning period. In the liquid crystal display device of this preferred embodiment, since the brightness levels of the subpixels are inverted every vertical scanning period as in the liquid crystal display device of the first preferred embodiment, the degree of non-smoothness of the image on the screen can be reduced. Also, in the liquid crystal display device of this preferred embodiment, each set of first and second polarity periods has a period in which the first subpixel is brighter than the second subpixel as in the liquid crystal display device of the first preferred embodiment. Thus, as

can be seen from portions **(b)** and **(c)** of FIG. **26,** the average of the effective voltages **VLspa** and that of the effective voltages **VLspb** over multiple vertical scanning periods (e.g., the first through fourth periods) can be equal to each other. Furthermore, the averages of the effective voltages **VLspa** and **VLspb** can be both controlled to zero by adjusting the counter voltage. As a result, the residual image and other reliability-related problems can be overcome.

[0169] FIG. **27** shows the brightness levels and polarities of the first and second subpixels and the first change of voltages on the storage capacitor lines at the vertical scanning period of the first and second subpixels. In FIG. **27,** the four consecutive frames are identified by n, n+1, n+2 and n+3, respectively.

[0170] As shown in FIG. **27,** in frame **n,** the polarity of the first and second subpixels is positive "+", the first change of voltages on the storage capacitor line at the vertical scanning period of the first subpixel is increase "↑", and the first change of voltages on the storage capacitor line at the vertical scanning period of the second subpixel is decrease " ↓ ". In the next frame **n+1,** the polarity of the first and second subpixels is negative "-", the first change of voltages on the storage capacitor line at the vertical scanning period of the first subpixel is increase " ↑ ", and the first change of voltages on the storage capacitor line at the vertical scanning period of the second subpixel is decrease "↓".

[0171] In the frame **n+2,** the polarity of the first and second subpixels is negative "-", the first change of voltages on the storage capacitor line at the vertical scanning period of the first subpixel is decrease "↓", and the first change of voltages on the storage capacitor line at the vertical scanning period of the second subpixel is increase "↑". In the next frame **n+3,** the polarity of the first and second subpixels is positive "+", the first change of voltages on the storage capacitor line at the vertical scanning period of the first subpixel is decrease " ↓ ", and the first change of voltages on the storage capacitor line at the vertical scanning period of the second subpixel is increase "↑".

[0172] If the first and second subpixels shown in portion **(a)** of FIG. **6,** which have been referred to for the description of the first preferred embodiment, were interchanged with each other, the brightness levels and polarities of the subpixels in the second through fifth periods would correspond with those of the subpixels in the first through fourth periods shown in portion **(a)** of FIG. **26.** That is why if the display area of the first subpixel electrode is as large as that of the second subpixel electrode, then the liquid crystal display device of this preferred embodiment will achieve substantially the same effects as the counterpart of the first preferred embodiment described above.

EMBODIMENT 3

[0173] Hereinafter, a third preferred embodiment of a liquid crystal display device **100** according to the present invention will be described. The liquid crystal display device **100** of this preferred embodiment is different from the counterparts described above in the brightness levels and polarities of subpixels and the order of change of the effective voltages in the four consecutive vertical scanning periods. In the following description, the repeated description is omitted for avoiding redundancy.

[0174] It will be described with reference to FIG. **28** how the brightness levels and polarities change in the subpixels and how the effective voltages applied to the liquid crystal layers of the first and second subpixels change in the liquid crystal display device **100** of this preferred embodiment.

[0175] As shown in portion **(a)** of FIG. **28,** the first, third and fifth periods are first polarity periods, while the second, fourth and sixth periods are second polarity periods in the liquid crystal display device **100** of this preferred embodiment. Looking at any series of four vertical scanning periods, it can be seen that two out of the four are first polarity periods and the rest is second polarity periods. For example, in the first through fourth periods shown in portion **(a)** of FIG. **28,** the first and third periods are first polarity periods and the second and fourth periods are second polarity periods. In the liquid crystal display device **100** of this preferred embodiment, however, the first polarity periods include a period that satisfies | VLspa | > | VLspb | (e.g., the first period in this example) and a period that satisfies | VLspa | < | VLspb | (e.g., the third period in this example). Also, in this liquid crystal display device **100,** the second polarity periods include a period that satisfies | VLspa | > | VLspb | (e.g., the second period in this example) and a period that satisfies | VLspa | < | VLspb | (e.g., the fourth period in this example).

[0176] Portions **(b)** and **(c)** of FIG. **28** show the effective voltages **VLspa** and **VLspb** that are applied to the respective liquid crystal layers of the first and second subpixels in the respective vertical scanning periods. The levels of these voltages are indicated by the bold lines. The effective voltages **VLspa** and **VLspb** applied to the respective liquid crystal layers of the first and second subpixels are the effective values of the differences between the voltages applied to the first and second subpixel electrodes and the voltage **Vc** applied to the counter electrode. In this example, the voltage **Vc** applied to the counter electrode is shown as being constant.

[0177] In the first period, the voltages applied to the first and second subpixel electrodes are higher than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the first subpixel is greater than that of the effective voltage applied to that of the second subpixel (| VLspa | > | VLspb |). For that reason, as shown in portion **(a)** of FIG. **28,** the first period is a first polarity period and the first subpixel is brighter than the second subpixel.

[0178] In the second period, the voltages applied to the first and second subpixel electrodes are lower than the voltage

applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the first subpixel is greater than that of the effective voltage applied to that of the second subpixel (| VLspb | > | VLspb |). For that reason, as shown in portion **(a)** of FIG. **28,** the second period is a second polarity period and the first subpixel is brighter than the second subpixel.

[0179] In the third period, the voltages applied to the first and second subpixel electrodes are higher than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the second subpixel is greater than that of the effective voltage applied to that of the first subpixel (| VLspa | < | VLspb |). For that reason, as shown in portion **(a)** of FIG. **28,** the third period is a first polarity period and the second subpixel is brighter than the first subpixel.

[0180] In the fourth period, the voltages applied to the first and second subpixel electrodes are lower than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the second subpixel is greater than that of the effective voltage applied to that of the first subpixel (| VLspa | < | VLspb |). For that reason, as shown in portion **(a)** of FIG. **28,** the fourth period is a second polarity period and the second subpixel is brighter than the first subpixel. From the fifth period on, the brightness levels and polarities of the first and second subpixels will vary in quite the same pattern as the first and second subpixels in the first through fourth periods. In the liquid crystal display device of this preferred embodiment, the frame frequency may be 120 Hz, for example.

[0181] Thus, the (brightness, polarity) combination of the first subpixel changes in the order of (B, +), (B, -), (D, +) and (D, -), while the (brightness, polarity) combination of the second subpixel changes in the order of (D, +), (D, -), (B, +) and (B, -) as shown in portion **(a)** of FIG. **28.** In this manner, the liquid crystal display device of this preferred embodiment inverts the brightness levels of the subpixels every other vertical scanning period and also inverts their polarities every vertical scanning period. In the liquid crystal display device of this preferred embodiment, since the brightness levels of the subpixels are inverted every other vertical scanning period unlike the liquid crystal display device disclosed in Patent Document No. 1, the degree of non-smoothness of the image on the screen can be reduced. Also, in the liquid crystal display device of this preferred embodiment, the brightness levels of the first and second subpixels are inverted in any of the first and second polarity periods unlike the liquid crystal display device disclosed in Patent Document No. 2. Thus, as can be seen from portions **(b)** and **(c)** of FIG. **28,** the average of the effective voltages **VLspa** and that of the effective voltages **VLspb** over multiple vertical scanning periods (e.g., the first through fourth periods) can be approximately equal to each other. Furthermore, the averages of the effective voltages **VLspa** and **VLspb** can be both controlled to zero by adjusting the counter voltage. As a result, the residual image and other reliability-related problems can be overcome.

[0182] Next, it will be described with reference to FIG. **29** how the effective voltages applied to the respective liquid crystal layers of the first and second subpixels change over multiple vertical scanning periods. In FIG. **29,** Vg represents the voltage on the scan line, Vcsa and Vcsb represent the voltages on the first and second storage capacitor lines, respectively, and VLspa and VLspb represent the effective voltages applied to the respective liquid crystal layers of the first and second subpixels. In this example, the voltages on the first and second storage capacitor lines vary in regular cycles of 20H by increasing or decreasing every 10H through the display periods **AH**. On the other hand, the voltages on the first and second storage capacitor lines increase or decrease every 18H during the first and third regulation periods **BH** and increase or decrease every 13H during the second and fourth regulation periods **BH.**

[0183] The effective voltages applied to the respective liquid crystal layers of the first and second subpixels change as the voltages on the first and second storage capacitor lines vary. As a result, the (brightness, polarity) combination of the first subpixel changes in the order of (B, +), (B, -), (D, +) and (D, -), while the (brightness, polarity) combination of the second subpixel changes in the order of (D, +), (D, -), (B, +) and (B, -). In this manner, the brightness levels and polarities of the first and second subpixels change as shown in portion **(a)** of FIG. **28.** Consequently, the liquid crystal display device of this preferred embodiment can minimize the deterioration of display quality with the viewing angle dependence of the γ characteristic reduced.

[0184] FIG. **30** shows the brightness levels and polarities of the first and second subpixels and the first change of voltages on the storage capacitor lines at the vertical scanning period of the first and second subpixels. In FIG. **30,** the four consecutive frames are identified by n, n+1, n+2 and n+3, respectively.

[0185] As shown in FIG. **30,** in frame **n,** the polarity of the first and second subpixels is positive "+", the first change of voltages on the storage capacitor line at the vertical scanning period of the first subpixel is increase "↑", and the first change of voltages on the storage capacitor line at the vertical scanning period of the second subpixel is decrease " ↓ ". In the next frame **n+1,** the polarity of the first and second subpixels is negative "-", the first change of voltages on the storage capacitor line at the vertical scanning period of the first subpixel is decrease " ↓ ", and the first change of voltages on the storage capacitor line at the vertical scanning period of the second subpixel is increase "↑".

[0186] In the frame **n+2,** the polarity of the first and second subpixels is positive "+", the first change of voltages on the storage capacitor line at the vertical scanning period of the first subpixel is decrease " ↓ ", and the first change of voltages on the storage capacitor line at the vertical scanning period of the second subpixel is increase "↑". In the next frame **n+3,** the polarity of the first and second subpixels is negative "-", the first change of voltages on the storage capacitor line at the vertical scanning period of the first subpixel is increase " ↑ ", and the first change of voltages on the

storage capacitor line at the vertical scanning period of the second subpixel is decrease "↓".

[0187] Comparing FIGS. **17** and **30** to each other, it can be seen that the first change of voltages on the storage capacitor line at the vertical scanning period of the first or second subpixel in the liquid crystal display device of this preferred embodiment is the same as in the counterpart of the first preferred embodiment described above. However, the polarities change differently in the liquid crystal display device of this preferred embodiment from in the first preferred embodiment described above.

[0188] Hereinafter, the difference in the brightness inversion interval of the subpixels between the liquid crystal display device of this preferred embodiment and the counterpart of the first preferred embodiment will be described. Specifically, in the liquid crystal display device of this preferred embodiment, the brightness levels of the subpixels invert every other vertical scanning period as shown in FIG. **28.** On the other hand, in the liquid crystal display device of the first preferred embodiment described above, the brightness levels of the subpixels invert every vertical scanning period as shown in FIG. **6.** That is to say, the subpixel brightness inversion interval of the liquid crystal display device of this preferred embodiment is twice as long as that of the liquid crystal display device of the first preferred embodiment. The non-smoothness of the image on the screen can be reduced by inverting the brightness levels of the subpixels as described above. In this case, the shorter the subpixel brightness inversion interval, the more significantly the non-smoothness can be reduced. Nevertheless, if one vertical scanning period became too short, then the orientations of the liquid crystal molecules could not change so much within one vertical scanning period that the luminance could fall short of a predetermined value. That is to say, if one vertical scanning period were too short for the response speed of liquid crystal molecules, the difference in luminance between the subpixels would not be so much as to reduce the viewing angle dependence of the γ characteristic significantly.

[0189] The following Table 1 summarizes how the display qualities of the liquid crystal display devices disclosed in Patent Documents Nos. 1 and 2 and the device of the first and this preferred embodiments of the present invention were affected when the frame frequencies were changed. In Table 1, a good display quality is indicated by the open circle ○, while a poor display quality is indicated by the cross ×.

[0190]

Table 1

Frame frequency	50 Hz	60 Hz	75 Hz	90 Hz	120 Hz
PATENT DOCUMENT #1					
Improvement of viewing angle characteristic	○	○	○	○	○
Image non-smoothness	×	×	×	×	×
Flicker	○	○	○	○	○
Reliability	○	○	○	○	○
PATENT DOCUMENT #2					
Improvement of viewing angle characteristic	○	○	○	○	×
Image non-smoothness	○	○	○	○	○
Flicker	○	○	○	○	○
Reliability	×	×	×	×	×
EMBODIMENT 1 (see FIG. 6)					
Improvement of viewing angle characteristic	○	○	○	○	×
Image non-smoothness	○	○	○	○	○
Flicker	×	×	○	○	○
Reliability	○	○	○	○	○
EMBODIMENT 3 (see FIG. 28)					
Improvement of viewing angle characteristic	○	○	○	○	○
Image non-smoothness	○	○	○	○	○
Flicker	×	×	×	×	○
Reliability	○	○	○	○	○

[0191] According to Table 1, the liquid crystal display device of Patent Document No. 1 improves the viewing angle characteristic at every frame frequency but made the viewer find the image on the screen non-smooth at any frame frequency, which is a problem. Meanwhile, as for the liquid crystal display device disclosed in Patent Document No. 2, its reliability was too questionable to manufacture it on an industrial basis.

[0192] On the other hand, the liquid crystal display devices of the first and third preferred embodiments of the present invention raised no reliability issues unlike the device of Patent Document No. 2, and therefore, can be manufactured on an industrial basis with no problem at all. Added to that, the liquid crystal display devices of the first and third preferred embodiments could also overcome the image non-smoothness problem with the device of Patent Document No. 1.

[0193] Comparing the liquid crystal display devices of the first and third preferred embodiments to each other, however, it can be seen that the best selection should be made according to the frame frequency so that the improvement of the viewing angle characteristic and the reduction of the flicker are achieved at the same time. Specifically, as shown in Table 1, the liquid crystal display device of the first preferred embodiment achieved good display qualities at frame frequencies of equal to or more than 60 Hz and equal to less than 90 Hz. On the other hand, the liquid crystal display device of this preferred embodiment could present a flicker-free image as long as the frame frequency was equal to or higher than 120 Hz. The present inventors confirmed via experiments that if the frame frequency was equal to or higher than 120 Hz, the liquid crystal display device of this preferred embodiment could reduce the viewing angle dependence of the γ characteristic sufficiently effectively. Once the frame frequency exceeds that value, however, it is preferred that the response speed be increased by changing the liquid crystal materials or driving methods into more appropriate ones.

EMBODIMENT 4

[0194] Hereinafter, a fourth preferred embodiment of a liquid crystal display device **100** according to the present invention will be described. The liquid crystal display device **100** of this preferred embodiment is different from the counterparts described above in the brightness levels and polarities of subpixels and the order of change of the effective voltages in the four consecutive vertical scanning periods. In the following description, the repeated description is omitted for avoiding redundancy.

[0195] It will be described with reference to FIG. **31** how the brightness levels and polarities change in the subpixels and how the effective voltages applied to the liquid crystal layers of the first and second subpixels change in the liquid crystal display device **100** of this preferred embodiment.

[0196] As shown in portion **(a)** of FIG. **31,** the first, third and fifth periods are first polarity periods, while the second, fourth and sixth periods are second polarity periods in the liquid crystal display device **100** of this preferred embodiment. Looking at any series of four vertical scanning periods, it can be seen that two out of the four are first polarity periods and the rest is second polarity periods. For example, in the first through fourth periods shown in portion **(a)** of FIG. **31,** the first and third periods are first polarity periods and the second and fourth periods are second polarity periods. In the liquid crystal display device **100** of this preferred embodiment, however, the first polarity periods include a period that satisfies | VLspa | > | VLspb | (e.g., the first period in this example) and a period that satisfies | VLspa | < | VLspb | (e.g., the third period in this example). Also, in this liquid crystal display device **100,** the second polarity periods include a period that satisfies | VLspa | > | VLspb (e.g., the fourth period in this example) and a period that satisfies | VLspa | < | VLspb | (e.g., the second period in this example).

[0197] Portions **(b)** and **(c)** of FIG. **31** show the effective voltages **VLspa** and **VLspb** that are applied to the respective liquid crystal layers of the first and second subpixels in the respective vertical scanning periods. The levels of these voltages are indicated by the bold lines. The effective voltages **VLspa** and **VLspb** applied to the respective liquid crystal layers of the first and second subpixels are the effective values of the differences between the voltages , applied to the first and second subpixel electrodes and the voltage **Vc** applied to the counter electrode. In this example, the voltage **Vc** applied to the counter electrode is shown as being constant.

[0198] In the first period, the voltages applied to the first and second subpixel electrodes are higher than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the first subpixel is greater than that of the effective voltage applied to that of the second subpixel (| VLspa| > | VLspb |). For that reason, as shown in portion **(a)** of FIG. 31, the first period is a first polarity period and the first subpixel is brighter than the second subpixel.

[0199] In the second period, the voltages applied to the first and second subpixel electrodes are lower than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the second subpixel is greater than that of the effective voltage applied to that of the first subpixel (| VLspa | < | VLspb |). For that reason, as shown in portion **(a)** of FIG. **31,** the second period is a second polarity period and the second subpixel is brighter than the first subpixel.

[0200] In the third period, the voltages applied to the first and second subpixel electrodes are higher than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the second subpixel is greater than that of the effective voltage applied to that of the first subpixel (| VLspa | < | VLspb |). For that reason, as shown in portion **(a)** of FIG. **31,** the third period is a first polarity period and the second subpixel is brighter than the first subpixel.

[0201] In the fourth period, the voltages applied to the first and second subpixel electrodes are lower than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the

first subpixel is greater than that of the effective voltage applied to that of the second subpixel (| VLspa | > | VLspb |). For that reason, as shown in portion **(a)** of FIG. **31,** the fourth period is a second polarity period and the first subpixel is brighter than the second subpixel. From the fifth period on, the brightness levels and polarities of the first and second subpixels will vary in quite the same pattern as the first and second subpixels in the first through fourth periods.

[0202] Thus, the (brightness, polarity) combination of the first subpixel changes in the order of (B, +), (D, -), (D, +) and (B, -), while the (brightness, polarity) combination of the second subpixel changes in the order of (D, +), (B, -), (B, +) and (D, -) as shown in portion **(a)** of FIG. **31.** In this manner, the liquid crystal display device of this preferred embodiment inverts the brightness levels of the subpixels every other vertical scanning period and also inverts their polarities every vertical scanning period. In this preferred embodiment, the frame frequency may be 120 Hz, for example.

[0203] FIG. **32** shows the brightness levels and polarities of the first and second subpixels and the first change of voltages on the storage capacitor lines at the vertical scanning period of the first and second subpixels. In FIG. **32,** the four consecutive frames are identified by n, n+1, n+2 and n+3, respectively.

[0204] As shown in FIG. **32,** in frame **n,** the polarity of the first and second subpixels is positive "+", the first change of voltages on the storage capacitor line at the vertical scanning period of the first subpixel is increase " ↑ ", and the first change of voltages on the storage capacitor line at the vertical scanning period of the second subpixel is decrease " ↓ ". In the next frame **n+1,** the polarity of the first and second subpixels is negative "-", the first change of voltages on the storage capacitor line at the vertical scanning period of the first subpixel is increase " ↑ ", and the first change of voltages on the storage capacitor line at the vertical scanning period of the second subpixel is decrease " ↓ ".

[0205] In the frame **n+2,** the polarity of the first and second subpixels is positive "+", the first change of voltages on the storage capacitor line at the vertical scanning period of the first subpixel is decrease " ↓ ", and the first change of voltages on the storage capacitor line at the vertical scanning period of the second subpixel is increase "↑". In the next frame **n+3,** the polarity of the first and second subpixels is negative "-", the first change of voltages on the storage capacitor line at the vertical scanning period of the first subpixel is decrease " ↓ ", and the first change of voltages on the storage capacitor line at the vertical scanning period of the second subpixel is increase "↑".

[0206] In the liquid crystal display device of this preferred embodiment as the liquid crystal display device of the third preferred embodiment, since the brightness levels of the subpixels are inverted every other vertical scanning period, the degree of non-smoothness of the image on the screen can be reduced. In the liquid crystal display device of this preferred embodiment as the liquid crystal display device of the third preferred embodiment, since the brightness levels of the first and second subpixels are inverted in each of the first and second polarity periods, as can be seen from portions **(b)** and **(c)** of FIG. **31,** the average of the effective voltages VLspa and that of the effective voltages VLspb over multiple vertical scanning periods (e.g., the first through fourth periods) can be approximately equal to each other. Furthermore, the averages of the effective voltages **VLspa** and **VLspb** can be both controlled to zero by adjusting the counter voltage. As a result, the residual image and other reliability-related problems can be overcome.

[0207] If the polarities were inverted in portion **(a)** of FIG. **28,** which has been referred to for the description of the liquid crystal display device of the third preferred embodiment, then the brightness levels and polarities of the subpixels in the second through fifth periods would correspond with those of the subpixels in the first through fourth periods shown in portion **(a)** of FIG. **31.** Consequently, the liquid crystal display device of this preferred embodiment would achieve substantially the same effects as the counterpart of the third preferred embodiment described above.

[0208] If the brightness levels and polarities of the subpixels **1-a-A** and **1-a-B** change as in the first through fourth periods shown in portion **(a)** of FIG. **31** when the liquid crystal display device of the third preferred embodiment is subjected to the dot inversion drive as already described with reference to FIGS. **14** and **15,** then the brightness levels .and polarities of the subpixels **2-a-A** and **2-a-B** will change as in the second through fifth periods shown in portion **(a)** of FIG. **28.**

EMBODIMENT 5

[0209] Hereinafter, a fifth preferred embodiment of a liquid crystal display device according to the present invention will be described. The liquid crystal display device **100** of this preferred embodiment is different from the counterparts described above in the brightness levels and polarities of subpixels and the order of change of the effective voltages in the four consecutive vertical scanning periods. In the following description, the repeated description is omitted for avoiding redundancy.

[0210] It will be described with reference to FIG. **33** how the brightness levels and polarities change in the subpixels and how the effective voltages applied to the liquid crystal layers of the first and second subpixels change in the liquid crystal display device **100** of this preferred embodiment.

[0211] As shown in portion **(a)** of FIG. **33,** the first, fourth and fifth periods are first polarity periods, while the second, third and sixth periods are second polarity periods in the liquid crystal display device **100** of this preferred embodiment. Looking at any series of four vertical scanning periods, it can be seen that two out of the four are first polarity periods and the rest is second polarity periods. For example, in the first through fourth periods shown in portion **(a)** of FIG. **33,** the first and fourth periods are first polarity periods and the second and third periods are second polarity periods. In the

liquid crystal display device **100** of this preferred embodiment, however, the first polarity periods include a period that satisfies | VLspa | > | VLspb | (e.g., the first period in this example) and a period that satisfies | VLspb | < | VLspb | (e.g., the fourth period in this example). Also, in this liquid crystal display device **100,** the second polarity periods include a period that satisfies | VLspa | > | VLspb | (e.g., the second period in this example) and a period that satisfies VLspa | < | VLspb | (e.g., the third period in this example).

[0212] Portions **(b)** and **(c)** of FIG. **33** show the effective voltages **VLspa** and **VLspb** that are applied to the respective liquid crystal layers of the first and second subpixels in the respective vertical scanning periods. The levels of these voltages are indicated by the bold lines. The effective voltages **VLspa** and **VLspb** applied to the respective liquid crystal layers of the first and second subpixels are the effective values of the differences between the voltages applied to the first and second subpixel electrodes and the voltage **Vc** applied to the counter electrode. In this example, the voltage **Vc** applied to the counter electrode is shown as being constant.

[0213] In the first period, the voltages applied to the first and second subpixel electrodes are higher than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the first subpixel is greater than that of the effective voltage applied to that of the second subpixel (| VLspa | > | VLspb |). For that reason, as shown in portion **(a)** of FIG. **33,** the first period is a first polarity period and the first subpixel is brighter than the second subpixel.

[0214] In the second period, the voltages applied to the first and second subpixel electrodes are lower than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the first subpixel is greater than that of the effective voltage applied to that of the second subpixel (| VLspa | > | VLspb |). For that reason, as shown in portion **(a)** of FIG. **33,** the second period is a second polarity period and the first subpixel is brighter than the second subpixel.

[0215] In the third period, the voltages applied to the first and second subpixel electrodes are lower than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the second subpixel is greater than that of the effective voltage applied to that of the first subpixel (| VLspa | < | VLspb |). For that reason, as shown in portion **(a)** of FIG. 33, the third period is a second polarity period and the second subpixel is brighter than the first subpixel.

[0216] In the fourth period, the voltages applied to the first and second subpixel electrodes are higher than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the second subpixel is greater than that of the effective voltage applied to that of the first subpixel (| VLspa | < | VLspb |). For that reason, as shown in portion **(a)** of FIG. 33, the fourth period is a first polarity period and the second subpixel is brighter than the first subpixel. From the fifth period on, the brightness levels and polarities of the first and second subpixels will vary in quite the same pattern as the first and second subpixels in the first through fourth periods. In the liquid crystal display device of this preferred embodiment, the frame frequency may be 120 Hz, for example.

[0217] Thus, the (brightness, polarity) combination of the first subpixel changes in the order of (B, +), (B, -), (D, -) and (D, +), while the (brightness, polarity) combination of the second subpixel changes in the order of (D, +), (D, -), (B, -) and (B, +) as shown in portion **(a)** of FIG. **33**. In this manner, the liquid crystal display device of this preferred embodiment inverts the brightness levels of the subpixels every other vertical scanning period and also inverts their polarities every other vertical scanning period. But the timing of inversion of the polarities is shifted by one vertical scanning period from that of the brightness levels of the subpixels. In the liquid crystal display device of this preferred embodiment, since the brightness levels of the subpixels are inverted every other vertical scanning period unlike the liquid crystal display device disclosed in Patent Document No. 1, the degree of non-smoothness of the image on the screen can be reduced. Also, in the liquid crystal display device of this preferred embodiment, the brightness levels of the first and second subpixels are inverted in any of the first and second polarity periods unlike the liquid crystal display device disclosed in Patent Document No. 2. Thus, as can be seen from portions **(b)** and **(c)** of FIG. **33,** the average of the effective voltages **VLspa** and that of the effective voltages **VLspb** over multiple vertical scanning periods (e.g., the first through fourth periods) can be approximately equal to each other. Furthermore, the averages of the effective voltages **VLspa** and **VLspb** can be both controlled to zero by adjusting the counter voltage. As a result, the residual image and other reliability-related problems can be overcome.

[0218] Next, it will be described with reference to FIG. **34** how the voltages change over multiple vertical scanning periods.

[0219] In FIG. **34,** Vg represents the voltage on the scan line, Vcsa and Vcsb represent the voltages on the first and second storage capacitor lines, respectively, and VLspa and VLspb represent the effective voltages applied to the respective liquid crystal layers of the first and second subpixels. In this example, the voltages on the first and second storage capacitor lines vary in regular cycles of 20H by increasing or decreasing every 10H through the display periods **AH.** On the other hand, the voltages on the first and second storage capacitor lines increase or decrease every 18H during the first through fourth regulation periods **BH.**

[0220] FIG. **35** shows the brightness levels and polarities of the first and second subpixels and the first change of voltages on the storage capacitor lines at the vertical scanning period of the first and second subpixels. In FIG. **35,** the

four consecutive frames are identified by n, n+1, n+2 and n+3, respectively.

[0221] As shown in FIG. **35,** in frame **n,** the polarity of the first and second subpixels is positive "+", the first change of voltages on the storage capacitor line at the vertical scanning period of the first subpixel is increase " ↑ ", and the first change of voltages on the storage capacitor line at the vertical scanning period of the second subpixel is decrease " ↓ ". In the next frame **n+1**, the polarity of the first and second subpixels is negative "-", the first change of voltages on the storage capacitor line at the vertical scanning period of the first subpixel is decrease " ↓ ", and the first change of voltages on the storage capacitor line at the vertical scanning period of the second subpixel is increase " ↑ ".

[0222] In the frame **n+2**, the polarity of the first and second subpixels is negative "-", the first change of voltages on the storage capacitor line at the vertical scanning period of the first subpixel is increase " ↑ ", and the first change of voltages on the storage capacitor line at the vertical scanning period of the second subpixel is decrease " ↓ ". In the next frame **n+3,** the polarity of the first and second subpixels is positive "+", the first change of voltages on the storage capacitor line at the vertical scanning period of the first subpixel is decrease " ↓ ", and the first change of voltages on the storage capacitor line at the vertical scanning period of the second subpixel is increase " ↑ ".

[0223] As described above, the effective voltages applied to the respective liquid crystal layers of the first and second subpixels change as the voltages on the first and second storage capacitor lines vary. As a result, the (brightness, polarity) combination of the first subpixel changes in the order of (B, +), (B, -), (D, -) and (D, +), while the (brightness, polarity) combination of the second subpixel changes in the order of (D, +), (D, -), (B, -) and (B, +). Consequently, the liquid crystal display device of this preferred embodiment can minimize the deterioration of display quality with the viewing angle dependence of the γ characteristic reduced.

EMBODIMENT 6

[0224] Hereinafter, a sixth preferred embodiment of a liquid crystal display device according to the present invention will be described. The liquid crystal display device **100** of this preferred embodiment is different from the counterparts described above in the brightness levels and polarities of subpixels and the order of change of the effective voltages in the four consecutive vertical scanning periods. In the following description, the repeated description is omitted for avoiding redundancy.

[0225] It will be described with reference to FIG. 36 how the brightness levels and polarities change in the subpixels and how the effective voltages applied to the liquid crystal layers of the first and second subpixels change in the liquid crystal display device **100** of this preferred embodiment.

[0226] As shown in portion **(a)** of FIG. **36,** the first, second, fifth and sixth periods are first polarity periods, while the third and fourth periods are second polarity periods in the liquid crystal display device **100** of this preferred embodiment. Looking at any series of four vertical scanning periods, it can be seen that two out of the four are first polarity periods and the rest is second polarity periods. For example, in the first through fourth periods shown in portion **(a)** of FIG. **36,** the first and second periods are first polarity periods and the third and fourth periods are second polarity periods. In the liquid crystal display device 100 of this preferred embodiment, however, the first polarity periods include a period that satisfies | VLspa | > | VLspb | (e.g., the first period in this example) and a period that satisfies | VLspa | < | VLspb | (e.g., the second period in this example). Also, in this liquid crystal display device **100,** the second polarity periods include a period that satisfies | VLspa | > | VLspb | (e.g., the fourth period in this example) and a period that satisfies | VLspa | < | VLspb | (e.g., the third period in this example).

[0227] Portions **(b)** and **(c)** of FIG. **36** show the effective voltages **VLspa** and **VLspb** that are applied to the respective liquid crystal layers of the first and second subpixels in the respective vertical scanning periods. The levels of these voltages are indicated by the bold lines. The effective voltages **VLspa** and **VLspb** applied to the respective liquid crystal layers of the first and second subpixels are the effective values of the differences between the voltages applied to the first and second subpixel electrodes and the voltage **Vc** applied to the counter electrode. In this example, the voltage Vc applied to the counter electrode is shown as being constant.

[0228] In the first period, the voltages applied to the first and second subpixel electrodes are higher than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the first subpixel is greater than that of the effective voltage applied to that of the second subpixel (| VLspa | > | VLspb |). For that reason, as shown in portion **(a)** of FIG. **36,** the first period is a first polarity period and the first subpixel is brighter than the second subpixel.

[0229] In the second period, the voltages applied to the first and second subpixel electrodes are higher than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the second subpixel is greater than that of the effective voltage applied to that of the first subpixel (| VLspb | < | VLspb |). For that reason, as shown in portion **(a)** of FIG. **36,** the second period is a first polarity period and the second subpixel is brighter than the first subpixel.

[0230] In the third period, the voltages applied to the first and second subpixel electrodes are lower than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the

first subpixel is smaller than that of the effective voltage applied to that of the second subpixel (| VLspa) | < | VLspb |). For that reason, as shown in portion **(a)** of FIG. **36,** the third period is a second polarity period and the second subpixel is brighter than the first subpixel.

[0231] In the fourth period, the voltages applied to the first and second subpixel electrodes are lower than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the first subpixel is greater than that of the effective voltage applied to that of the second subpixel (| VLspa | > | VLspb |). For that reason, as shown in portion **(a)** of FIG. **36,** the fourth period is a second polarity period and the first subpixel is brighter than the second subpixel. From the fifth period on, the brightness levels and polarities of the first and second subpixels will vary in quite the same pattern as the first and second subpixels in the first through fourth periods.

[0232] Thus, the (brightness, polarity) combination of the first subpixel changes in the order of (B, +), (D, +), (D, -) and (B, -), while the (brightness, polarity) combination of the second subpixel changes in the order of (D, +), (B, +), (B, -) and (D, -) as shown in portion **(a)** of FIG. **36.** In this manner, the liquid crystal display device of this preferred embodiment inverts the brightness levels of the subpixels every other vertical scanning period and also inverts their polarities every other vertical scanning period. But the timing of inversion of the polarities is shifted by one vertical scanning period from that of the brightness levels of the subpixels. In the liquid crystal display device of this preferred embodiment, since the brightness levels of the subpixels are inverted every other vertical scanning period as in the liquid crystal display device of the fifth preferred embodiment, the degree of non-smoothness of the image on the screen can be reduced. Also, in the liquid crystal display device of this preferred embodiment, the brightness levels of the first and second subpixels are inverted in any of the first and second polarity periods as in the liquid crystal display device of the fifth preferred embodiment. Thus, as can be seen from portions **(b)** and **(c)** of FIG. **36,** the average of the effective voltages **VLspa** and that of the effective voltages **VLspb** over multiple vertical scanning periods (e.g., the first through fourth periods) can be approximately equal to each other. Furthermore, the averages of the effective voltages **VLspa** and **VLspb** can be both controlled to zero by adjusting the counter voltage. As a result, the residual image and other reliability-related problems can be overcome.

[0233] FIG. **37** shows the brightness levels and polarities of the first and second subpixels and the first change of voltages on the storage capacitor lines at the vertical scanning period of the first and second subpixels. In FIG. **37,** the four consecutive frames are identified by n, n+1, n+2 and n+3, respectively.

[0234] As shown in FIG. **37,** in frame n, the polarity of the first and second subpixels is positive "+", the first change of voltages on the storage capacitor line at the vertical scanning period of the first subpixel is increase " ↑ ", and the first change of voltages on the storage capacitor line at the vertical scanning period of the second subpixel is decrease " ↓ ". In the next frame **n+1,** the polarity of the first and second subpixels is positive "+", the first change of voltages on the storage capacitor line at the vertical scanning period of the first subpixel is decrease " ↓ ", and the first change of voltages on the storage capacitor line at the vertical scanning period of the second subpixel is increase " ↑ ".

[0235] In the frame **n+2,** the polarity of the first and second subpixels is negative "-", the first change of voltages on the storage capacitor line at the vertical scanning period of the first subpixel is increase " ↑ ", and the first change of voltages on the storage capacitor line at the vertical scanning period of the second subpixel is decrease " ↓ ". In the next frame **n+3,** the polarity of the first and second subpixels is negative "-", the first change of voltages on the storage capacitor line at the vertical scanning period of the first subpixel is decrease " ↓ ", and the first change of voltages on the storage capacitor line at the vertical scanning period of the second subpixel is increase " ↑ ".

[0236] If the first and second subpixels shown in portion **(a)** of FIG. **36** were interchanged with each other, the brightness levels and polarities of the subpixels in the second through fifth periods would correspond with those of the subpixels in the first through fourth periods shown in portion **(a)** of FIG. **33,** which has been referred to for the description of the fifth preferred embodiment. That is why if the display area of the first subpixel electrode is as large as that of the second subpixel electrode, then the liquid crystal display device of this preferred embodiment will achieve substantially the same effects as the counterpart of the fifth preferred embodiment described above.

[0237] If the brightness levels and polarities of the subpixels **1-a-A** and **1-a-B** change as in the first through fourth periods shown in portion **(a)** of FIG. **36** when the liquid crystal display device of this sixth preferred embodiment is subjected to the dot inversion drive as already described with reference to FIGS. **14** and **15,** then the brightness levels and polarities of the subpixels **2-a-A** and **2-a-B** will change as in the second through fifth periods shown in portion **(a)** of FIG. 33.

EMBODIMENT 7

[0238] Hereinafter, a seventh preferred embodiment of a liquid crystal display device according to the present invention will be described. The liquid crystal display device **100** of this preferred embodiment is different from the counterparts of the first through sixth preferred embodiments described above in the subpixels change their luminances by way of a moderate luminance. In the following description, the repeated description is omitted for avoiding redundancy.

[0239] It will be described with reference to FIG. **38** how the brightness levels and polarities change in the subpixels

and how the effective voltages applied to the liquid crystal layers of the first and second subpixels change in the liquid crystal display device **100** of this preferred embodiment. As shown in portion **(a)** of FIG. **38,** the first, third, and fifth periods are first polarity periods, while the second, fourth and sixth periods are second polarity periods in the liquid crystal display device **100** of this preferred embodiment. Looking at any series of four vertical scanning periods, it can be seen that two out of the four are first polarity periods and the rest is second polarity periods. For example, in the first through fourth periods, the first and third periods are first polarity periods and the second and fourth periods are second polarity periods. The first polarity periods include a period that satisfies | VLspa | > | VLspb | (e.g., the first period in this example) and a period that satisfies | VLspa | < | VLspb | I (e.g., the third period in this example). On the other hand, in the second polarity periods, VLspa = VLspb (e.g., the second and fourth periods in this example).

[0240] Portions **(b)** and **(c)** of FIG. **38** show the effective voltages **VLspa** and **VLspb** that are applied to the respective liquid crystal layers of the first and second subpixels in the respective vertical scanning periods. The levels of these voltages are indicated by the bold lines. The effective voltages **VLspa** and **VLspb** applied to the respective liquid crystal layers of the first and second subpixels are the effective values of the differences between the voltages applied to the first and second subpixel electrodes and the voltage **Vc** applied to the counter electrode. In this example, the voltage **Vc** applied to the counter electrode is shown as being constant.

[0241] In the first period, the voltages applied to the first and second subpixel electrodes are higher than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the first subpixel is greater than that of the effective voltage applied to that of the second subpixel (| VLspa | > | VLspb |). For that reason, as shown in portion **(a)** of FIG. **38,** the first period is a first polarity period and the first subpixel is brighter than the second subpixel.

[0242] In the second period, the voltages applied to the first and second subpixel electrodes are lower than the voltage applied to the counter electrode, and the effective voltage applied to the liquid crystal layer of the first subpixel is equal to the one applied to that of the second subpixel (VLspa = VLspb). For that reason, as shown in portion **(a)** of FIG. **38,** the second period is a second polarity period and the first subpixel is as bright as the second subpixel.

[0243] In the third period, the voltages applied to the first and second subpixel electrodes are higher than the voltage applied to the counter electrode, and the absolute value of the effective voltage applied to the liquid crystal layer of the second subpixel is greater than that of the effective voltage applied to that of the first subpixel (| VLspb | < | VLspb |). For that reason, as shown in portion **(a)** of FIG. 38, the third period is a first polarity period and the second subpixel is brighter than the first subpixel.

[0244] In the fourth period, the voltages applied to the first and second subpixel electrodes are lower than the voltage applied to the counter electrode, and the effective voltage applied to the liquid crystal layer of the first subpixel is equal to the one applied to that of the second subpixel (VLspa=VLspb). For that reason, as shown in portion **(a)** of FIG. **38,** the fourth period is a second polarity period and the first subpixel is as bright as the second subpixel. From the fifth period on, the brightness levels and polarities of the first and second subpixels will vary in quite the same pattern as the first and second subpixels in the first through fourth periods.

[0245] Thus, the (brightness, polarity) combination of the first subpixel changes in the order of (B, +), (M(oderate), -), (D, +) and (M, -), while the (brightness, polarity) combination of the second subpixel changes in the order of (D, +), (M, -), (B, +) and (M, -) as shown in portion **(a)** of FIG. 38, where "M" means that the brightness (or luminance) of the first subpixel is equal to that of the second subpixel. In this manner, the liquid crystal display device of this preferred embodiment changes the luminances of the subpixels in three steps by way of a moderate luminance every vertical scanning period and also inverts the polarities every vertical scanning period.

[0246] In the liquid crystal display device of this preferred embodiment, since the brightness levels of the subpixels are inverted, the degree of non-smoothness of the image on the screen can be reduced. Also, as can be seen from portions **(b)** and **(c)** of FIG. **38,** in the liquid crystal display device of this preferred embodiment, the average of the effective voltages **VLspa** and that of the effective voltages **VLspb** over multiple vertical scanning periods (e.g., the first through fourth periods) can be approximately equal to each other. Furthermore, the averages of the effective voltages **VLspa** and **VLspb** can be both controlled to zero by adjusting the counter voltage. As a result, the residual image and other reliability-related problems can be overcome.

[0247] Next, it will be described with reference to FIGS. **39A, 39B** and **40** how the effective voltages applied to the respective liquid crystal layers of subpixels vary in the liquid crystal display device of this preferred embodiment. In the following description, a series of four frames (corresponding to four vertical scanning periods) will be identified herein by n, n+1, n+2 and n+3, respectively.

[0248] FIG. **39A** illustrates the brightness levels and polarities of respective subpixels that have changed in frame **n,** while FIG. **39B** illustrates the brightness levels and polarities of respective subpixels that have changed in frame **n+1.** The liquid crystal display device of this preferred embodiment has a pixel arrangement such as the one shown in FIGS. **39A** and **39B,** which is the same as the one that has been described for the liquid crystal display device of the first preferred embodiment with reference to FIG. **14.** Thus, the repeated description is omitted in order to avoid complicating the description excessively. The liquid crystal display device of this preferred embodiment includes twelve storage

capacitor trunks. In FIGS. **39A** and **39B,** the storage capacitor lines that are connected to the twelve storage capacitor trunks are identified herein by CS1, CS2, CS3, ... and CS12, respectively.

[0249] As an example, it will be described how the brightness levels and polarities of subpixels that are included in pixels **1-a, 1-b, 2-a** and **2-b** change. In the frame **n,** the pixels **1-a** and **2-b** have the first polarity (+), while the pixels **1-b** and **2-a** have the second polarity (-) as shown in FIG. **39A.** Also, each of the subpixels **1-a-A, 1-b-B, 2-a-A** and **2-b-A** is brighter than the other subpixel of the pixel. Next, in the frame **n+1,** the luminances of the respective subpixels change into a moderate one and the polarities of the respective subpixels are inverted compared to the ones during the frame **n** as shown in FIG. **39B.** Subsequently, in the frame **n+2,** the polarities of the respective subpixels are inverted compared to the ones during the frame **n+1** to be the same as the ones shown in FIG. **39A,** while the brightness levels of the respective subpixels are inverted compared to the ones shown in FIG. **39A.** Thereafter, in the frame **n+3,** the luminances of the respective subpixels change into a moderate one and the polarities of the respective subpixels are inverted to be the same as the ones shown in FIG. **39B.**

[0250] Next, it will be described how the liquid crystal display device of this preferred embodiment satisfies the three conditions described above to minimize a flicker.

[0251] Just like the liquid crystal display device of the first preferred embodiment that has already been described with reference to FIG. 15, the liquid crystal display device of this preferred embodiment regulates the voltages on the respective signal lines and the voltage applied to the counter electrode appropriately, thereby equalizing the effective voltages applied to the liquid crystal layer in respective electric field directions as closely as possible and satisfying the first condition. In addition, in the liquid crystal display device of this preferred embodiment, pixels with mutually different polarities are arranged adjacent to each other as shown in FIGS. **39A** and **39B,** thereby satisfying the second condition as well. Furthermore, in the liquid crystal display device of this preferred embodiment, subpixels, each of which is brighter than the other subpixel of the same pixel, are arranged as randomly as possible, e.g., such that the "B" and "D" signs are arranged on a subpixel-by-subpixel basis in a checkered pattern as shown in FIG. **39A,** thereby satisfying the third condition, too.

[0252] The following Table 2 summarizes how the display qualities of the liquid crystal display devices of the first, third and the present preferred embodiments were affected when the frame frequencies were changed. In Table 2, a good display quality is indicated by the open circle ○, while a poor display quality is indicated by the cross ×. As shown in Table 2, the liquid crystal display device of this preferred embodiment achieved good display qualities at frame frequencies of 90 Hz or more.

[0253]

Table 2

Frame frequency	50 Hz	60 Hz	75 Hz	90 Hz	120 Hz
EMBODIMENT 1 (see FIG. 6)					
Improvement of viewing angle characteristic	○	○	○	○	×
Image non-smoothness	○	○	○	○	○
Flicker	×	○	○	○	○
Reliability	○	○	○	○	○
EMBODIMENT 3 (see FIG. 28)					
Improvement of viewing angle characteristic	○	○	○	○	○
Image non-smoothness	○	○	○	○	○
Flicker	×	×	×	×	○
Reliability	○	○	○	○	○
EMBODIMENT 7 (see FIG. 38)					
Improvement of viewing angle characteristic	○	○	○	○	○
Image non-smoothness	○	○	○	○	○
Flicker	×	×	×	○	○
Reliability	○	○	○	○	○

[0254] Hereinafter, the changes in the voltages on the signal lines, the voltages on the first and second storage capacitor trunks, the voltages on the scan line, and the effective voltages applied to the respective liquid crystal layers of subpixels **1-a-A** and **1-a-B** that are enclosed with the dashed lines in FIGS. **39A** and **39B** in the liquid crystal display device of this preferred embodiment will be described with reference to FIG. **40.** In FIG. **40,** Vsa and Vsb represent the voltages on the signal lines **Sa** and **Sb,** Vcs1 and Vcs2 represent the voltages on the first and second storage capacitor

trunks **CS1** and **CS2,** Vg1 represents the voltages on the scan line **G1,** and VLsp1-a-A and VLsp1-b-B represent the effective voltages applied to the liquid crystal layer of the subpixels **1-a-A** and **1-a-B,** respectively.

[0255] FIG. **40** shows the waveforms of the respective voltages in the four frames of n through n+3. As described with reference to FIGS. **38, 39A** and **39B,** the subpixels **1-a-A** and **1-a-B** have their polarities inverted in the order of (+, - , +, -) while having their luminances changed in the patterns (B, M, D, M) and (D, M, B, M), respectively. In each frame, the write operation is started when the voltage **Vg1** on the scan line **G1** goes VgH (high level). One vertical scanning period V-Total of the input video signal has a duration of 801H. The voltage **Vcs1** on the first storage capacitor trunk **CS1** has such a waveform that completes one cycle of its level change in the order of the first, second, third and second levels **VL1, VL2, VL3** and **VL2** every 6H period. And the voltages **Vcs1** and **Vcs2** have phases that are different from each other by 180 degrees.

[0256] In FIG. **40,** the interval between the point in time when the voltage **Vg1** on the scan line **G1** goes VgL (i.e., low level) and the point in time when the voltages **Vcs1** and **Vcs2** on the storage capacitor lines change for the first time is 3H. The display period of the voltage **Vcs1** on the first storage capacitor trunk **CS1** (i.e., the first waveform period) has a cycle of 24H and each period in which its amplitude continues to be constant at the first, second or third level has a length of 6H. That is why 3H is a half of the period in which the voltage **Vcs** on the storage capacitor line has constant amplitude (i.e., a quarter of one cycle of each display period).

[0257] In the frames **n** and **n+2,** while the scan line **G1** is selected, the voltage **Vsa** on the signal line **Sa** is higher than the voltage at the counter electrode. On the other hand, in the frames **n+1** and **n+3,** while the scan line **G1** is selected, the voltage **Vsa** on the signal line **Sa** is lower than the voltage at the counter electrode.

[0258] Hereinafter, it will be described with reference to FIG. **40** how the brightness levels and polarities of these subpixels **1-a-A** and **1-a-B** of the pixel **1-a** change from the frame n through the frame **n+3.**

[0259] In the frame **n,** when the voltage **Vcs1** on the first storage capacitor trunk is maintained at the first level after having decreased from the second level, the scan line **G1** is selected (i.e., the voltage **Vg** on the scan line goes VgH). When the scan line **G1** is selected, voltages higher than the one at the counter electrode are applied to the subpixel electrodes of the subpixels **1-a-A** and **1-a-B.** After the voltage **Vg1** on the scan line **G1** has fallen to VgL again, the voltage **Vcs1** on the first storage capacitor trunk will vary periodically. In the case that the voltage **Vg1** on the scan line G1 goes down from VgH to VgL again, the voltage **Vcs1** on the first storage capacitor trunk is VL1, while the voltage **Vcs2** on the second storage capacitor trunk is VL3. Since the average voltage **VL2** of the voltages **Vcs1** and **Vcs2** on the first and second storage capacitor trunks is higher than VL1 but lower than VL3, the absolute value of the effective voltage applied to the liquid crystal layer of the subpixel **1-a-A** becomes greater than that of the effective voltage applied to that of the subpixel **1-a-B.** As a result, the subpixel **1-a-A** looks brighter than the subpixel **1-a-B.**

[0260] Next, in the frame **n+1,** when the voltage **Vcs1** on the first storage capacitor trunk is maintained at the second level after having decreased from the third level, the scan line **G1** is selected (i.e., the voltage **Vg** on the scan line goes VgH). When the scan line **G1** is selected, voltages lower than the one at the counter electrode are applied to the subpixel electrodes of the subpixels **1-a-A** and **1-a-B.** After the voltage **Vg1** on the scan line **G1** has fallen to VgL again, the voltage **Vcs1** on the first storage capacitor trunk will vary periodically. In the case that the voltage **Vg1** on the scan line **G1** goes down to VgL again, the voltages **Vcs1** and **Vcs2** on the first and second storage capacitor trunks are equal to the average voltage **VL2** of the voltages **Vcs1** and **Vcs2** on the first and second storage capacitor trunks. That is why the absolute value of the effective voltage applied to the liquid crystal layer of the subpixel **1-a-A** becomes equal to that of the effective voltage applied to that of the subpixel **1-a-B.** As a result, the subpixel **1-a-A** looks as bright as the subpixel **1-a-B.**

[0261] Next, in the frame **n+2,** when the voltage **Vcs1** on the first storage capacitor trunk goes up from the second level to the third level, the scan line **G1** is selected (i.e., the voltage **Vg** on the scan line goes VgH). When the scan line G1 is selected, voltages higher than the one at the counter electrode are applied to the subpixel electrodes of the subpixels **1-a-A** and **1-a-B.** When the voltage **Vg1** on the scan line G1 goes down from VgH to VgL again, the voltage **Vcs1** on the first storage capacitor trunk is VL3, while the voltage **Vcs2** on the second storage capacitor trunk is VL1. That is why the absolute value of the effective voltage applied to the liquid crystal layer of the subpixel **1-a-A** becomes smaller than that of the effective voltage applied to that of the subpixel **1-a-B.** As a result, the subpixel **1-a-A** looks darker than the subpixel **1-a-B.**

[0262] Next, in the frame **n+3,** after the voltage **Vcs1** on the first storage capacitor trunk goes up from the first level to the second level, the scan line **G1** is selected (i.e., the voltage **Vg** on the scan line goes VgH). When the scan line **G1** is selected, voltages lower than the one at the counter electrode are applied to the subpixel electrodes of the subpixels **1-a-A** and **1-a-B.** When the voltage **Vg1** on the scan line **G1** goes down from VgH to VgL again, the voltages **Vcs1** and **Vcs2** on the first and second storage capacitor trunks are equal to VL2. That is why the absolute value of the effective voltage applied to the liquid crystal layer of the subpixel **1-a-A** becomes equal to that of the effective voltage applied to that of the subpixel **1-a-B.** As a result, the subpixel **1-a-A** looks as bright as the subpixel **1-a-B.**

[0263] As can be seen from the description that has just been given with reference to FIG. **40,** the (brightness, polarity) combination of the subpixel **1-a-A** changes in the order of (B, +), (M, -), (D, +) and (M, -), while the (brightness, polarity)

combination of the subpixel **1-a-B** changes in the order of (D, +), (M, -), (B, +) and (M, -). Also, although not shown, the (brightness, polarity) combination of the subpixel **2-a-A** changes in the order of (B,-), (M, +), (D, -) and (M, +). In this manner, the liquid crystal display device of this preferred embodiment not only changes the brightness levels of each subpixel in the order of bright, moderate, dark and moderate every vertical scanning period but also inverts the polarity every vertical scanning period, thereby reducing the degree of non-smoothness of the image on the screen. Also, in the liquid crystal display device of this preferred embodiment, each set of first and second polarity periods has a period in which the first subpixel is brighter than the second subpixel as in the liquid crystal display device of the first preferred embodiment. Thus, as can be seen from portions **(b)** and **(c)** of FIG. **38,** the average of the effective voltages **VLspa** and that of the effective voltages **VLspb** over multiple vertical scanning periods (e.g., the first through fourth periods) can be equal to each other. Furthermore, the averages of the effective voltages **VLspa** and **VLspb** can be both controlled to zero by adjusting the counter voltage. As a result, the residual image and other reliability-related problems can be overcome.

[0264] In the liquid crystal display device of the first through seventh preferred embodiments of the present invention described above, each pixel is supposed to consist of two subpixels. However, the present invention is in no way limited to those specific preferred embodiments. Each pixel may also consist of three or more subpixels. The greater the number of subpixels per pixel, the more significantly the non-uniformity in γ characteristic can be reduced. For example, if the pixel division number is increased from two to four, the degree of the non-uniformity produced by a variation in display grayscale can be reduced and the display qualities can be further improved. However, the greater the division number, the lower the (frontal) transmittance will be in the case of white display. Particularly if the division number is increased from two to four, the transmittance in the white display will decrease significantly. Such a significant decrease is caused partly because each subpixel has a much smaller display area in that case. Thus, the division number needs to be appropriately adjusted according to the intended application of the liquid crystal display device so as to strike an adequate balance between the degree of reduction in the viewing angle dependence of the γ characteristic and the magnitude of decrease in the transmittance in the white display. It should be noted that the reduction in the viewing angle dependence of the γ characteristic is most noticeable if a non-divided pixel is divided into two subpixels (i.e., when each pixel consists of two subpixels). Considering the inevitable decreases in transmittance in the white display and in mass-productivity when each pixel is divided into a greater number of subpixels, each pixel preferably consists of two subpixels, after all.

[0265] Optionally, a configuration for supplying the voltages **Vcs** to respective storage capacitor lines independently of each other may also be adopted as already described with reference to FIGS. **13** and **14.** In that case, each voltage **Vcs** will have an increased number of waveform options in the display period and the regulation period, which is beneficial. Nevertheless, the voltage **Vcs** should change its levels at least once after the voltage on the scan line has gone low during one vertical scanning period. For example, in a liquid crystal display device that includes twice as many storage capacitor lines as scan lines and that has a configuration for supplying voltages **Vcs** to those storage capacitor lines independently of each other, if the voltage **Vcs** needs to change its levels only once after the voltage on each scan line has gone low, then the interval between the point in time when the voltage on the scan line goes low and the point in time when the voltage **Vcs** changes its levels or the interval between the point in time when the voltage **Vcs** changes its levels and the point in time when the voltage on the scan line goes high next time is preferably defined equally for every display line.

[0266] Meanwhile, if a configuration in which a number of storage capacitor lines are provided for each storage capacitor trunk is adopted, then the voltages **Vcs** on those multiple storage capacitor lines connected to a single storage capacitor trunk can have their oscillation amplitudes exactly matched with each other, which is advantageous. Naturally, the circuit configuration can also be simpler than a situation where a lot of voltages should be supplied independently of each other.

[0267] Furthermore, the liquid crystal display device according to any of the first through seventh preferred embodiments of the present invention described above is supposed to adopt the multi-picture element driving method disclosed in Patent Document No. 1, i.e., make the luminances of two subpixels that form one pixel different from each other by applying a rectangular wave voltage to a CS bus line. However, the present invention is in no way limited to those specific preferred embodiments.

[0268] The present invention has the following two important points, and embodiments embodied these points are in no way limited to the above described embodiments.

[0269] The first point of the present invention is to switch the luminance levels of multiple subpixels that form a single pixel one after another, thereby averaging the luminance levels of those subpixels over a predetermined period of time and optimizing the variation in the luminance level of each subpixel with time such that the difference in luminance level between the subpixels becomes substantially equal to zero.

[0270] The second point of the present invention is to invert the polarities of respective subpixels such that the averages of the voltages applied to those subpixels over a certain period of time becomes substantially equal to each other among them, thereby optimizing the variation in the effective voltage applied to the liquid crystal layer (or the variation in luminance). It should be noted that to ensure reliability, the difference in average effective voltage between the subpixels

is preferably 1 V or less.

[0271] Examples of liquid crystal display devices that embody these two important points include a device in which subpixels that form each pixel have the same number of sets of four frames with the pixel polarity-subpixel brightness combinations (B, +), (B, -), (D, +) and (D, -) (where B and D stand for "bright" and "dark", respectively) within a certain period and another device in which subpixels that form each pixel have the same number of sets of four frames with the pixel polarity-subpixel brightness combinations (B, +), (D, +), (M, -) and (M, -) or (B, -), (D, -), (M, -) and (M, -) (where M stands for "moderate") within a certain period.

[0272] To embody these points, the polarities and luminances of subpixels may be controlled on a frame-by-frame basis unlike the liquid crystal display device according to any of the first through seventh preferred embodiments of the present invention described above. For example, in an alternative liquid crystal display device, a TFT provided for each subpixel may drive it with data signals and scan signals applied independently to respective subpixels.

[0273] Alternatively, the liquid crystal display device according to the present invention may also be designed such that a TFT provided for each subpixel controls the luminance with a data signal that has been applied independently on a subpixel-by-subpixel basis but that those TFTs are driven through a common scan line as shown in FIG. 25. In that case, the luminances and polarities of respective subpixels can be controlled with independent data signals applied to those subpixels.

[0274] Still alternatively, the liquid crystal display device according to the present invention may also be designed such that a TFT provided for each subpixel controls its luminance with a data signal applied in common for respective subpixels but that the TFTs are driven through respectively different scan lines. In that case, by further subdividing one frame period, defining luminances and polarities for respective subpixels with the same data signal applied thereto, and setting the scan periods or timings for the respective subpixels (i.e., by performing time sharing within one frame), the luminances and polarities of the respective subpixels can be controlled.

[0275] It should be noted that the disclosure of Japanese Patent Application No. 2006-228476, upon which the present application claims the benefit of priority, and the disclosure of its related Japanese Patent Application No. 2006-228475 are hereby incorporated by reference.

INDUSTRIAL APPLICABILITY

[0276] The present invention provides a big-screen or high-definition liquid crystal display device that realizes very high display qualities with the viewing angle dependence of the γ characteristic reduced significantly. The liquid crystal display device of the present invention can be used effectively as a TV monitor of a big screen size of 30 inches or more. Further embodiments are:

1. A liquid crystal display device comprising a plurality of pixels, each including a first subpixel and a second subpixel, wherein each of the first and second subpixels includes:

a counter electrode; a subpixel electrode; and a liquid crystal layer interposed between the counter electrode and the subpixel electrode, and
wherein the subpixel electrodes of the first and second subpixels are provided separately from each other as first and second subpixel electrodes, respectively, while the first and second subpixels share the same counter electrode with each other, and
wherein when a predetermined grayscale tone is displayed through four or more consecutive even number of vertical scanning periods, the first and second subpixels have mutually different luminances in at least two of the even number of vertical scanning periods, first polarity periods that are included in the even number of vertical scanning periods and that maintain a first polarity are as long as second polarity
periods that are also included in the even number of vertical scanning periods and that maintain a second polarity for each of the first and second subpixels, and in each of the first and second polarity periods, the difference between the average of effective voltages applied to the liquid crystal layer of the first subpixel and that of effective voltages applied to the liquid crystal layer of the second subpixel is substantially equal to zero.

2. The liquid crystal display device of item 1, wherein if the effective voltages applied to the respective liquid crystal layers of the first and second subpixels of each said pixel are represented by VLspa and VLspb, respectively, then two of the four consecutive vertical scanning periods are the first polarity periods and the other two vertical scanning periods are the second polarity periods, and
wherein in at least one the first polarity periods and the second polarity periods, one of the two vertical scanning periods thereof satisfies | VLspa | > | VLspb | and the other vertical scanning period satisfies | VLspb | < | VLspb |.

3. The liquid crystal display device of item 1, wherein if the effective voltages applied to the respective liquid crystal

layers of the first and second subpixels of each said pixel are represented by VLspa and VLspb, respectively, then two of the four consecutive vertical scanning periods are the first polarity periods and the other two vertical scanning periods are the second polarity periods, and
wherein in at least one of the first polarity periods and the second polarity periods, the | VLspa | and | VLspb | values of one of the two vertical scanning periods thereof are equal to those of the other vertical scanning period.

4. The liquid crystal display device of item 2 or 3, wherein of the four vertical scanning periods, the number of vertical scanning periods that satisfy | VLspb | > | VLspb | is equal to that of vertical scanning periods that satisfy | VLspb | < | VLspb |.

5. The liquid crystal display device of any of items 1 to 4, wherein the plurality of the pixels are arranged in column and row directions so as to form a matrix pattern, and
wherein in each of the plurality of the pixels the first and second subpixels are arranged in the column direction.

6. The liquid crystal display device of any of items 1 to 5, wherein in each of the plurality of the pixels, voltages applied to the first and second subpixel electrodes change as voltages on their associated storage capacitor lines vary.

7. The liquid crystal display device of item 6, wherein in each of the plurality of the pixels, a voltage on a storage capacitor line associated with the first subpixel electrode and a voltage on a storage capacitor line associated with the second subpixel electrode change mutually differently.

8. The liquid crystal display device of any of items 5 to 7, wherein a voltage applied to the second subpixel electrode of a particular one of the plurality of the pixels and a voltage applied to the first subpixel electrode of another pixel that is adjacent to the particular pixel in the column direction change as the voltage on their common storage capacitor line varies.

9. The liquid crystal display device of any of items 5 to 7, wherein a voltage applied to the second subpixel electrode of a particular one of the plurality of the pixels and a voltage applied to the first subpixel electrode of another pixel that is adjacent to the particular pixel in the column direction change as voltages on their associated storage capacitor lines vary.

10. The liquid crystal display device of any of items 1 to 9, wherein in each of the plurality of the pixels, the first and second subpixel electrodes are connected to the same signal line by way of their associated switching element.

11. The liquid crystal display device of any of items 1 to 5, wherein in each of the plurality of the pixels, the first and second subpixel electrodes are respectively
connected to first and second signal lines by way of first and second switching elements, respectively.

12. The liquid crystal display device of any of items 1 to 11, wherein in each of the first and second polarity periods, one of the two vertical scanning periods satisfies | VLspb | > | VLspb | and the other vertical scanning period satisfies | VLspb | < | VLspb |.

13. The liquid crystal display device of any of items 1 to 12, wherein in each of the plurality of the pixels, | VLspa | and | VLspb | switch their magnitudes every vertical scanning period and the polarities of the first and second subpixels are inverted every other vertical scanning period.

14. The liquid crystal display device of any of items 1 to 13, wherein the frame frequency is 60 Hz.

15. The liquid crystal display device of any of items 1 to 12, wherein in each of the plurality of the pixels, | VLspb | and | VLspb | switch their magnitudes every other vertical scanning period and the polarities of the first and second subpixels are inverted every vertical scanning period.

16. The liquid crystal display device of item 15, wherein the frame frequency is 120 Hz.

17. The liquid crystal display device of any of items 1 to 12, wherein in each of the plurality of the pixels, | VLspa | and | VLspb | switch their magnitudes every other vertical scanning period and the polarities of the first and second subpixels are inverted every other vertical scanning period, and

wherein | VLspb | and | VLspb | switch their magnitudes non-synchronously with the inversion of the polarities of the first and second subpixels.

18. The liquid crystal display device of any of items 1 to 11, wherein in either the first polarity periods or the second polarity periods, one of the two vertical scanning
periods satisfies | VLspb | > | VLspb | and the other vertical scanning period satisfies | VLspa | < | VLspb |, and wherein in the other polarity periods, VLspa is equal to VLspb in each of the two vertical scanning periods.

19. The liquid crystal display device of item 18, wherein voltages on storage capacitor lines associated with the first and second subpixel electrodes change between a first level, a second level that is higher than the first level, and a third level that is higher than the second level.

20. The liquid crystal display device of any of items 1 to 19, wherein the first and second subpixel electrodes have the same display area.

Claims

1. A liquid crystal display device (100) comprising a display section (110) and a driver (120) which is adapted to generate a drive signal based on an input video signal to drive the display section (110),
the display section (110) comprises a plurality of pixels, each including first subpixel (10a) and a second subpixel (10b).
wherein each of the first and second subpixels (10a, 10b) includes: a counter electrode (17); a subpixel electrode; and a liquid crystal layer interposed between the counter electrode (17) and the subpixel electrode, and
wherein the subpixel electrodes of the first and second subpixels (10a, 10b) are provided separately from each other as first and second subpixel electrodes (18a, 18b), respectively, while the first and second subpixels (10a, 10b) share the same counter electrode (17) with each other, and
wherein when the input video signal indicates a predetermined grayscale tone through at least two of four or more consecutive even number of vertical scanning periods, the driver (120) drives the display section (110) such that the first and second subpixels (10a, 10b) have mutually different luminances in the even number of vertical scanning periods, first polarity periods that are included in the even number of vertical scanning periods and that maintain a first polarity are as long as second polarity periods that are also included in the even number of vertical scanning periods and that maintain a second polarity for each of the first and second subpixels, the first polarity indicating a direction of an electric field applied on the liquid crystal display and the second polarity indicating a direction, being opposite to that to the first polarity, of an electric field applied on the liquid crystal display, and in each of the first and second polarity periods, the difference between the average of effective voltages applied to the liquid crystal layer of the first subpixel (10a) and that of effective voltages applied to the liquid crystal layer of the second subpixel (10b) is substantially equal to zero, and
wherein in each of the plurality of the pixels, the polarities of the first and second subpixels (10a, 10b) are inverted every other vertical scanning period.

2. The liquid crystal display device (100) of claim 1, wherein if the effective voltages applied to the respective liquid crystal layers of the first and second subpixels (10a, 10b) of each said pixel are represented by VLspa and VLspb, respectively, then two of the four consecutive vertical scanning periods are the first polarity periods and the other two vertical scanning periods are the second polarity periods, and
wherein in at least one the first polarity periods and the second polarity periods, one of the two vertical scanning periods thereof satisfies | VLspa | > | VLspb | and the other vertical scanning period satisfies | VLspa | < | VLspb | .

3. The liquid crystal display device (100) of claim 1, wherein if the effective voltages applied to the respective liquid crystal layers of the first and second subpixels (10a, 10b) of each said pixel are represented by VLspa and VLspb, respectively, then two of the four consecutive vertical scanning periods are the first polarity periods and the other two vertical scanning periods are the second polarity periods, and
wherein in at least one of the first polarity periods and the second polarity periods, the | VLspa | and | VLspb | values of one of the two vertical scanning periods thereof are equal to those of the other vertical scanning period.

4. The liquid crystal display device (100) of claim 2 or 3, wherein of the four vertical scanning periods, the number of vertical scanning periods that satisfy | VLspa | > | VLspb | is equal to that of vertical scanning periods that satisfy | VLspa | < | VLspb |.

5. The liquid crystal display device (100) of any of claims 1 to 4, wherein the plurality of the pixels are arranged in column and row directions so as to form a matrix pattern, and
wherein in each of the plurality of the pixels the first and second subpixels (10a, 10b) are arranged in the column direction.

6. The liquid crystal display device (100) of any of claims 1 to 5, wherein in each of the plurality of the pixels, the first and second subpixel electrodes are respectively connected to storage capacitor lines (24a, 24b) each connected to a storage capacitor of the liquid crystal display device(100), and voltages applied to the first and second subpixel electrodes change as voltages on the respectively connected storage capacitor lines (24a, 24b) vary.

7. The liquid crystal display device (100) of claim 6, wherein in each of the plurality of the pixels, a voltage on a storage capacitor line (24a) associated with the first subpixel electrode and a voltage on a storage capacitor line (24b) associated with the second subpixel electrode change mutually differently.

8. The liquid crystal display device (100) of any of claim 6 or 7, wherein the second subpixel electrode of a particular one of the plurality of the pixels and the first subpixel electrode of another pixel that is adjacent to the particular pixel in the column direction are connected to their common storage capacitor line (24a, 24b), and a voltage applied to the second subpixel electrode of the particular pixel and a voltage applied to the first subpixel electrode of the other pixel change as the voltage on the common storage capacitor line (24a, 24b) varies.

9. The liquid crystal display device (100) of any of claims 1 to 5, wherein in each of the plurality of the pixels, the first and second subpixel electrodes are respectively connected to first and second signal lines by way of first and second switching elements, respectively.

10. The liquid crystal display device (100) of any of claims 1 to 9, wherein in each of the first and second polarity periods, one of the two vertical scanning periods satisfies | VLspa | > | VLspb | and the other vertical scanning period satisfies | VLspa | < | VLspb |.

11. The liquid crystal display device (100) of any of claims 1 to 10, wherein in each of the plurality of the pixels. | VLspa | and | VLspb | switch their magnitudes every vertical scanning period.

12. The liquid crystal display device (100) of any of claims 1 to 10, wherein in each of the plurality of the pixels, | VLspa | and | VLspb | switch their magnitudes every other vertical scanning period and, and
wherein | VLspa | and | VLspb | switch their magnitudes at a beginning of the last of each of the two vertical scanning periods over which the polarities of the first and second subpixels (10a, 10b) are maintained.

FIG.1

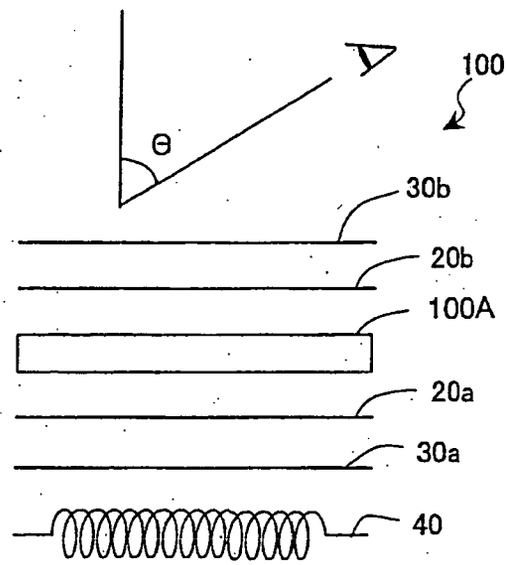

FIG.2

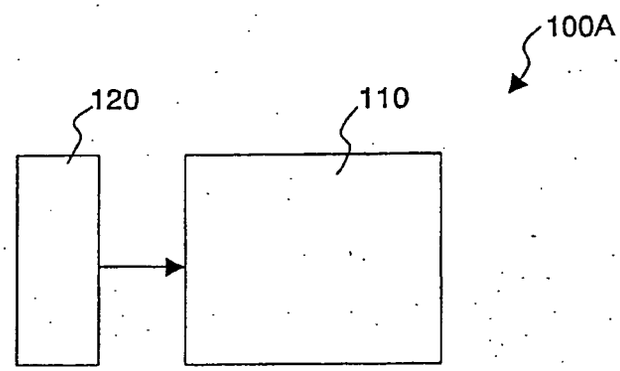

FIG.3

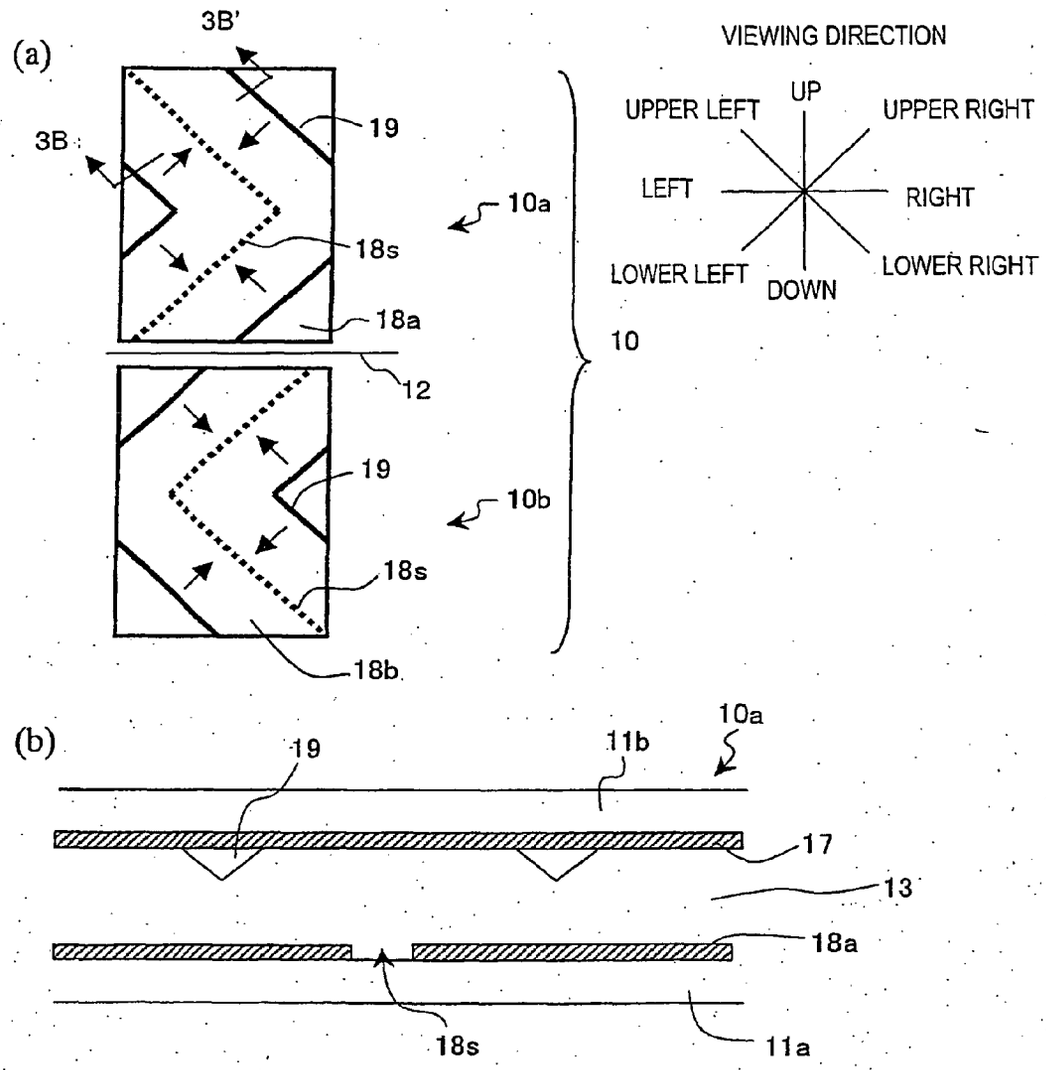
(a)
3B'
3B
19
18s
18a
10a
12
19
18s
18b
10b
10
VIEWING DIRECTION
UP
UPPER LEFT
UPPER RIGHT
LEFT
RIGHT
LOWER LEFT
DOWN
LOWER RIGHT
(b)
19
11b
10a
17
13
18a
18s
11a

FIG.4

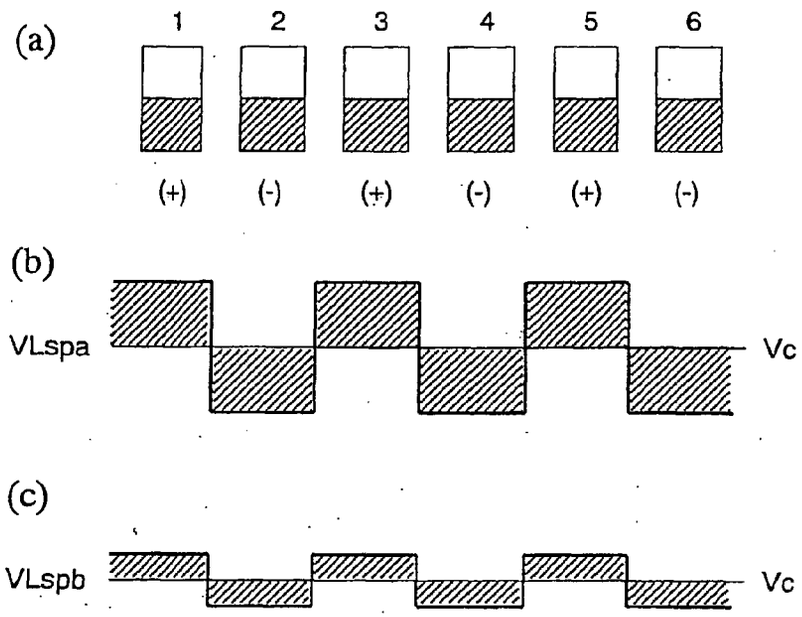

FIG.5

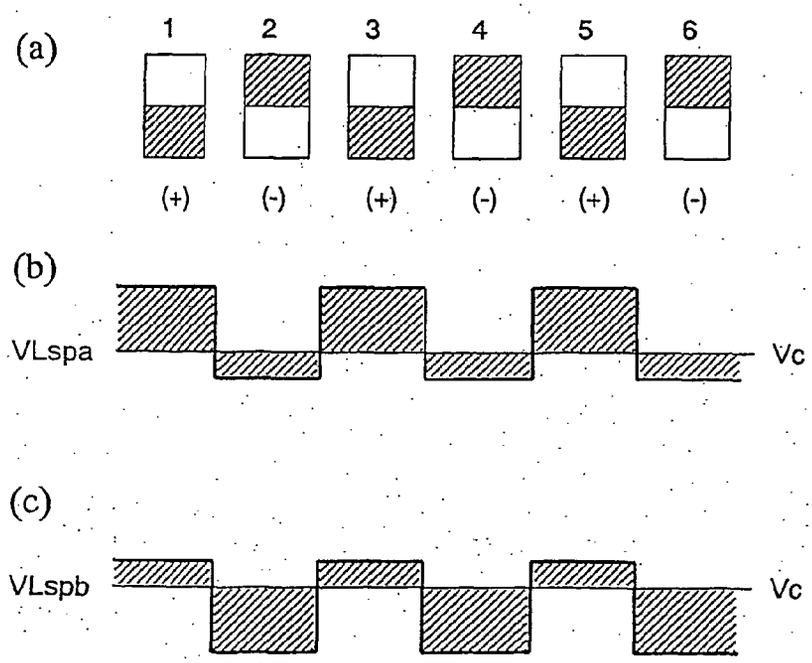

FIG.6

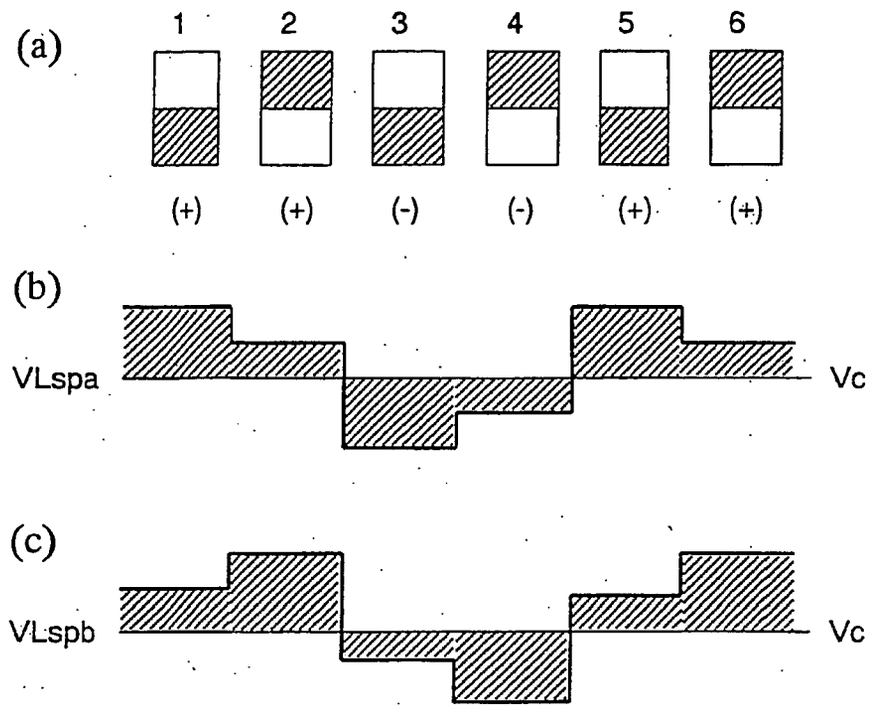

FIG. 7

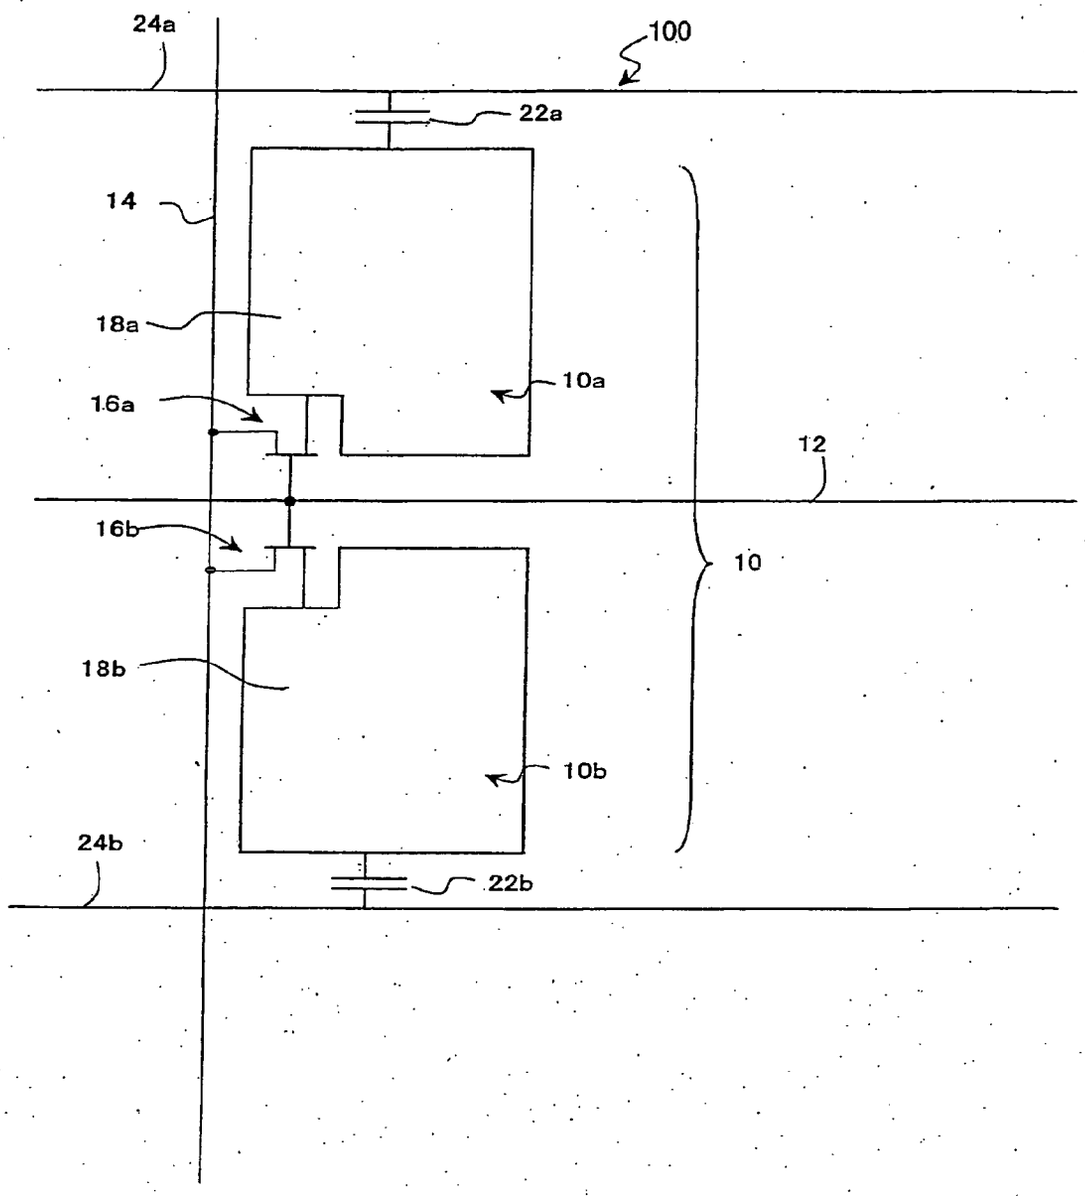

FIG.8

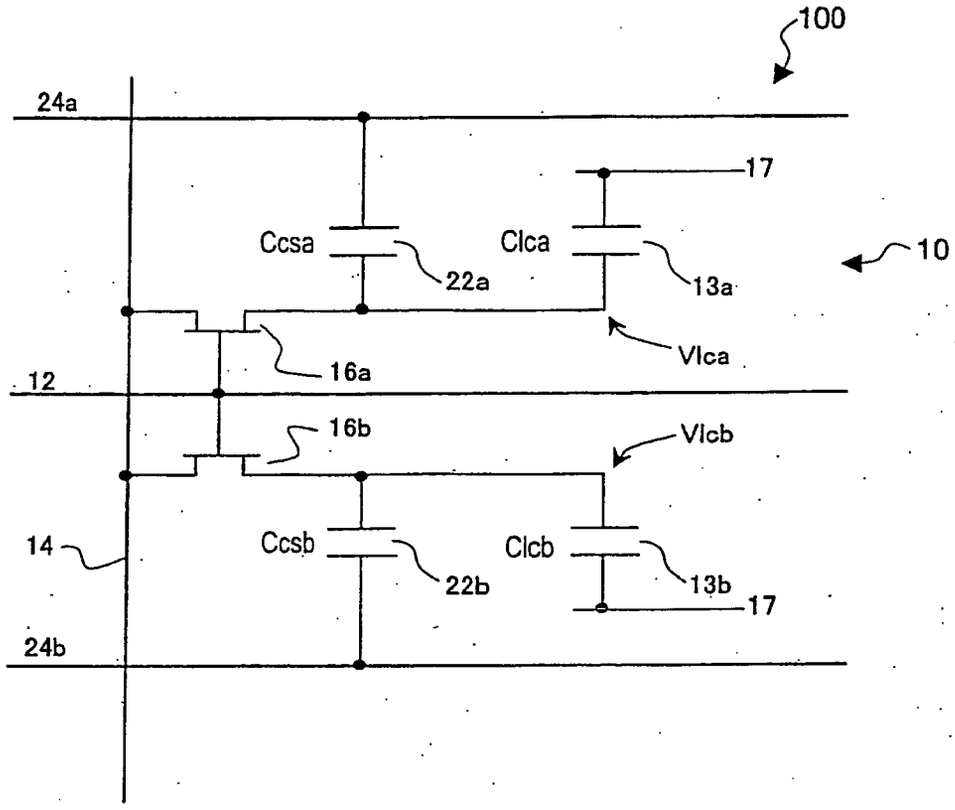
100
24a
17
Ccsa
Clca
10
22a
13a
Vlca
16a
12
16b
Vlcb
14
Ccsb
Clcb
22b
13b
17
24b

FIG.9

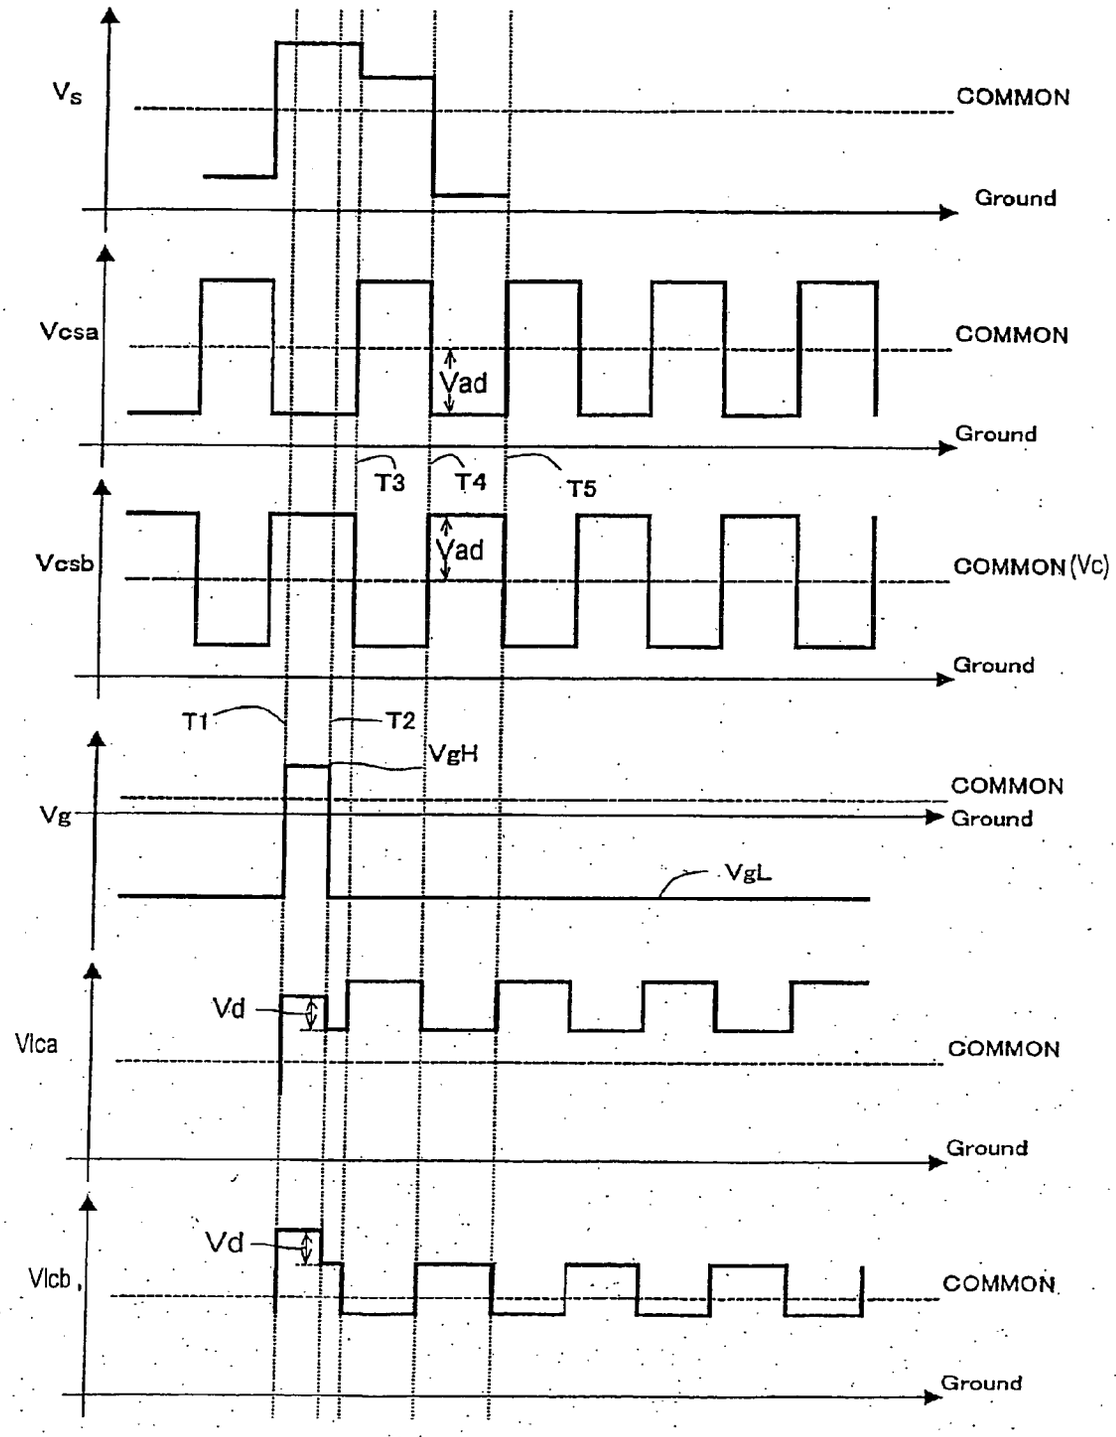
Vs
COMMON
Ground
Vcsa
COMMON
Vad
Ground
T3
T4
T5
Vcsb
Vad
COMMON (Vc)
Ground
T1
T2
VgH
Vg
COMMON
Ground
VgL
Vd
Vlca
COMMON
Ground
Vd
Vlcb
COMMON
Ground

FIG.10

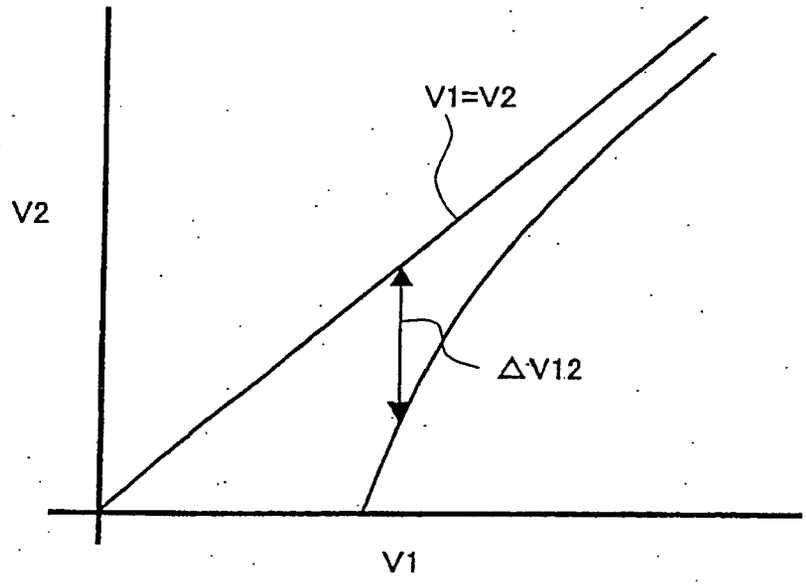

FIG. 11

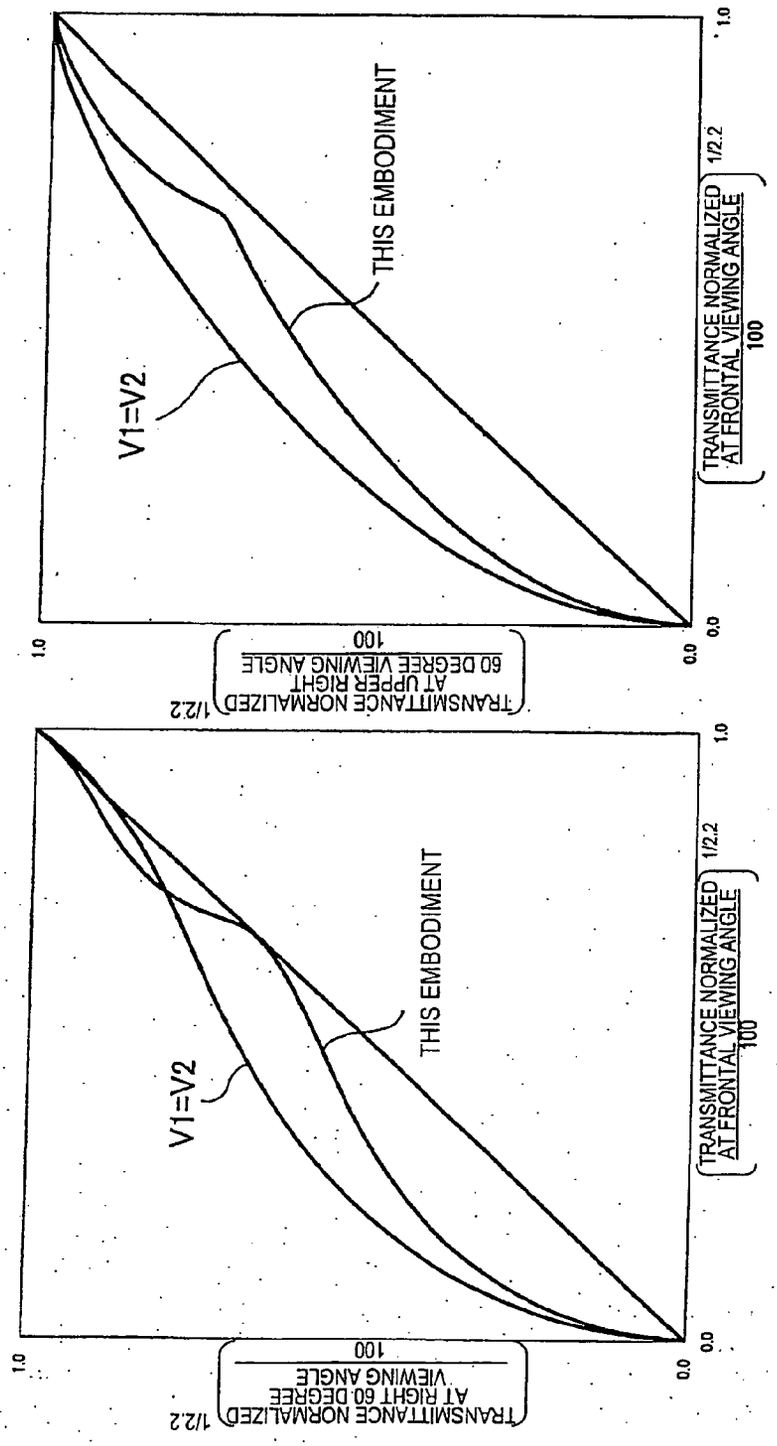
1.0
0.0
TRANSMITTANCE NORMALIZED
AT RIGHT 60 DEGREE
VIEWING ANGLE
100
1/2.2
V1=V2
THIS EMBODIMENT
TRANSMITTANCE NORMALIZED
AT FRONTAL VIEWING ANGLE
100
1/2.2
1.0
0.0
TRANSMITTANCE NORMALIZED
AT UPPER RIGHT
60 DEGREE VIEWING ANGLE
100
1/2.2
V1=V2
THIS EMBODIMENT
TRANSMITTANCE NORMALIZED
AT FRONTAL VIEWING ANGLE
100
1/2.2
1.0
0.0

(a)

(b)

FIG.12

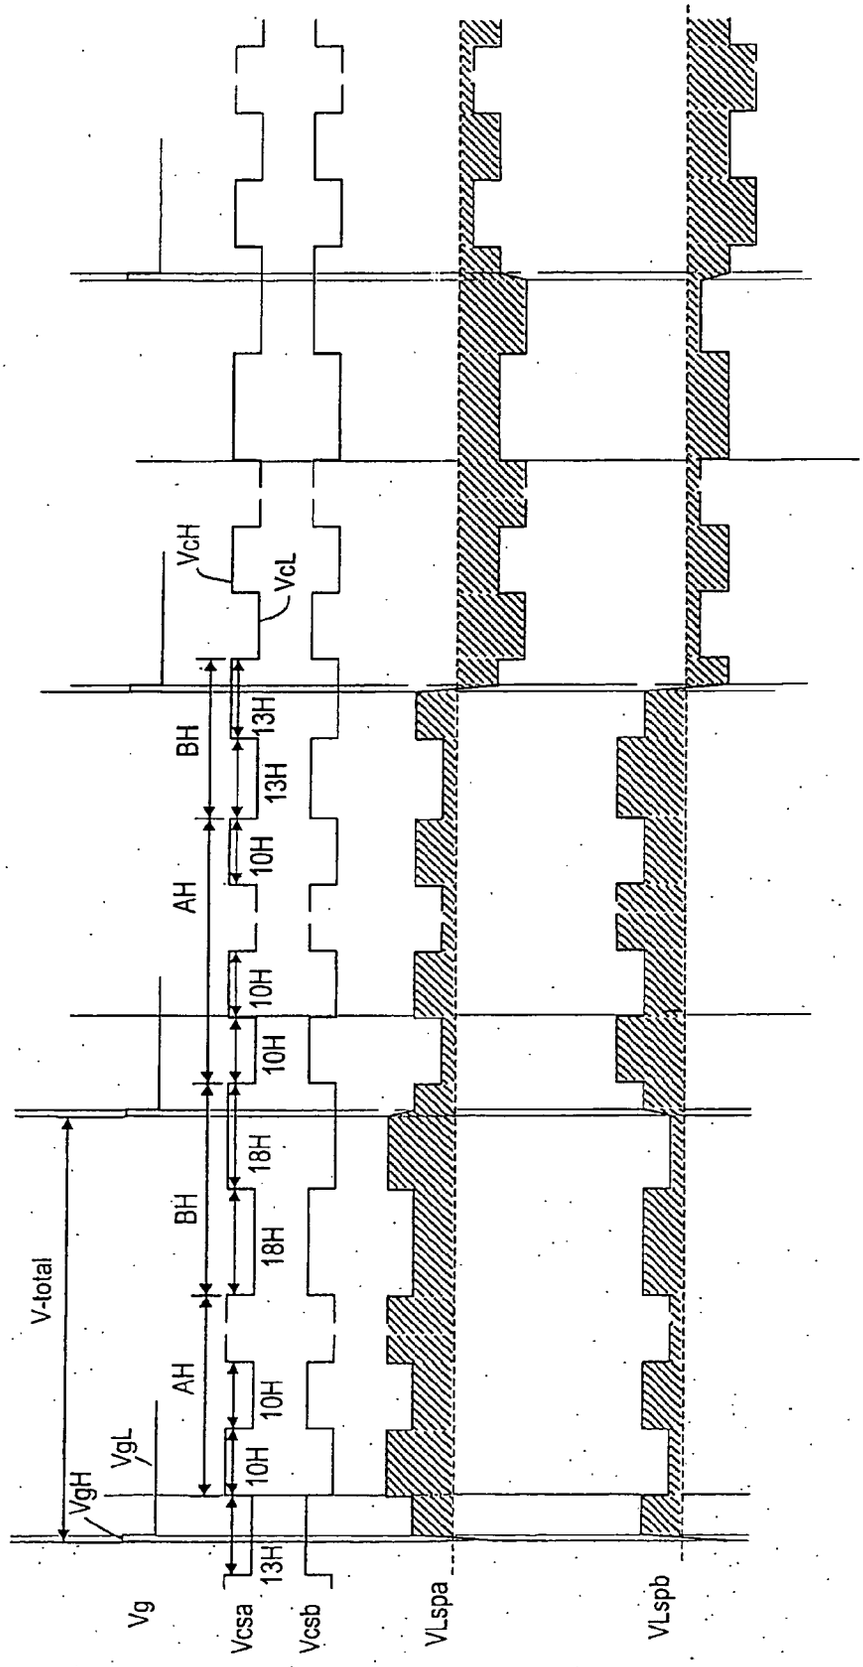
V-total
VgH
VgL
AH
BH
AH
BH
10H
10H
18H
18H
10H
10H
13H
13H
13H
VcH
VcL
Vg
Vcsa
Vcsb
VLspa
VLspb

FIG.13

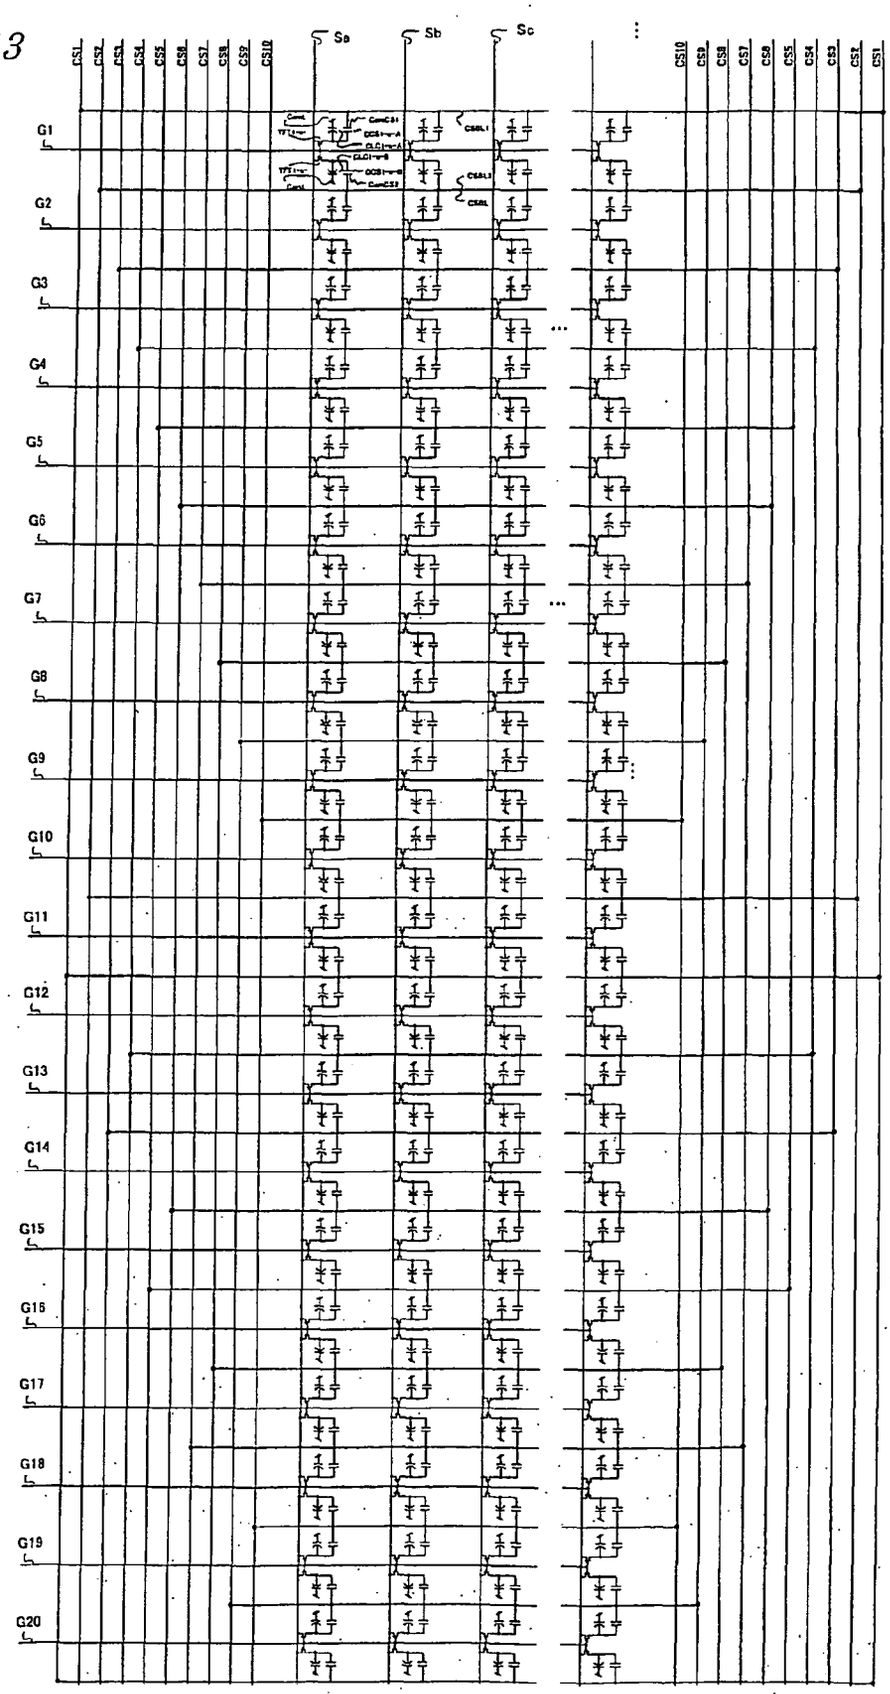
CS1
CS2
CS3
CS4
CS5
CS6
CS7
CS8
CS9
CS10
Sa
Sb
Sc
G1
G2
G3
G4
G5
G6
G7
G8
G9
G10
G11
G12
G13
G14
G15
G16
G17
G18
G19
G20

FIG.14

	Sa	Sb	Sc	Sd	Se	Sf
CS1	1-a-A B +	1-b-A D -	1-c-A B +	1-d-A D -	1-e-A B +	1-f-A D -
ONE DOT → G1	1-a-B D +	1-b-B B -	1-c-B D +	1-d-B B -	1-e-B D +	1-f-B B -
CS2	2-a-A B -	2-b-A D +	2-c-A B -	2-d-A D +	2-e-A B -	2-f-A D +
G2	2-a-B D -	2-b-B B +	2-c-B D -	2-d-B B +	2-e-B D -	2-f-B B +
CS3	3-a-A B +	3-b-A D -	3-c-A B +	3-d-A D -	3-e-A B +	3-f-A D -
G3	3-a-B D +	3-b-B B -	3-c-B D +	3-d-B B -	3-e-B D +	3-f-B B -
CS4	4-a-A B -	4-b-A D +	4-c-A B -	4-d-A D +	4-e-A B -	4-f-A D +
G4	4-a-B D -	4-b-B B +	4-c-B D -	4-d-B B +	4-e-B D -	4-f-B B +
CS5	5-a-A B +	5-b-A D -	5-c-A B +	5-d-A D -	5-e-A B +	5-f-A D -
G5	5-a-B D +	5-b-B B -	5-c-B D +	5-d-B B -	5-e-B D +	5-f-B B -
CS6	6-a-A B -	6-b-A D +	6-c-A B -	6-d-A D +	6-e-A B -	6-f-A D +
G6	6-a-B D -	6-b-B B +	6-c-B D -	6-d-B B +	6-e-B D -	6-f-B B +
CS7	7-a-A B +	7-b-A D -	7-c-A B +	7-d-A D -	7-e-A B +	7-f-A D -
G7	7-a-B D +	7-b-B B -	7-c-B D +	7-d-B B -	7-e-B D +	7-f-B B -
CS8	8-a-A B -	8-b-A D +	8-c-A B -	8-d-A D +	8-e-A B -	8-f-A D +
G8	8-a-B D -	8-b-B B +	8-c-B D -	8-d-B B +	8-e-B D -	8-f-B B +
CS9	9-a-A B +	9-b-A D -	9-c-A B +	9-d-A D -	9-e-A B +	9-f-A D -
G9	9-a-B D +	9-b-B B -	9-c-B D +	9-d-B B -	9-e-B D +	9-f-B B -
CS10	10-a-A B -	10-b-A D +	10-c-A B -	10-d-A D +	10-e-A B -	10-f-A D +
G10	10-a-B D -	10-b-B B +	10-c-B D -	10-d-B B +	10-e-B D -	10-f-B B +
CS2	11-a-A B +	11-b-A D -	11-c-A B +	11-d-A D -	11-e-A B +	11-f-A D -
G11	11-a-B D +	11-b-B B -	11-c-B D +	11-d-B B -	11-e-B D +	11-f-B B -
CS1	12-a-A B -	12-b-A D +	12-c-A B -	12-d-A D +	12-e-A B -	12-f-A D +
G12	12-a- D -	12-b-B B +	12-c-B D -	12-d-B B +	12-e-B D -	12-f-B B +

FIG.15

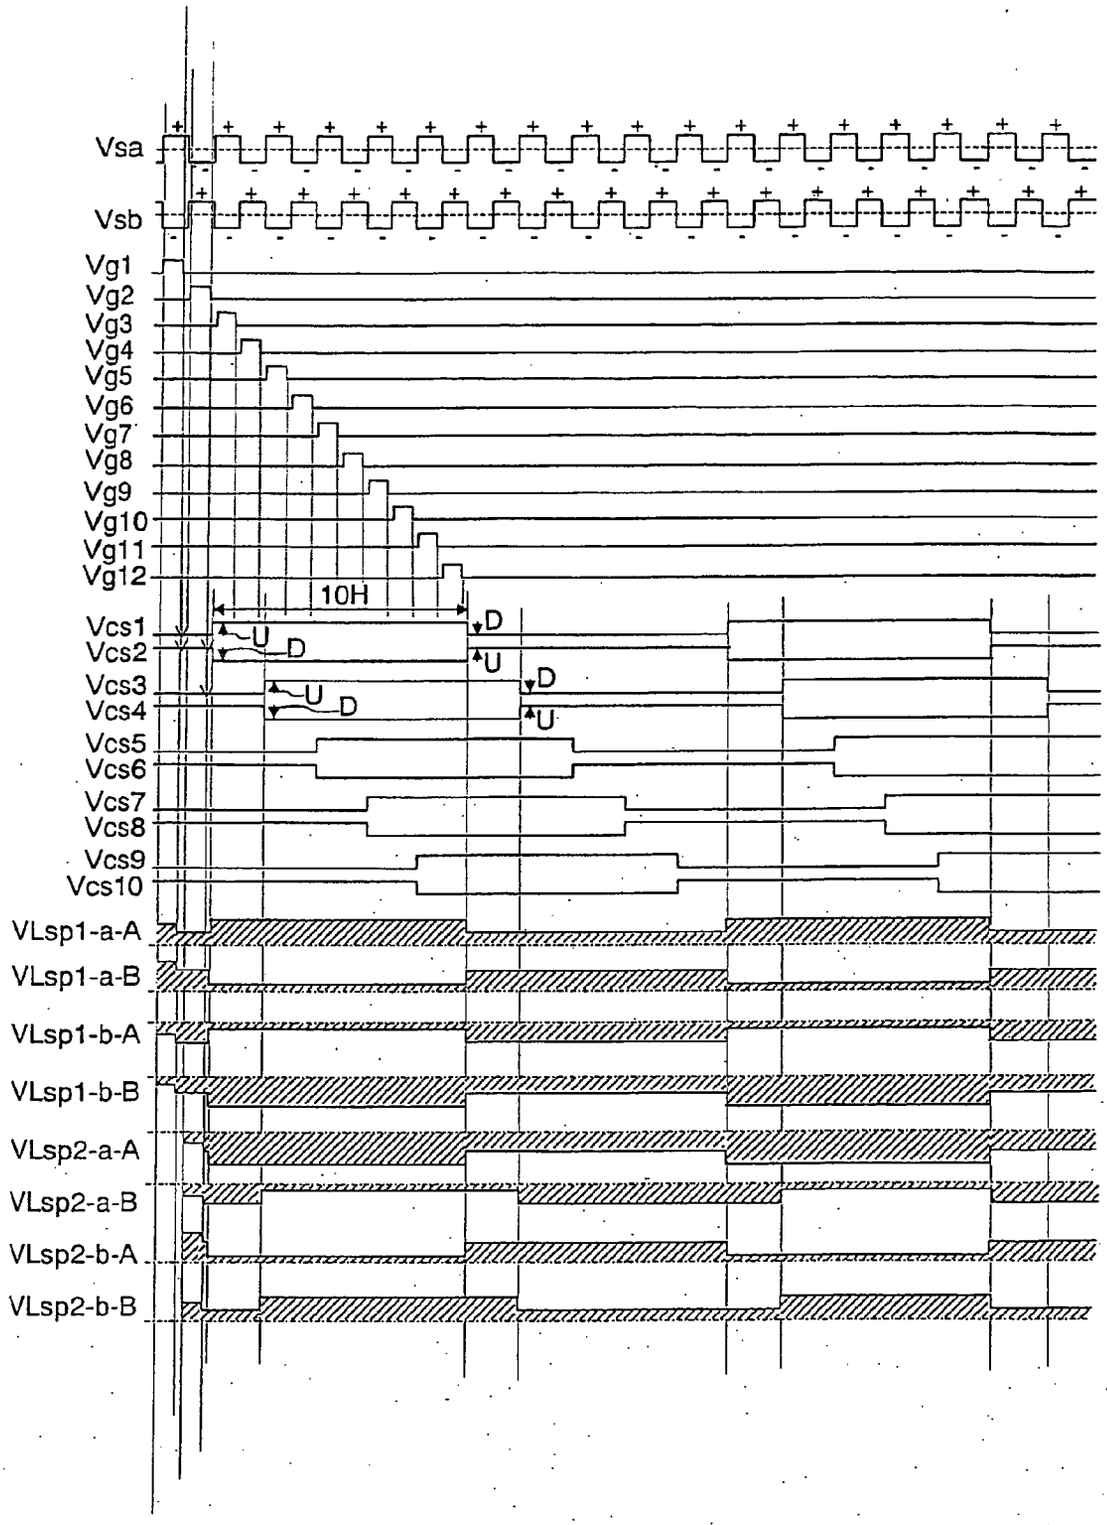
Vsa
Vsb
Vg1
Vg2
Vg3
Vg4
Vg5
Vg6
Vg7
Vg8
Vg9
Vg10
Vg11
Vg12
10H
Vcs1
Vcs2
Vcs3
Vcs4
Vcs5
Vcs6
Vcs7
Vcs8
Vcs9
Vcs10
U
D
VLsp1-a-A
VLsp1-a-B
VLsp1-b-A
VLsp1-b-B
VLsp2-a-A
VLsp2-a-B
VLsp2-b-A
VLsp2-b-B

FIG.16

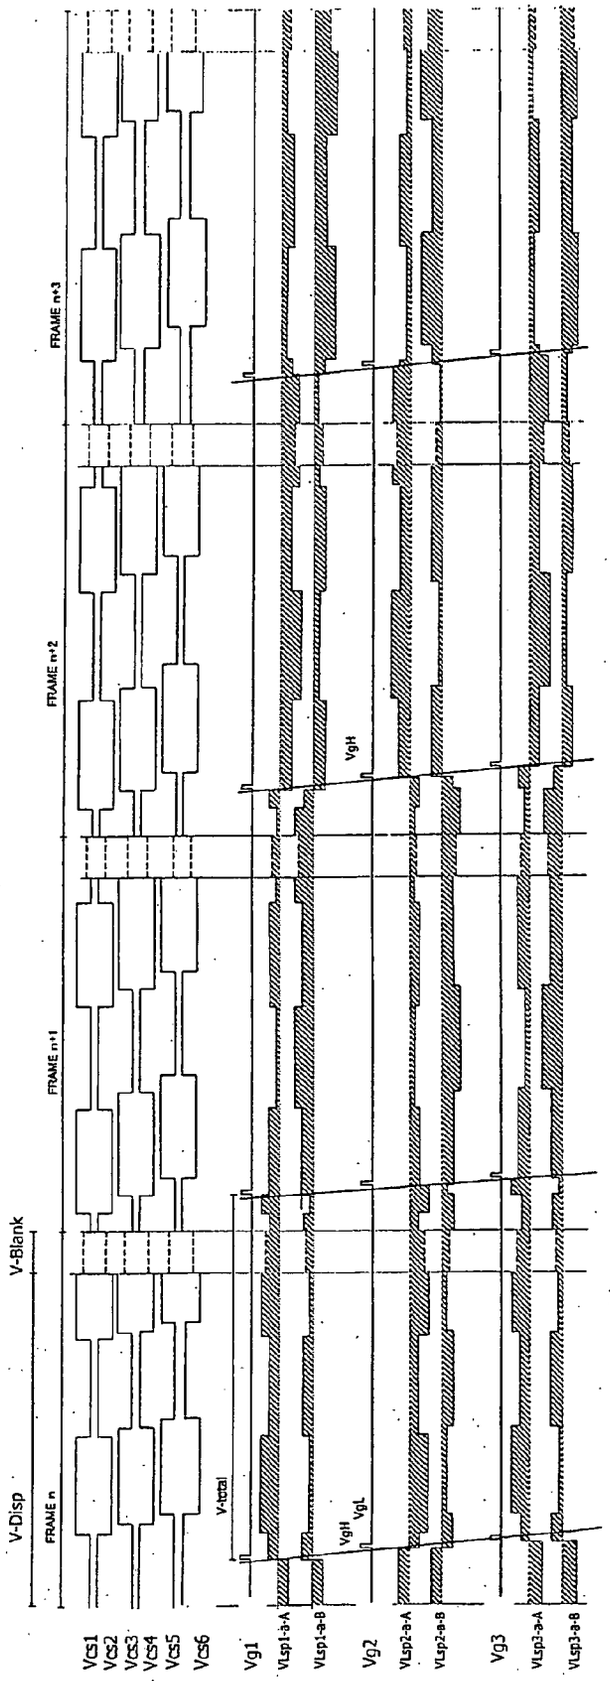
V-Disp
V-Blank
FRAME n
FRAME n+1
FRAME n+2
FRAME n+3
V-total
Vcs1
Vcs2
Vcs3
Vcs4
Vcs5
Vcs6
Vg1
VLsp1-a-A
VLsp1-a-B
VgH
VgL
Vg2
VLsp2-a-A
VLsp2-a-B
Vg3
VLsp3-a-A
VLsp3-a-B

FIG.17

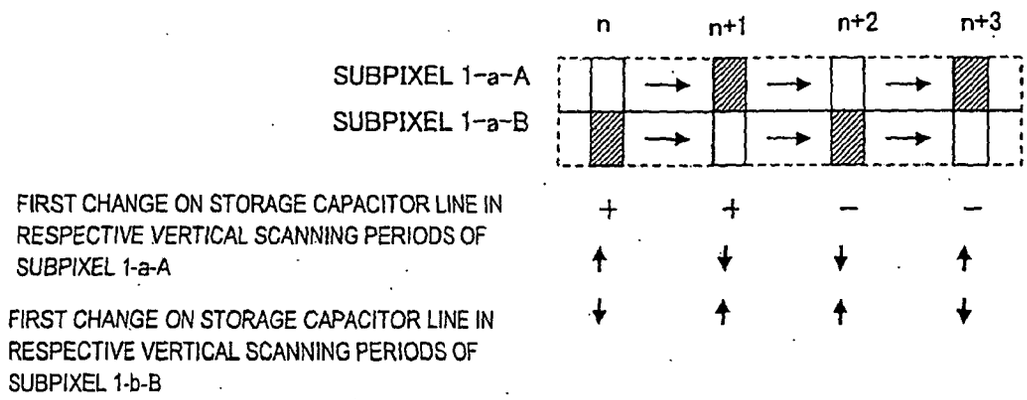
n
n+1
n+2
n+3
SUBPIXEL 1-a-A
SUBPIXEL 1-a-B
FIRST CHANGE ON STORAGE CAPACITOR LINE IN RESPECTIVE VERTICAL SCANNING PERIODS OF SUBPIXEL 1-a-A
+
+
−
−
FIRST CHANGE ON STORAGE CAPACITOR LINE IN RESPECTIVE VERTICAL SCANNING PERIODS OF SUBPIXEL 1-b-B

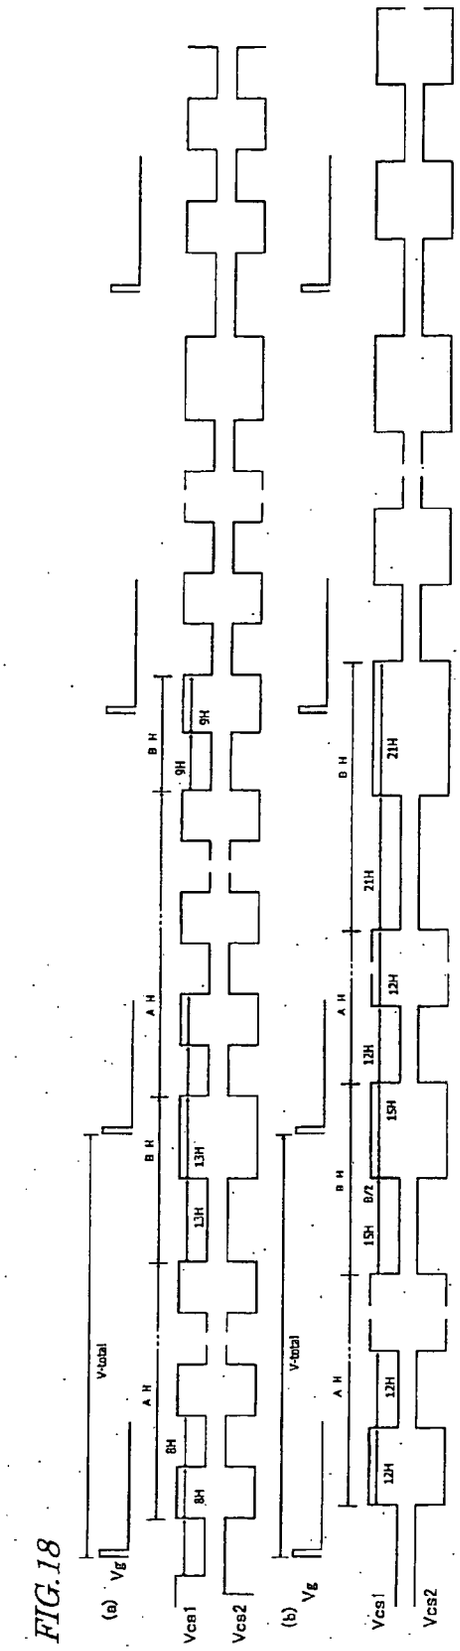
(a)
Vg
V-total
A H
B H
8H
13H
9H
Vcs1
Vcs2
(b)
Vg
V-total
A H
B H
12H
15H
8/2
21H
Vcs1
Vcs2

FIG.18

FIG.19

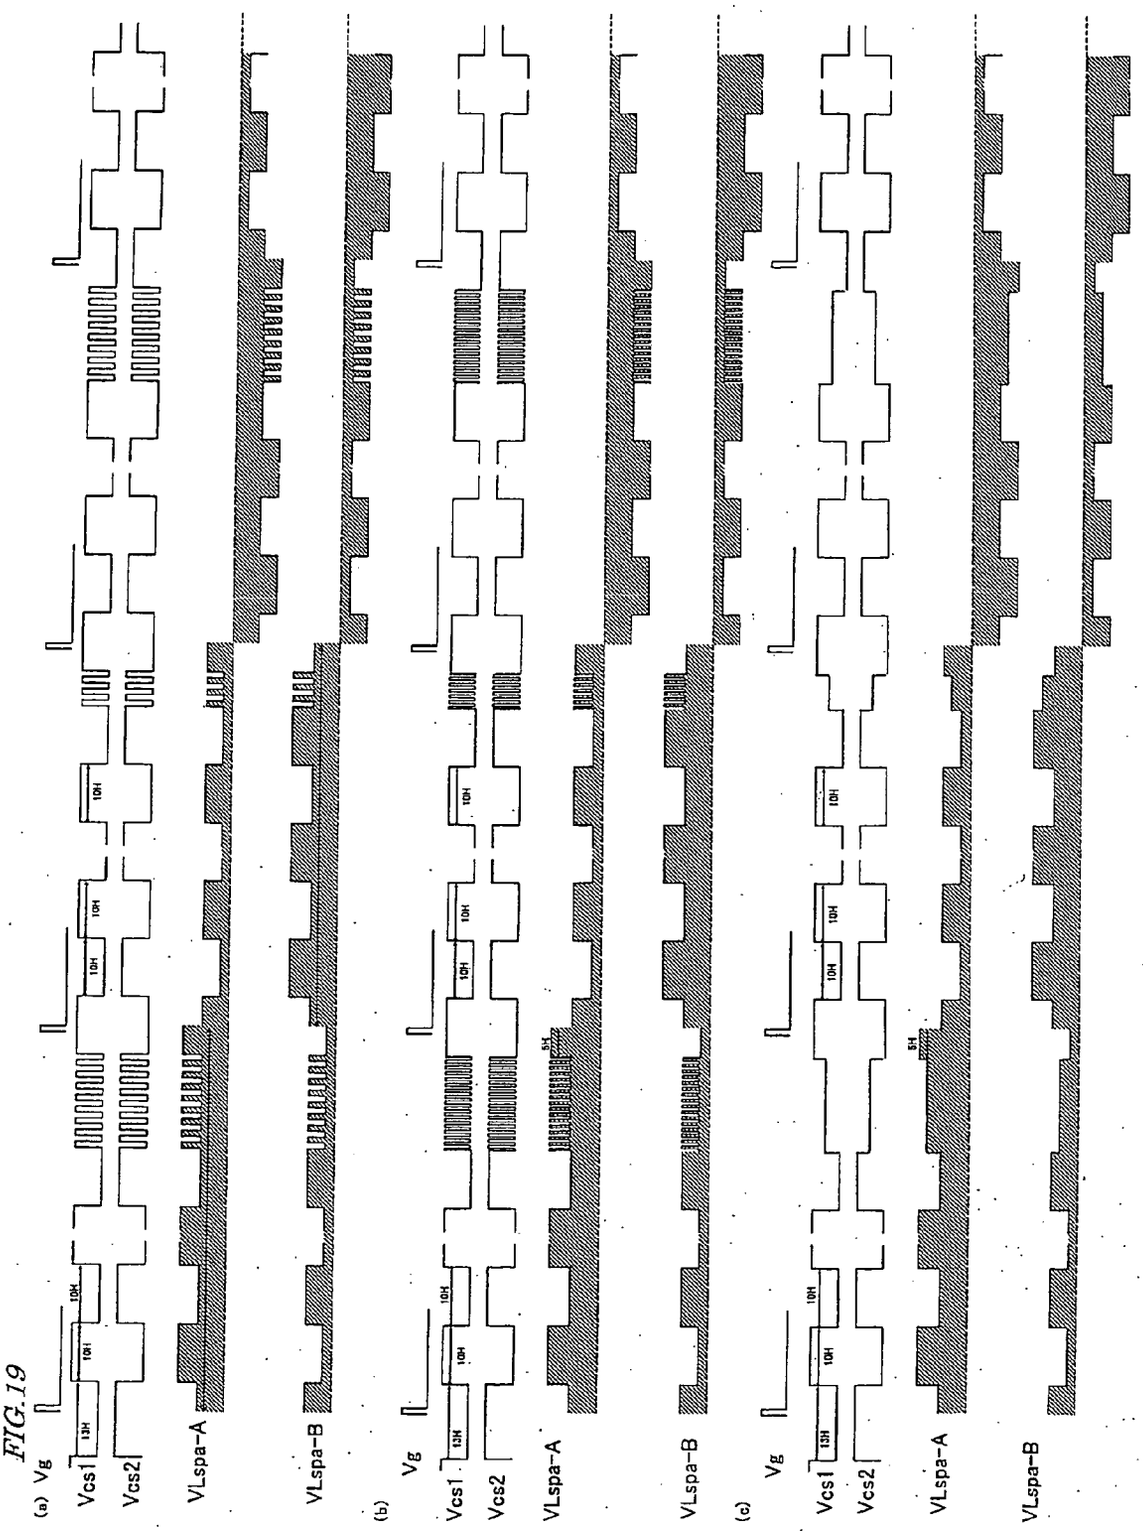
(a)
Vg
Vcs1
Vcs2
VLspa-A
VLspa-B
(b)
Vg
Vcs1
Vcs2
VLspa-A
VLspa-B
(c)
Vg
Vcs1
Vcs2
VLspa-A
VLspa-B

FIG.20

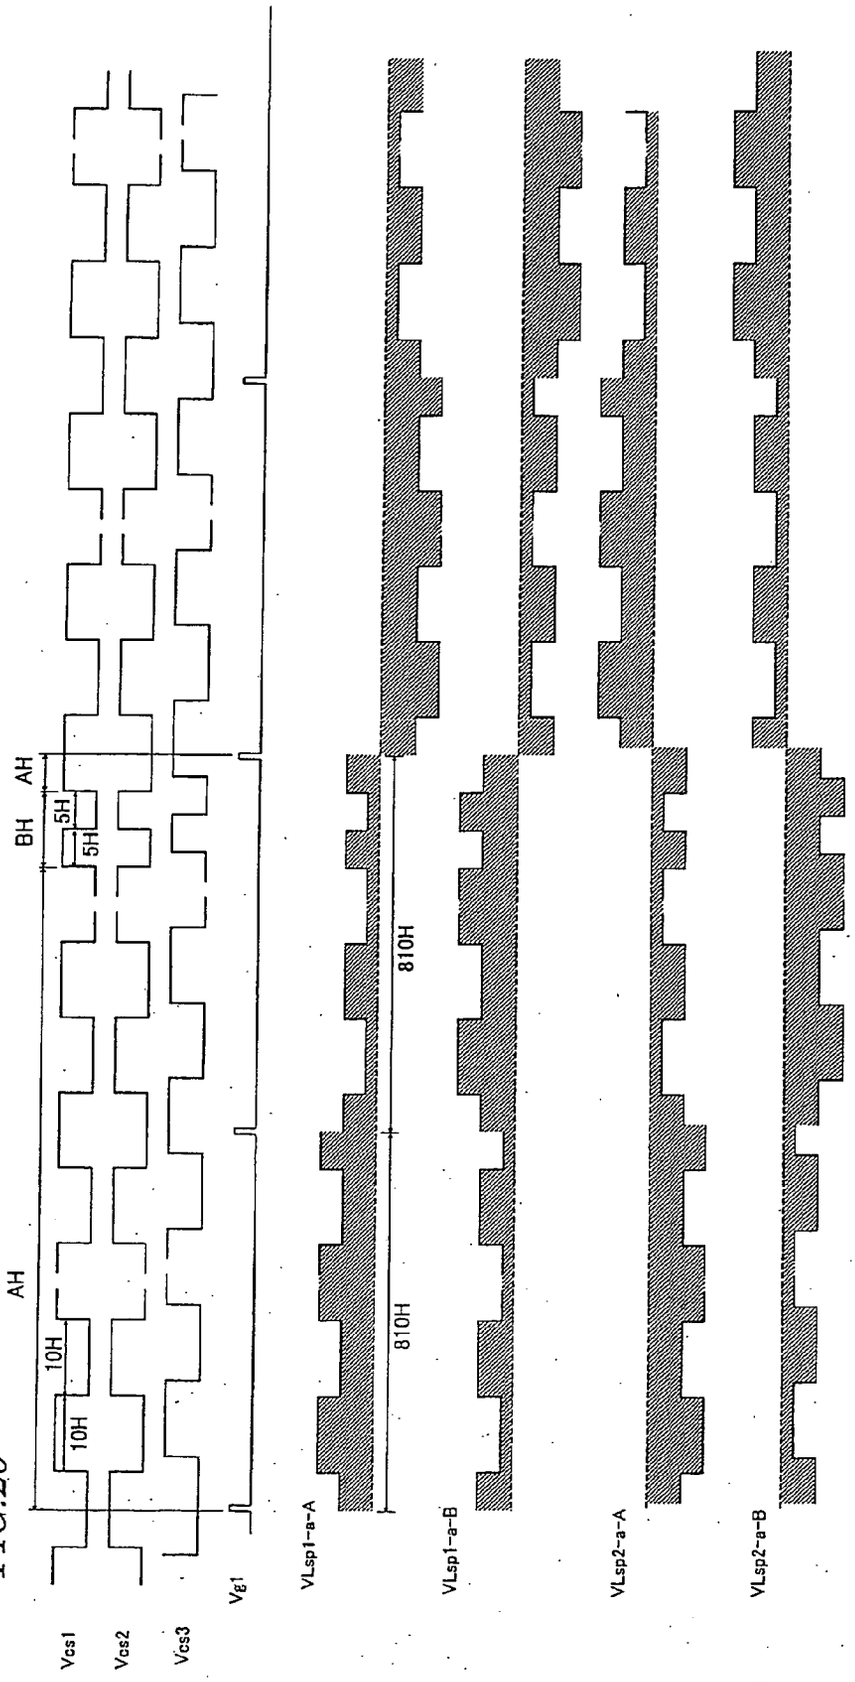
Vcs1
Vcs2
Vcs3
Vg1
VLsp1-a-A
VLsp1-a-B
VLsp2-a-A
VLsp2-a-B
AH
10H
10H
AH
BH
5H
5H
810H
810H

FIG.21

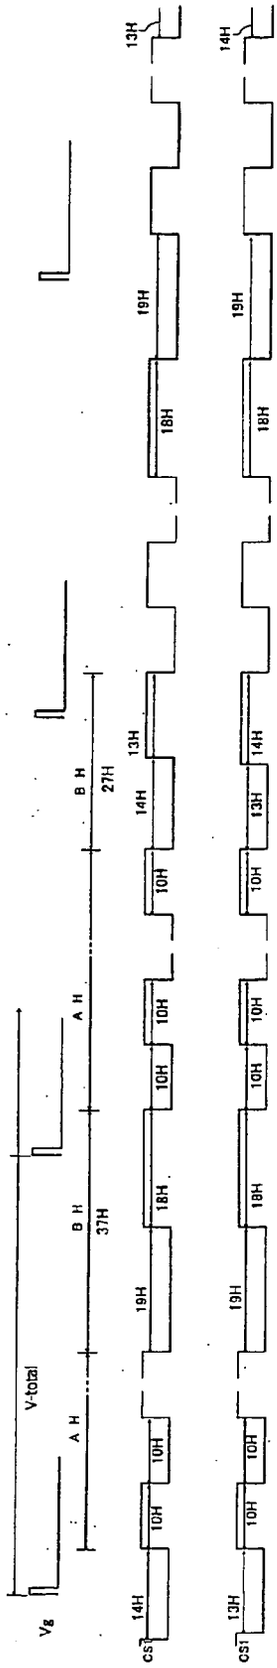

FIG.22

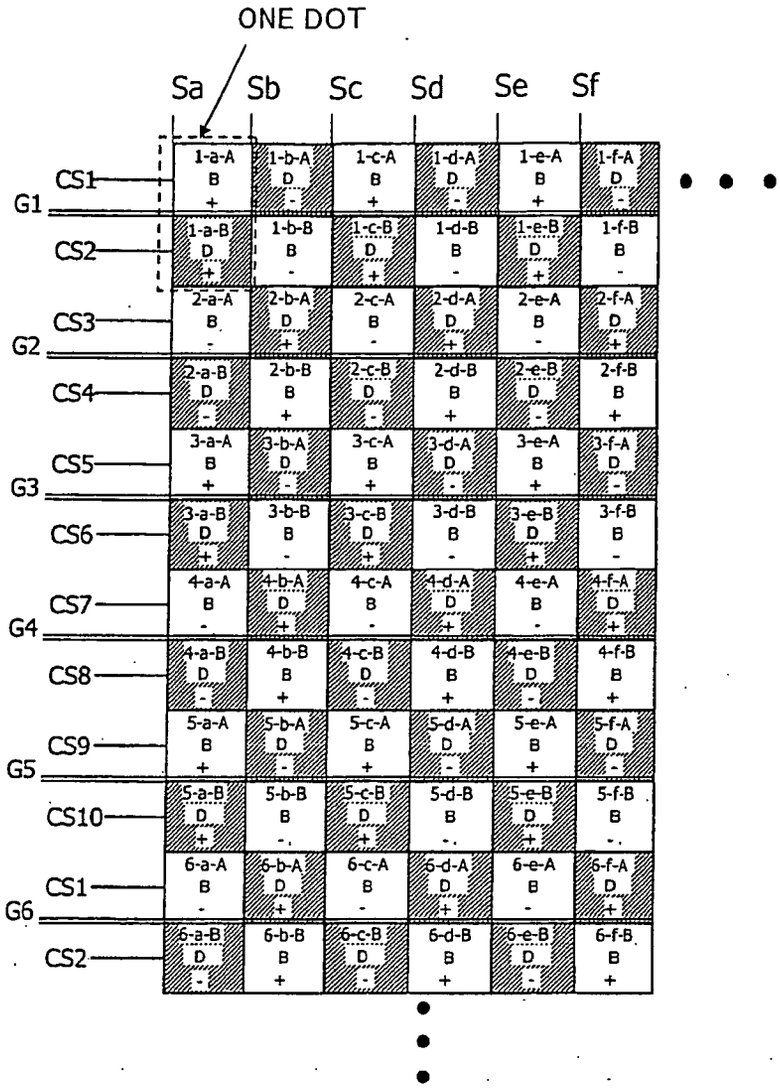
ONE DOT
Sa
Sb
Sc
Sd
Se
Sf
CS1
CS2
CS3
CS4
CS5
CS6
CS7
CS8
CS9
CS10
CS1
CS2
G1
G2
G3
G4
G5
G6
1-a-A B +
1-b-A D -
1-c-A B +
1-d-A D -
1-e-A B +
1-f-A D -
1-a-B D +
1-b-B B -
1-c-B D +
1-d-B B -
1-e-B D +
1-f-B B -
2-a-A B -
2-b-A D +
2-c-A B -
2-d-A D +
2-e-A B -
2-f-A D +
2-a-B D -
2-b-B B +
2-c-B D -
2-d-B B +
2-e-B D -
2-f-B B +
3-a-A B +
3-b-A D -
3-c-A B +
3-d-A D -
3-e-A B +
3-f-A D -
3-a-B D +
3-b-B B -
3-c-B D +
3-d-B B -
3-e-B D +
3-f-B B -
4-a-A B -
4-b-A D +
4-c-A B -
4-d-A D +
4-e-A B -
4-f-A D +
4-a-B D -
4-b-B B +
4-c-B D -
4-d-B B +
4-e-B D -
4-f-B B +
5-a-A B +
5-b-A D -
5-c-A B +
5-d-A D -
5-e-A B +
5-f-A D -
5-a-B D +
5-b-B B -
5-c-B D +
5-d-B B -
5-e-B D +
5-f-B B -
6-a-A B -
6-b-A D +
6-c-A B -
6-d-A D +
6-e-A B -
6-f-A D +
6-a-B D -
6-b-B B +
6-c-B D -
6-d-B B +
6-e-B D -
6-f-B B +

FIG.23

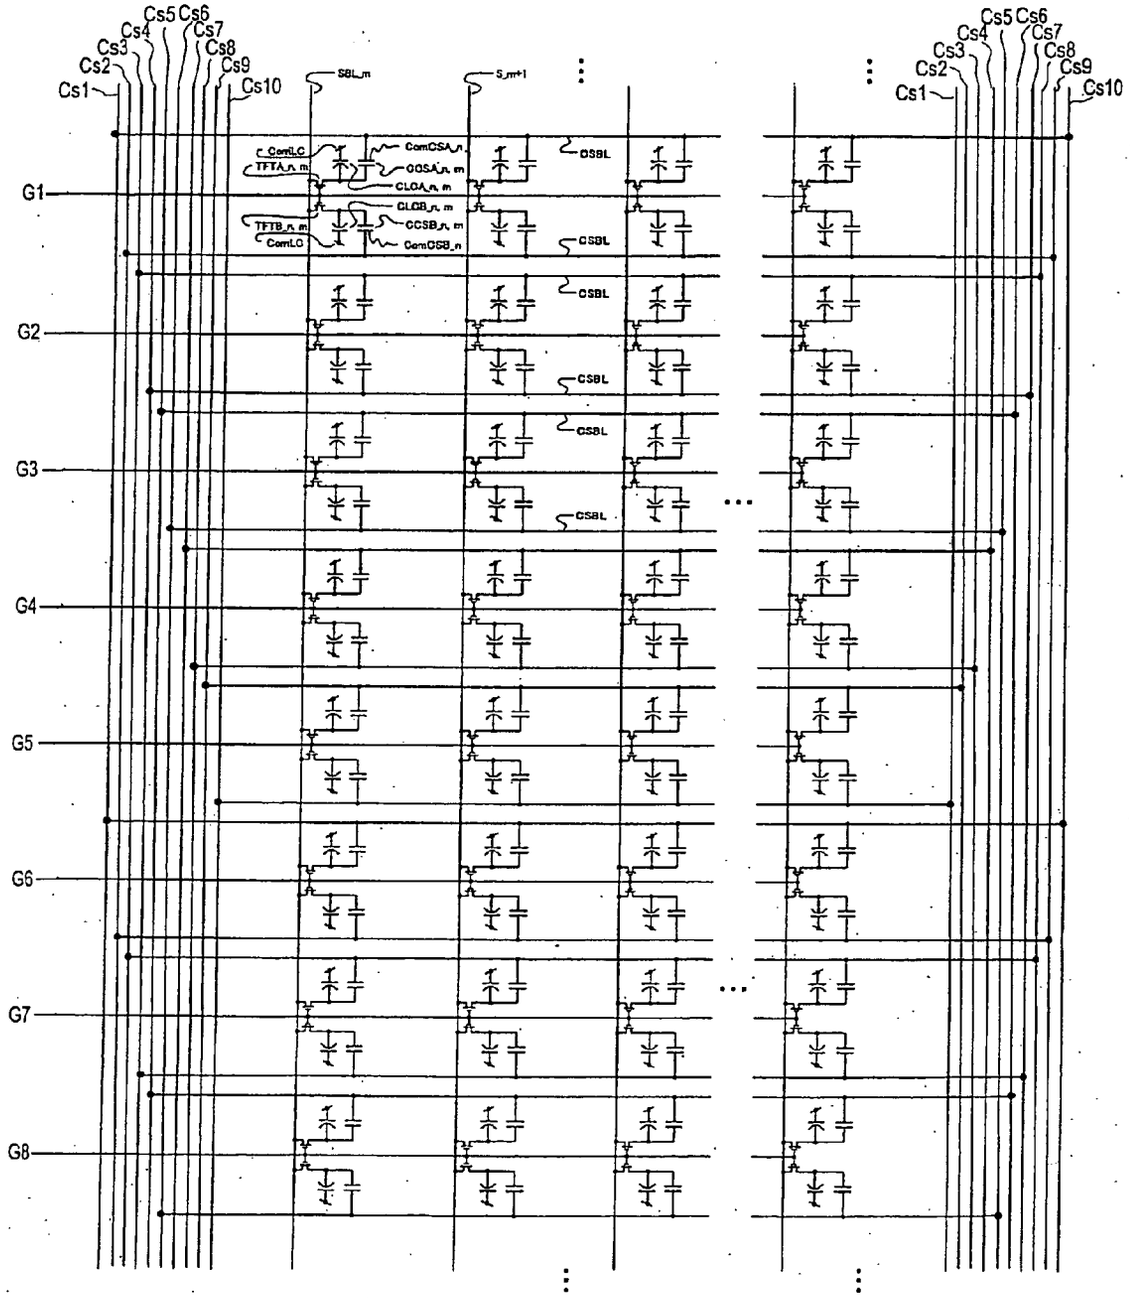
Cs1
Cs2
Cs3
Cs4
Cs5
Cs6
Cs7
Cs8
Cs9
Cs10
SBL_m
S_m+1
ComLC
TFTA_n, m
ComCSA_n
CCSA_n, m
CLCA_n, m
CLCB_n, m
TFTB_n, m
CCSB_n, m
ComLC
ComCSB_n
CSBL
G1
G2
G3
G4
G5
G6
G7
G8

FIG.24

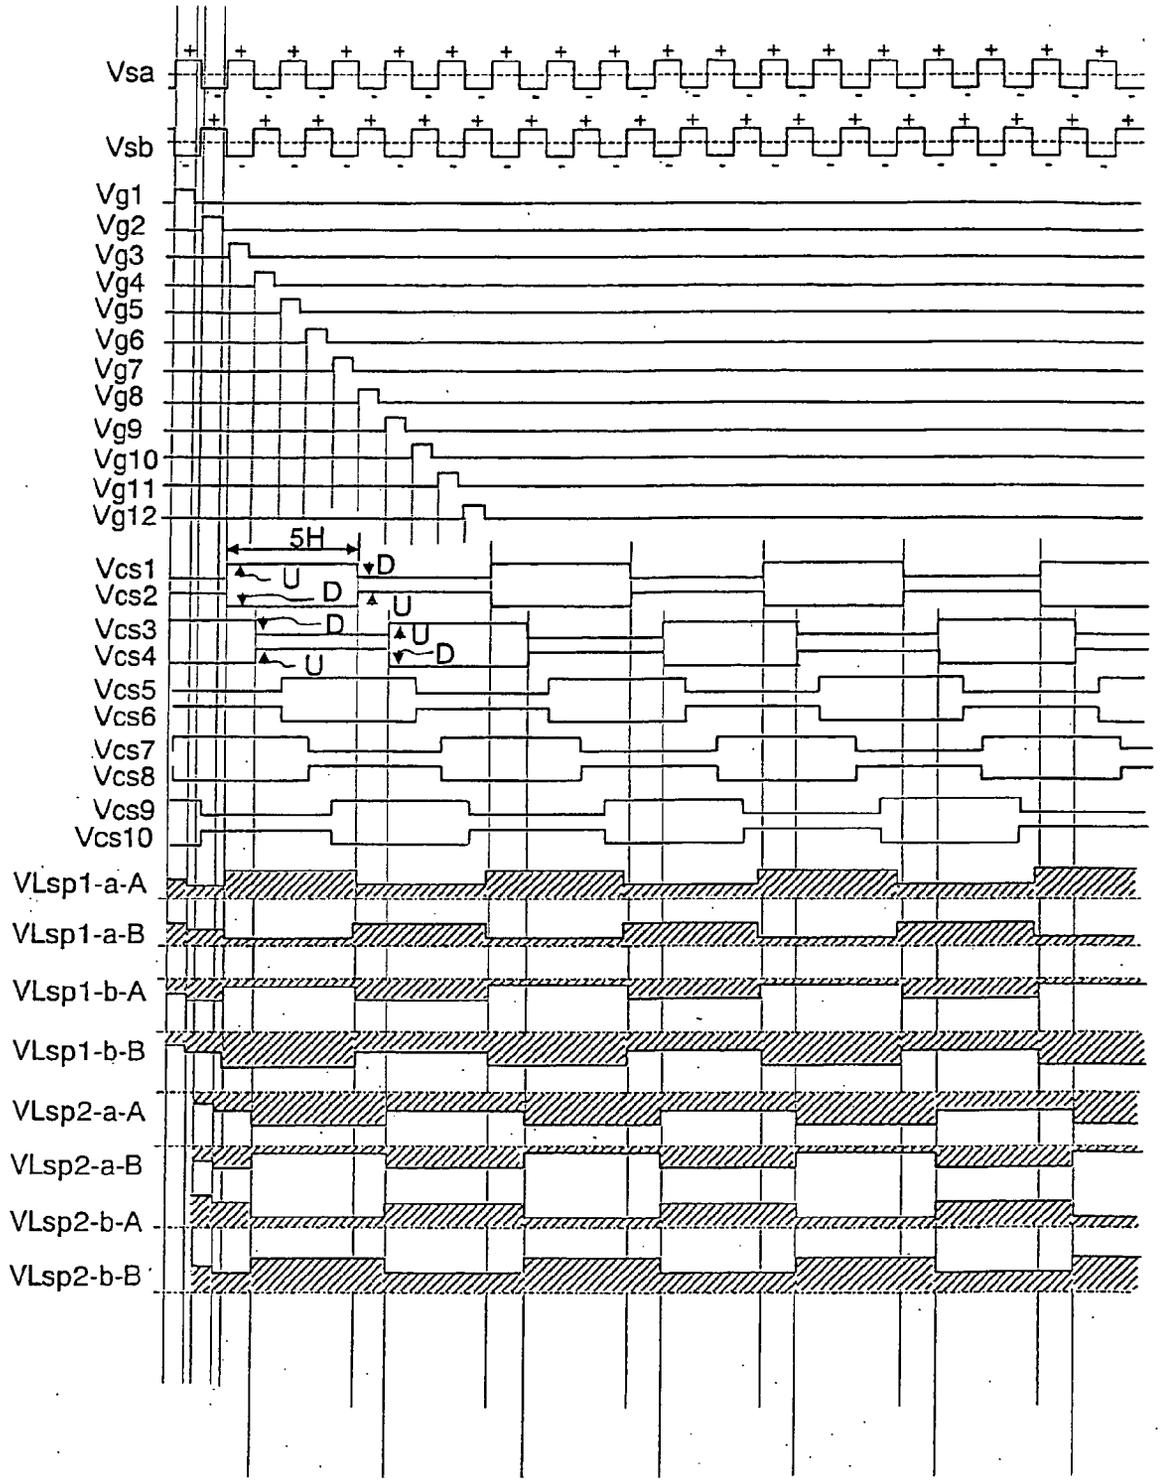
Vsa
Vsb
Vg1
Vg2
Vg3
Vg4
Vg5
Vg6
Vg7
Vg8
Vg9
Vg10
Vg11
Vg12
5H
Vcs1
Vcs2
Vcs3
Vcs4
Vcs5
Vcs6
Vcs7
Vcs8
Vcs9
Vcs10
U
D
VLsp1-a-A
VLsp1-a-B
VLsp1-b-A
VLsp1-b-B
VLsp2-a-A
VLsp2-a-B
VLsp2-b-A
VLsp2-b-B

FIG.25

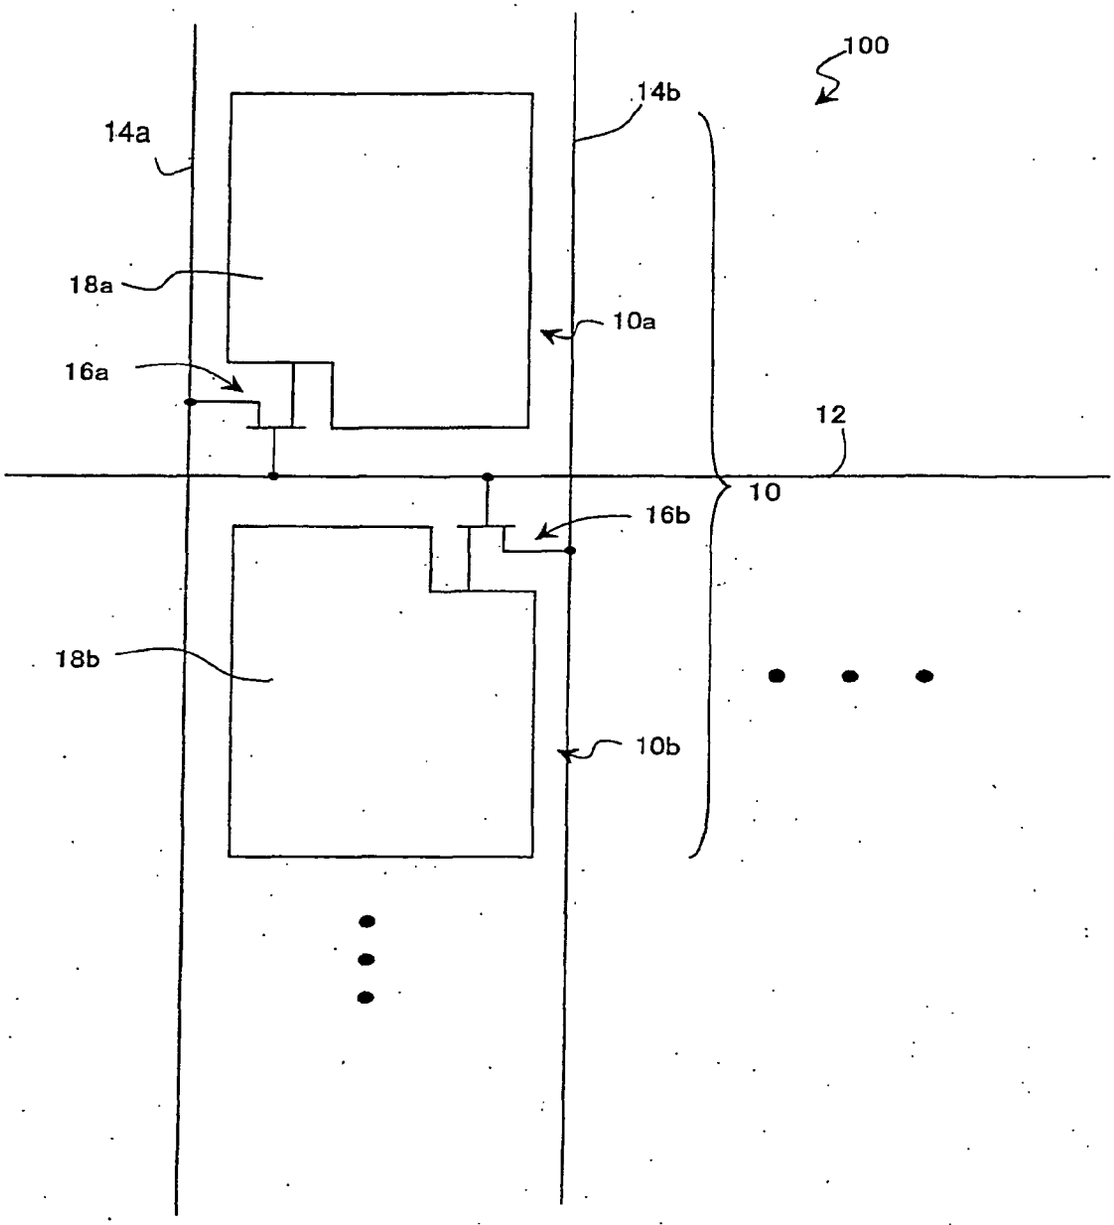

FIG.26

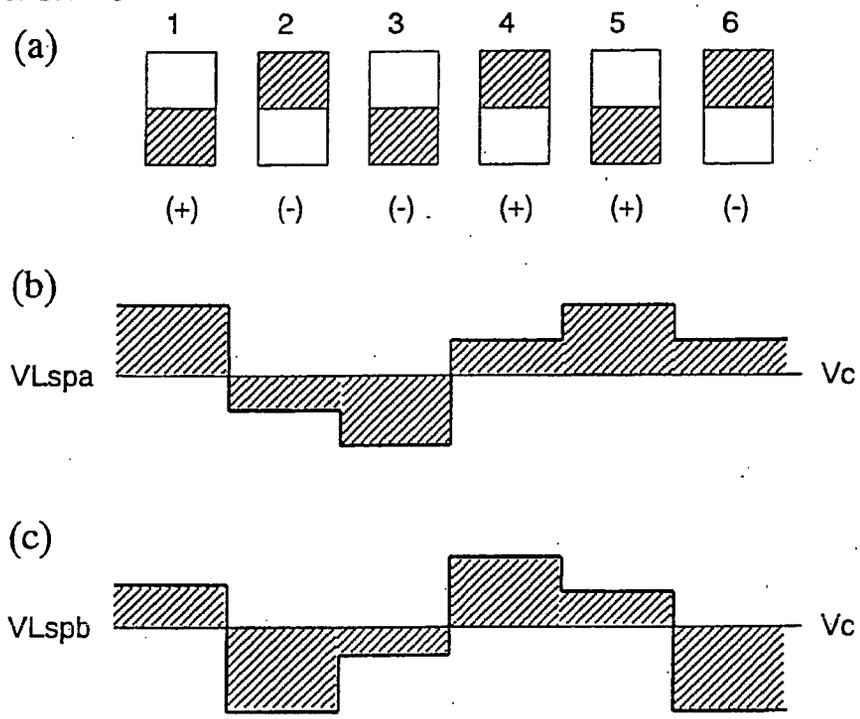
(a)
1
2
3
4
5
6
(+)
(-)
(-)
(+)
(+)
(-)
(b)
VLspa
Vc
(c)
VLspb
Vc

FIG.27

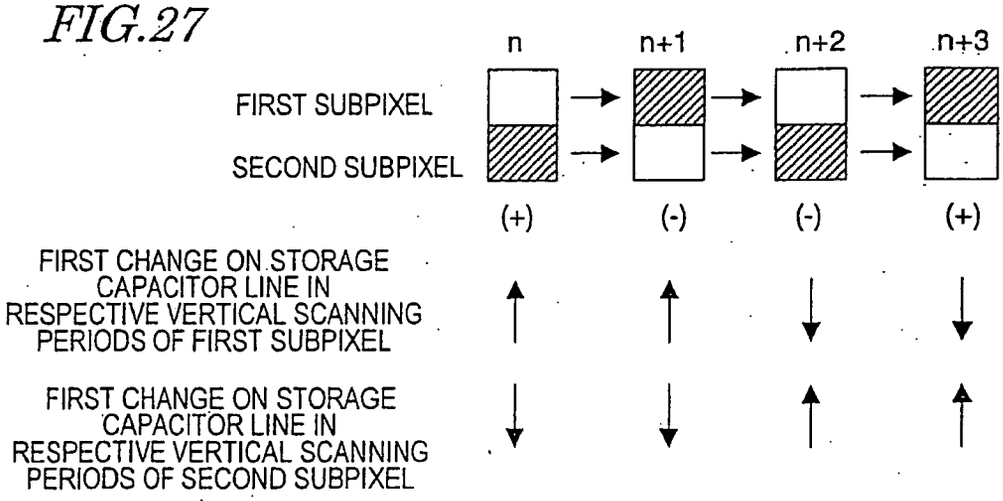
n
n+1
n+2
n+3
FIRST SUBPIXEL
SECOND SUBPIXEL
(+)
(-)
(-)
(+)
FIRST CHANGE ON STORAGE CAPACITOR LINE IN RESPECTIVE VERTICAL SCANNING PERIODS OF FIRST SUBPIXEL
FIRST CHANGE ON STORAGE CAPACITOR LINE IN RESPECTIVE VERTICAL SCANNING PERIODS OF SECOND SUBPIXEL

FIG.28

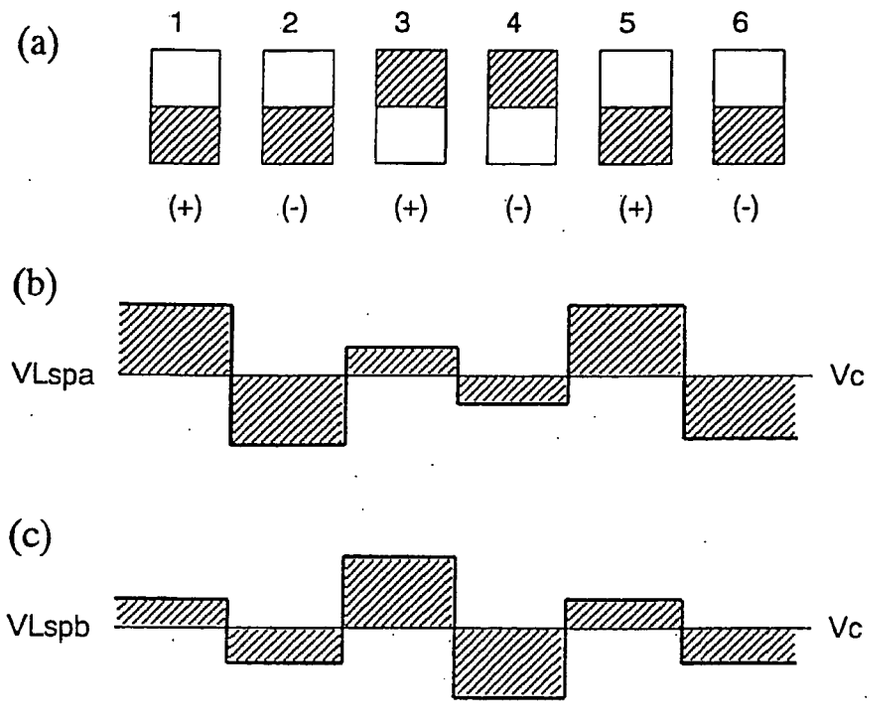

FIG.29

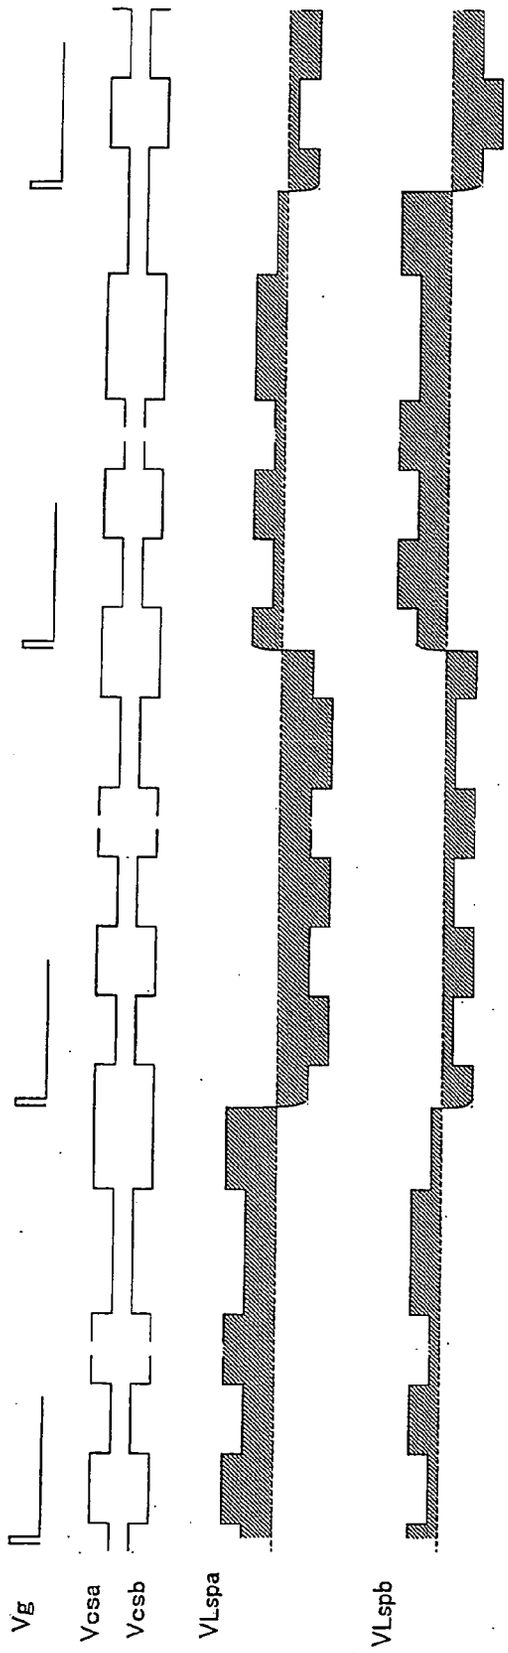

FIG.30

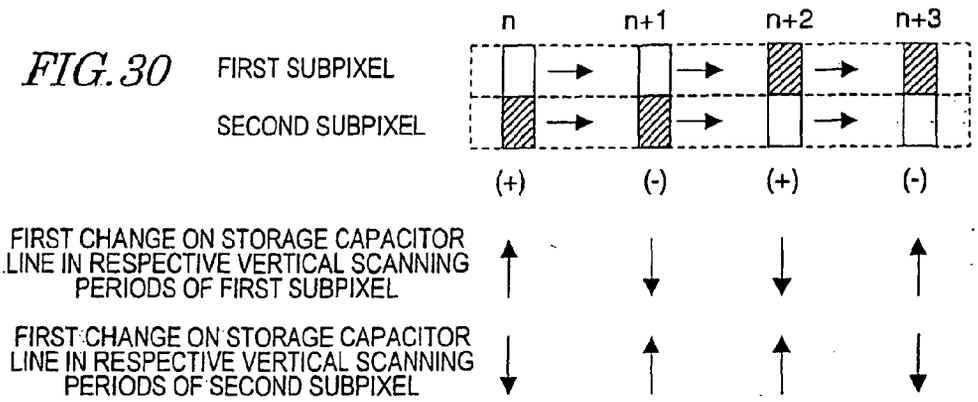

FIG.31

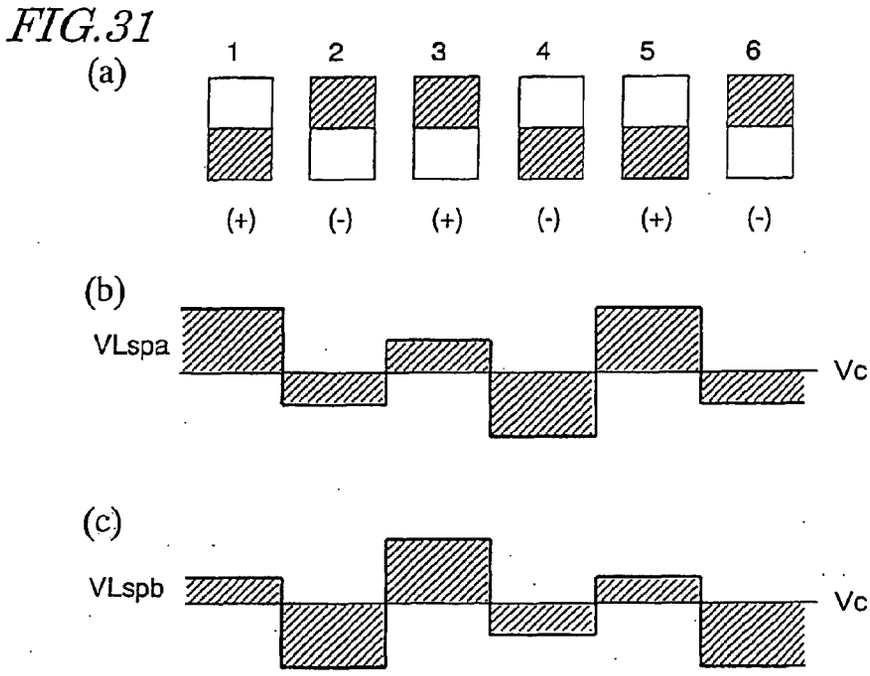

FIG.32

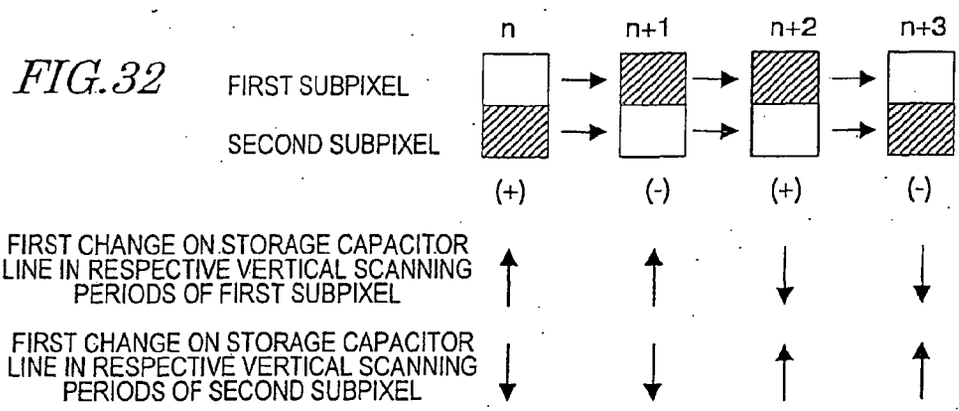

FIG.33

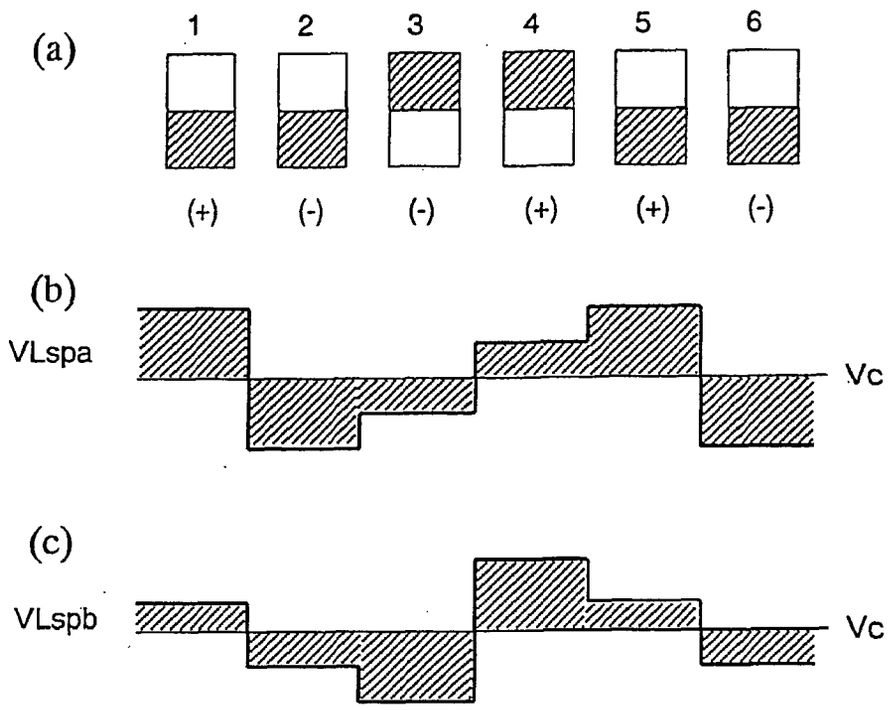

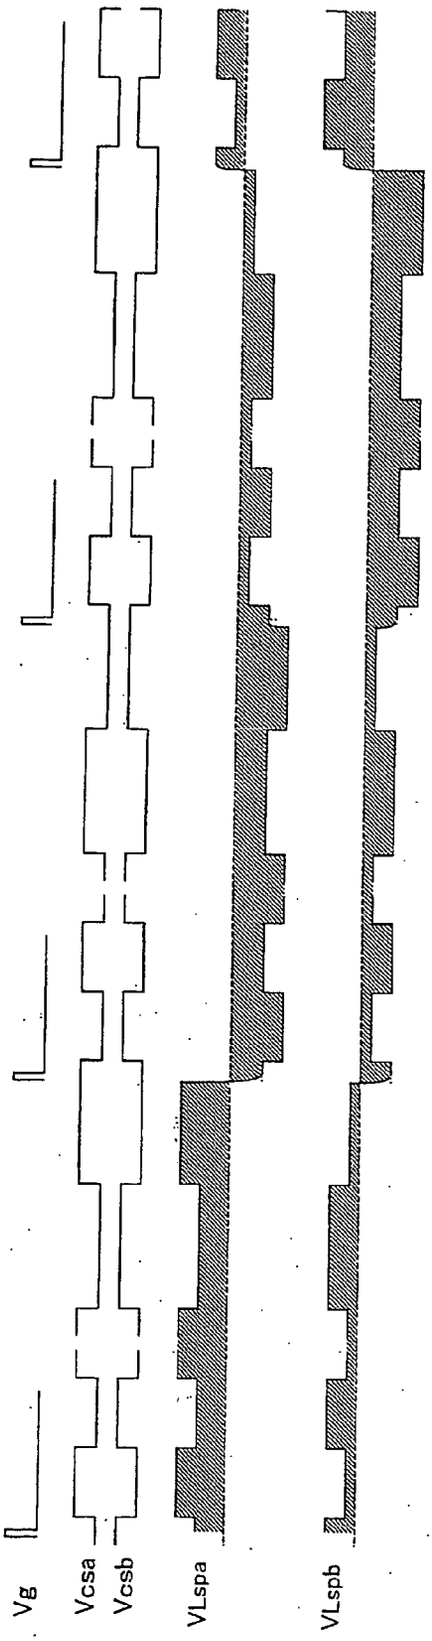

FIG.34

FIG.35

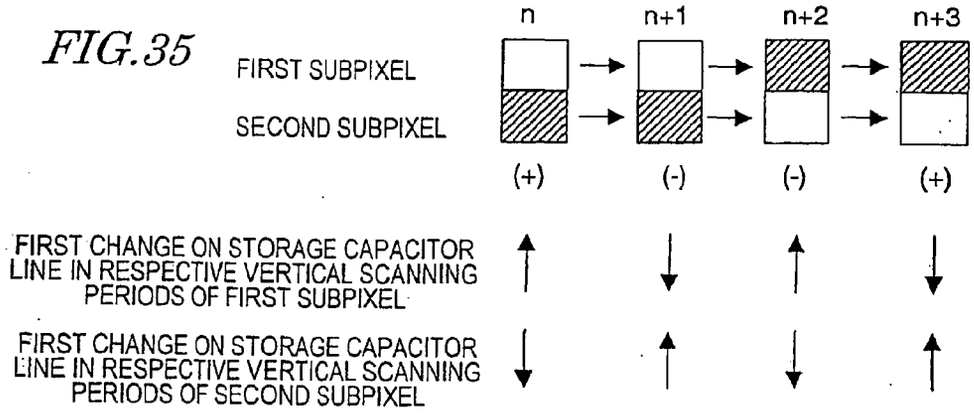

FIG.36

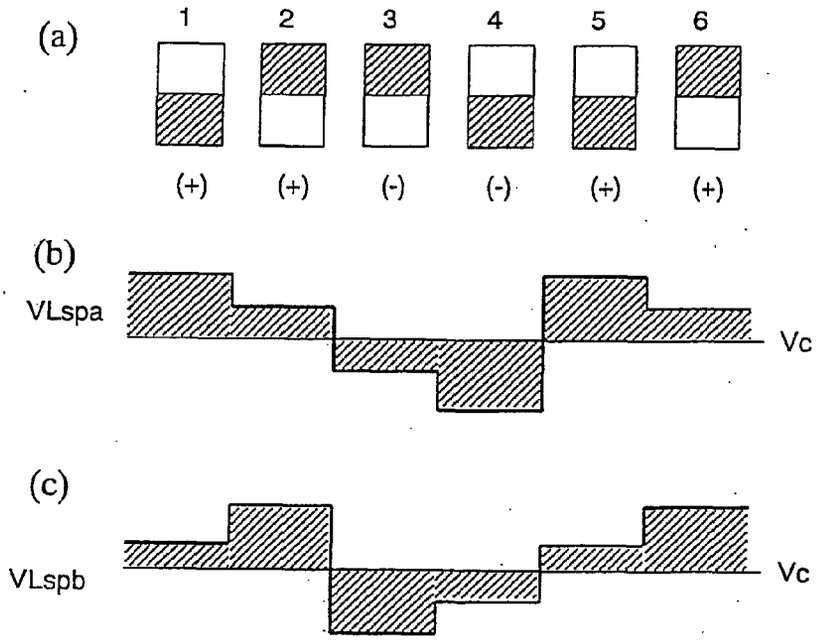

FIG.37

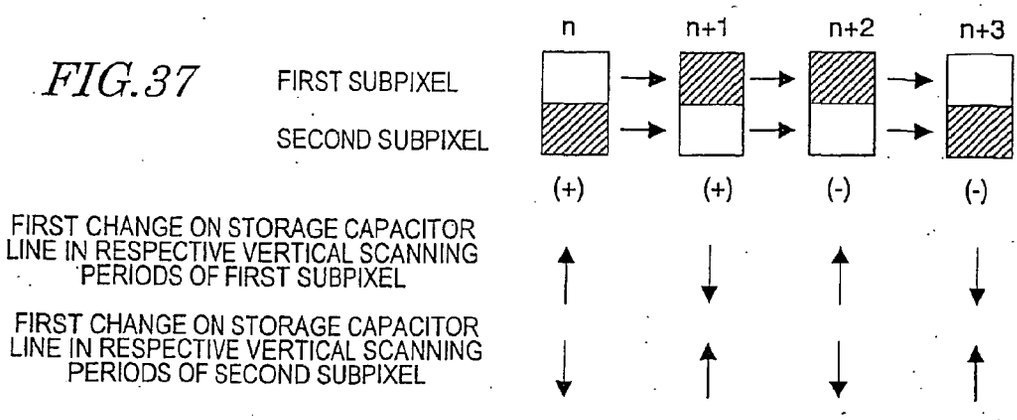

FIG.38

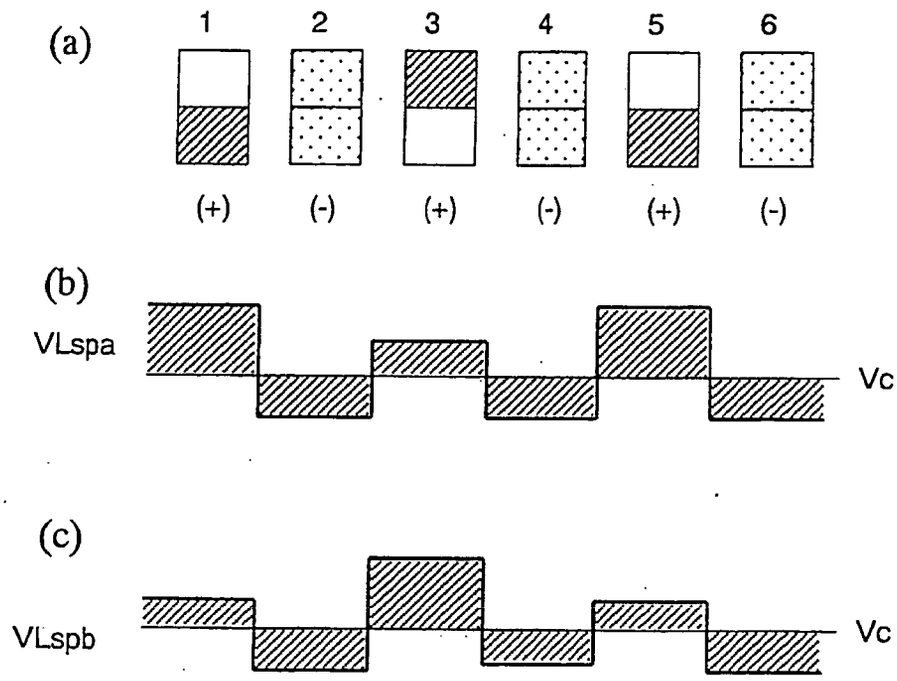

FIG.39A

	Sa	Sb	Sc	Sd	Se	Sf
CS1	1-a-A B +	1-b-A D -	1-c-A B +	1-d-A D -	1-e-A B +	1-f-A D -
G1	1-a-B D +	1-b-B B	1-c-B D +	1-d-B B	1-e-B D +	1-f-B B
CS2	2-a-A B -	2-b-A D +	2-c-A B -	2-d-A D +	2-e-A B -	2-f-A D +
G2	2-a-B D -	2-b-B B +	2-c-B D -	2-d-B B +	2-e-B D -	2-f-B B +
CS3	3-a-A B +	3-b-A D -	3-c-A B +	3-d-A D -	3-e-A B +	3-f-A D -
G3	3-a-B D +	3-b-B B -	3-c-B D +	3-d-B B -	3-e-B D +	3-f-B B -
CS4	4-a-A B -	4-b-A D +	4-c-A B -	4-d-A D +	4-e-A B -	4-f-A D +
G4	4-a-B D -	4-b-B B +	4-c-B D -	4-d-B B +	4-e-B D -	4-f-B B +
CS5	5-a-A B +	5-b-A D -	5-c-A B +	5-d-A D -	5-e-A B +	5-f-A D -
G5	5-a-B D +	5-b-B B -	5-c-B D +	5-d-B B -	5-e-B D +	5-f-B B -
CS6	6-a-A B -	6-b-A D +	6-c-A B -	6-d-A D +	6-e-A B -	6-f-A D +
G6	6-a-B D -	6-b-B B +	6-c-B D -	6-d-B B +	6-e-B D -	6-f-B B +
CS7	7-a-A B +	7-b-A D -	7-c-A B +	7-d-A D -	7-e-A B +	7-f-A D -
G7	7-a-B D +	7-b-B B -	7-c-B D +	7-d-B B -	7-e-B D +	7-f-B B -
CS8	8-a-A B -	8-b-A D +	8-c-A B -	8-d-A D +	8-e-A B -	8-f-A D +
G8	8-a-B D -	8-b-B B +	8-c-B D -	8-d-B B +	8-e-B D -	8-f-B B +
CS9	9-a-A B +	9-b-A D -	9-c-A B +	9-d-A D -	9-e-A B +	9-f-A D -
G9	9-a-B D +	9-b-B B -	9-c-B D +	9-d-B B -	9-e-B D +	9-f-B B -
CS10	10-a-A B -	10-b-A D +	10-c-A B -	10-d-A D +	10-e-A B -	10-f-A D +
G10	10-a-B D -	10-b-B B +	10-c-B D -	10-d-B B +	10-e-B D -	10-f-B B +
CS11	11-a-A B +	11-b-A D -	11-c-A B +	11-d-A D -	11-e-A B +	11-f-A D -
G11	11-a-B D +	11-b-B B -	11-c-B D +	11-d-B B -	11-e-B D +	11-f-B B -
CS12	12-a-A B -	12-b-A D +	12-c-A B -	12-d-A D +	12-e-A B -	12-f-A D +
G12	12-a-B D -	12-b-B B +	12-c-B D -	12-d-B B +	12-e-B D -	12-f-B B +

ONE DOT

FIG.39B

	Sa	Sb	Sc	Sd	Se	Sf
CS1	1-a-A M -	1-b-A M +	1-c-A M -	1-d-A M +	1-e-A M -	1-f-A M +
G1	1-a-B M -	1-b-B M +	1-c-B M -	1-d-B M +	1-e-B M -	1-f-B M +
CS2	2-a-A M +	2-b-A M -	2-c-A M +	2-d-A M -	2-e-A M +	2-f-A M -
G2	2-a-B M +	2-b-B M -	2-c-B M +	2-d-B M -	2-e-B M +	2-f-B M -
CS3	3-a-A M -	3-b-A M +	3-c-A M -	3-d-A M +	3-e-A M -	3-f-A M +
G3	3-a-B M -	3-b-B M +	3-c-B M -	3-d-B M +	3-e-B M -	3-f-B M +
CS4	4-a-A M +	4-b-A M -	4-c-A M +	4-d-A M -	4-e-A M +	4-f-A M -
G4	4-a-B M +	4-b-B M -	4-c-B M +	4-d-B M -	4-e-B M +	4-f-B M -
CS5	5-a-A M -	5-b-A M +	5-c-A M -	5-d-A M +	5-e-A M -	5-f-A M +
G5	5-a-B M -	5-b-B M +	5-c-B M -	5-d-B M +	5-e-B M -	5-f-B M +
CS6	6-a-A M +	6-b-A M -	6-c-A M +	6-d-A M -	6-e-A M +	6-f-A M -
G6	6-a-B M +	6-b-B M -	6-c-B M +	6-d-B M -	6-e-B M +	6-f-B M -
CS7	7-a-A M -	7-b-A M +	7-c-A M -	7-d-A M +	7-e-A M -	7-f-A M +
G7	7-a-B M -	7-b-B M +	7-c-B M -	7-d-B M +	7-e-B M -	7-f-B M +
CS8	8-a-A M +	8-b-A M -	8-c-A M +	8-d-A M -	8-e-A M +	8-f-A M -
G8	8-a-B M +	8-b-B M -	8-c-B M +	8-d-B M -	8-e-B M +	8-f-B M -
CS9	9-a-A M -	9-b-A M +	9-c-A M -	9-d-A M +	9-e-A M -	9-f-A M +
G9	9-a-B M -	9-b-B M +	9-c-B M -	9-d-B M +	9-e-B M -	9-f-B M +
CS10	10-a-A M +	10-b-A M -	10-c-A M +	10-d-A M -	10-e-A M +	10-f-A M -
G10	10-a-B M +	10-b-B M -	10-c-B M +	10-d-B M -	10-e-B M +	10-f-B M -
CS11	11-a-A M -	11-b-A M +	11-c-A M -	11-d-A M +	11-e-A M -	11-f-A M +
G11	11-a-B M -	11-b-B M +	11-c-B M -	11-d-B M +	11-e-B M -	11-f-B M +
CS12	12-a-A M +	12-b-A M -	12-c-A M +	12-d-A M -	12-e-A M +	12-f-A M -
G12	12-a-B M +	12-b-B M -	12-c-B M +	12-d-B M -	12-e-B M +	12-f-B M -

ONE DOT

FIG.40

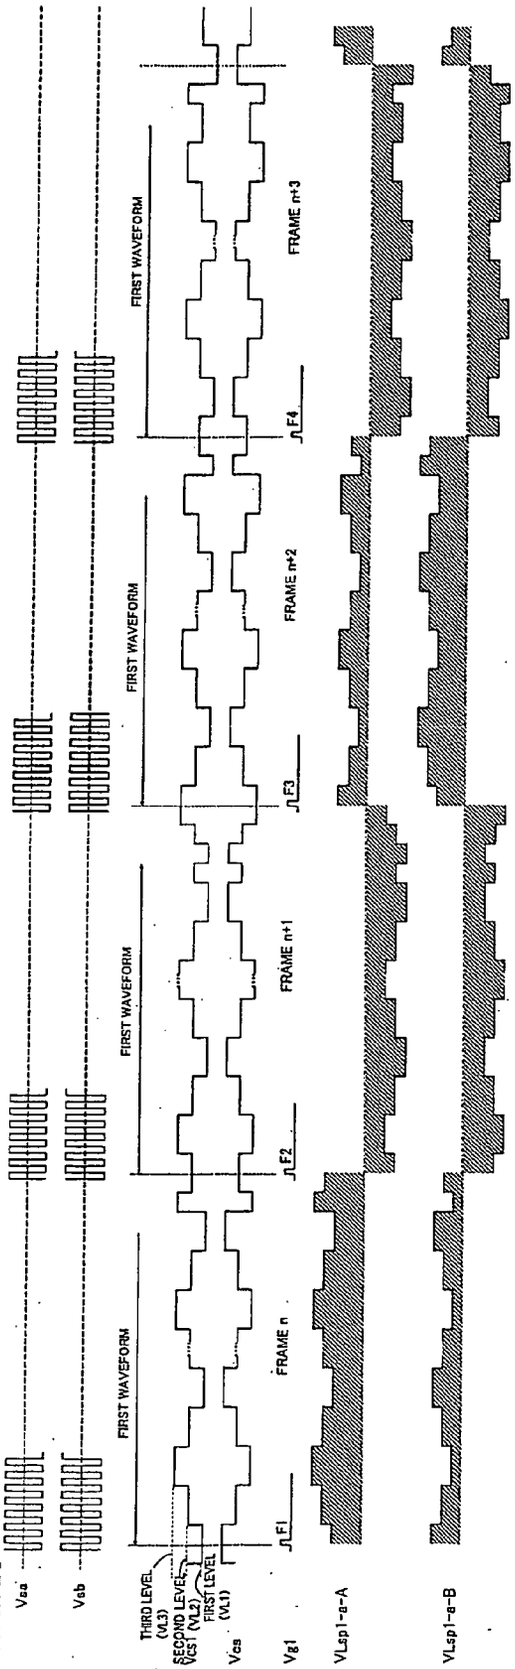
Vga
Vgb
THIRD LEVEL (VL3)
SECOND LEVEL (VL2)
VCS1
FIRST LEVEL (VL1)
Vcs
Vg1
VLsp1-a-A
VLsp1-a-B
FIRST WAVEFORM
FIRST WAVEFORM
FIRST WAVEFORM
FIRST WAVEFORM
F1
F2
F3
F4
FRAME n
FRAME n+1
FRAME n+2
FRAME n+3

Europäisches Patentamt
European Patent Office
Office européen des brevets

EUROPEAN SEARCH REPORT

Application Number
EP 10 01 5233

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
Y	WO 2006/049245 A (SHARP KK [JP]; IRIE KENTARO; SHIMOSHIKIRYOH FUMIKAZU) 11 May 2006 (2006-05-11) * the whole document * & EP 1 818 903 A (SHARP KK [JP]) 15 August 2007 (2007-08-15) * paragraphs [0011], [0030], [0078], [0125] - [0148]; figures 5,13,16-18 *	1-12	INV. G09G3/36 G02F1/133 G02F1/1343 G09G3/20
Y	WO 2006/070829 A (SHARP KK [JP]; KITAYAMA MASAE; SHIMOSHIKIRYOH FUMIKAZU) 6 July 2006 (2006-07-06) * the whole document *	1-12	
Y	US 2003/058211 A1 (KIM SANG-IL [KR] ET AL) 27 March 2003 (2003-03-27) * page 4; figure 7 *	1-12	
Y	EP 1 564 714 A (SHARP KK [JP]) 17 August 2005 (2005-08-17) * page 17 - page 18; figures 9,12,13,15,18 *	1-12	TECHNICAL FIELDS SEARCHED (IPC) G09G
A	US 2004/239698 A1 (KAMADA TSUYOSHI [JP] ET AL) 2 December 2004 (2004-12-02) * pages 27-28; figures 55-57 *	1-11	
A	US 2006/176322 A1 (LEE SEUNG-WOO [KR]) 10 August 2006 (2006-08-10) * paragraphs [0061] - [0080]; figures 3-6 *	1-11	

The present search report has been drawn up for all claims

Place of search	Date of completion of the search	Examiner
The Hague	12 January 2011	Pichon, Jean-Michel

CATEGORY OF CITED DOCUMENTS

X : particularly relevant if taken alone
Y : particularly relevant if combined with another document of the same category
A : technological background
O : non-written disclosure
P : intermediate document

T : theory or principle underlying the invention
E : earlier patent document, but published on, or after the filing date
D : document cited in the application
L : document cited for other reasons

& : member of the same patent family, corresponding document

3

EPO FORM 1503 03.82 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO. EP 10 01 5233

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-01-2011

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2006049245 A	11-05-2006	CN 101053009 A	10-10-2007
		EP 1818903 A1	15-08-2007
		KR 20070051264 A	17-05-2007
		US 2008158203 A1	03-07-2008
WO 2006070829 A	06-07-2006	JP 4104639 B2	18-06-2008
		US 2008106660 A1	08-05-2008
US 2003058211 A1	27-03-2003	CN 1404029 A	19-03-2003
		JP 4558263 B2	06-10-2010
		JP 2003099017 A	04-04-2003
		KR 20030020153 A	08-03-2003
		TW 233586 B	01-06-2005
EP 1564714 A	17-08-2005	CN 1658269 A	24-08-2005
		JP 4197322 B2	17-12-2008
		JP 2005234552 A	02-09-2005
		KR 20050076713 A	26-07-2005
		KR 20060088857 A	07-08-2006
		KR 20060084835 A	25-07-2006
		US 2005184944 A1	25-08-2005
US 2004239698 A1	02-12-2004	KR 20040086777 A	12-10-2004
		TW 251199 B	11-03-2006
		US 2010090938 A1	15-04-2010
		US 2010103206 A1	29-04-2010
US 2006176322 A1	10-08-2006	KR 20060089831 A	09-08-2006

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2004062146 A **[0010]**
- JP 2003295160 A **[0010]**
- JP 6958791 B **[0010]**
- JP 11242225 A **[0069]**
- JP 2006228476 A **[0275]**
- JP 2006228475 A **[0275]**