



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
16.03.2011 Bulletin 2011/11

(51) Int Cl.:
C22C 1/04 (2006.01) **C22C 21/00 (2006.01)**
B22F 3/20 (2006.01)

(21) Application number: **10251602.8**

(22) Date of filing: **15.09.2010**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK SM TR
Designated Extension States:
BA ME RS

(72) Inventor: **Pandey, Awadh B.**
Jupiter, Florida 33458 (US)

(74) Representative: **Hall, Matthew Benjamin**
Dehns
St. Bride's House
10 Salisbury Square
London EC4Y 8JD (GB)

(30) Priority: **15.09.2009 US 560000**

(71) Applicant: **United Technologies Corporation**
Hartford, CT 06101 (US)

(54) **Direct extrusion of shapes with L12 aluminum alloys**

(57) A method for producing a high strength aluminum alloy brackets, cases, tubes, ducts, beams, spars and other parts containing L₁₂ dispersoids from an aluminum alloy powder containing the L₁₂ dispersoids. The powder is consolidated into a billet having a density of about 100 percent. The billet is extruded using an extrusion die shaped to produce the component.

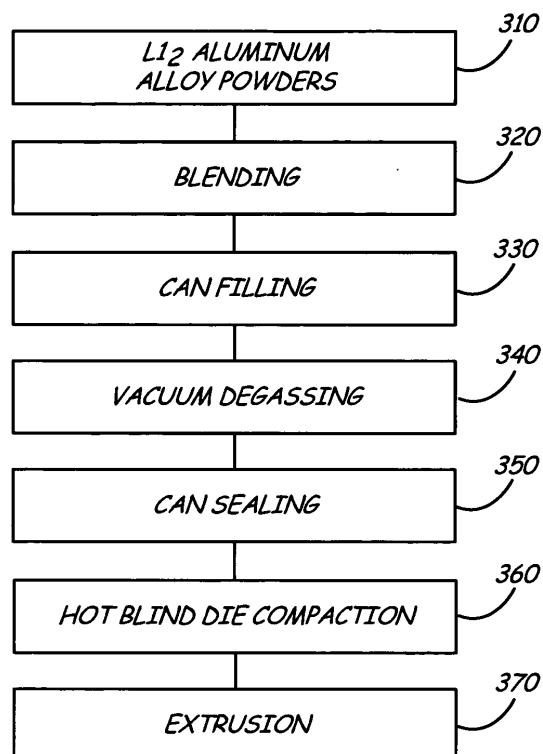


FIG. 10

Description

[0001] The present invention relates generally to aluminum alloys and more specifically to a method for forming high strength aluminum alloy powder having $L1_2$ dispersoids therein into aluminum parts such as brackets, cases and other components of turbine engines as well as other products fabricated from aluminum alloys.

[0002] The combination of high strength, ductility, and fracture toughness, as well as low density, make aluminum alloys natural candidates for a variety of applications. Because of its low weight high strength, ductility and fracture toughness, aluminum alloys are of interest in the manufacture and use for many applications.

[0003] The development of aluminum alloys with improved elevated temperature mechanical properties is a continuing process. Some attempts have included aluminum-iron and aluminum-chromium based alloys such as Al-Fe-Ce, Al-Fe-V-Si, Al-Fe-Ce-W, and Al-Cr-Zr-Mn that contain incoherent dispersoids. These alloys, however, also lose strength at elevated temperatures due to particle coarsening. In addition, these alloys exhibit ductility and fracture toughness values lower than other commercially available aluminum alloys.

[0004] Other attempts have included the development of mechanically alloyed Al-Mg and Al-Ti alloys containing ceramic dispersoids. These alloys exhibit improved high temperature strength due to the particle dispersion, but the ductility and fracture toughness are not improved.

[0005] U.S. patent 6,248,453 discloses aluminum alloys strengthened by dispersed Al_3X $L1_2$ intermetallic phases where X is selected from the group consisting of Sc, Er, Lu, Yb, Tm, and Lu. The Al_3X particles are coherent with the aluminum alloy matrix and are resistant to coarsening at elevated temperatures. The improved mechanical properties of the disclosed dispersion strengthened $L1_2$ aluminum alloys are stable up to 572°F (300°C). U.S. Patent Application Publication No. 2006/0269437 A1 discloses a high strength aluminum alloy that contains scandium and other elements that is strengthened by $L1_2$ dispersoids.

[0006] $L1_2$ strengthened aluminum alloys have high strength and improved fatigue properties compared to commercial aluminum alloys. Fine grain size results in improved mechanical properties of materials. Hall-Petch strengthening has been known for decades where strength increases as grain size decreases. An optimum grain size for optimum strength is in the nano range of about 30 to 100 nm. These alloys also have higher ductility.

[0007] The present invention is a method for consolidating aluminum alloy powders into useful components such as brackets, cases and other components having improved strength and fracture toughness.

[0008] The present invention provides a method for forming a high strength aluminum alloy component containing $L1_2$ dispersoids, comprising the steps of: placing in a container a quantity of an aluminum alloy powder containing an $L1_2$ dispersoid $L1_2$ comprising Al_3X dispersoids wherein X is at least one first element selected from the group comprising: about 0.1 to about 4.0 weight percent scandium, about 0.1 to about 20.0 weight percent erbium, about 0.1 to about 15.0 weight percent thulium, about 0.1 to about 25.0 weight percent ytterbium, and about 0.1 to about 25.0 weight percent lutetium; and at least one second element selected from the group comprising about 0.1 to about 20.0 weight percent gadolinium, about 0.1 to about 20.0 weight percent yttrium, about 0.05 to about 4.0 weight percent zirconium, about 0.05 to about 10.0 weight percent titanium, about 0.05 to about 10.0 weight percent hafnium, and about 0.05 to about 5.0 weight percent niobium; the balance substantially aluminum; the alloy powder having a mesh size of less than 450 mesh (30 microns) in a container, vacuum degassing the powder at a temperature of about 300°F (149°C) to about 900°F (482°C) for about 0.5 hours to about 8 days; sealing the degassed powder in the container under vacuum; heating the sealed container at about 300°F (149°C) to about 900°F (482°C) for about 15 minutes to eight hours; vacuum hot pressing the heated container to form a billet; removing the container from the formed billet; and extruding the billet into a component using an extrusion die shaped to form the component.

[0009] In embodiments, powders include an aluminum alloy having coherent $L1_2$ Al_3X dispersoids where X is at least one first element selected from scandium, erbium, thulium, ytterbium, and lutetium, and at least one second element selected from gadolinium, yttrium, zirconium, titanium, hafnium, and niobium. The balance is substantially aluminum containing at least one alloying element selected from silicon, magnesium, manganese, lithium, copper, zinc, and nickel.

[0010] The aluminum alloy components and parts are formed by direct extrusion of consolidated billets using a die with the required component shape. Extrusion of these alloys produces considerable improvement in mechanical properties, especially ductility compared to the consolidated billet. Extrusion parameters include billet temperature, billet soak time, extrusion rate, extrusion ratio and die temperature.

[0011] The present invention also provides a high strength aluminum alloy component, comprising: an extruded aluminum alloy billet containing an $L1_2$ dispersoid comprising Al_3X dispersoids wherein X is at least one first element selected from the group comprising: about 0.1 to about 4.0 weight percent scandium, about 0.1 to about 20.0 weight percent erbium, about 0.1 to about 15.0 weight percent thulium, about 0.1 to about 25.0 weight percent ytterbium, and about 0.1 to about 25.0 weight percent lutetium; at least one second element selected from the group comprising about 0.1 to about 20.0 weight percent gadolinium, about 0.1 to about 20.0 weight percent yttrium, about 0.05 to about 4.0 weight percent zirconium, about 0.05 to about 10.0 weight percent titanium, about 0.05 to about 10.0 weight percent hafnium, and about 0.05 to about 5.0 weight percent niobium; and the balance substantially aluminum; the billet having

been extruded into a component using an extrusion die shaped to form the component.

[0012] In one embodiment of the alloy component, the extrusion has been carried out at a temperature of from about 300°F (148.9°C) to about 900°F (482.2°C). In another embodiment of the alloy component, the extrusion has been carried out at about 0.1 inch (0.25 cm) per minute to about 20 inch (50.8 cm) per minute. In a further embodiment of the alloy component, the billet temperature ranged from about 300°F (148.9°C) to about 900°F (482.2°C), and preferably the billet was given a soak time ranging from about 0.5 hours to about 8 hours. In a further preferred embodiment of the alloy component, the consolidating of the powders has comprised: sieving the powders to achieve a particle size of less than about -325 mesh (45 microns); placing the powders in a container with a rectangular cross-section; vacuum degassing the powder; sealing the container; and hot pressing the container to achieve a powder density of about 100 percent.

[0013] Certain preferred embodiments of the invention will now be described, with reference to the accompanying drawings by way of example only.

FIG. 1 is an aluminum scandium phase diagram.

FIG. 2 is an aluminum erbium phase diagram.

FIG. 3 is an aluminum thulium phase diagram.

FIG. 4 is an aluminum ytterbium phase diagram.

FIG. 5 is an aluminum lutetium phase diagram.

FIG. 6A is a schematic diagram of a vertical gas atomizer.

FIG. 6B is a close up view of nozzle 108 in FIG. 6A.

FIG. 7A and 7B are SEM photos of the inventive aluminum alloy powder.

FIG. 8A and 8B are optical micrographs showing the microstructure of gas atomized L₁₂ aluminum alloy powder.

FIG. 9 is a diagram showing the steps of the gas atomization process.

FIG. 10 is a diagram showing the processing steps to consolidate the L₁₂ aluminum alloy powder.

FIG. 11 is a schematic diagram of blind die compaction.

FIG. 12 is a schematic diagram of a direct extrusion process.

FIG. 13 A-C are extrusions and examples of products made by sectioning off extrusions.

FIG. 14 is a schematic of a hollow extrusion die.

FIG. 15 is a photograph of duct produced for a rocket engine.

1. L₁₂ Aluminum Alloys

[0014] Alloy powders of this invention are formed from aluminum based alloys with high strength and fracture toughness for applications at temperatures from about -420°F (-251°C) up to about 650°F (343°C). The aluminum alloy comprises a solid solution of aluminum and at least one element selected from silicon, magnesium, manganese, lithium, copper, zinc, and nickel strengthened by L₁₂ Al₃X coherent precipitates where X is at least one first element selected from scandium, erbium, thulium, ytterbium, and lutetium, and at least one second element selected from gadolinium, yttrium, zirconium, titanium, hafnium, and niobium.

[0015] The binary aluminum magnesium system is a simple eutectic at 36 weight percent magnesium and 842°F (450°C). There is complete solubility of magnesium and aluminum in the rapidly solidified inventive alloys discussed herein.

[0016] The binary aluminum silicon system is a simple eutectic at 12.6 weight percent silicon and 1070.6°F (577°C). There is complete solubility of silicon and aluminum in the rapidly solidified inventive alloys discussed herein.

[0017] The binary aluminum manganese system is a simple eutectic at about 2 weight percent manganese and 1216.4°F (658°C). There is complete solubility of manganese and aluminum in the rapidly solidified inventive alloys discussed herein.

[0018] The binary aluminum lithium system is a simple eutectic at 8 weight percent lithium and 1105°F (596°C). The equilibrium solubility of 4 weight percent lithium can be extended significantly by rapid solidification techniques. There is complete solubility of lithium in the rapid solidified inventive alloys discussed herein.

[0019] The binary aluminum copper system is a simple eutectic at 32 weight percent copper and 1018°F (548°C). There is complete solubility of copper in the rapidly solidified inventive alloys discussed herein.

[0020] The aluminum zinc binary system is a eutectic alloy system involving a monotectoid reaction and a miscibility gap in the solid state. There is a eutectic reaction at 94 weight percent zinc and 718°F (381°C). Zinc has maximum solid solubility of 83.1 weight percent in aluminum at 717.8°F (381°C), which can be extended by rapid solidification processes. Decomposition of the supersaturated solid solution of zinc in aluminum gives rise to spherical and ellipsoidal GP zones, which are coherent with the matrix and act to strengthen the alloy.

[0021] The aluminum nickel binary system is a simple eutectic at 5.7 weight percent nickel and 1183.8°F (639.9°C). There is little solubility of nickel in aluminum. However, the solubility can be extended significantly by utilizing rapid solidification processes. The equilibrium phase in the aluminum nickel eutectic system is L₁₂ intermetallic Al₃Ni.

[0022] In the aluminum based alloys disclosed herein, scandium, erbium, thulium, ytterbium, and lutetium are potent strengtheners that have low diffusivity and low solubility in aluminum. All these elements form equilibrium Al_3X intermetallic dispersoids where X is at least one of scandium, erbium, thulium, ytterbium, and lutetium, that have an L_{12} structure that is an ordered face centered cubic structure with the X atoms located at the corners and aluminum atoms located

on the cube faces of the unit cell.

[0023] Scandium forms Al_3Sc dispersoids that are fine and coherent with the aluminum matrix. Lattice parameters of aluminum and Al_3Sc are very close (0.405 nm and 0.410 nm respectively), indicating that there is minimal or no driving force for causing growth of the Al_3Sc dispersoids. This low interfacial energy makes the Al_3Sc dispersoids thermally stable and resistant to coarsening up to temperatures as high as about 842°F (450°C). Additions of magnesium in aluminum increase the lattice parameter of the aluminum matrix, and decrease the lattice parameter mismatch further increasing the resistance of the Al_3Sc to coarsening. Additions of zinc, copper, lithium, silicon, manganese and nickel provide solid solution and precipitation strengthening in the aluminum alloys. These Al_3Sc dispersoids are made stronger and more resistant to coarsening at elevated temperatures by adding suitable alloying elements such as gadolinium, yttrium, zirconium, titanium, hafnium, niobium, or combinations thereof, that enter Al_3Sc in solution.

[0024] Erbium forms Al_3Er dispersoids in the aluminum matrix that are fine and coherent with the aluminum matrix. The lattice parameters of aluminum and Al_3Er are close (0.405 nm and 0.417 nm respectively), indicating there is minimal driving force for causing growth of the Al_3Er dispersoids. This low interfacial energy makes the Al_3Er dispersoids thermally stable and resistant to coarsening up to temperatures as high as about 842°F (450°C). Additions of magnesium in aluminum increase the lattice parameter of the aluminum matrix, and decrease the lattice parameter mismatch further increasing the resistance of the Al_3Er to coarsening. Additions of zinc, copper, lithium, silicon, manganese and nickel provide solid solution and precipitation strengthening in the aluminum alloys. These Al_3Er dispersoids are made stronger and more resistant to coarsening at elevated temperatures by adding suitable alloying elements such as gadolinium, yttrium, zirconium, titanium, hafnium, niobium, or combinations thereof that enter Al_3Er in solution.

[0025] Thulium forms metastable Al_3Tm dispersoids in the aluminum matrix that are fine and coherent with the aluminum matrix. The lattice parameters of aluminum and Al_3Tm are close (0.405 nm and 0.420 nm respectively), indicating there is minimal driving force for causing growth of the Al_3Tm dispersoids. This low interfacial energy makes the Al_3Tm dispersoids thermally stable and resistant to coarsening up to temperatures as high as about 842°F (450°C). Additions of magnesium in aluminum increase the lattice parameter of the aluminum matrix, and decrease the lattice parameter mismatch further increasing the resistance of the Al_3Tm to coarsening. Additions of zinc, copper, lithium, silicon, manganese and nickel provide solid solution and precipitation strengthening in the aluminum alloys. These Al_3Tm dispersoids are made stronger and more resistant to coarsening at elevated temperatures by adding suitable alloying elements such as gadolinium, yttrium, zirconium, titanium, hafnium, niobium, or combinations thereof that enter Al_3Tm in solution.

[0026] Ytterbium forms Al_3Yb dispersoids in the aluminum matrix that are fine and coherent with the aluminum matrix. The lattice parameters of Al and Al_3Yb are close (0.405 nm and 0.420 nm respectively), indicating there is minimal driving force for causing growth of the Al_3Yb dispersoids. This low interfacial energy makes the Al_3Yb dispersoids thermally stable and resistant to coarsening up to temperatures as high as about 842°F (450°C). Additions of magnesium in aluminum increase the lattice parameter of the aluminum matrix, and decrease the lattice parameter mismatch further increasing the resistance of the Al_3Yb to coarsening. Additions of zinc, copper, lithium, silicon, manganese and nickel provide solid solution and precipitation strengthening in the aluminum alloys. These Al_3Yb dispersoids are made stronger and more resistant to coarsening at elevated temperatures by adding suitable alloying elements such as gadolinium, yttrium, zirconium, titanium, hafnium, niobium, or combinations thereof that enter Al_3Yb in solution.

[0027] Lutetium forms Al_3Lu dispersoids in the aluminum matrix that are fine and coherent with the aluminum matrix. The lattice parameters of Al and Al_3Lu are close (0.405 nm and 0.419 nm respectively), indicating there is minimal driving force for causing growth of the Al_3Lu dispersoids. This low interfacial energy makes the Al_3Lu dispersoids thermally stable and resistant to coarsening up to temperatures as high as about 842°F (450°C). Additions of magnesium in aluminum increase the lattice parameter of the aluminum matrix, and decrease the lattice parameter mismatch further increasing the resistance of the Al_3Lu to coarsening. Additions of zinc, copper, lithium, silicon, manganese and nickel provide solid solution and precipitation strengthening in the aluminum alloys. These Al_3Lu dispersoids are made stronger and more resistant to coarsening at elevated temperatures by adding suitable alloying elements such as gadolinium, yttrium, zirconium, titanium, hafnium, niobium, or mixtures thereof that enter Al_3Lu in solution.

[0028] Gadolinium forms metastable Al_3Gd dispersoids in the aluminum matrix that are stable up to temperatures as high as about 842°F (450°C) due to their low diffusivity in aluminum. The Al_3Gd dispersoids have a D0_{19} structure in the equilibrium condition. Despite its large atomic size, gadolinium has fairly high solubility in the Al_3X intermetallic dispersoids (where X is scandium, erbium, thulium, ytterbium or lutetium). Gadolinium can substitute for the X atoms in Al_3X intermetallic, thereby forming an ordered L_{12} phase which results in improved thermal and structural stability.

[0029] Yttrium forms metastable Al_3Y dispersoids in the aluminum matrix that have an L_{12} structure in the metastable condition and a D0_{19} structure in the equilibrium condition. The metastable Al_3Y dispersoids have a low diffusion coefficient, which makes them thermally stable and highly resistant to coarsening. Yttrium has a high solubility in the Al_3X

intermetallic dispersoids allowing large amounts of yttrium to substitute for X in the Al_3X L_{12} dispersoids, which results in improved thermal and structural stability.

[0030] Zirconium forms Al_3Zr dispersoids in the aluminum matrix that have an L_{12} structure in the metastable condition and D_{023} structure in the equilibrium condition. The metastable Al_3Zr dispersoids have a low diffusion coefficient, which makes them thermally stable and highly resistant to coarsening. Zirconium has a high solubility in the Al_3X dispersoids allowing large amounts of zirconium to substitute for X in the Al_3X dispersoids, which results in improved thermal and structural stability.

[0031] Titanium forms Al_3Ti dispersoids in the aluminum matrix that have an L_{12} structure in the metastable condition and D_{022} structure in the equilibrium condition. The metastable Al_3Ti dispersoids have a low diffusion coefficient, which makes them thermally stable and highly resistant to coarsening. Titanium has a high solubility in the Al_3X dispersoids allowing large amounts of titanium to substitute for X in the Al_3X dispersoids, which result in improved thermal and structural stability.

[0032] Hafnium forms metastable Al_3Hf dispersoids in the aluminum matrix that have an L_{12} structure in the metastable condition and a D_{023} structure in the equilibrium condition. The Al_3Hf dispersoids have a low diffusion coefficient, which makes them thermally stable and highly resistant to coarsening. Hafnium has a high solubility in the Al_3X dispersoids allowing large amounts of hafnium to substitute for scandium, erbium, thulium, ytterbium, and lutetium in the above-mentioned Al_3X dispersoids, which results in stronger and more thermally stable dispersoids.

[0033] Niobium forms metastable Al_3Nb dispersoids in the aluminum matrix that have an L_{12} structure in the metastable condition and a D_{022} structure in the equilibrium condition. Niobium has a lower solubility in the Al_3X dispersoids than hafnium or yttrium, allowing relatively lower amounts of niobium than hafnium or yttrium to substitute for X in the Al_3X dispersoids. Nonetheless, niobium can be very effective in slowing down the coarsening kinetics of the Al_3X dispersoids because the Al_3Nb dispersoids are thermally stable. The substitution of niobium for X in the above mentioned Al_3X dispersoids results in stronger and more thermally stable dispersoids.

[0034] Al_3X L_{12} precipitates improve elevated temperature mechanical properties in aluminum alloys for two reasons. First, the precipitates are ordered intermetallic compounds. As a result, when the particles are sheared by glide dislocations during deformation, the dislocations separate into two partial dislocations separated by an anti-phase boundary on the glide plane. The energy to create the anti-phase boundary is the origin of the strengthening. Second, the cubic L_{12} crystal structure and lattice parameter of the precipitates are closely matched to the aluminum solid solution matrix. This results in a lattice coherency at the precipitate/matrix boundary that resists coarsening. The lack of an interphase boundary results in a low driving force for particle growth and resulting elevated temperature stability. Alloying elements in solid solution in the dispersed strengthening particles and in the aluminum matrix that tend to decrease the lattice mismatch between the matrix and particles will tend to increase the strengthening and elevated temperature stability of the alloy.

[0035] L_{12} phase strengthened aluminum alloys are important structural materials because of their excellent mechanical properties and the stability of these properties at elevated temperature due to the resistance of the coherent dispersoids in the microstructure to particle coarsening. The mechanical properties are optimized by maintaining a high volume fraction of L_{12} dispersoids in the microstructure. The L_{12} dispersoid concentration following aging scales as the amount of L_{12} phase forming elements in solid solution in the aluminum alloy following quenching. Examples of L_{12} phase forming elements include but are not limited to Sc, Er, Th, Yb, and Lu. The concentration of alloying elements in solid solution in alloys cooled from the melt is directly proportional to the cooling rate.

[0036] Exemplary aluminum alloys for this invention include, but are not limited to (in weight percent unless otherwise specified):

about Al-M-(0.1-4)Sc-(0.1-20)Gd;
 about Al-M-(0.1-20)Er-(0.1-20)Gd;
 about Al-M-(0.1-15)Tm-(0.1-20)Gd;
 about Al-M-(0.1-25)Yb-(0.1-20)Gd;
 about Al-M-(0.1-25)Lu-(0.1-20)Gd;
 about Al-M-(0.1-4)Sc-(0.1-20)Y;
 about Al-M-(0.1-20)Er-(0.1-20)Y;
 about Al-M-(0.1-15)Tm-(0.1-20)Y;
 about Al-M-(0.1-25)Yb-(0.1-20)Y;
 about Al-M-(0.1-25)Lu-(0.1-20)Y;
 about Al-M-(0.1-4)Sc-(0.05-4)Zr;
 about Al-M-(0.1-20)Er-(0.05-4)Zr;
 about Al-M-(0.1-15)Tm-(0.05-4)Zr;
 about Al-M-(0.1-25)Yb-(0.05-4)Zr;
 about Al-M-(0.1-25)Lu-(0.05-4)Zr;

about Al-M-(0.1-4)Sc-(0.05-10)Ti;
 about Al-M-(0.1-20)Er-(0.05-10)Ti;
 about Al-M-(0.1-15)Tm-(0.05-10)Ti;
 about Al-M-(0.1-25)Yb-(0.05-10)Ti;
 about Al-M-(0.1-25)Lu-(0.05-10)Ti;
 about Al-M-(0.1-4)Sc-(0.05-10)Hf;
 about Al-M-(0.1-20)Er-(0.05-10)Hf;
 about Al-M-(0.1-15)Tm-(0.05-10)Hf;
 about Al-M-(0.1-25)Yb-(0.05-10)Hf;
 about Al-M-(0.1-25)Lu-(0.05-10)Hf;
 about Al-M-(0.1-4)Sc-(0.05-5)Nb;
 about Al-M-(0.1-20)Er-(0.05-5)Nb;
 about Al-M-(0.1-15)Tm-(0.05-5)Nb;
 about Al-M-(0.1-25)Yb-(0.05-5)Nb; and
 about Al-M-(0.1-25)Lu-(0.05-5)Nb.

[0037] M is at least one of about (4-25) weight percent silicon, (1-8) weight percent magnesium, (0.1-3) weight percent manganese, (0.5-3) weight percent lithium, (0.2-6) weight percent copper, (3-12) weight percent zinc, and (1-12) weight percent nickel.

[0038] The amount of silicon present in the fine grain matrix, if any, may vary from about 4 to about 25 weight percent, more preferably from about 5 to about 20 weight percent, and even more preferably from about 6 to about 14 weight percent.

[0039] The amount of magnesium present in the fine grain matrix, if any, may vary from about 1 to about 8 weight percent, more preferably from about 3 to about 7.5 weight percent, and even more preferably from about 4 to about 6.5 weight percent.

[0040] The amount of manganese present in the fine grain matrix, if any, may vary from about 0.1 to about 3 weight percent, more preferably from about 0.2 to about 2 weight percent, and even more preferably from about 0.3 to about 1 weight percent.

[0041] The amount of lithium present in the fine grain matrix, if any, may vary from about 0.5 to about 3 weight percent, more preferably from about 1 to about 2.5 weight percent, and even more preferably from about 1 to about 2 weight percent.

[0042] The amount of copper present in the fine grain matrix, if any, may vary from about 0.2 to about 6 weight percent, more preferably from about 0.5 to about 5 weight percent, and even more preferably from about 2 to about 4.5 weight percent.

[0043] The amount of zinc present in the fine grain matrix, if any, may vary from about 3 to about 12 weight percent, more preferably from about 4 to about 10 weight percent, and even more preferably from about 5 to about 9 weight percent.

[0044] The amount of nickel present in the fine grain matrix, if any, may vary from about 1 to about 12 weight percent, more preferably from about 2 to about 10 weight percent, and even more preferably from about 4 to about 10 weight percent.

[0045] The amount of scandium present in the fine grain matrix, if any, may vary from 0.1 to about 4 weight percent, more preferably from about 0.1 to about 3 weight percent, and even more preferably from about 0.2 to about 2.5 weight percent. The Al-Sc phase diagram shown in FIG. 1 indicates a eutectic reaction at about 0.5 weight percent scandium at about 1219°F (659°C) resulting in a solid solution of scandium and aluminum and Al₃Sc dispersoids. Aluminum alloys with less than 0.5 weight percent scandium can be quenched from the melt to retain scandium in solid solution that may precipitate as dispersed L1₂ intermetallic Al₃Sc following an aging treatment. Alloys with scandium in excess of the eutectic composition (hypereutectic alloys) can only retain scandium in solid solution by rapid solidification processing (RSP) where cooling rates are in excess of about 10³°C/second.

[0046] The amount of erbium present in the fine grain matrix, if any, may vary from about 0.1 to about 20 weight percent, more preferably from about 0.3 to about 15 weight percent, and even more preferably from about 0.5 to about 10 weight percent. The Al-Er phase diagram shown in FIG. 2 indicates a eutectic reaction at about 6 weight percent erbium at about 1211°F (655°C). Aluminum alloys with less than about 6 weight percent erbium can be quenched from the melt to retain erbium in solid solutions that may precipitate as dispersed L1₂ intermetallic Al₃Er following an aging treatment. Alloys with erbium in excess of the eutectic composition can only retain erbium in solid solution by rapid solidification processing (RSP) where cooling rates are in excess of about 10³°C/second.

[0047] The amount of thulium present in the alloys, if any, may vary from about 0.1 to about 15 weight percent, more preferably from about 0.2 to about 10 weight percent, and even more preferably from about 0.4 to about 6 weight percent. The Al-Tm phase diagram shown in FIG. 3 indicates a eutectic reaction at about 10 weight percent thulium at about 1193°F (645°C). Thulium forms metastable Al₃Tm dispersoids in the aluminum matrix that have an L1₂ structure in the equilibrium condition. The Al₃Tm dispersoids have a low diffusion coefficient, which makes them thermally stable and

highly resistant to coarsening. Aluminum alloys with less than 10 weight percent thulium can be quenched from the melt to retain thulium in solid solution that may precipitate as dispersed metastable $L1_2$ intermetallic Al_3Tm following an aging treatment. Alloys with thulium in excess of the eutectic composition can only retain Tm in solid solution by rapid solidification processing (RSP) where cooling rates are in excess of about 10^3 °C/second.

[0048] The amount of ytterbium present in the alloys, if any, may vary from about 0.1 to about 25 weight percent, more preferably from about 0.3 to about 20 weight percent, and even more preferably from about 0.4 to about 10 weight percent. The Al-Yb phase diagram shown in FIG. 4 indicates a eutectic reaction at about 21 weight percent ytterbium at about 1157°F (625°C). Aluminum alloys with less than about 21 weight percent ytterbium can be quenched from the melt to retain ytterbium in solid solution that may precipitate as dispersed $L1_2$ intermetallic Al_3Yb following an aging treatment. Alloys with ytterbium in excess of the eutectic composition can only retain ytterbium in solid solution by rapid solidification processing (RSP) where cooling rates are in excess of about 10^3 °C/second.

[0049] The amount of lutetium present in the alloys, if any, may vary from about 0.1 to about 25 weight percent, more preferably from about 0.3 to about 20 weight percent, and even more preferably from about 0.4 to about 10 weight percent. The Al-Lu phase diagram shown in FIG. 5 indicates a eutectic reaction at about 11.7 weight percent Lu at about 1202°F (650°C). Aluminum alloys with less than about 11.7 weight percent lutetium can be quenched from the melt to retain Lu in solid solution that may precipitate as dispersed $L1_2$ intermetallic Al_3Lu following an aging treatment. Alloys with Lu in excess of the eutectic composition can only retain Lu in solid solution by rapid solidification processing (RSP) where cooling rates are in excess of about 10^3 °C/second.

[0050] The amount of gadolinium present in the alloys, if any, may vary from about 0.1 to about 20 weight percent, more preferably from about 0.3 to about 15 weight percent, and even more preferably from about 0.5 to about 10 weight percent.

[0051] The amount of yttrium present in the alloys, if any, may vary from about 0.1 to about 20 weight percent, more preferably from about 0.3 to about 15 weight percent, and even more preferably from about 0.5 to about 10 weight percent.

[0052] The amount of zirconium present in the alloys, if any, may vary from about 0.05 to about 4 weight percent, more preferably from about 0.1 to about 3 weight percent, and even more preferably from about 0.3 to about 2 weight percent.

[0053] The amount of titanium present in the alloys, if any, may vary from about 0.05 to about 10 weight percent, more preferably from about 0.2 to about 8 weight percent, and even more preferably from about 0.4 to about 4 weight percent.

[0054] The amount of hafnium present in the alloys, if any, may vary from about 0.05 to about 10 weight percent, more preferably from about 0.2 to about 8 weight percent, and even more preferably from about 0.4 to about 5 weight percent.

[0055] The amount of niobium present in the alloys, if any, may vary from about 0.05 to about 5 weight percent, more preferably from about 0.1 to about 3 weight percent, and even more preferably from about 0.2 to about 2 weight percent.

[0056] In order to have the best properties for the fine grain matrix, it is desirable to limit the amount of other elements. Specific elements that should be reduced or eliminated include no more than about 0.1 weight percent iron, 0.1 weight percent chromium, 0.1 weight percent vanadium, and 0.1 weight percent cobalt. The total quantity of additional elements should not exceed about 1% by weight, including the above listed impurities and other elements.

2. $L1_2$ Alloy Powder Formation and Consolidation

[0057] The highest cooling rates observed in commercially viable processes are achieved by gas atomization of molten metals to produce powder. Gas atomization is a two fluid process wherein a stream of molten metal is disintegrated by a high velocity gas stream. The end result is that the particles of molten metal eventually become spherical due to surface tension and finely solidify in powder form. Heat from the liquid droplets is transferred to the atomization gas by convection. The solidification rates, depending on the gas and the surrounding environment, can be very high and can exceed 10^6 °C/second. Cooling rates greater than 10^3 °C/second are typically specified to ensure supersaturation of alloying elements in gas atomized $L1_2$ aluminum alloy powder in the inventive process described herein.

[0058] A schematic of typical vertical gas atomizer 100 is shown in FIG. 6A. FIG. 6A is taken from R. Germain, Powder Metallurgy Science Second Edition MPIF (1994) (chapter 3, p. 101) and is included herein for reference. Vacuum or inert gas induction melter 102 is positioned at the top of free flight chamber 104. Vacuum induction melter 102 contains melt 106 which flows by gravity or gas overpressure through nozzle 108. A close up view of nozzle 108 is shown in FIG. 6B. Melt 106 enters nozzle 108 and flows downward till it meets the high pressure gas stream from gas source 110 where it is transformed into a spray of droplets. The droplets eventually become spherical due to surface tension and rapidly solidify into spherical powder 112 which collects in collection chamber 114. The gas recirculates through cyclone collector 116 which collects fine powder 118 before returning to the input gas stream. As can be seen from FIG. 6A, the surroundings to which the melt and eventual powder are exposed are completely controlled.

[0059] There are many effective nozzle designs known in the art to produce spherical metal powder. Designs with short gas-to-melt separation distances produce finer powders. Confined nozzle designs where gas meets the molten stream at a short distance just after it leaves the atomization nozzle are preferred for the production of the inventive $L1_2$

aluminum alloy powders disclosed herein. Higher superheat temperatures cause lower melt viscosity and longer cooling times. Both result in smaller spherical particles.

[0060] A large number of processing parameters are associated with gas atomization that affect the final product. Examples include melt superheat, gas pressure, metal flow rate, gas type, and gas purity. In gas atomization, the particle size is related to the energy input to the metal. Higher gas pressures, higher superheat temperatures and lower metal flow rates result in smaller particle sizes. Higher gas pressures provide higher gas velocities for a given atomization nozzle design.

[0061] To maintain purity, inert gases are used, such as helium, argon, and nitrogen. Helium is preferred for rapid solidification because the high heat transfer coefficient of the gas leads to high quenching rates and high supersaturation of alloying elements.

[0062] Lower metal flow rates and higher gas flow ratios favor production of finer powders. The particle size of gas atomized melts typically has a log normal distribution. In the turbulent conditions existing at the gas/metal interface during atomization, ultra fine particles can form that may reenter the gas expansion zone. These solidified fine particles can be carried into the flight path of molten larger droplets resulting in agglomeration of small satellite particles on the surfaces of larger particles. An example of small satellite particles attached to inventive spherical L1₂ aluminum alloy powder is shown in the scanning electron microscopy (SEM) micrographs of FIG. 7A and 7B at two magnifications. The spherical shape of gas atomized aluminum powder is evident. The spherical shape of the powder is suggestive of clean powder without excessive oxidation. Higher oxygen in the powder results in irregular powder shape. Spherical powder helps in improving the flowability of powder which results in higher apparent density and tap density of the powder. The satellite particles can be minimized by adjusting processing parameters to reduce or even eliminate turbulence in the gas atomization process. The microstructure of gas atomized aluminum alloy powder is predominantly cellular as shown in the optical micrographs of cross-sections of the inventive alloy in FIG. 8A and 8B at two magnifications. The rapid cooling rate suppresses dendritic solidification common at slower cooling rates resulting in a finer microstructure with minimum alloy segregation.

[0063] Oxygen and hydrogen in the powder can degrade the mechanical properties of the final part. It is preferred to limit the oxygen in the L1₂ alloy powder to about 1 ppm to 2000 ppm. Oxygen is intentionally introduced as a component of the helium gas during atomization. An oxide coating on the L1₂ aluminum powder is beneficial for two reasons. First, the coating prevents agglomeration by contact sintering and secondly, the coating inhibits the chance of explosion of the powder. A controlled amount of oxygen is important in order to provide good ductility and fracture toughness in the final consolidated material. Hydrogen content in the powder is controlled by ensuring the dew point of the helium gas is low. A dew point of about minus 50°F (minus 45.5°C) to minus 100°F (minus 73.3°C) is preferred.

[0064] In preparation for final processing, the powder is classified according to size by sieving. To prepare the powder for sieving, if the powder has zero percent oxygen content, the powder may be exposed to nitrogen gas which passivates the powder surface and prevents agglomeration. Finer powder sizes result in improved mechanical properties of the end product. While minus 325 mesh (about 45 microns) powder can be used, minus 450 mesh (about 30 microns) powder is a preferred size in order to provide good mechanical properties in the end product. During the atomization process, powder is collected in collection chambers in order to prevent oxidation of the powder. Collection chambers are used at the bottom of atomization chamber 104 as well as at the bottom of cyclone collector 116. The powder is transported and stored in the collection chambers also. Collection chambers are maintained under positive pressure with nitrogen gas which prevents oxidation of the powder.

[0065] A schematic of the L1₂ aluminum powder manufacturing process is shown in FIG. 9. In the process aluminum 200 and L12 forming (and other alloying) elements 210 are melted in furnace 220 to a predetermined superheat temperature under vacuum or inert atmosphere. Preferred charge for furnace 220 is prealloyed aluminum 200 and L1₂ and other alloying elements before charging furnace 220. Melt 230 is then passed through nozzle 240 where it is impacted by pressurized gas stream 250. Gas stream 250 is an inert gas such as nitrogen, argon or helium, preferably helium. Melt 230 can flow through nozzle 240 under gravity or under pressure. Gravity flow is preferred for the inventive process disclosed herein. Preferred pressures for pressurized gas stream 250 are about 50 psi (10.35 MPa) to about 750 psi (5.17 MPa) depending on the alloy.

[0066] The atomization process creates molten droplets 260 which rapidly solidify as they travel through agglomeration chamber 270 forming spherical powder particles 280. The molten droplets transfer heat to the atomizing gas by convection. The role of the atomizing gas is two fold: one is to disintegrate the molten metal stream into fine droplets by transferring kinetic energy from the gas to the melt stream and the other is to extract heat from the molten droplets to rapidly solidify them into spherical powder. The solidification time and cooling rate vary with droplet size. Larger droplets take longer to solidify and their resulting cooling rate is lower. On the other hand, the atomizing gas will extract heat efficiently from smaller droplets resulting in a higher cooling rate. Finer powder size is therefore preferred as higher cooling rates provide finer microstructures and higher mechanical properties in the end product. Higher cooling rates lead to finer cellular microstructures which are preferred for higher mechanical properties. Finer cellular microstructures result in finer grain sizes in consolidated product. Finer grain size provides higher yield strength of the material through

the Hall-Petch strengthening model.

[0067] Key process variables for gas atomization include superheat temperature, nozzle diameter, helium content and dew point of the gas, and metal flow rate. Superheat temperatures of from about 150°F (66°C) to 200°F (93°C) are preferred. Nozzle diameters of about 0.07 in. (1.8 mm) to 0.12 in. (3.0 mm) are preferred depending on the alloy. The gas stream used herein was a helium nitrogen mixture containing 74 to 87 vol. % helium. The metal flow rate ranged from about 0.8 lb/min (0.36 kg/min) to 4.0 lb/min (1.81 kg/min). The oxygen content of the L₁₂ aluminum alloy powders was observed to consistently decrease as a run progressed. This is suggested to be the result of the oxygen gettering capability of the aluminum powder in a closed system. The dew point of the gas was controlled to minimize hydrogen content of the powder. Dew points in the gases used in the examples ranged from -10°F (-23°C) to -110°F (-79°C).

[0068] The powder is then classified by sieving process 290 to create classified powder 300. Sieving of powder is performed under an inert environment to minimize oxygen and hydrogen pickup from the environment. While the yield of minus 450 mesh (30 microns) powder is extremely high (95%), there are always larger particle sizes, flakes and ligaments that are removed by the sieving. Sieving also ensures a narrow size distribution and provides a more uniform powder size. Sieving also ensures that flaw sizes cannot be greater than minus 450 mesh (30 microns) which will be required for nondestructive inspection of the final product.

[0069] Processing parameters of exemplary gas atomization runs are listed in Table 1.

Table 1: Gas atomization parameters used for producing powder

Run	Nozzle Diameter (in)	He Content (vol%)	Gas Pressure (psi)	Dew Point (°F)	Charge Temperature	Average Metal Flow Rate (lbs/min)	Oxygen Content (ppm) Start	Oxygen Content (ppm) End
1	0.10	79	190	<-58	2200	2.8	340	35
2	0.10	83	192	-35	1635	0.8	772	27
3	0.09	78	190	-10	2230	1.4	297	<0.01
4	0.09	85	160	-38	1845	2.2	22	4.1
5	0.10	86	207	-88	1885	3.3	286	208
6	0.09	86	207	-92	1915	2.6	145	88

[0070] The role of powder quality is extremely important to produce material with higher strength and ductility. Powder quality is determined by powder size, shape, size distribution, oxygen content, hydrogen content, and alloy chemistry. Over fifty gas atomization runs were performed to produce the inventive powder with finer powder size, finer size distribution, spherical shape, and lower oxygen and hydrogen contents. Processing parameters of some exemplary gas atomization runs are listed in Table 1. It is suggested that the observed decrease in oxygen content is attributed to oxygen gettering by the powder as the runs progressed.

[0071] Inventive L₁₂ aluminum alloy powder was produced with over 95% yield of minus 450 mesh (30 microns) which includes powder from about 1 micron to about 30 microns. The average powder size was about 10 microns to about 15 microns. As noted above, finer powder size is preferred for higher mechanical properties. Finer powders have finer cellular microstructures. As a result, finer cell sizes lead to finer grain size by fragmentation and coalescence of cells during powder consolidation. Finer grain sizes produce higher yield strength through the Hall-Petch strengthening model where yield strength varies inversely as the square root of the grain size. It is preferred to use powder with an average particle size of 10-15 microns. Powders with a powder size less than 10-15 microns can be more challenging to handle due to the larger surface area of the powder. Powders with sizes larger than 10-15 microns will result in larger cell sizes in the consolidated product which, in turn, will lead to larger grain sizes and lower yield strengths.

[0072] Powders with narrow size distributions are preferred. Narrower powder size distributions produce product microstructures with more uniform grain size. Spherical powder was produced to provide higher apparent and tap densities which help in achieving 100% density in the consolidated product. Spherical shape is also an indication of cleaner and lower oxygen content powder. Lower oxygen and lower hydrogen contents are important in producing material with high ductility and fracture toughness. Although it is beneficial to maintain low oxygen and hydrogen content in powder to achieve good mechanical properties, lower oxygen may interfere with sieving due to self sintering. An oxygen content of about 25 ppm to about 500 ppm is preferred to provide good ductility and fracture toughness without any sieving issue. Lower hydrogen is also preferred for improving ductility and fracture toughness. It is preferred to have about 25-200 ppm of hydrogen in atomized powder by controlling the dew point in the atomization chamber. Hydrogen in the powder is further reduced by heating the powder in vacuum. Lower hydrogen in final product is preferred to achieve

good ductility and fracture toughness.

[0073] A schematic of the L₁₂ aluminum powder consolidation process is shown in FIG. 10. The starting material is sieved and classified L₁₂ aluminum alloy powders (step 310). Blending (step 320) is a preferred step in the consolidation process because it results in improved uniformity of particle size distribution. Gas atomized L₁₂ aluminum alloy powder generally exhibits a bimodal particle size distribution and cross blending of separate powder batches tends to homogenize the particle size distribution. Blending (step 320) is also preferred when separate metal and/or ceramic powders are added to the L₁₂ base powder to form bimodal or trimodal consolidated alloy microstructures.

[0074] Following blending (step 320), the powders are transferred to a can (step 330) where the powder is vacuum degassed (step 340) at elevated temperatures. The can (step 330) is an aluminum container having a cylindrical, rectangular or other configuration with a central axis. Cylindrical configurations are preferred with hydraulic extrusion presses. Vacuum degassing times can range from about 0.5 hours to about 8 days. A temperature range of about 300°F (149°C) to about 900°F (482°C) is preferred. Dynamic degassing of large amounts of powder is preferred to static degassing. In dynamic degassing, the can is preferably rotated during degassing to expose all of the powder to a uniform temperature. Degassing removes oxygen and hydrogen from the powder.

[0075] Following vacuum degassing (step 340), the vacuum line is crimped and welded shut (step 350). The powder is then fully densified by blind die compaction or closed die forging as the process is sometimes called (step 360). At this point the can may be removed by machining (step 380) to form a useful billet (step 390).

[0076] A schematic showing blind die compaction (process 400) is shown in FIGS. 11A and 11B. The equipment comprises base 410, die 420, ram 430, and means to apply pressure to ram 430 indicated by arrow 450. Prior to compaction, billet 440 does not fill die cavity 460. After compaction, billet 445 completely fills the die cavity and has taken the shape of die cavity 460. The die cavities can have any shape provided they have a central symmetrical axis parallel to arrow 450. Cylindrical shapes adopt well for extrusion billets. Canned L₁₂ aluminum alloy powder preforms are easily densified due to the large capacity of modern hydraulic presses.

[0077] FIG. 12 is a perspective view of a direct extrusion process. In the process, a billet of, in this case, L₁₂ aluminum alloy is extruded through a die having a cavity with a shape necessary to produce a cross-sectional profile of the final part. The components of extrusion process 500 are illustrated in the FIG. and comprise container 510, container liner 520, and ram 540 with dummy block 550. Dummy block 550 isolates billet 530 from direct contact with ram 540 during extrusion. During extrusion, billet 530 is forced through opening (s) in die 560 by pressure on ram 540. Ram 540 can be mechanically or hydraulically actuated. Hydraulic extrusion presses are preferred for higher pressure operation. During extrusion, die 560 is held in place against the ram pressure by die backer 570. Other forms of extrusion are indirect extrusion, hydrostatic extrusion, lateral extrusion, and others known to those in the art.

[0078] An almost unlimited number of cross-sectional shapes of extrusions can be achieved. Extrusion 580 in FIG. 12 has a simple circular cross-section. FIG. 13 shows examples of other common shapes. FIG. 13A is an example of how a bracket can be fabricated from an extrusion. FIG. 13B is an example of a gear. FIG. 13C is another exemplary shape. FIGS. 13B and 13C have hollow shapes and are formed by the process of hollow die extrusion. During extrusions, to produce parts with hollow cross-sections, the L₁₂ aluminum alloy is divided during extrusion in port sections of a first (interior) hollow die into a plurality of portions, which are again joined (welded) to each other in a second (exterior) die with a welding chamber section, to form a welded portion, thereby producing a hollow section having a complicated profile.

[0079] A perspective representation of hollow die system 600 used to form a rectangular tube is shown in FIG. 14. The die system comprises internal die 660 and external die 665. Internal die 660 contains a plurality of inlet ports 620 and internal bearing 630. When assembled, internal bearing 630 fits inside external bearing 635 such that there is clearance between bearing wall 640 of internal bearing 630 and bearing wall 645 of external bearing 635. During extrusion, L₁₂ alloy billet 610 is forced in direction of arrow 615 in a container (not shown) by a ram (not shown) such that the alloy is forced to flow through port (s) 620 such that it flows around internal bearing 630. The metal rejoins in welding chamber 665 and flows through the gap between internal bearing 630 and external bearing 635 and is formed into rectangular hollow extrusion 670 with dimensions formed by bearing surfaces 640 and 645. Die 660 (shown) is termed a porthole die. Other dies used to form extrusions with hollow features are spider and bridge dies and others known to those in the art.

[0080] L₁₂ aluminum alloy parts useful for turbine and rocket engine applications can be rapidly and efficiently made by direct extrusion including brackets, cases, tubes, ducts, beams, spars.

Table 2: Effect of compaction and extrusion parameters on extruded L1 ₂ Al alloys duct								
Billet ID	Compaction Temperature, F	Extrusion Temperature, F	Ratio	Extrusion Speed, ipm	Ultimate Tensile strength, ksi	0.2% Yield Strength, ksi	Elongation, %	Reduction in Area, %
1	750	700	10:01	0.5	115.0	104.0	9.0	18.5
2	750	650	10:01	0.5	114.0	103.0	6.5	12.0
3	750	650	6:01	0.5	117.0	107.0	7.5	15.0
4	750	600	10:01	3	112.0	104.0	6.5	12.5
5	750	700	15:01	3	105.0	96.0	10.0	20.0
6	750	550	10:01	3	112.0	102.0	7.5	12.0
7	750	500	10:01	3	118.0	108.0	8.0	16.0

[0081] Extrusion parameters including extrusion temperature, billet soaking time, extrusion ratio and extrusion speed have significant influence on mechanical properties of L₁₂ aluminum alloy duct. Billet soaking time was kept constant at 1.5 hours for all these billets. These billets were compacted at 750°F using vacuum hot pressing resulting in 100% dense billets which were extruded to produce ducts. Lower extrusion temperature of 500°F at ratio of 10:1 and speed of 3 inch (7.6 cm) per minute resulted in 118 ksi tensile strength, 8% elongation and 16% reduction in area. Higher extrusion temperature of 700°F at ratio of 10:1 and speed of 0.5 inch (1.3 cm) per minute resulted in 115 ksi tensile strength, 9% elongation and 18.5% reduction in area. In other example, extrusion temperature of 650°F at ratio of 6:1 and speed of 0.5 inch (1.3 cm) per minute resulted in 117 ksi tensile strength, about 7.5% elongation and 15% reduction in area. In other example, extrusion temperature of 700°F, ratio of 15:1 and speed of 3:1 resulted in 105 ksi tensile strength, 10% elongation and 20% reduction in area. A number of examples of extrusion demonstrated excellent tensile properties with about 105-120 ksi tensile strength and ductility in terms of reduction in area of about 10 to 20%. These examples suggest that a unique combination of extrusion parameters that have been developed in the present invention can lead to a good combination of tensile strength and ductility for L₁₂ aluminum alloys ducts and that can be applied to other extruded products also including brackets, cases, tubes, beams, spars.

[0082] Extrusions when carried at very high speeds can result in reduced strength and higher ductility due to adiabatic heating generated during extrusion. Higher the speed larger the adiabatic heat generated due to friction during extrusion. Therefore higher speed is not preferred from strength point of view. Higher speed is preferred from cost point of view since more number of components can be produced in same amount of time. Slower speeds do not produce adiabatic heat and therefore preferred for higher strength extrusions. Slower the speed less adiabatic heat is produced. However, below a certain speed extrusion becomes uneconomical and therefore it is not preferred to use too low extrusion speed. Based on all the results produced, extrusion speed of about 0.1 inch (0.25 cm) per minute to about 20 inch (50.8 cm) per minute is preferred for present inventive L₁₂ aluminum alloys based on balanced mechanical properties resulting in good combination of strength and ductility.

[0083] A photograph of a duct produced for a jet engine is shown in Fig. 15. Products such as this are a significant improvement in the industry.

[0084] Although the present invention has been described with reference to preferred embodiments, workers skilled in the art will recognize that changes may be made in form and detail without departing from the scope of the invention as defined by the attached claims.

Claims

1. A method for forming a high strength aluminum alloy component containing L₁₂ dispersoids, comprising the steps of:

placing in a container a quantity of an aluminum alloy powder containing an L₁₂ dispersoid comprising Al₃X dispersoids wherein X is at least one first element selected from the group comprising:

about 0.1 to about 4.0 weight percent scandium, about 0.1 to about 20.0 weight percent erbium, about 0.1 to about 15.0 weight percent thulium,

about 0.1 to about 25.0 weight percent ytterbium, and about 0.1 to about 25.0 weight percent lutetium; and at least one second element selected from the group comprising about 0.1 to about 20.0 weight percent gadolinium, about 0.1 to about 20.0 weight percent yttrium, about 0.05 to about 4.0 weight percent zirconium, about 0.05 to about 10.0 weight percent titanium, about 0.05 to about 10.0 weight percent hafnium, and about 0.05 to about 5.0 weight percent niobium;

the balance substantially aluminum;

the alloy powder having a mesh size of less than 450 mesh (30 microns) in a container, vacuum degassing the powder at a temperature of about 300°F (149°C) to about 900°F (482°C) for about 0.5 hours to about 8 days;

sealing the degassed powder in the container under vacuum;

heating the sealed container at about 300°F (149°C) to about 900°F (482°C) for about 15 minutes to eight hours;

vacuum hot pressing the heated container to form a billet;

removing the container from the formed billet; and

extruding the billet into a component using an extrusion die shaped to form the component.

2. The method of claim 1, wherein the aluminum alloy powder contains at least one ceramic selected from the group comprising: about 5 to about 40 volume percent aluminum oxide, about 5 to about 40 volume percent silicon carbide, about 5 to about 40 volume percent aluminum nitride, about 5 to about 40 volume percent titanium diboride, about

5 to about 40 volume percent titanium boride, about 5 to about 40 volume percent boron carbide and about 5 to about 40 volume percent titanium carbide.

3. The method of claim 1 or 2, wherein the aluminum alloy powder contains at least one third element selected from the group consisting of silicon, magnesium, manganese, lithium, copper, zinc, and nickel, and preferably wherein the third element comprises at least one of about 4 to about 25 weight percent silicon, about 1 to about 8 weight percent magnesium, about 0.1 to about 3 weight percent manganese, about 0.5 to about 3 weight percent lithium, about 0.2 to about 6 weight percent copper, about 3 to about 12 weight percent zinc, about 1 to about 12 weight percent nickel.

4. The method of claim 1, 2 or 3, wherein the extrusion is carried out at a temperature of from about 300°F (148.9 °C) to about 900°F (482.2 °C), and/or wherein the extrusion die temperature ranges from about 300°F (148.9 °C) to about 900°F (482.2°C).

5. The method of any preceding claim, wherein the extrusion is carried out at rate of about 0.1 inch (0.25 cm) per minute to about 20 inch (50.8 cm) per minute.

6. The method of any preceding claim, wherein the billet temperature ranges from about 300°F (148.9 °C) to about 900°F (482.2°C), and/or wherein billet has a soak time ranging from about 0.5 hours to about 8 hours.

7. The method of any preceding claim, wherein the extrusion is carried out at ratios of about 2:1 to 40:1.

8. The method of any preceding claim, wherein consolidating the powders comprises:

sieving the powders to achieve a particle size of less than about -325 mesh (45 microns);
placing the powders in a container with a rectangular cross-section;
vacuum degassing the powder;
sealing the container; and
hot pressing the container to achieve a powder density of about 100 percent.

9. The method of any preceding claim, wherein the high strength aluminum alloy component is selected from brackets, cases, tubes, ducts, beams, spars and other components for gas turbine engines, rocket engines and other aerospace applications.

10. The method of any preceding claim, wherein the powder has an average particle size of 10-15 microns.

11. A high strength aluminum alloy component, comprising:

an extruded aluminum alloy billet containing an $L1_2$ dispersoid comprising Al_3X dispersoids wherein X is at least one first element selected from the group comprising:

about 0.1 to about 4.0 weight percent scandium, about 0.1 to about 20.0 weight percent erbium, about 0.1 to about 15.0 weight percent thulium,
about 0.1 to about 25.0 weight percent ytterbium, and about 0.1 to about 25.0 weight percent lutetium;
at least one second element selected from the group comprising about 0.1 to about 20.0 weight percent gadolinium, about 0.1 to about 20.0 weight percent yttrium, about 0.05 to about 4.0 weight percent zirconium, about 0.05 to about 10.0 weight percent titanium, about 0.05 to about 10.0 weight percent hafnium, and about 0.05 to about 5.0 weight percent niobium; and
the balance substantially aluminum;

the billet having been extruded into a component using an extrusion die shaped to form the component.

12. The alloy component of claim 11, wherein the aluminum alloy component contains at least one ceramic selected from the group comprising: about 5 to about 40 volume percent aluminum oxide, about 5 to about 40 volume percent silicon carbide, about 5 to about 40 volume percent aluminum nitride, about 5 to about 40 volume percent titanium diboride, about 5 to about 40 volume percent titanium boride, about 5 to about 40 volume percent boron carbide and about 5 to about 40 volume percent titanium carbide.

- 5 **13.** The alloy component of claim 11 or 12, wherein the aluminum alloy contains at least one third element selected from the group consisting of silicon, magnesium, manganese, lithium, copper, zinc, and nickel, and preferably wherein the third element comprises at least one of about 4 to about 25 weight percent silicon, about 1 to about 8 weight percent magnesium, about 0.1 to about 3 weight percent manganese, about 0.5 to about 3 weight percent lithium, about 0.2 to about 6 weight percent copper, about 3 to about 12 weight percent zinc, about 1 to about 12 weight percent nickel.
- 10 **14.** The alloy component of any of claims 11 to 13, wherein the extrusion has been carried out ratios of about 2:1 to about 40:1, and preferably at extrusion die temperatures from about 300°F (148.9°C) to about 900°F (482.2°C).
- 15 **15.** The alloy component of any of claims 11 to 14, wherein the high strength aluminum alloy component is selected from brackets, cases, tubes, ducts, beam, spars and other components for gas turbine engines, rocket engines and other aerospace applications.

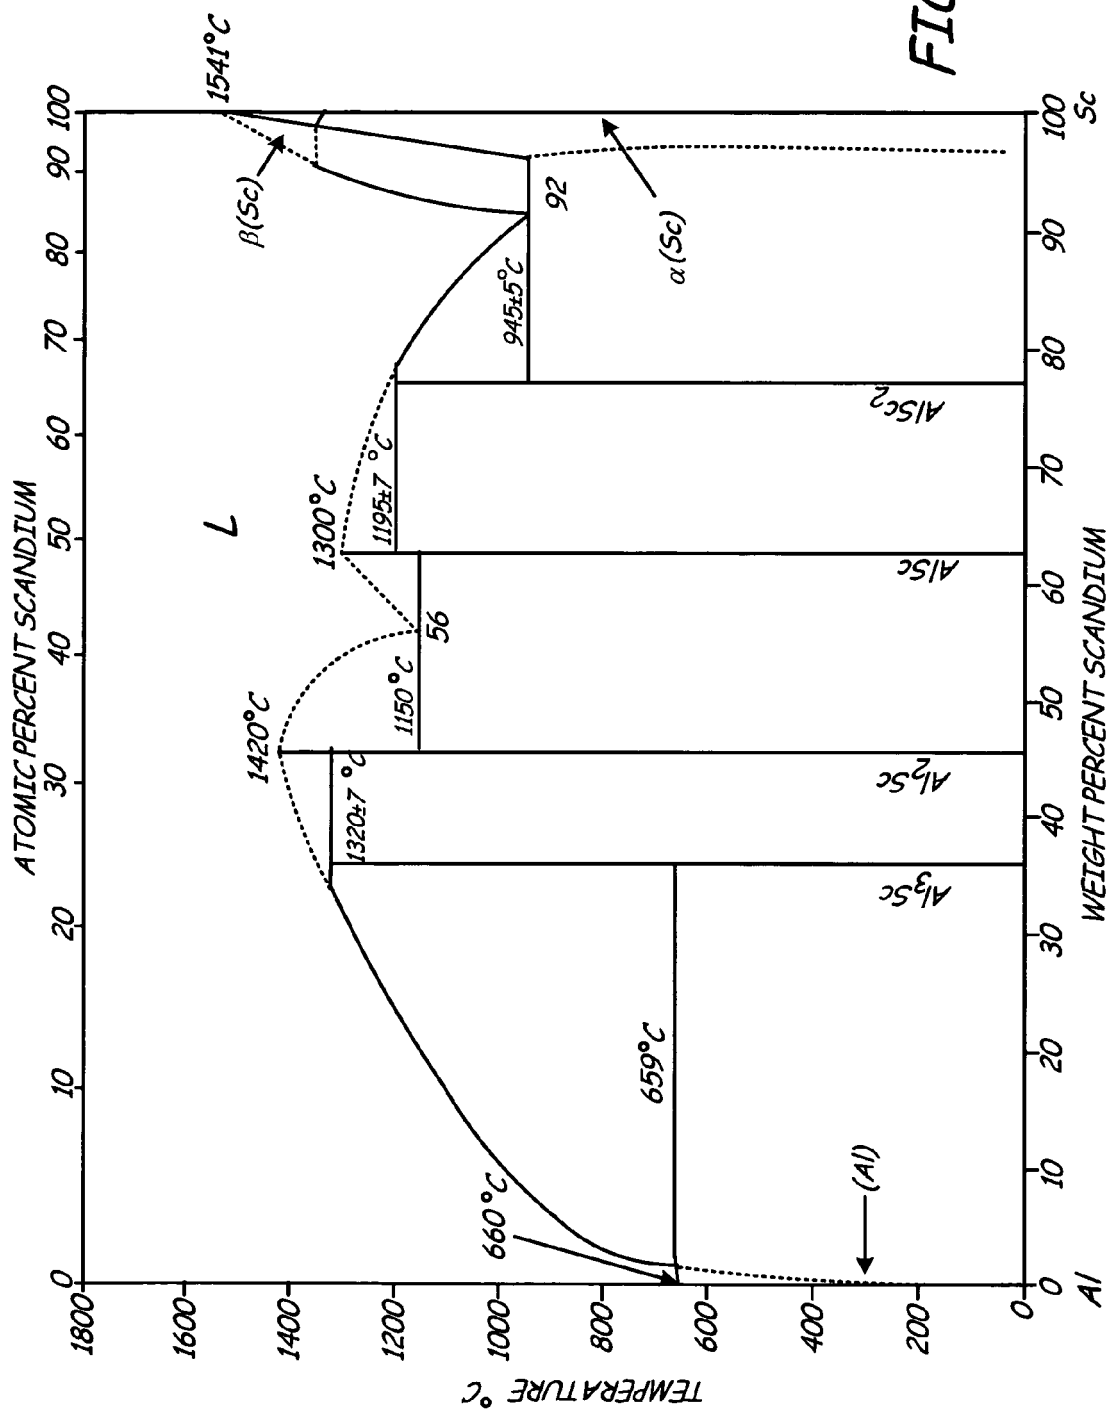


FIG. 1

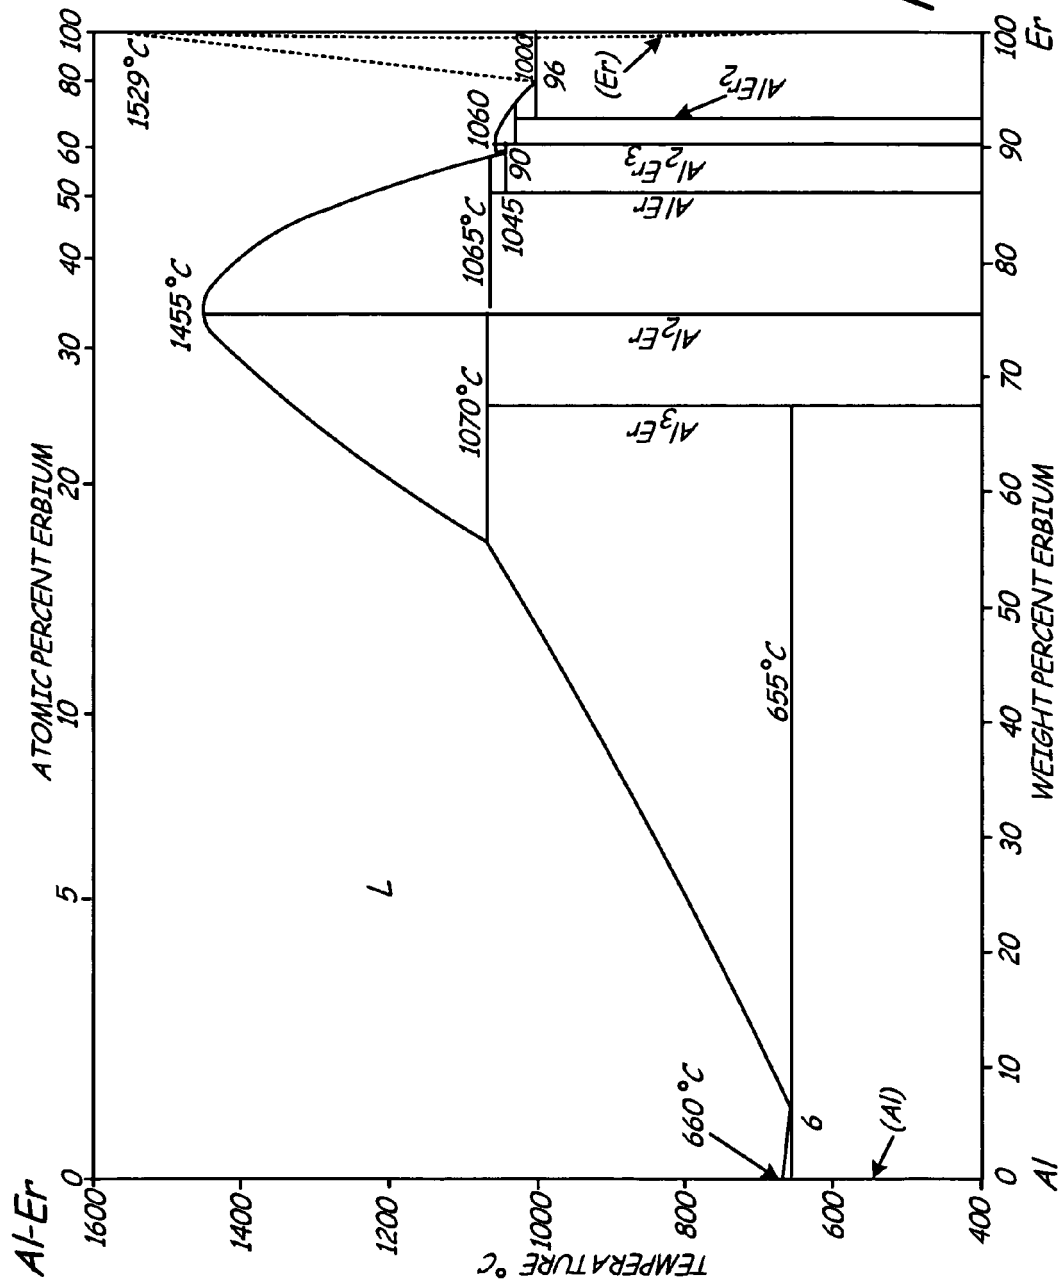
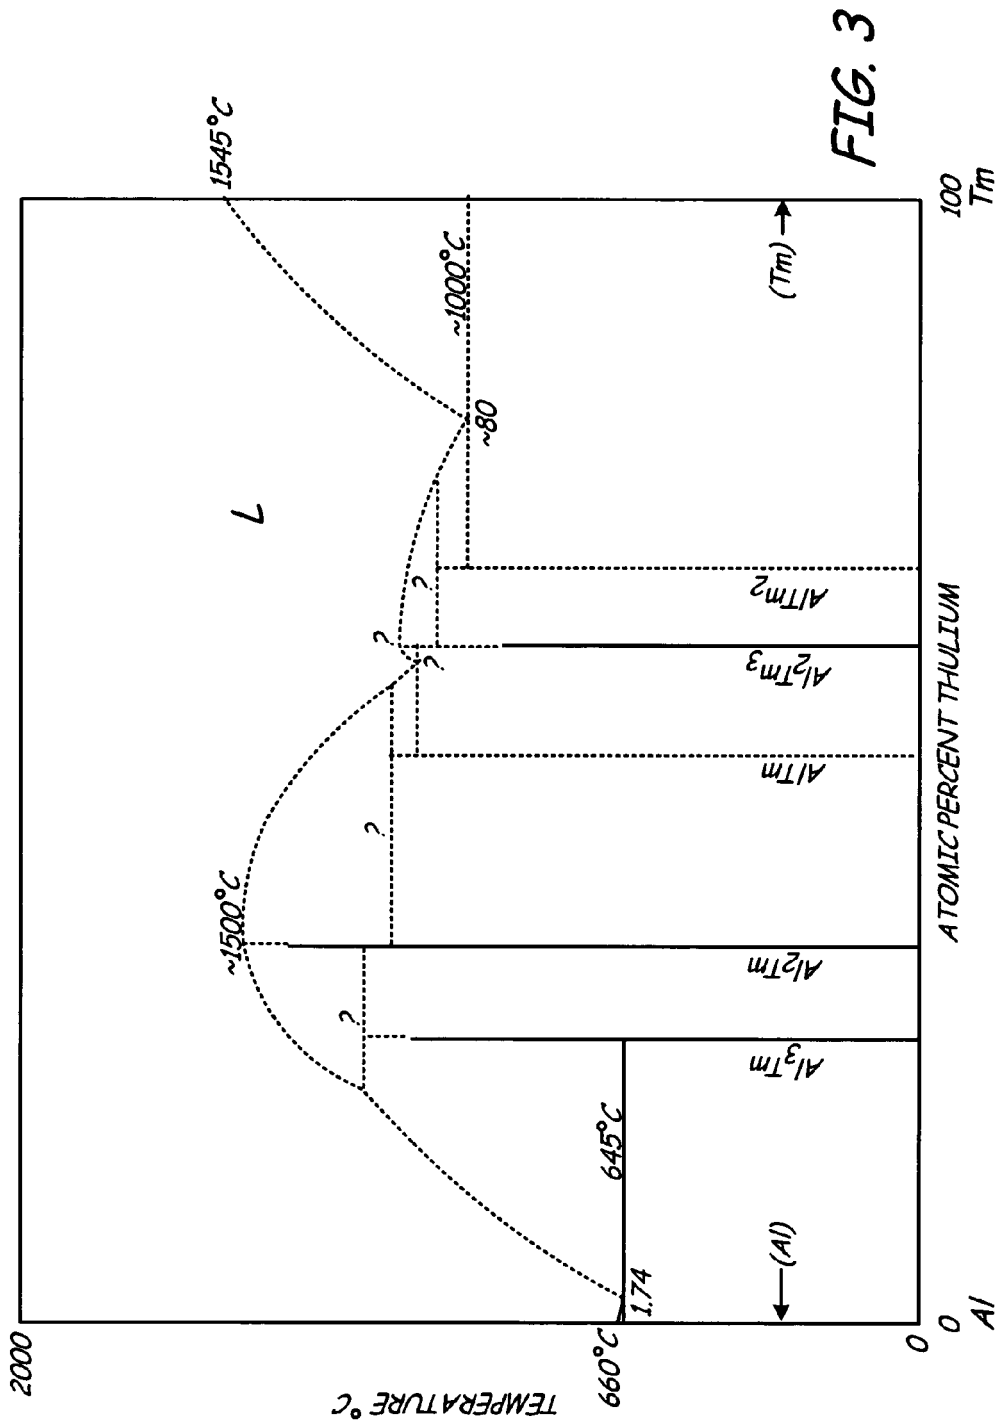
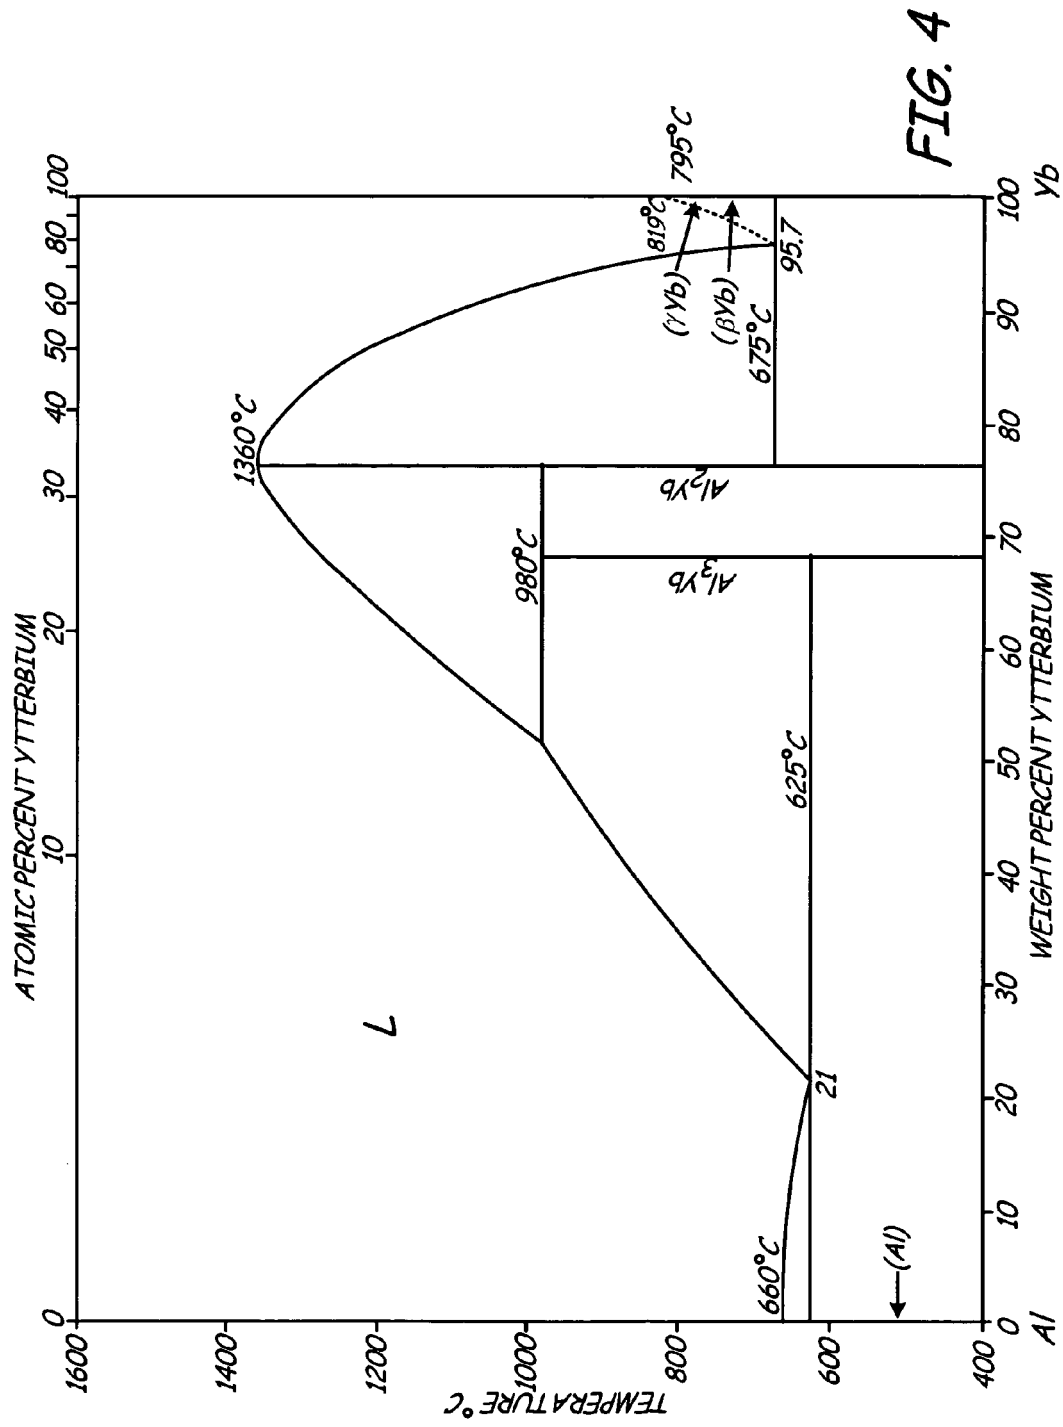
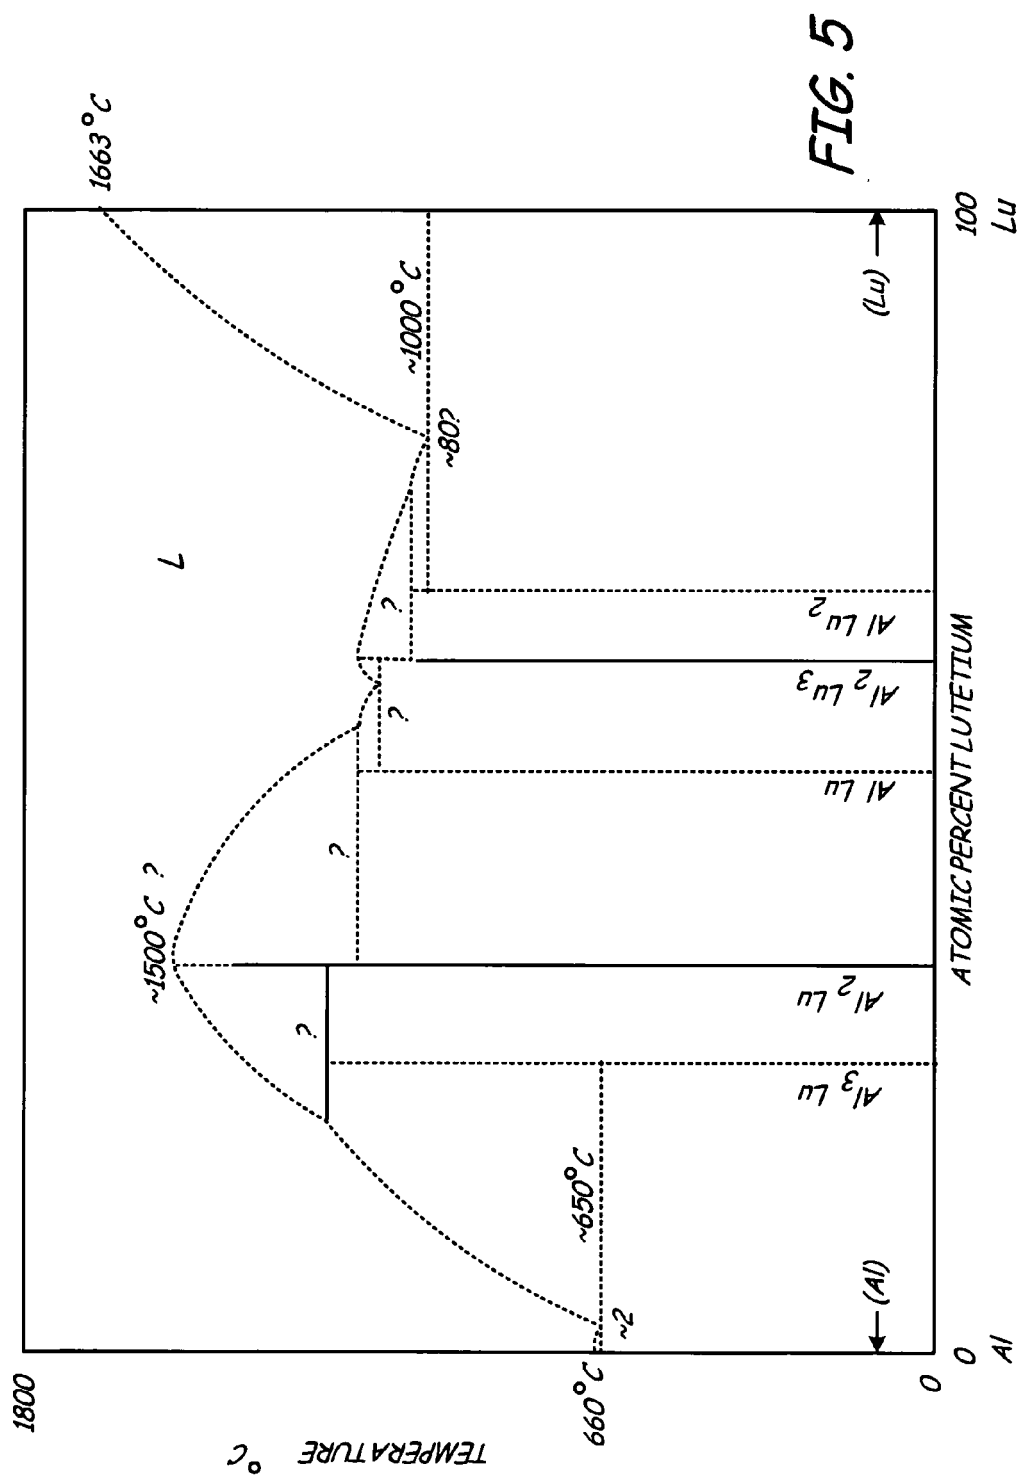
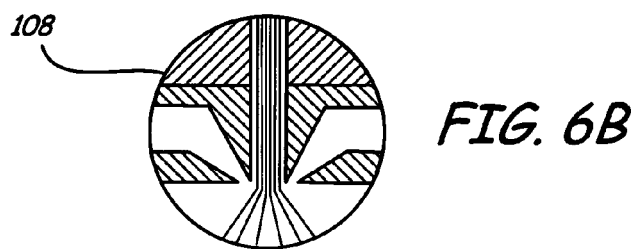
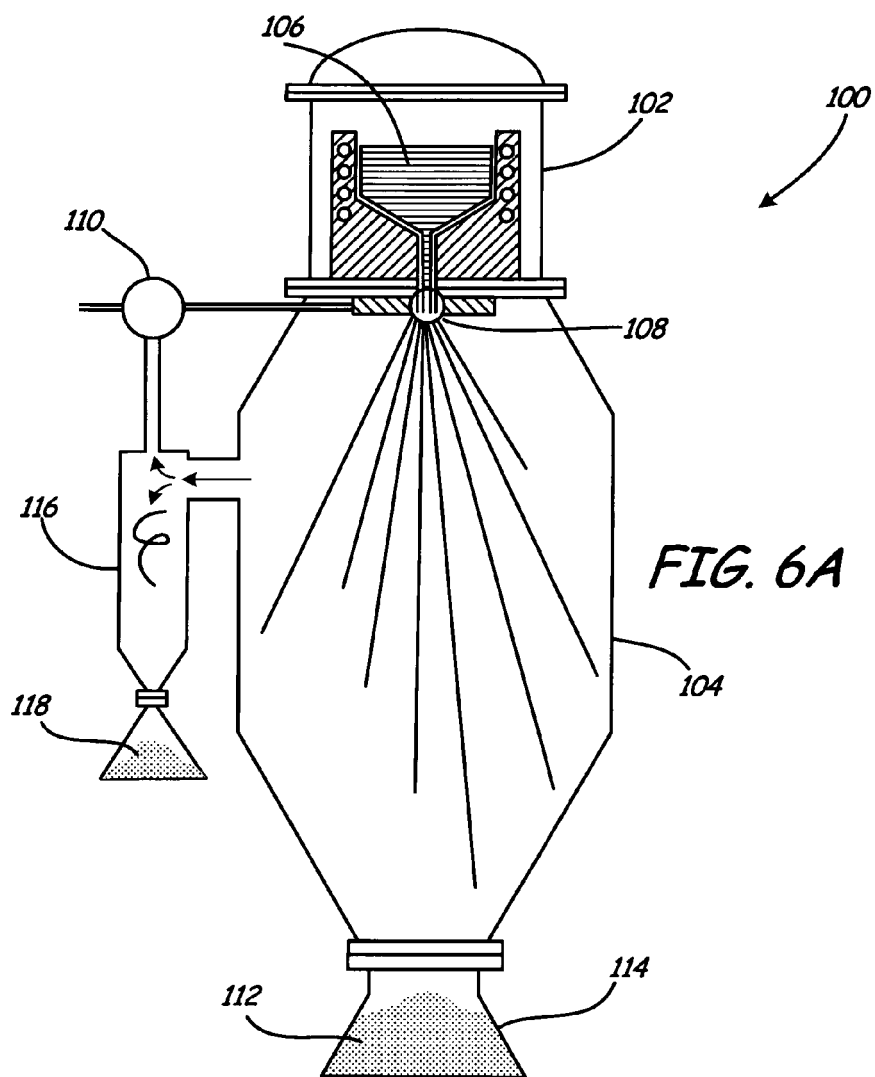


FIG. 2









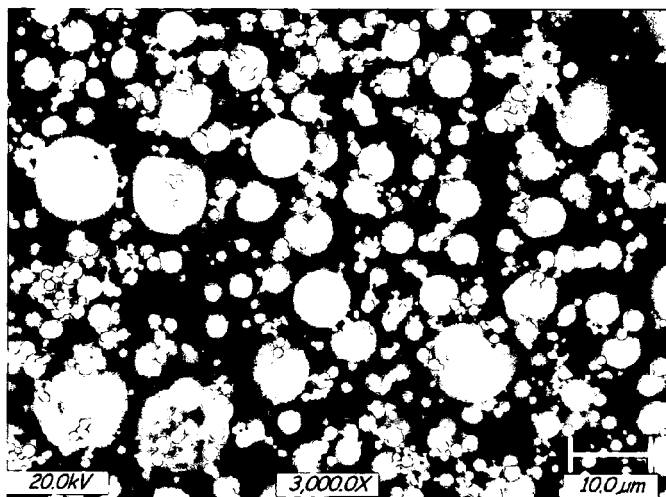


FIG. 7A

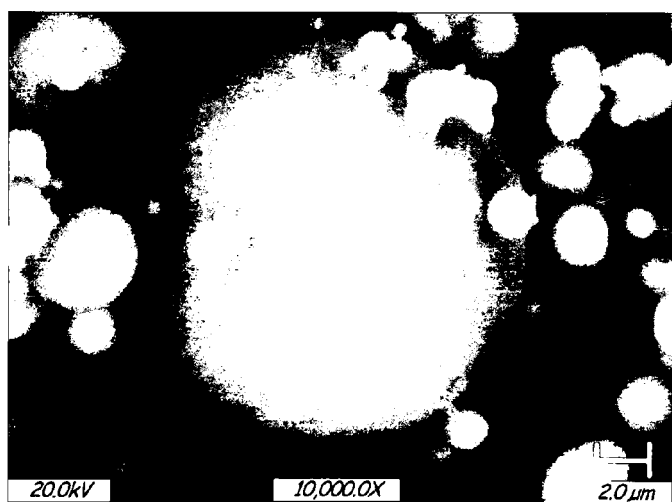


FIG. 7B

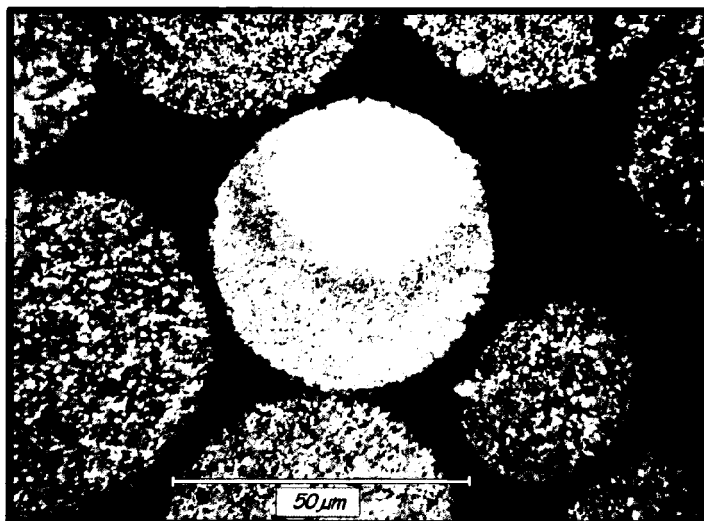


FIG. 8A

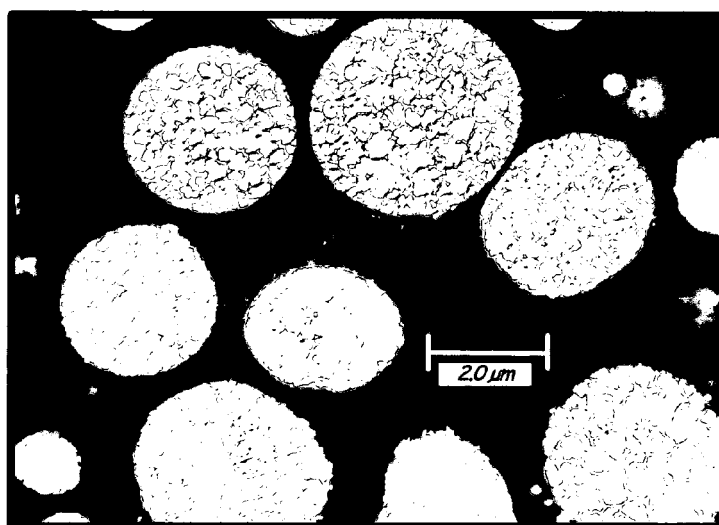


FIG. 8B

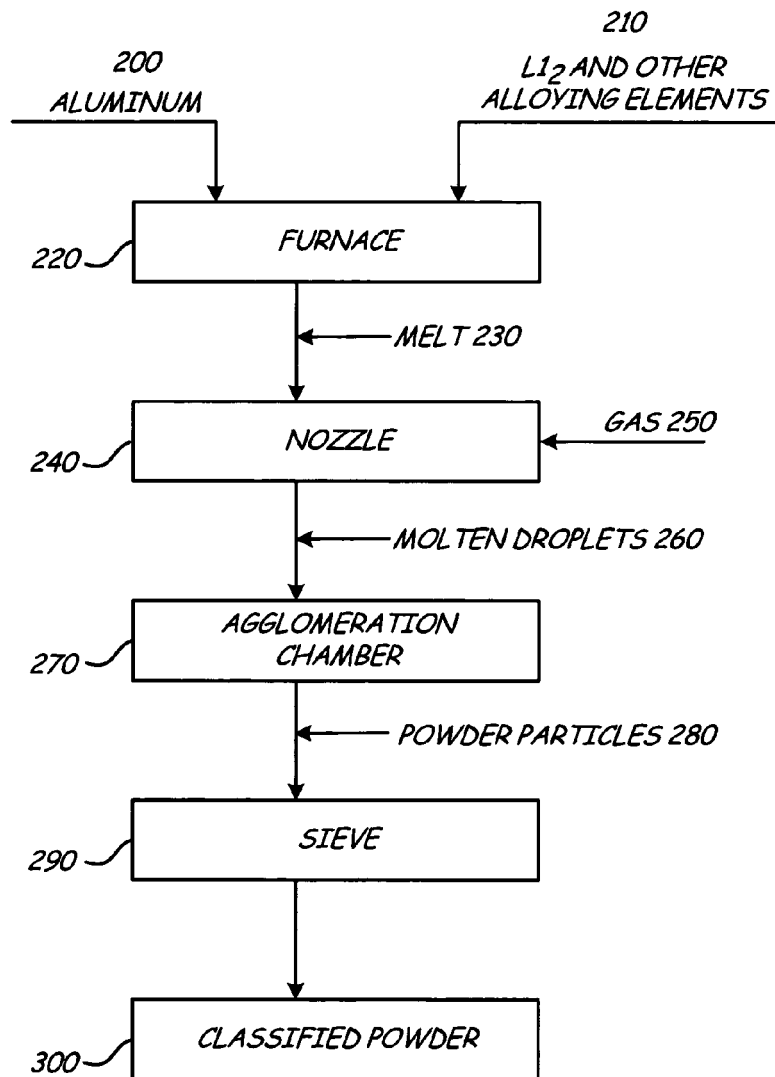


FIG. 9

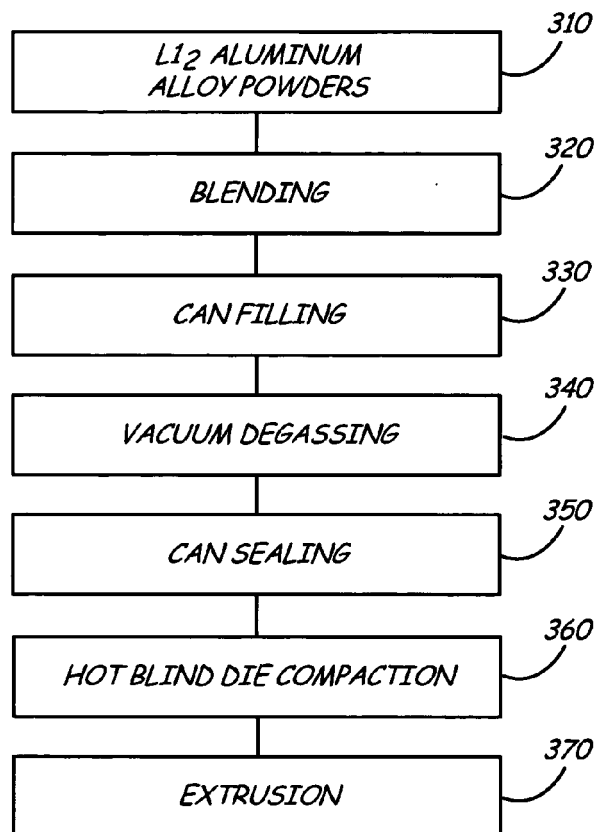


FIG. 10

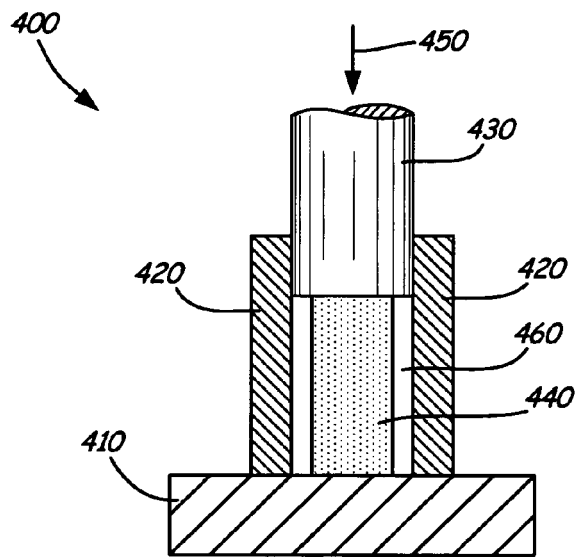


FIG. 11A

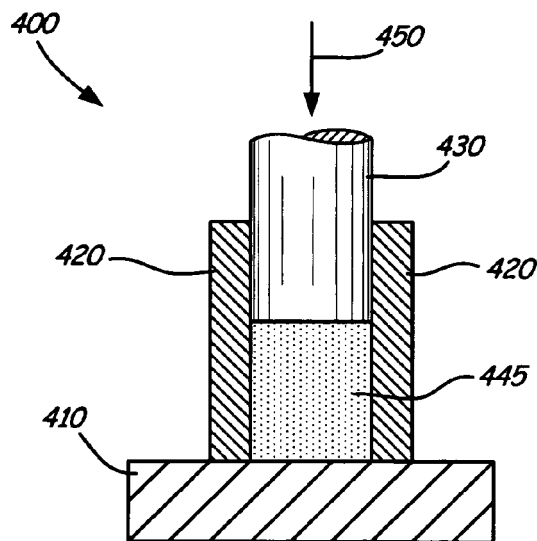
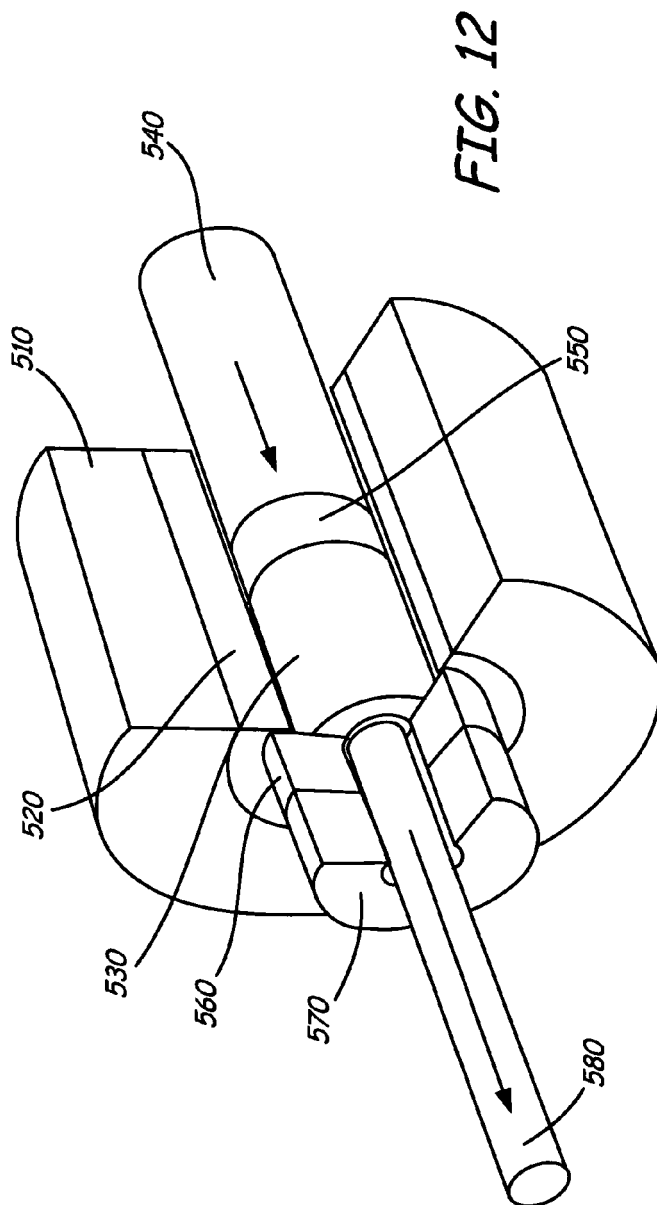
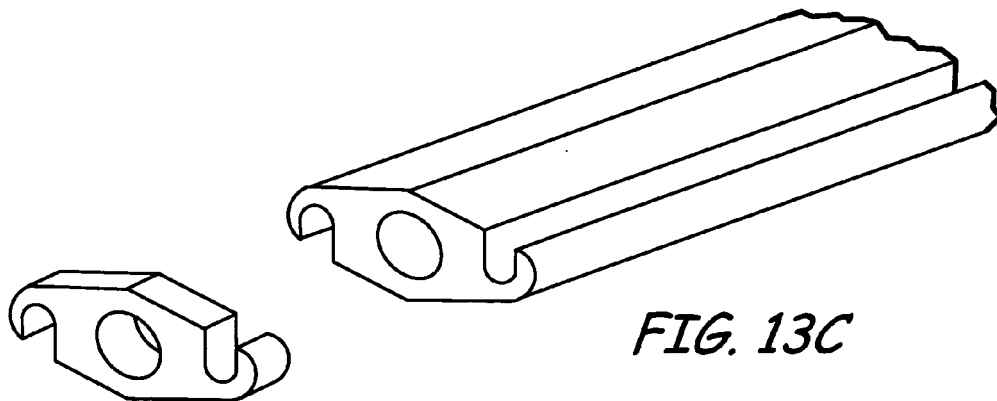
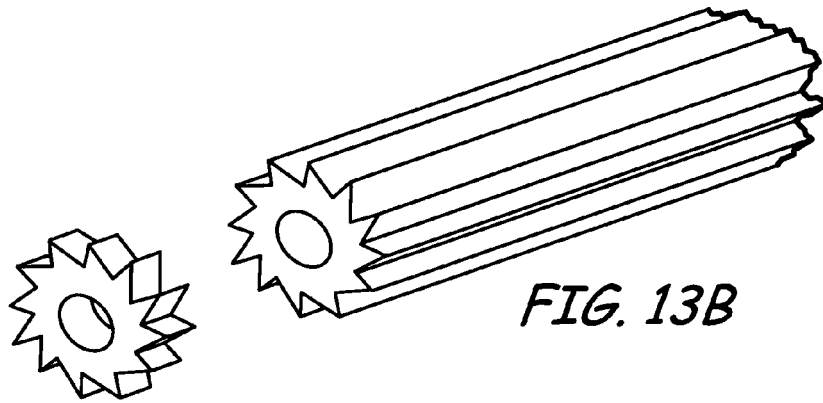
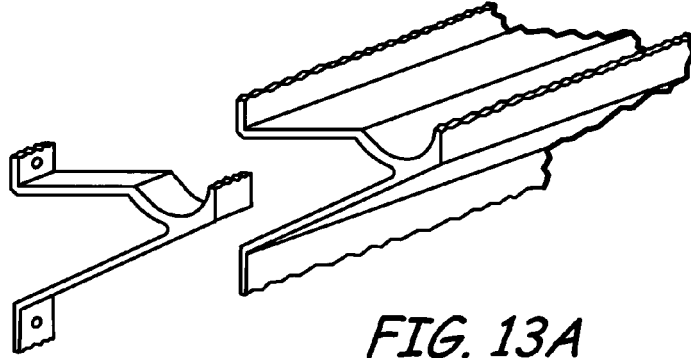
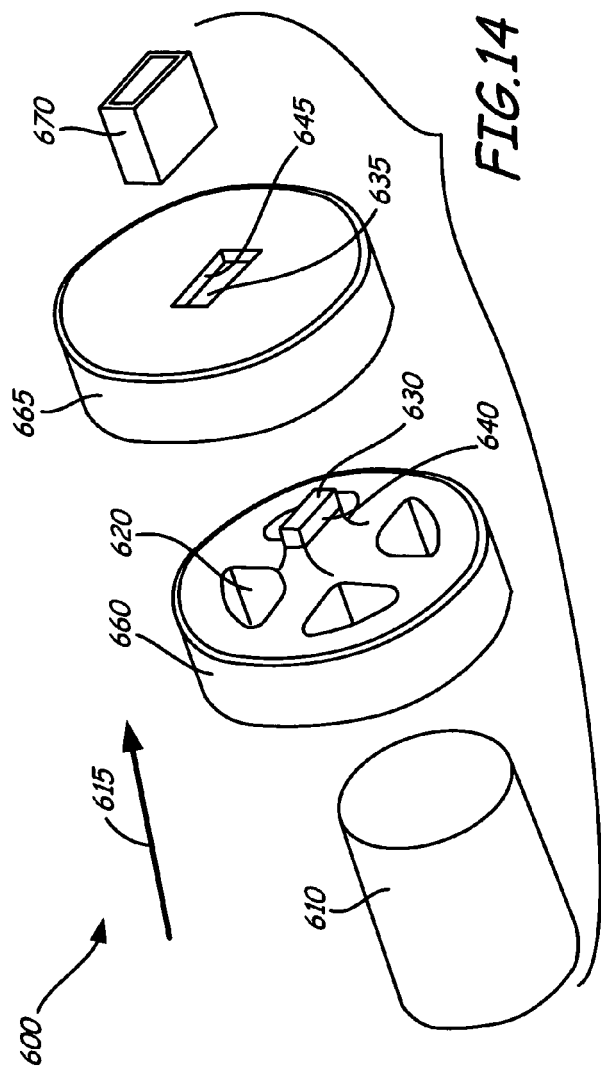


FIG. 11B







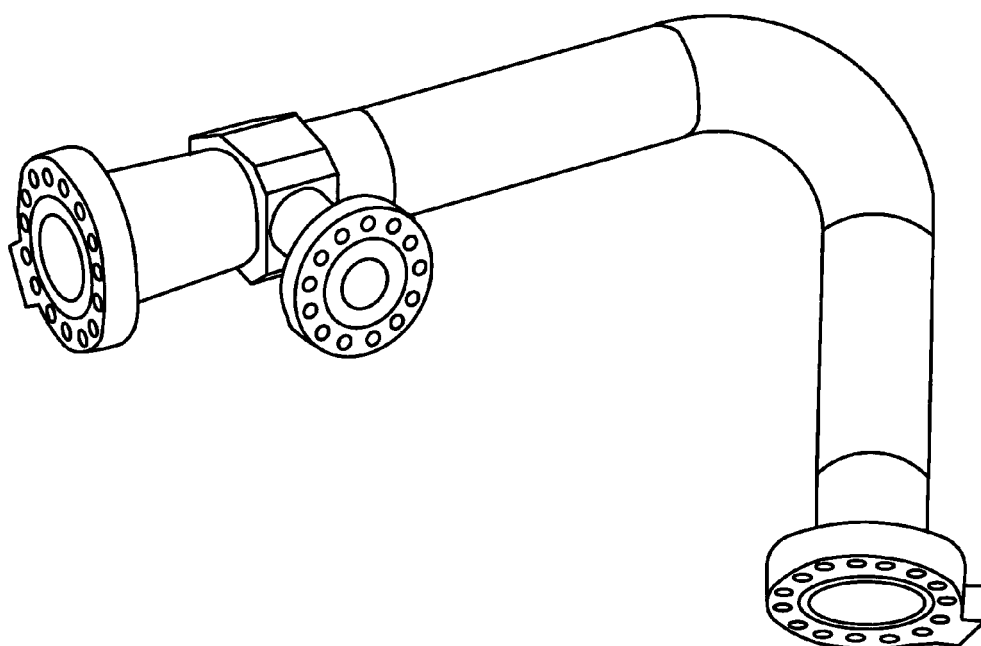


FIG. 15



EUROPEAN SEARCH REPORT

Application Number
EP 10 25 1602

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	EP 1 728 881 A2 (UNITED TECHNOLOGIES CORP [US]) 6 December 2006 (2006-12-06)	11-15	INV. C22C1/04 C22C21/00 B22F3/20
Y	* the whole document *	1-10	

X	EP 1 111 078 A2 (UNITED TECHNOLOGIES CORP [US]) 27 June 2001 (2001-06-27)	11-15	
Y	* the whole document *	1-10	

X	EP 1 439 239 A1 (UNITED TECHNOLOGIES CORP [US]) 21 July 2004 (2004-07-21)	11-15	
	* the whole document *		

X	EP 1 788 102 A1 (UNITED TECHNOLOGIES CORP [US]) 23 May 2007 (2007-05-23)	11-15	
	* the whole document *		

E	EP 2 251 447 A1 (UNITED TECHNOLOGIES CORP [US]) 17 November 2010 (2010-11-17)	11-13,15	
	* the whole document *		

X,P	EP 2 110 450 A1 (UNITED TECHNOLOGIES CORP [US]) 21 October 2009 (2009-10-21)	11,13-15	TECHNICAL FIELDS SEARCHED (IPC)
	* the whole document *		C22C B22F

X,P	US 2010/143177 A1 (PANDEY AWADH B [US]) 10 June 2010 (2010-06-10)	1-15	
	* the whole document *		

X,P	WO 2010/102206 A2 (UNITED TECHNOLOGIES CORP [US]; PANDEY AWADH B [US]) 10 September 2010 (2010-09-10)	1-15	
	* the whole document *		

A	US 4 834 942 A (FRAZIER WILLIAM E [US] ET AL) 30 May 1989 (1989-05-30)	1-15	
	* the whole document *		

	-/--		
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 13 January 2011	Examiner Patton, Guy
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 3
EPO FORM 1503 03.82 (P04C01)



EUROPEAN SEARCH REPORT

Application Number
EP 10 25 1602

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	US 4 834 810 A (BENN RAYMOND C [US] ET AL) 30 May 1989 (1989-05-30) * the whole document * -----	1-15	
			TECHNICAL FIELDS SEARCHED (IPC)
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 13 January 2011	Examiner Patton, Guy
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

3
EPO FORM 1503 03/92 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 10 25 1602

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-01-2011

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1728881	A2	06-12-2006	CN 1873035 A	06-12-2006
			JP 2006336104 A	14-12-2006
			US 2006269437 A1	30-11-2006
EP 1111078	A2	27-06-2001	DE 60030668 T2	13-09-2007
			JP 2001181767 A	03-07-2001
			US 6248453 B1	19-06-2001
EP 1439239	A1	21-07-2004	AT 474070 T	15-07-2010
			JP 3929978 B2	13-06-2007
			JP 2004218090 A	05-08-2004
			US 2006093512 A1	04-05-2006
EP 1788102	A1	23-05-2007	JP 2007138278 A	07-06-2007
EP 2251447	A1	17-11-2010	US 2010282428 A1	11-11-2010
EP 2110450	A1	21-10-2009	US 2009260722 A1	22-10-2009
US 2010143177	A1	10-06-2010	WO 2010077735 A2	08-07-2010
WO 2010102206	A2	10-09-2010	US 2010226817 A1	09-09-2010
US 4834942	A	30-05-1989	NONE	
US 4834810	A	30-05-1989	AU 603537 B2	15-11-1990
			AU 3407689 A	09-11-1989
			BR 8902091 A	05-12-1989
			DE 68904689 D1	18-03-1993
			DE 68904689 T2	27-05-1993
			EP 0340788 A1	08-11-1989
			JP 1312052 A	15-12-1989
			JP 1761295 C	20-05-1993
			JP 4048857 B	07-08-1992

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6248453 B [0005]
- US 20060269437 A1 [0005]

Non-patent literature cited in the description

- **R. Germain.** Powder Metallurgy Science. 1994, 101 [0058]