

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**23.03.2011 Bulletin 2011/12**

(51) Int Cl.: **D06F 58/20** <sup>(2006.01)</sup> **D06F 95/00** <sup>(2006.01)</sup>

(21) Application number: **10171499.6**

(22) Date of filing: 30.07.2010

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB**  
**GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO**  
**PL PT RO SE SI SK SM TR**  
 Designated Extension States:  
**BA ME RS**

(72) Inventors:

- **Bombardieri, Giovanni**  
24021 Albino (BG) (IT)
- **Colucci, Nicola**  
60044 Fabriano (AN) (IT)
- **Potena, Giuseppina Pia**  
60044 Fabriano (AN) (IT)

(30) Priority: 07.08.2009 IT RN20090036

(71) Applicant: **Indesit Company S.p.A.**  
**60044 Fabriano (AN) (IT)**

(74) Representative: **Santonicola, Paolo**  
**Indesit Company S.p.A.**  
**Industrial Property Management Team**  
**Via Lamberto Corsi, 55**  
**60044 Fabriano (AN) (IT)**


(54) **Dryer and drying method**

(57) A dryer of at least one product comprises:

- a rotary drum (2);
- a perforated shell (3) which may be fitted inside the drum (2) and defining an inner compartment (30) suitable

for holding at least one product to be dried.

The perforated shell (3) comprises an outer rolling surface (31) which during the rotation of the drum (2) is free to roll spontaneously along a first inner surface (32) of the drum (2) thereby rotating the perforated shell (3).

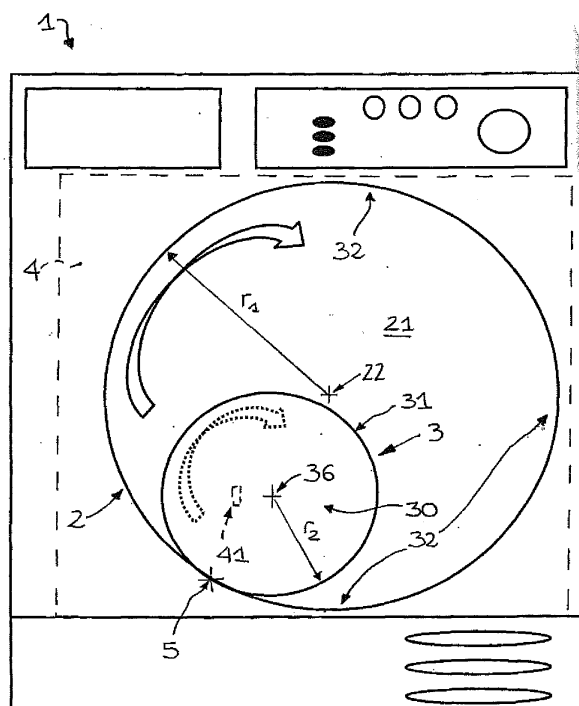

## Description

**[0001]** The object of this invention is a dryer and a method for drying a product. The use of this dryer and drying method is particularly advantageous for delicate garments that have a tendency to become matted (wool for example). Inside the dryer the garments to be dried are placed within a rotary drum. It is known that in order to minimise the risk of garment matting, it is necessary to reduce the stress that the rotation of the drum transfers to the garment to be dried. The rotating drum carries the garment from the bottom to the top, where gravity forces it to drop back down again. Normally the speeds at which the dryer drum rotates do not permit the centrifugal force to hold the garment against the surface of the drum for the entire rotation (contrary to what happens in a washing machine during the spinning phase).

**[0002]** A dryer preventing garment matting by using a moveable frame connected to the rotary drum is known. The garment to be dried is physically held between the cylinder wall of the drum and this frame so that it remains stable in this position. The frame comprises a border that encloses an inlet to allow the transit of hot air from the centre of the drum to the garment to be dried.

**[0003]** This dryer is not without its drawbacks.

**[0004]** In fact, due to the limited dimensions of the drum, the garment to be dried (a shirt for example) folds back on itself before being positioned between the frame and the cylinder wall of the drum. Consequently it is always the same portion of the garment facing the centre of the drum, thereby increasing the drying time of the garment. Furthermore, in dryers the hot air normally enters and leaves the drum via the two opposite surface areas of the drum corresponding to the rotation axis of the drum (2) itself.

**[0005]** As the garment to be dried is found along the cylindrical surface area of the drum (therefore not along the trajectory used by the hot air), it will only be marginally touched by the flow of hot air and as a result of this will take longer to dry.

**[0006]** In this context the technical basis of this invention is to propose a dryer and drying method that overcome the drawbacks of the above-mentioned technique.

**[0007]** More specifically, the scope of this invention is to create a dryer that has the capacity to improve the drying speed of delicate garments, particularly wool and other fabrics that have a tendency to become matted.

**[0008]** A further aim for this invention is to improve energy efficiency when drying delicate garments.

**[0009]** The technical basis indicated and the specific aims are substantially achieved by a dryer and by a drying method designed in accordance with the technical features expressed in one or more of the annexed claims.

**[0010]** Further features as well as further advantages of the present invention will become apparent from the following description of an embodiment of a dryer and a drying method thereof as shown in the annexed drawings, which are supplied by way of non-limiting example,

wherein:

- figure 1 shows a schematic view of a dryer according to this invention;
- figure 2 shows in detail a dryer component for this invention.

**[0011]** The object of this invention is a dryer for at least one product. Such dryers are characteristically designed to dry textile garments, particularly delicate textile garments that have the tendency to become matted (typically wool). In the annexed drawings this dryer is identified with the reference number (1).

**[0012]** The dryer (1) comprises a rotary drum (2) that appropriately rotates on a primary axis (22); advantageously the drum (2) presents substantial cylindrical symmetry, in having as its axis of symmetry the said primary axis (22) of rotation of the drum (2).

**[0013]** The dryer (1) also comprises a perforated shell (3) that may be placed inside the drum (2) to create an inner compartment (30) suitable for holding said at least one product to be dried. Advantageously it is free from any apparatus extending inside the said inner compartment (30) and that acts as a support for said at least one product to be dried. The support function for the said product to be dried is therefore exclusively carried out by at least one wall (possibly with a reticular structure) of the shell (3) that is used to define the outside of the said inner compartment (30).

**[0014]** The presence of one or more perforations (35) in the shell (3) is important in order to permit air outside the shell (3) to enter the compartment (30) and dry said at least one product. This previously heated external air facilitates the drying of at least one product. The presence of at least one perforation (35) also facilitates evacuation of moisture from the internal compartment (30).

**[0015]** The said perforated shell (3) comprises an outer rolling surface (31) that during rotation of the drum (2) is free to roll along the first inner surface (32) of the drum (2), thereby rotating the said perforated shell (3). During rotation of the drum (2) the outer rolling surface (31), by rolling along the first inner surface (32) of the drum (2), appropriately rotates the said perforated shell (3) on a secondary axis of rotation (36) in a straight line with the shell (3) itself. This secondary axis of rotation (36) essentially passes through the barycentre of the outer rolling surface (31). The rolling can be with or without sliding (the latter is the ideal situation that will be referenced later for further detailed considerations herein). There is rolling between two bodies when the instantaneous axis of rotation of the relative movement of the two bodies is in alignment with the area of contact.

**[0016]** In the case in question the two bodies are the shell (3) and the drum (2). Said secondary axis of rotation (36) is different to the instantaneous axis of rotation of relative motion indicated by reference number (5) in figure 1.

**[0017]** Said one or more perforations (35) pass through

said outer rolling surface (31). If there are more perforations (35) the outer rolling surface (31) has a reticular structure with more cells, each perforation (35) being identified by a cell within this reticular structure. The shell (3) is appropriately rigid to prevent said at least one product to be dried being placed within the compartment (30), from being squashed. When the shell (3) is positioned inside the drum (2) it uses gravity to support itself against the first inner surface (32) of the drum (2).

**[0018]** The drum (2) is operated using a motorised means, for example an electric motor and possibly a drive belt or cog mechanism.

**[0019]** The dryer (1) comprises a door that can be opened to permit the introduction and extraction of the products to be dried inside the drum (2). The shell (3) may also be inserted into and removed from the rotary drum (2). In particular, using this door it is also possible to insert and remove the shell (3) into and from the drum (2). Advantageously the shell (3) and the drum (2) are not coupled together and the shell (3) is therefore considered to be an additional accessory to the dryer (1).

**[0020]** In addition to the first inner surface (32) the drum (2) also comprises a rear wall (21) opposite the door. This rear wall (21) horizontally defines the primary axis (22) of rotation of the drum (2). The first inner surface (32) of the drum (2) is completely closed and expands around the primary axis of rotation (22) of the drum (2) without intersecting it. Advantageously the first inner surface (32) of the drum (2) follows a curved and rounded line of expansion to facilitate its movement relative to the shell (3). This line of expansion is advantageously circular. The first inner surface (32) expands in the area between the rear wall (21) and the door.

**[0021]** Under ideal operating conditions, during rotation of the drum (2), the perforated shell (3) always remains in contact with the first inner surface (32) of the drum (2).

**[0022]** Under ideal conditions, the secondary axis of rotation (36) always remains parallel to the primary axis (22) of rotation of the drum (2).

**[0023]** Under ideal conditions, the perforated shell (3) rolls without sliding on the first inner surface (32) of the drum (2).

**[0024]** Under ideal operating conditions, the position of the secondary axis of rotation (36) tends to essentially remain fixed within the space, at least when the drum (2) turns at a uniform speed.

**[0025]** Under ideal conditions without any sliding between the outer rolling surface (31) of the shell (3) and the first inner surface (32) of the drum (2), the linear velocity at one point of the outer rolling surface (31) is equal to the linear velocity of the first inner surface (32) of the drum (2).

**[0026]** Advantageously the rolling surface (31) of the shell (3) has a radius  $r_2$ . Similarly the first inner surface (32) of the drum (2) has a radius  $r_1$ .

**[0027]** As the shell (3) can be placed inside the drum (2), the radius  $r_2$  of the outer rolling surface (31) will be

less than the radius  $r_1$  of the first inner surface (32).

**[0028]** Under ideal conditions without any sliding between the outer rolling surface (31) of the shell (3) and the first inner surface (32) of the drum (2) the modulus  $v$  of the linear velocity at one point of the outer rolling surface (31) is equal to the modulus  $v$  of the linear velocity of the first inner surface (32) of the drum (2). From the equation  $v = \omega_1 r_1 = \omega_2 r_2$ , it can be noted immediately that  $\omega_2$  is greater than  $\omega_1$ , where  $\omega_1$  is the angular speed of rotation of the drum (2) on the primary axis (22) and  $\omega_2$  is the angular speed of rotation of the shell (3) on the secondary axis (36).

**[0029]** In relation to the shell (3), in order for the product to be dried when placed in the compartment (30) to remain in its position it is necessary that the rotation speed of the shell (3), not of the drum (2), is sufficient for the centrifugal force associated with the rotation of the shell (3) to overcome the gravitational force acting on the product placed in the compartment (30). This results in what is known in slang as satellisation; the corresponding rotation speed of the shell (3) around the secondary axis (36) is also known as satellisation speed. The Applicant has verified that the satellisation speed of a textile garment directly and freely positioned, without the shell (3), in a conventional dryer drum is equal to 70 rpm. The centrifugal force acting on a garment depends on the mass  $m_1$  of the garment, the distance of the rotation axis and the angular speed of the garment in relation to the rotation axis.

**[0030]** Consequently in conditions of satellisation, it can be more or less assumed that  $m_1 r_1 \omega_1^2 = m_1 r_2 \omega_2^2$ . Combining this with the ideal condition of pure rolling motion  $\omega_1 r_1 = \omega_2 r_2$  results in the properties of the radius  $r_2$  of the outer rolling surface (31).

**[0031]** This condition indicates that the appropriate radius  $r_2$  for the outer rolling surface (31) is less than or equal to:

$$r_1 \cdot (\omega_1)^2 / 4900$$

where:

$\omega_1$  is the rotation speed of the drum (2) expressed in rpm;

$r_1$  is the radius of the first inner surface (32) of the drum (2) along which the shell (3) is free to roll, expressed in the same unit of measurement as  $r_2$ .

**[0032]** Normally  $\omega_1$  is between 45 and 65 rpm. The radius  $r_1$  is usually between 200 and 300 millimetres.

**[0033]** The radius  $r_2$  of the outer rolling surface (31) is greater than 50 millimetres, preferably greater than 100 millimetres. This allows it to easily contain the shell (3) as well as a product to be dried of a certain size. The radius  $r_2$  of the outer rolling surface (31) is appropriately smaller than 150 millimetres (in order not to excessively

reduce the multiplication effect of the angular speed from the drum (2) to the shell (3) and to allow the shell (3) to pass through the opening door of the dryer (1)).

**[0034]** During actual operation, the dryer (1) may behave very differently to these ideal conditions and may show particular evidence of transitory sliding between the rolling surface (31) of the shell (3) and the first inner surface (32) of the drum (2). Therefore the rolling of the shell (3) in the drum (2) could also be accompanied by some sliding. In any event, even in the presence of sliding, it would still be possible to obtain the benefits previously expressed in reference to the ideal circumstances (meaning that the shell (3), having a smaller radius, would roll at a rotation speed greater than that of the drum (2), possibly resulting in satellisation of the product to be dried placed in the compartment (30)).

**[0035]** Generally when the shell (3) containing said at least one product to be dried is placed inside the drum (2), no other products to be dried are introduced into the said drum (2) and outside the shell (3); this in fact would hinder the motion of the shell (3), rendering it ineffective. Furthermore, the said at least one product to be dried placed inside the compartment (30) would benefit more from the air flow than it would if held against the first inner surface (32) of the drum (2). As the shell (3) rolls the product to be dried is in periodical proximity to the primary axis of rotation (22) of the drum (2) (as previously indicated the hot air enters and leaves via two opposite surfaces close to the primary axis of rotation (22) of the drum (2) and therefore the said at least one product to be dried benefits more from the flow of hot air entering the drum (2)).

**[0036]** The shell (3) conveniently may be opened to permit said at least one product to be dried to be placed inside and removed from the compartment (30).

**[0037]** The shell (3) also conveniently comprises a first and a second portion (330, 340) that together enclose the said inner compartment (30).

**[0038]** Advantageously the first and second portions (330, 340) correspond to a first and second semi-shell (33, 34), which may be fitted together and taken apart as two halves of the main shell (3).

**[0039]** The first and second portions (330, 340) can be screw-threaded onto and unscrewed from each other. The threading allows the first and second portions (330, 340) to be screwed and unscrewed.

**[0040]** This threading is made on both the first and second portions (330, 340) corresponding to a joint (37) between them. As an alternative, another type of moveable connection would be suitable for joining together the first and second portions (330, 340) corresponding to a joint (37) between them. For example, elastic deformable catch-and-release mechanisms could be used. The solution with the two portions (advantageously two semi-shells) that can be screwed together and unscrewed is however preferable as it is less likely that the two semi-shells will become inadvertently separated during the drying process. The first and second portions (330, 340),

advantageously the first and second semi-shells (33, 34), when not in use can be placed one on top of the other, with the concave sides facing towards the same plane of reference in order to reduce the amount of space that they occupy.

**[0041]** The said shell (3), advantageously, is substantially spherical or ellipsoidal.

**[0042]** The said outer rolling surface (31), advantageously, is substantially spherical or ellipsoidal (with perforations (35) in the outer rolling surface (31)).

**[0043]** It is important that the outer rolling surface (31) is rounded. This device (especially if the outer rolling surface (31) is spherical) permits, regardless of the orientation of the shell (3) in relation to the drum (2), rolling without the outer rolling surface (31) becoming caught on the first inner surface (32).

**[0044]** Alternatively the shell (3) could be cylindrical but in this case the shell (3) could only rotate around the axis of cylindrical symmetry.

**[0045]** Consequently if the secondary axis of rotation (36) and the primary axis of rotation (22) of the drum (2) were not parallel, the operation would be adversely affected. Amongst the possible causes of incorrect positioning of the primary and secondary axes of rotation (22, 36) are incorrect initial positioning on the part of the user or undesirable stress during the rotation of the drum (2), (it must be kept in mind that in the event of satellisation the shell (3) acts as a body with eccentric mass due to the presence of said at least one product to be dried; obviously this eccentricity generates unwanted stresses that can result in sliding or displacement of the shell (3) in relation to the drum (2)).

**[0046]** Advantageously at least one part of the rolling surface (31) of the shell (3) is made from a material suitable for dampening the noise generated by the movement of the shell (3) along the first inner surface (32) of the drum (2). For example, the shell (3) can have inserts made of rubber or plastic or in a material that is slightly deformable. It should be noted that it is usual for a large part of the shell (3) to be made from plastic.

**[0047]** Advantageously the shell (3) could also have on the outer rolling surface (31) indentations to interact (or more specifically, to mesh together with) corresponding indentations along the first inner surface (32). This device would conveniently reduce sliding of the shell (3) in relation to the first inner surface (32). The indentations in the first inner surface (32) completely surround the primary axis of rotation (22) of the drum (2). Similarly, on the shell (3) indentations on at least one plane of the section completely encompass the said compartment (30).

**[0048]** An alternative solution is for the first inner surface (32) to be smooth (and therefore lacking in any obvious irregularities). In this way there is less risk of the shell (3) coming away from the drum (2) whilst the shell (3) is rolling along the drum (2).

**[0049]** Advantageously the dryer (1) comprises a housing chamber (4) for the drum (2). In order to deter-

mine when a certain level of dryness has been attained, the dryer (1) normally has a humidity sensor (41). This sensor (41) is indicated in figure 1 with a dotted line to show that it has been taken out of this view so that the underlying elements can be better seen. Advantageously this humidity sensor (41) is fixed to the said chamber (4) and the drum (2) turns in relation to the humidity sensor (41). Normally the humidity sensor (41) is located above the locus of points of the first inner surface (32) that are found at the minimum distance from a fictitious horizontal plane underlying the dryer (1). The humidity sensor (41) works on an electrical signal and therefore it is important that it comes into electrical contact with the damp clothes (thereby acting as electrical conductors) to be able to evaluate the level of dampness of the clothes. If the first inner surface (32) has a cylindrical lateral surface, this said locus of points coincides with the generatrix of the cylinder, which is found at the minimum distance from the fictitious horizontal plane. In order for the humidity sensor (41) to function correctly, it is necessary that the vertical component of the distance between the humidity sensor (41) and the said locus of points of the first inner surface (32) is less than or equal to the diameter of the outer rolling surface (31) of the shell (3). To this regard it would also be necessary for at least part of the shell (3) to be made from electrically conductive material. In this way the shell (3) can function in cooperation with the humidity sensor (41). At the moment that the humidity sensor (41) acts on an electrical signal, if at least part of the shell (3) is made from electrically conductive material this would allow it to connect the sensor (41) with the damp clothes, thereby acting as electrical conductors. Advantageously the shell (3) includes an element made from electrically conductive material that electrically connects the inside of the shell (3) to the outside of the shell (3). This element made from electrically conductive material runs through the thickness of the shell (3). This element made from electrically conductive material is conveniently surrounded by (preferably enclosed in) portions of the shell (3) that are made from electrically insulating material. This element in electrically conductive material is designed to come into contact with the sensor (41).

**[0050]** The object of this invention is also a method of drying at least one product using a dryer. This method concerns the drying of at least one delicate fabric garment (wool for example) The method comprises the following stages:

- inserting said at least one product to be dried inside a perforated shell (3) with an outer rolling surface (31);
- placing the said perforated shell (3) inside the drum (2);
- rotating the drum (2), first inner surface (32) of the drum (2) transferring the movement to the rolling surface (31) of the perforated shell (3), the rolling of the shell (3) on the first inner surface (32) of the drum

(2) permitting the rotation of the perforated shell (3) at a rotation speed greater than that of the drum (2). This permits satellisation of the product to be dried placed in the shell (3).

**[0051]** During the rotation stage of the drum (2), the shell (3) is rotated by the drum (2) at a rotation speed greater than or equal to the satellisation speed of said at least one product to be dried placed in the shell (3). During rotation of the drum (2), at least at its fullest potential, the product to be dried remains stable in relation to the shell (3), therefore allowing the product to be dried without being subjected to stresses and movements that may damage it (for this reason the method is particularly beneficial for delicate fabric garments).

**[0052]** The stage of placing the said perforated shell (3) inside the drum (2) takes place when inside the drum (2) there are no further objects (typically fabric garments) to be dried. The stage of rotating the drum (2) takes place when there are no further objects (typically fabric garments) to be dried placed in the drum (2) outside the shell (3).

**[0053]** Advantageously the rotation speed of the drum (2) around the primary axis (22) of rotation of the drum (2) is between 50 and 60 rpm.

**[0054]** Appropriately, the rotation speed of the shell (3) around the secondary axis (36) of rotation of the shell (3) is between 75 and 100 rpm.

**[0055]** As previously indicated under ideal operating conditions during the rotation of the drum (2) the perforated shell (3), particularly the outer rolling surface (31), remains substantially in contact with the first inner surface (32) of the drum (2).

**[0056]** Still under ideal operating conditions, during rotation of the drum (2) the perforated shell (3) rolls substantially without sliding on the first inner surface (32) of the drum (2).

**[0057]** This method is advantageously implemented by a dryer (1) comprising one or more of the previously described technical features.

**[0058]** The stage of introducing said at least one product to be dried inside the perforated shell (3) requires opening up the said shell (3). The stage of opening up the shell (3) is also necessary at the end of the drying process in order to remove the said at least one product to be extracted from the shell (3). In order to advantageously open up the said shell (3) at least two sides of a first and a second portion (330, 340) of the shell (3) - conveniently a first and a second semi-shell (33, 34) - can be detached. The first and second portions (330, 340), like the first and second semi-shells (33, 34), as per the other technical features detailed in reference to the method, can be of the type described beforehand in reference to the structural and functional features of the dryer (1). The stage of opening up the first and second semi-shells (33, 34) can be carried out by unscrewing the first and second semi-shells (33, 34), one from the other.

[0059] Advantageously during the rotation of the drum (2) an electrically conductive element of the shell (3) comes into contact (periodically at least) with a humidity sensor (41) integrated into the dryer (1). This electrically conductive element electrically connects the inside of the shell (3) with the outside of the shell (3) (as explained in more detail previously). In particular, this electrically conductive element puts into contact the product to be dried inside the shell (3) and the humidity sensor (41) to provide the dryer with a predetermined signal, upon which the drying cycle is interrupted. Typically this signal is linked to detection by the humidity signal (41) of an electrical current below the determined threshold.

[0060] The invention has significant benefits. First and foremost it allows the products to be dried to attain satelisation speed, even in dryers where the drum rotation speed would be insufficient to achieve this effect. This, as previously described, makes this dryer particularly beneficial for use with delicate garments.

[0061] Furthermore, the invention permits optimisation of the drying times required for fabric garments.

[0062] The idea for the invention is subject to numerous modifications and variations, all within the scope of the inventive concept by which it is defined. Furthermore, all the details may be substituted by other technically equivalent elements. In practice, all the materials used, as well as the dimensions, may vary according to the requirements.

## Claims

1. A dryer of at least one product comprising:

- a rotary drum (2);
- a perforated shell (3) which may be fitted inside the drum (2) and defining an inner compartment (30) suitable for holding at least one product to be dried;

**characterised in that** the perforated shell (3) comprises an outer rolling surface (31) which during the rotation of the drum (2) is free to roll spontaneously along a first inner surface (32) of the drum (2) thereby rotating the perforated shell (3).

2. The dryer according to claim 1, **characterised in that** during the rotation of the drum (2) the perforated shell (3) remains substantially always in contact with the first inner surface (32) of the drum (2).

3. The dryer according to claim 1 or 2, **characterised in that** during rotation of the drum (2), the perforated shell (3) rolls substantially without sliding on the first inner surface (32) of the drum (2).

4. The dryer according to any of the foregoing claims, **characterised in that** the rolling surface (31) has a

radius  $r_2$  greater than or equal to 100 millimetres and/or less than or equal to:

$$r_1 \cdot (\omega_1)^2 / 4900$$

where:

$\omega_1$  is the angular speed of rotation of the drum (2) expressed in rpm;

$r_1$  is the radius of the first inner surface (32) of the drum (2) along which the shell (3) is free to roll, expressed in the same unit of measurement as  $r_2$ .

5. The dryer according to any of the foregoing claims, **characterised in that** the shell (3) may be opened to permit the introduction and extraction of at least one product to be dried.

6. The dryer according to any of the foregoing claims, **characterised in that** the shell (3) comprises, or coincides with, a first and a second portion (330, 340) which in combination encompass the inner compartment (30) and which may be screwed on and screwed off to and from one another.

7. The dryer according to any of the foregoing claims, **characterised in that** the shell (3) is substantially spherical.

8. The dryer according to any of the foregoing claims, **characterised in that** at least a part of the rolling surface (31) of the shell is made from a material suitable for dampening the noise generated by the movement of the shell (3) along the first inner surface (32) of the drum (2).

9. The dryer according to any of the foregoing claims, **characterised in that** the shell (3) comprises an element made from electrically conductive material which electrically connects the inside of the shell (3) with the outside of the shell (3).

10. The dryer according to any of the foregoing claims, **characterised in that** it is free from any apparatus extending inside the inner compartment (30) and that it acts as a support for at least one product to be dried.

11. A method for drying at least one product using a dryer, the method comprising the steps of:

- introducing at least one product to be dried inside a perforated shell (3) comprising an outer rolling surface (31);
- placing the perforated shell (3) inside the drum (2);

- rotating the drum (2), a first inner surface (32) of the drum (2) transferring the movement to the rolling surface (31) of the perforated shell (3), the rolling of the shell (3) on the first inner surface (32) of the drum (2) permitting the rotation of the perforated shell (3) at a speed of rotation greater than that of the drum (2). 5

10

15

20

25

30

35

40

45

50

55


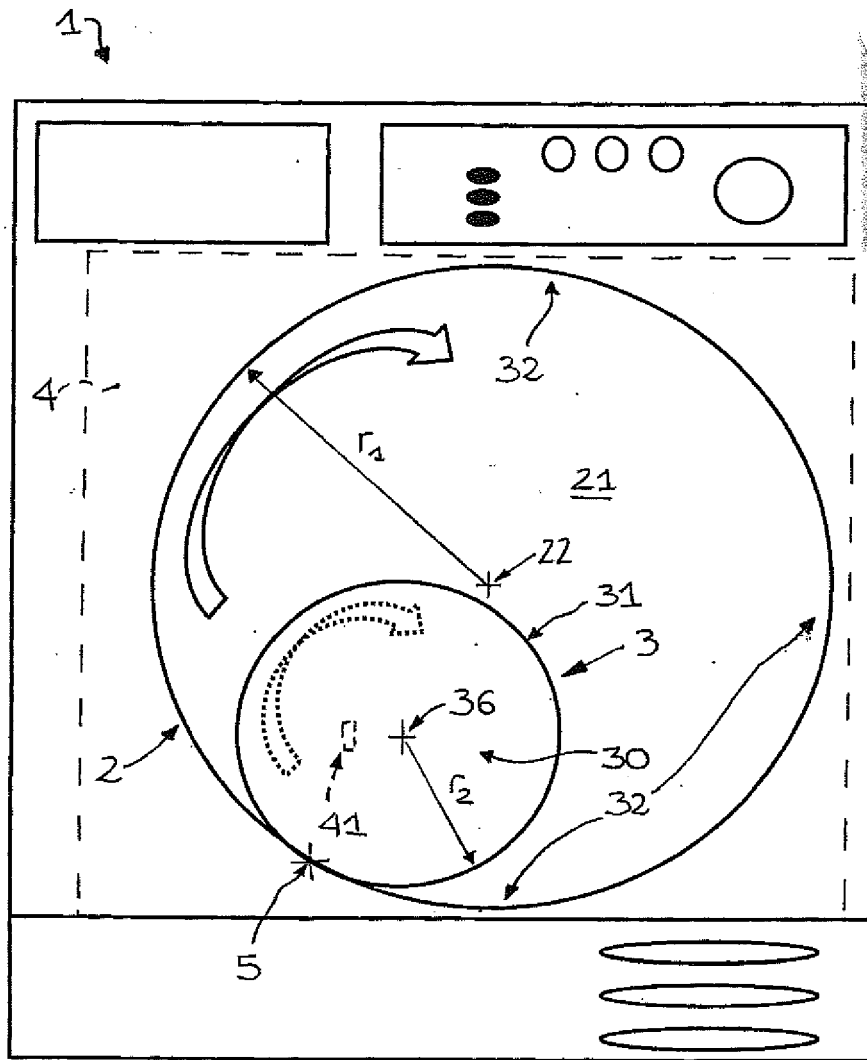


Fig: 1





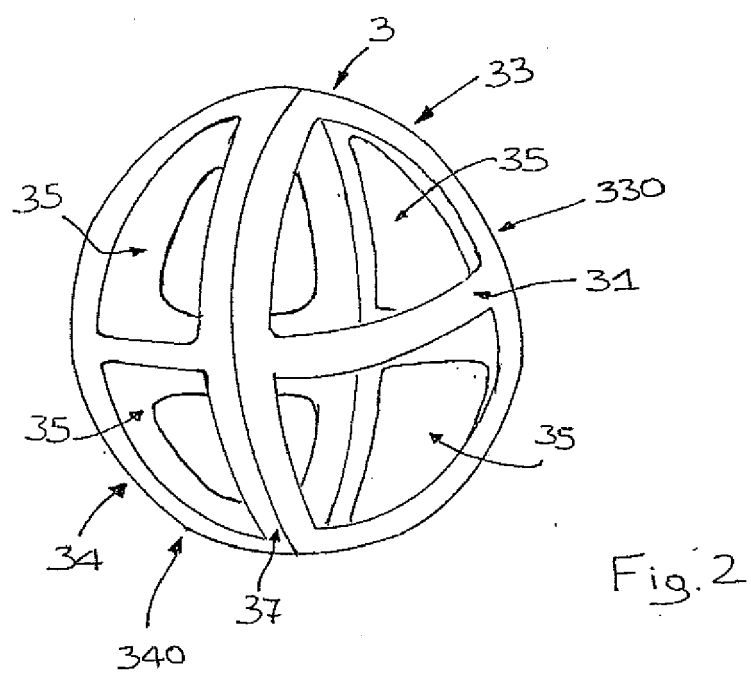

## EUROPEAN SEARCH REPORT

Application Number  
EP 10 17 1499

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2009/078725 A1 (PHAN KIEU THI-BICH [US]) 26 March 2009 (2009-03-26) * figures *	1-3,5,7,11	INV. D06F58/20 D06F95/00
A	US 4 714 353 A (LEAPHART C MARK [US]) 22 December 1987 (1987-12-22) * the whole document *	1-11	
A	EP 1 678 369 B1 (BSH BOSCH SIEMENS HAUSGERAETE [DE]) 12 July 2006 (2006-07-12) * claim 1; figures *	1-11	
A	WO 02/061196 A2 (BSH BOSCH SIEMENS HAUSGERAETE [DE]) 8 August 2002 (2002-08-08) * the whole document *	1-11	
			TECHNICAL FIELDS SEARCHED (IPC)
			D06F
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 10 February 2011	Examiner Stroppa, Giovanni
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

1  
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 10 17 1499

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

10-02-2011

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2009078725	A1	26-03-2009	AU 2008302425 A1	26-03-2009
			CA 2699776 A1	26-03-2009
			CN 101861423 A	13-10-2010
			EP 2231915 A2	29-09-2010
			WO 2009039104 A2	26-03-2009
-----				
US 4714353	A	22-12-1987	NONE	
-----				
EP 1678369	B1	28-03-2007	AT 358207 T	15-04-2007
			CN 1871396 A	29-11-2006
			DE 10348837 A1	25-05-2005
			EP 1678369 A1	12-07-2006
			WO 2005040485 A1	06-05-2005
			KR 20060088551 A	04-08-2006
			RU 2321694 C2	10-04-2008
			US 2009071028 A1	19-03-2009
-----				
WO 02061196	A2	08-08-2002	CA 2436694 A1	08-08-2002
			DE 10103986 A1	01-08-2002
			DE 20122486 U1	15-12-2005
			EP 1358381 A2	05-11-2003
			US 2004118012 A1	24-06-2004
-----				