

(19)



(11)

EP 2 300 546 B9

(12)

CORRECTED EUROPEAN PATENT SPECIFICATION

(15) Correction information:

Corrected version no 1 (W1 B1)

Corrections, see

Description Paragraph(s) 8, 44, 46

(48) Corrigendum issued on:

31.05.2017 Bulletin 2017/22

(45) Date of publication and mention
of the grant of the patent:

20.04.2016 Bulletin 2016/16

(21) Application number: **09767605.0**

(22) Date of filing: **16.06.2009**

(51) Int Cl.:

C09D 7/00 (2006.01)

C09D 7/14 (2006.01)

B01F 13/10 (2006.01)

(86) International application number:

PCT/US2009/047543

(87) International publication number:

WO 2009/155296 (23.12.2009 Gazette 2009/52)

(54) EXPANDED COLOR SPACE ARCHITECTURAL PAINT AND STAIN TINTING SYSTEM

BAUANSTRICHMITTEL UND FARBTÖNUNGSSYSTEME MIT ERWEITERTEM FARBRAUM

SYSTÈME DE PEINTURES ET TEINTURES ARCHITECTURAL À ESPACE CHROMATIQUE
ÉTENDU

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK TR**

(30) Priority: **17.06.2008 US 141006**

(43) Date of publication of application:
30.03.2011 Bulletin 2011/13

(73) Proprietor: **Valspar Sourcing, Inc.**
Minneapolis, MN 55440-1461 (US)

(72) Inventors:

• **KORENKIEWICZ, Stephen, M.**
Prospect
KY 40059 (US)

• **COWARD, Mark, R.**

Jeffersonville

IN 47130 (US)

• **LEE, David, Y.**

Glenview

IL 60025 (US)

(74) Representative: **Vossius & Partner**
Patentanwälte Rechtsanwälte mbB
Siebertstrasse 3
81675 München (DE)

(56) References cited:

EP-A1- 0 427 497 EP-A1- 1 331 249
US-A- 3 851 798 US-A1- 2007 221 531
US-A1- 2008 305 241

Description**Field**

5 [0001] This invention relates to point-of-sale customized-color architectural paint and stain tinting systems, such as those used in retail paint stores to make custom-tinted house paints or stains.

Background

10 [0002] Architectural paint and stain manufacturers typically distribute premixed paints and stains in a small number of popular colors. To accommodate consumer desires and enable matching of existing painted or stained surfaces, architectural paint and stain manufacturers typically also distribute a set of tintable base paints or stains and several concentrated colorants. These are combined in point-of-sale outlets using colorant dispensing and shaker mixing equipment to make small batch lots of custom-tinted paint or stain in a much larger array of colors than the limited colors 15 available in premixed products.

15 [0003] Owing in part to industry custom and the available colorant dispensing equipment, the custom color systems from different paint or stain manufacturers tend to have somewhat similar components. For example, a typical custom color paint system may employ several (e.g., 2 to 4) tintable base paints ranging for example from a bright white base intended to accept at most a small quantity of colorant (viz., having a relatively small available headspace in the base 20 paint container), to a relatively unpigmented clear base intended to accept a much larger quantity of colorant (viz., in a container initially containing for example about 9-10% less base than the bright white base and consequently having greater available headspace for colorant addition). Base paints or stains may employ various binders (e.g., natural or synthetic resins), binder forms (e.g., solution polymers or latex polymers) and vehicles (e.g., solvent-base or waterborne 25 versions), and may provide various dried surface finishes (e.g., matte, semi-gloss or gloss finishes). Some manufacturers also sell colored base paints (e.g. a red, a blue and yellow colored base) which are intended to be combined with additional colorant(s) when one coat hiding power is desired for strongly-tinted custom paint shades.

30 [0004] Colorants may for example be volumetrically metered from a multiple-colorant manually-operated dispensing station, with 12 paint colorants typically being employed in paint tinting colorant dispensing stations for the U.S. market, and more (e.g., 16 or 24 colorants) sometimes being employed in other markets. The dispensing station may for example 35 include an individual dispensing canister for each colorant, and each dispensing canister may for example include a manually-movable piston whose stroke has been indexed to dispense colorant in minimum 1/48 fluid ounce (0.62 cm³) or 1/96 fluid ounce (0.31 cm³) increments. For example, a manually-operated dispensing station is available from CPS Color Equipment, Inc. as the COROB™ D50 dispenser. It accepts up to 24 colorant canisters and has a minimum 1/48 fluid ounce dispensing capacity. Using such manual equipment, it is difficult accurately to tint small batch volumes. For 40 example, paint stores may be reluctant to sell custom-tinted paints in 1 quart or 1 liter containers and instead may insist on selling only larger quantities such as containers holding at least 1 gallon or 4 liters.

45 [0005] In recent years, point-of-sale outlets have begun to employ automated colorant dispensing machines capable of dispensing colorants in smaller minimum quantities, e.g., in 1/192 fluid ounce (0.153 cm³), 1/384 fluid ounce (0.077 cm³) or 1/1024 fluid ounce (0.029 cm³) minimum dispensing quantities. This has enabled point-of-sale preparation of 50 custom-tinted paints and stains in smaller containers than those previously employed.

55 [0006] Some colorants are made and sold by paint or stain manufacturers, and others are available from specialty colorant suppliers. For example, CPS Color Equipment, Inc. sells the COLOR FUSION™ A (8, 10 or 12 colorants), COLTEC™ (12-16 colorants) and MONICOLOR™ C (16 colorants) lines of pigment dispersions for use in point-of-sale paint tinting applications.

60 [0007] In paint factories, high solids content colorant dispersions or surface-treated pigments may be dispensed gravimetrically into paint batches to prepare premixed paints. For example, CPS Color Equipment, Inc sells the HY-DRASPERSE™ D line of pigment dispersions, and BASF Corporation sells the XFAST™ line of powdered paint pigments.

Summary of the Invention

65 [0008] Many existing custom-tint point-of-sale paint tinting systems involve an undesirably large number of base paints or colorants. This increases inventory levels and stocking complexity (viz., through a proliferation of Stock Keeping Units or SKUs), and may pose waste disposal problems when slower-selling base paints or colorants have not been consumed before their shelf lives expire.

70 EP 0 846 149 discloses colorant compositions for paint products comprising a pigment component consisting of one or more organic and/or inorganic pigments. Preferably, the colorants are used in tinting systems containing a series of colorant pastes that allow the tinting of various types of base paints at the paint plant.

75 [0009] The shades imparted by earth-tone colorants are important to many customers. Attaining light tints (e.g., pastels)

using these and other colorants may require only a very small colorant addition, especially when preparing small batch volumes. Strong (*viz.*, highly tinted) colors are also important to many customers. Depending on the desired hue, some strong colors may be easier to attain than others. For example, strong yellows may require less colorant addition than may be the case when making strong reds, blues or greens. Often it will not be feasible simply to add more colorant owing to the limited available headspace within the chosen base container and a desire to avoid unduly affecting the overall properties of the finished tinted product through excessive dilution. Highly concentrated colorants might be employed, but doing so could also make it difficult to use the same colorants to prepare light pastel tints. Some current paint color systems rely on a combination of uncolored and colored bases to provide both light pastel tints and strong colors with adequate hiding power. Other systems employ both less concentrated and more concentrated colorants having the same or similar hues.

[0010] We have found that by employing an array of appropriately concentrated colorants and a suitably high precision automated colorant dispenser, we can provide a point-of-sale custom color paint or stain system having a low number of bases and colorants, and having the capability to provide custom-tinted paints or stains in a wide gamut array of tints ranging from light pastel tints to strong colors. The invention thus provides, in one aspect, a point-of-sale custom color system for tinting white-pigmented and unpigmented base paints and stains, the system comprising an automated colorant dispenser having a minimum fluid dispensing quantity less than 0.01 fluid ounce ($<0.3\text{ cm}^3$) for placing colorant into the base paint or stain, the dispenser providing an array of colorants including:

- a) white colorant,
- b) black colorant,
- c) yellow-hued colorant,
- d) green-hued colorant having a color strength (measured as described below) greater than that of a comparison colorant containing 12 wt. % PG7 pigment,
- e) blue-hued colorant having a color strength greater than that of a comparison colorant containing 7 wt. % PB 15:2 pigment, and
- f) red-hued colorant having a color strength greater than that of a comparison colorant containing 17 wt. % PR209 pigment,

wherein said green-hued or blue-hued colorant is dispensed into the base paint or stain whenever a green-hued or blue-hued tint is required.

[0011] The invention provides, in another aspect, a method for point-of-sale custom paint or stain tinting, the method comprising the step of dispensing colorant into white-pigmented or unpigmented base paint or stain using an automated colorant dispenser having a minimum fluid dispensing quantity less than 0.01 fluid ounce ($<0.3\text{ cm}^3$) and an array of colorants including white colorant, black colorant, yellow-hued colorant, green-hued colorant having a color strength greater than that of a comparison colorant containing 12 wt. % PG7 pigment, blue-hued colorant having a color strength greater than that of a comparison colorant containing 7 wt. % PB15:2 pigment, and red-hued colorant having a color strength greater than that of a comparison colorant containing 17 wt. % PR209 pigment, wherein said green-hued or blue-hued colorant is dispensed into the base paint or stain whenever a green-hued or blue-hued tint is required.

[0012] The colorants, and especially the green-hued and blue-hued colorants, desirably are not too dilute and not too concentrated. The system and method may be configured so that individual colorants within the system provide both light pastel tints in small containers and strong colors in large containers, and without requiring the use of additional colorants having the same general hue and lower strength to make light pastel tints. The disclosed system and method may free up otherwise dedicated dispenser circuits, thereby permitting the addition of specialty colorants or other fluid products to an array of materials intended to be mixed with the base paints. In an especially preferred embodiment, the overall number of base paints and stains is less, the overall number of colorants is less and the gamut is wider than in conventional color systems dispensed using manually-operated dispensing stations. This can reduce inventory complexity, space and cost requirements.

Brief Description of the Drawing

[0013]

Fig. 1 is a perspective view of one embodiment of the disclosed paint mixing system.
Figs. 2a through 2c are schematic color space diagrams.

[0014] Like reference symbols in the various figures of the drawing indicate like elements. The elements in the drawing are not to scale.

Detailed Description

[0015] Unless the context indicates otherwise the following terms shall have the following meaning and shall be applicable to the singular and plural:

[0016] The terms "a," "an," "the," "at least one," and "one or more" are used interchangeably. Thus, for example, a colorant composition that contains "a" pigment means that the coating composition may include "one or more" pigments.

[0017] The terms "architectural paints" and "architectural stains" respectively mean paints and stains for use on interior or exterior walls, trim, floors, ceilings or furniture.

[0018] The term "automated colorant dispenser" means a dispenser for paint or stain colorants that is controlled or controllable via electronically-regulated precision pumps or other electronically-regulated fluid flow management devices so as to meter quantities of one or more fluid colorants into a base paint or stain container and thereby facilitate preparation of tinted paints or stains whose tints are selected from an array of tints. The amounts and types of colorants selected by such an automated colorant dispenser will optionally and preferably also be controlled using software and a suitable database.

[0019] The terms "blue-hued", "green-hued" and "red-hued" respectively refer to the blue, green and red principal hues in the Munsell color system.

[0020] The term "color strength" refers the value obtained using Datacolor TOOLS™ software and a Datacolor SPEC-TRAFLASH™ SF300 or similar spectrophotometer to measure the color strength of a paint sample applied using a 4 mil (0.1 mm) BIRD™ bar applicator to a BYK-GARDNER™ plain white chart, and using a D65 illuminant, CIE 1964 10° Standard Observer angle and reflectance mode.

[0021] The term "low VOC" when used with respect to a paint or stain means that the paint or stain when in liquid form contains less than about 10 wt. % volatile organic compounds, more preferably less than about 7% volatile organic compounds, and most preferably less than about 4% volatile organic compounds based upon the total liquid coating composition weight.

[0022] The term "minimum fluid dispensing quantity" means the smallest amount, expressed on a volumetric basis, of liquid colorant that can reliably be dispensed by an automated colorant dispenser. In case the dispenser controls the weight rather than volume of dispensed colorant, the phrase "minimum fluid dispensing quantity" means the mass of fluid corresponding to a recited volumetric amount. Dispenser reliability may be evaluated visually, by preparing a series of custom-tinted paint batches with the same tint recipe and comparing the appearance of painted samples made using the batches to ascertain if any batch-to-batch differences in appearance can be observed by an average human observer. Dispenser reliability may also be evaluated quantitatively, using for example the CIELAB color difference formula $\Delta E = [\Delta L^2 + \Delta a^2 + \Delta b^2]^{1/2}$ and selecting a dispenser which can provide batch-to-batch variations of 0.5 ΔE units or less.

[0023] The term "point-of-sale outlet" means a site at which custom-mixed paint or stain is tinted and mixed in small batch lots (e.g., one quart, one liter, one gallon, four liter, five gallon or 20 liter containers, corresponding to containers from about 0.9 to 20 L) for sale to end-users (e.g., paint contractors, builders and homeowners). Representative point-of-sale outlets include retail paint stores, hardware stores, building supply stores (including warehouses), and distribution centers.

[0024] The terms "preferred" and "preferably" refer to embodiments of the invention that may afford certain benefits, under certain circumstances. However, other embodiments may also be preferred, under the same or other circumstances. Furthermore, the recitation of one or more preferred embodiments does not imply that other embodiments are not useful, and is not intended to exclude other embodiments from the scope of the invention.

[0025] When used with respect to a component which may be found in a mixture, the term "substantially free of" means containing less than about 5 wt. % of the component based on the mixture weight.

[0026] The recitation of a numerical range using endpoints includes all numbers subsumed within that range (e.g., 1 to 5 includes 1, 1.5, 2, 2.75, 3, 3.80, 4, 5, etc.).

[0027] **Fig. 1** shows a perspective view of one embodiment of the disclosed paint mixing system **100**. A cabinet **102** holds replaceable colorant canisters such as canisters **104** behind access door **106**. Base paint or stain containers may be placed on stage **108** where they may receive colorant from dispensing nozzles located in dispensing head **110**. A monitor **112** and keyboard **114** permit information and commands to be entered into system **100**. A barcode reader (not shown in **Fig. 1**) may be used to read information from paint sample cards or paint containers to assist and controlling the system. A power button **116** and emergency off button **120** may be used to start and stop system **100**.

[0028] **Fig. 2a** shows a schematic illustration of hue and color strength for a first paint colorant system, depicted in a color space similar to but not necessarily matching a Munsell color space. The plot is in two dimensions, and except for white colorant **200** and black colorant **202**, value ratings (darkness to lightness ratings) are not depicted. The colorants shown are approximately located in the color space, with the large individual colorant regions shown being merely illustrative and not defining limits for individual colorants whose hues and color strengths may differ from those shown. Colorants with visibly noticeable hues in the depicted color space include higher color strength colorants such as yellow **204**, medium yellow **206**, red **208**, magenta **210**, blue **212** and green **214**, and lower color strength colorants such as

raw umber **216**, yellow oxide **218**, brown oxide **220** and red oxide **222**.

[0029] **Fig. 2b** shows a schematic illustration for a second paint colorant system which is similar to the first color system but which adds higher color strength colorants in the form of red **230**, magenta **232**, blue **234** and green **236**. This enables the preparation of stronger paint colors in an expanded gamut of shades, but employs lower color strength colorants such as red **208**, magenta **224**, blue **212** and green **214** to make light pastel tints, especially in smaller containers. In a system such as that shown in **Fig. 2b**, the hues of lower color strength colorants may differ from those of the corresponding higher color strength colorants. For example, blue colorant **212** might be made using a PB15:4 pigment and blue colorant **234** might be made using a PB 15:3 pigment, and green colorant **214** might be made using a PG36 pigment and green colorant **236** might be made using a PG7 pigment. This system uses a larger number of colorants (16 rather than 12) compared to the system in **Fig. 2a**.

[0030] **Fig. 2c** shows a schematic illustration for a third paint colorant system. The red **208**, magenta **210**, blue **212**, green **214**, raw umber **216** and brown oxide **220** colorants used in **Fig. 2a** and **Fig. 2b** are no longer employed. Automatically-metered precise small amounts of the red **230**, magenta **232**, blue **234** and green **236** colorants may instead be employed to make light pastel tints embodying these hues. Blue-hued colorant **234** and green-hued colorant **236** are dispensed into the base paint or stain whenever a green-hued or blue-hued tint is required, and without employing lower color strength blue or green colorants.

[0031] Some individual colorants are themselves mixtures of pigments. For example, many custom color paint systems employ one or more earth-tone colorants variously referred to using names such as brown oxide, raw umber or umber. Although brown oxide colorant is sometimes referred to as being made from a single pigment (e.g., PBr7 natural iron oxide), it may actually have been made using a blend of red and yellow oxides (e.g., PR101 red iron oxide and PY42 yellow iron oxide) shaded with black pigment (e.g., PBk7 carbon black) to match a specific color target. Raw umber or umber earth-tone colorants (which may collectively be referred to as "raw umber" colorants) likewise may have been made from a blend of colored oxides and black pigment. Precisely-metered small amounts of yellow oxide **218**, red oxide **222** and black **202** may be used to make earth tone tints such as brown oxide and raw umber, and may be dispensed into the base paint or stain whenever brown oxide or raw umber tints are required. The number of colorants is decreased compared to the systems in **Fig. 2a** and **Fig. 2b**, with only 10 colorants being used even though a wide gamut of shades is maintained.

[0032] An 11 to 14 colorant system with equal or better gamut and wider potential applicability than the 16 colorant system shown in **Fig. 2b** may also be provided by adding one or more other colorants such as orange **240** for making strong orange paints, or one or more transparent stain colorants such as transparent yellow iron oxide **242**, transparent red oxide **244** or a dark, saturated magenta **246** for making tinted stains.

[0033] Other colorants which may be employed in the disclosed system and method include colorants containing both colored and white pigments to provide increased hiding power without the need for a separate colored base, fluorescent colorants, iridescent colorants, metaflake colorants, colorants for use on alkaline surfaces such as stucco and enhanced weatherability colorants. Non-colorant ingredients may be dispensed as well, including unpigmented or white-pigmented base extender(s) to permit topping up a base paint container when the amount of added colorant is less than the available container headspace.

[0034] A variety of automated paint colorant dispensers may be used in the disclosed system and method, including the ACCUTINTER™ 1500, 2000, 7000 and 8000 series machines with a 1/384 fluid ounce (0.077 cm³) minimum dispensing quantity from Fluid Management, Inc., and the Sample Dispensing System with a 1/1024 fluid ounce (0.029 cm³) minimum dispensing quantity from Fluid Management, Inc. Additional automated paint colorant dispensers include the COROB MODULA HF™ machine with a 1/192 fluid ounce (0.153 cm³) minimum dispensing quantity from CPS Color Equipment, Inc., and the TATOCOLOR™ machine with a 1/384 fluid ounce (0.077 cm³) minimum dispensing quantity from CPS Color Equipment, Inc. The chosen dispenser may for example have a minimum fluid dispensing quantity less than 0.01 fluid ounce (<0.3 cm³), preferably less than 0.007 fluid ounce (<0.2 cm³) and more preferably less than 0.005 fluid ounce (<0.15 cm³). Dispensers with even smaller minimum dispensing quantities may be employed, e.g. less than 0.001 fluid ounce (<0.03 cm³) or less than 0.0002 (<0.014 cm³) minimum dispensing quantities, but such dispensers may also require longer amounts of time to prepare strong colors in large containers. To overcome this, the dispenser may be modified to provide multiple dispensing circuits for one or more colorants, e.g., a lower flow rate, lower minimum dispensing quantity circuit and a higher flow rate, higher minimum dispensing quantity circuit for at least some (e.g., the green, blue, red and magenta if used) colorants in the dispenser. These circuits may share some common components (e.g., the withdrawal line from a colorant canister, the colorant dispensing nozzle or nozzles, or nozzle cleaning devices) and may employ some unshared components (e.g., gear pumps). The somewhat increased equipment cost necessitated by such an approach will be offset by an increased fill rate when making strong colors in large containers and by a reduced or eliminated need to use separate dispensers to handle larger or smaller colorant volumes, while retaining a reduced SKU colorant set and a wide color gamut.

[0035] A variety of base paints and stains may be used in the disclosed system and method. For example, exemplary base paint sets may comprise, consist essentially of or consist of a set of white and clear (unpigmented) bases, or a set

of white, midbase (intermediate white) and clear bases, or a set of white, pastel, standard color and clear bases. Colored base paints may optionally be included but preferably are not employed in order to simplify the number of required base paint SKUs. The system may also optionally include one or more stain bases. For example, the system may include exterior or interior stains such as semi-transparent or solid color (*viz.*, opaque) stains. By way of explanation it might be noted that when a semi-transparent stain is applied to wood, the wood grain and its texture normally remains noticeable, whereas when a solid color stain is applied the grain normally becomes hidden while the texture normally remains noticeable. When a paint is applied to wood, both the wood grain and its texture normally no longer are noticeable, and a new surface which completely hides the old surface and has its own appearance is presented. This new surface may be smooth or textured.

[0036] The base paints or stains typically will be packaged in containers suitable for small batch lots. Exemplary small batch lot container sizes are about one half pint, one pint, one quart, one liter, one gallon, four liter, five gallon or 20 liter containers, corresponding to containers from about 0.24 to 20 L. Depending on the amount of pigmentation (e.g., white pigmentation) already present in a base paint or stain, the container typically will have a small amount of headspace for colorant addition. For example, a one gallon (3.79 L) white base paint container may hold about 128 oz. (3.79 L) of the base paint, with only a small headspace volume available for colorant addition. A one gallon (3.79 L) clear base paint container may for example hold about 116 oz. (3.43 L) of the base paint, with about 12 oz. (0.35 L, or about 9% of the total container volume) of headspace available for colorant addition. When additional base paints of intermediate opacity are employed, they likewise may have intermediate available headspace volumes for colorant addition. For example, a four base system may employ the white and clear base paints mentioned above, together with a pastel base whose container has about 126 oz. (3.73 L) of base paint with about 2 oz. (0.06 L) of headspace available for colorant addition, and a standard color base whose container has about 124 oz. (3.57 L) of base paint with about 4 oz. (0.12 L) of headspace available for colorant addition.

[0037] A variety of colorants may be employed in the disclosed system and method. The colorants may be solvent based, water based or universal colorants, with universal colorants being preferred to reduce the number of required colorant SKUs. The disclosed system and method preferably employ 8, 9, 10, 11 or 12 colorants but may employ fewer colorants if a restricted color space is acceptable, or more colorants if additional dispenser slots are available and additional colorant SKUs are acceptable. For example, the disclosed system and method may employ 6, 7, 13, 14, 15, 16, 20 or 24 colorants. Exemplary universal colorants include those described in U.S. Patent No. 6,488,760 B1 to Binns et al. and published PCT Application No. WO 2006/102011 A1. Colorants may also be obtained from a number of suppliers including CPS Color, Inc., Evonik Industries and Color Corporation of America (a subsidiary of the present assignee). The colorants preferably are non-settling and low VOC. The colorants normally will include a binder and one or more solvents which collectively provide the "vehicle binder", sometimes referred to as merely the "binder". The types and amounts of such binders and solvents will be familiar to persons having ordinary skill in the art. The colorants normally also will include one or more pigments or dyes, with pigments usually being preferred over dyes for cost reasons. The actual pigment or dye amount in a given colorant may vary depending upon the chosen hue and chosen pigment or dye. Set out below in Table 1 are exemplary prime pigment (colored pigment) types and ranges for the green, blue, red (and if used, magenta) colorants. The amounts shown do not include inert pigments (e.g., extender filler) which may also be employed in the disclosed colorants.

Table 1

Colorant	Exemplary Pigment	Wt. % Pigment	Preferred Wt. % Pigment	More Preferred Wt. % Pigment
Green	PG7	>12	20-48	22-42
Blue	PB15:2	>7	12-28	13-25
Red	PR254	>17	29-68	31-60
Magenta	PR122	>7	12-28	13-25

[0038] The pigments listed above are not required to be employed. Any other suitable pigment may be substituted for those shown with appropriate adjustment as needed to obtain comparable color strengths. For example, the blue colorant may be made using PB15:3 or PB15:4 blue, and the red colorant may be made using PR112 or PR209 red. Blends of pigments may be employed in a single colorant. For example, the red colorant may be made using a blend of PR188 red and PV19 violet.

[0039] Color strength may be measured using a Datacolor TOOLS™ software and a Datacolor SPECTRAFLASH™ SF300 or similar spectrophotometer as described above. Color strength values may also be determined according to ASTM D 3022-84 (Reapproved 2005), Standard Test Method for Color and Strength of Color Pigments by use of a Miniature Sandmill, and calculated using the Kubelka-Monk equation for tinting strength set out in Section 8.4.4 and

reproduced below:

$$5 \quad TS_u, \% = \frac{[(1 - R_{\infty})^2 / 2R_{\infty}]_u}{[(1 - R_{\infty})^2 / 2R_{\infty}]_s} \times 100$$

where:

10 R_{∞} = spectral reflectance factor, expressed as a decimal fraction, of an infinitely thick layer of material (at the wavelength of maximum absorption), or, by mutual agreement, an appropriate tristimulus value
 u is the colorant being measured and
 s is the comparison colorant.

15 In this instance R_{∞} may be determined using CIELAB color space values and a CIE 1964 10° Standard Observer angle.
[0040] Adjustments in colorant color strength may be made based on the available minimum dispensing quantity for the chosen automated dispenser. Dispensers with very low minimum dispensing quantities preferably employ colorants at the high end of the preferred and more preferred ranges shown in Table 1, and dispensers with higher minimum dispensing quantities preferably employ colorants at the low end of the preferred and more preferred ranges shown in
20 Table 1.

[0041] In some current colorant systems both less concentrated and more concentrated colorants having the same or similar hues are employed to provide an acceptable color gamut. If the less concentrated colorant is referred to as a single strength colorant then the more concentrated colorant may be referred to as a double, triple or quadruple strength colorant. The number of required colorant SKUs may be reduced by replacing the less concentrated and more concentrated colorants having the same or similar hues with one colorant whose color strength preferably is between about 1.7 and 4 times as strong (based on the weight percent of prime pigment) and more preferably between about 1.8 and 3.5 times as strong as the less concentrated (single strength) colorant.

[0042] In order to provide improved hiding power and avoid the need for colored base paints, the blue and green colorants may respectively include a blue or green pigment mixed with a white pigment (e.g., titanium dioxide). Exemplary white pigment amounts are about 4 to about 7 wt. % based on the total colorant weight.

[0043] The colorants may contain a variety of adjuvants including extender fillers, surfactants, thickeners, defoamers and biocides. The types and amounts of such adjuvants will be familiar to persons having ordinary skill in the art.

[0044] Some versions (e.g., some low VOC versions) of the disclosed colorants may require compatibility with paints or stains containing hydrophobically modified, ethoxylated urethane (HEUR) associative thickeners. Compatibility may be evaluated using a viscosity test carried out by adding 12 ounces of the colorant to 1 gallon of base paint containing an HEUR associative thickener, and observing the extent to which the viscosity changes. The colorant preferably will induce less than about 20 KU and more preferably less than about 15 KU viscosity decrease as measured using a BROOKFIELD™ KU-1+ Viscometer, from Brookfield Engineering Laboratories, Middleboro, MA, U.S.A.

[0045] In the following preferred embodiments are summarized:

40 1. A point-of sale custom color system for tinting white-pigmented and unpigmented base paints and stains, the system comprising an automated colorant dispenser having a minimum fluid dispensing quantity less than 0.01 fluid ounce (<0.3 cm³) for placing colorant into the base paint or stain, the dispenser providing an array of colorants including:

45 a) white colorant,
b) black colorant,
c) yellow-hued colorant,
d) green-hued colorant having a color strength greater than that of a comparison colorant containing 12 wt. % PG7 pigment,
50 e) blue-hued colorant having a color strength greater than that of a comparison colorant containing 7 wt. % PB15:2 pigment, and
f) red-hued colorant having a color strength greater than that of a comparison colorant containing 17 wt. % PR209 pigment,

55 wherein said green-hued or blue-hued colorant is dispensed into the base paint or stain whenever a green-hued or blue-hued tint is required.

2. A system according to item 1 wherein the dispenser has a minimum fluid dispensing quantity less than 0.007 fluid ounce (<0.2 cm³).

5 3. A system according to item 1 wherein the dispenser has a minimum fluid dispensing quantity less than 0.005 fluid ounce (<0.15 cm³), the green-hued colorant has a color strength comparable to that of a comparison colorant containing 20 to 48 wt. % PG7 pigment, and the blue-hued colorant has a color strength comparable to that of a comparison colorant containing 12 to 28 wt. % PB15:2 pigment.

10 4. A system according to item 3 wherein the red-hued colorant has a color strength comparable to that of a comparison colorant containing 29 to 68 wt. % PR209 pigment.

15 5. A system according to item 1 wherein the array of colorants contains no more than 12 colorants.

6. A system according to item 1 wherein the array of colorants contains no more than 10 colorants

15 7. A system according to item 1 wherein the dispenser places colorants into base paint or stain containers of 0.9 to 20 L.

20 8. A system according to item 1 wherein a mixture of the black, red oxide and yellow oxide colorants are dispensed into the base paint or stain whenever a brown oxide or raw umber tint is required.

25 9. A system according to item 1 wherein the dispenser includes a low flow rate, low minimum dispensing quantity circuit and a high flow rate, high minimum dispensing quantity circuit for at least some of the colorants in the dispenser.

30 10. A method for point-of-sale custom paint or stain tinting, the method comprising the step of dispensing colorant into white-pigmented or unpigmented base paint or stain using an automated colorant dispenser having a minimum fluid dispensing quantity less than 0.01 fluid ounce (<0.3 cm³) and an array of colorants including white colorant, black colorant, yellow-hued colorant, green-hued colorant having a color strength greater than that of a comparison colorant containing 12 wt. % PG7 pigment, blue-hued colorant having a color strength greater than that of a comparison colorant containing 7 wt. % PB15:2 pigment, and red-hued colorant having a color strength greater than that of a comparison colorant containing 17 wt. % PR209 pigment, wherein said green-hued or blue-hued colorant is dispensed into the base paint or stain whenever a green-hued or blue-hued tint is required.

35 11. A method according to item 10 comprising dispensing colorant using a dispenser having a minimum fluid dispensing quantity less than 0.007 fluid ounce (<0.2 cm³).

12. A method according to item 10 comprising dispensing colorant using a dispenser having a minimum fluid dispensing quantity less than 0.005 fluid ounce (<0.15 cm³).

40 13. A method according to item 10 comprising dispensing green-hued colorant having a color strength comparable to that of a comparison colorant containing 20 to 48 wt. % PG7 pigment.

14. A method according to item 10 comprising dispensing green-hued colorant having a color strength comparable to that of a comparison colorant containing 22 to 42 wt. % PG7 pigment.

45 15. A method according to item 10 comprising dispensing blue-hued colorant having a color strength comparable to that of a comparison colorant containing 12 to 28 wt. % PB15:2 pigment.

16. A method according to item 10 comprising dispensing blue-hued colorant having a color strength comparable to that of a comparison colorant containing 13 to 25 wt. % PB15:2 pigment.

50 17. A method according to item 10 comprising dispensing red-hued colorant having a color strength comparable to that of a comparison colorant containing 29 to 68 wt. % PR209 pigment.

18. A method according to item 10 comprising dispensing red-hued colorant having a color strength comparable to that of a comparison colorant containing 31 to 60 wt. % PR209 pigment.

55 19. A method according to item 10 comprising dispensing the colorants into base paint or stain containers of 0.9 to 20 L.

20. A method according to item 10 comprising dispensing a mixture of the black, red oxide and yellow oxide colorants into the base paint or stain whenever a brown oxide or raw umber tint is required.

5 [0046] The invention is further described in the following Examples, in which all parts and percentages are by weight unless otherwise indicated.

Examples

Example 1

10 [0047] A 10 colorant array was prepared using the pigments shown below in Table 2:

15 Table 2

Colorant		
Colorant Hue	Pigment	Wt. % Pigment
White	PW6	53.1
Black	PBK7	9.8
Green	PG7	20.5
Blue	PB15:2	13.1
Red	PR254	18
Magenta	PR122	11.9
Yellow	PY74	16.5
Medium Yellow	PY74 + PY65	36.1
Yellow Oxide	PY42	57.9
Red Oxide	PR101	59.8

35 The blue and green colorants respectively also contained 4.5% and 6.2% titanium dioxide which provided compensatory lightness to offset the higher pigment levels. Custom-tinted paints were prepared by mixing the above colorants with pastel and clear bases using an automated colorant dispenser capable of dispensing a 1/384 fluid ounce (0.077 cm³) minimum dispensing quantity. A lighter pastel green could be obtained when dispensing a 1/384 fluid ounce minimum quantity of the green colorant shown in Table 1 into 1 gallon (3.8 L) of pastel base than could be obtained when dispensing a 1/96 fluid ounce (0.31 cm³) minimum quantity of a comparison single strength green colorant containing 11.5% PG7 green. A lighter pastel blue could be obtained when dispensing a 1/384 fluid ounce minimum quantity of the blue colorant shown in Table 1 into 1 gallon of pastel base compared to dispensing a 1/96 fluid ounce (0.31 cm³) minimum quantity of a comparison single strength blue colorant containing 7% PB15:2 blue. Addition of 12 oz. (0.35 L) of the green or blue colorants shown in Table 1 to 1 gallon of clear base provided a darker, more saturated blue or green mass tone color than could be obtained using a 12 oz. addition of the comparison colorants. Use of the Table 1 colorants and a precision automated dispenser thus provided tinted paints in an expanded gamut colors space, while using only 10 colorants and 2 bases and employing a single green-hued or blue-hued colorant whenever a green-hued or blue-hued tint was required. A mixture of the black, red oxide and yellow oxide colorants was also dispensed into the pastel base to provide tinted pastel paints in brown oxide and raw umber tints without requiring the use of separate brown oxide or raw umber colorants.

40 Example 2

45 [0048] Triple strength versions of the magenta and blue colorants shown in Table 1 were prepared using 23.4 wt. % PR122 pigment for the magenta colorant and 25.4 wt. % PB15:2 pigment for the blue colorant. Using an automated dispenser with a 1/1024 fluid ounce (0.029 cm³) minimum dispensing quantity, a lighter pastel magenta or blue could be made using the triple strength colorants and 1 gallon of pastel base, and a darker more saturated magenta or blue could be made using the triple strength colorants and 1 gallon of clear base, than could be obtained by dispensing the comparison single strength colorants using a 1/96 fluid ounce (0.31 cm³) minimum quantity dispenser.

Example 3

[0049] Additional colorants for use with transparent stains were prepared using the pigments shown below in Table 3:

Table 3

Colorant		
Colorant Hue	Pigment	Wt. % Pigment
Transparent Yellow Iron Oxide	PY42	30
Transparent Red Oxide	PR101	35.2
Dark, Saturated Magenta	PR122	10.6

15 The Table 3 colorants were dispensed using an automated dispenser with a 1/384 fluid ounce (0.077 cm³) minimum dispensing quantity into a clear base in amounts up to 12 oz. (0.35 L) per gallon to provide a low hiding but UV resistant transparent protective coating through which the natural grain patterns of underlying wood surfaces were visible.

Example 4

20 [0050] Additional colorants for use with the system shown in Example 1 were prepared using the pigments shown below in Table 4:

Table 4

Colorant		
Colorant Hue	Pigment	Wt. % Pigment
Raw Umber	PBR7	21.1
Orange	PO74	12.8

25 The Table 4 colorants were dispensed in varying amounts into clear or TiO₂-containing bases, with the desired colorant amount depending on the desired tint and on the amount of TiO₂ in the chosen base. Clear bases containing no TiO₂ typically were mixed with about 8 to about 12 oz/gal (about 62.5 to about 93.8 mL/L) of colorant to make saturated tints.

30 Bases containing about 1.5 lbs (0.68 Kg) of TiO₂ typically were mixed with about 2 to about 6 oz/gal (about 15.6 to about 46.9 mL/L) of colorant to make medium pastel tints. Bases containing about 2 lbs. (1.8 Kg) of TiO₂ typically were mixed with 0 to about 2 oz/gal (0 to about 15.6 mL/L) of colorant to make very light pastel tints.

Claims

1. A point-of-sale custom color system for tinting white-pigmented and unpigmented base paints and stains, the system comprising an automated colorant dispenser having a minimum fluid dispensing quantity less than 0.01 fluid ounce (<0.3 cm³) for placing colorant into the base paint or stain, the dispenser providing an array of colorants including:
 - a) white colorant,
 - b) black colorant,
 - c) yellow-hued colorant,
 - d) green-hued colorant having a color strength greater than that of a comparison colorant containing 12 wt. % PG7 pigment,
 - e) blue-hued colorant having a color strength greater than that of a comparison colorant containing 7 wt. % PB15:2 pigment, and
 - f) red-hued colorant having a color strength greater than that of a comparison colorant containing 17 wt. % PR209 pigment,

55 wherein said green-hued or blue-hued colorant is dispensed into the base paint or stain whenever a green-hued or blue-hued tint is required.

2. A system according to claim 1 wherein the dispenser has a minimum fluid dispensing quantity less than 0.007 fluid ounce ($<0.2 \text{ cm}^3$).

5 3. A system according to claim 1 wherein the dispenser has a minimum fluid dispensing quantity less than 0.005 fluid ounce ($<0.15 \text{ cm}^3$), the green-hued colorant has a color strength comparable to that of a comparison colorant containing 20 to 48 wt. % PG7 pigment, and the blue-hued colorant has a color strength comparable to that of a comparison colorant containing 12 to 28 wt. % PB15:2 pigment.

10 4. A system according to claim 3 wherein the red-hued colorant has a color strength comparable to that of a comparison colorant containing 29 to 68 wt. % PR209 pigment.

15 5. A system according to claim 1 wherein the array of colorants contains no more than 12 colorants.

6. A system according to claim 1 wherein the dispenser places colorants into base paint or stain containers of 0.9 to 20 L.

20 7. A system according to claim 1 wherein a mixture of the black, red oxide and yellow oxide colorants are dispensed into the base paint or stain whenever a brown oxide or raw umber tint is required.

8. A system according to claim 1 wherein the dispenser includes a low flow rate, low minimum dispensing quantity circuit and a high flow rate, high minimum dispensing quantity circuit for at least some of the colorants in the dispenser.

25 9. A method for point-of-sale custom paint or stain tinting, the method comprising the step of dispensing colorant into white-pigmented or unpigmented base paint or stain using an automated colorant dispenser having a minimum fluid dispensing quantity less than 0.01 fluid ounce ($<0.3 \text{ cm}^3$) and an array of colorants including white colorant, black colorant, yellow-hued colorant, green-hued colorant having a color strength greater than that of a comparison colorant containing 12 wt. % PG7 pigment, blue-hued colorant having a color strength greater than that of a comparison colorant containing 7 wt. % PB 15:2 pigment, and red-hued colorant having a color strength greater than that of a comparison colorant containing 17 wt. % PR209 pigment, wherein said green-hued or blue-hued colorant is dispensed into the base paint or stain whenever a green-hued or blue-hued tint is required.

30 10. A method according to claim 9 comprising dispensing colorant using a dispenser having a minimum fluid dispensing quantity less than 0.007 fluid ounce ($<0.2 \text{ cm}^3$).

11. A method according to claim 9 comprising dispensing green-hued colorant having a color strength comparable to that of a comparison colorant containing 20 to 48 wt. % PG7 pigment.

35 12. A method according to claim 9 comprising dispensing blue-hued colorant having a color strength comparable to that of a comparison colorant containing 12 to 28 wt. % PB15:2 pigment.

13. A method according to claim 9 comprising dispensing red-hued colorant having a color strength comparable to that of a comparison colorant containing 29 to 68 wt. % PR209 pigment.

40 14. A method according to claim 9 comprising dispensing the colorants into base paint or stain containers of 0.9 to 20 L.

15. A method according to claim 9 comprising dispensing a mixture of the black, red oxide and yellow oxide colorants into the base paint or stain whenever a brown oxide or raw umber tint is required.

50 **Patentansprüche**

1. Ein kundenspezifisches Point-of-Sale Farbsystem für das Färben von weiß-pigmentierten und unpigmentierten Basisfarben und Färbemitteln, wobei das System einen automatisierten Spender für farbgebende Stoffe mit einer Mindestfluidabgabemenge von weniger als 0,01 Fluidunzen ($<0,3 \text{ cm}^3$) für die Platzierung des farbgebenden Stoffs in die Basisfarbe oder das Färbemittel umfasst, wobei der Spender eine Reihe von farbgebenden Stoffen bereit stellt, einschließlich:

55 a) weißen farbgebenden Stoff,
b) schwarzen farbgebenden Stoff,

- c) gelbfarbenen farbgebenden Stoff,
- d) grünfarbenen farbgebenden Stoff mit einer Farbstärke größer als die eines 12 Gew.-% PG7 Pigment enthaltenden farbgebenden Vergleichsstoffs,
- e) blaufarbenen farbgebenden Stoff mit einer Farbstärke größer als die eines 7 Gew.-% PB 15:2 Pigment enthaltenden farbgebenden Vergleichsstoffs, und
- f) rotfarbenen farbgebenden Stoff mit einer Farbstärke größer als die eines 17 Gew.-% PR209 Pigment enthaltenden farbgebenden Vergleichsstoffs,

10 wobei der grünfarbene oder blaufarbene farbgebende Stoff in die Basisfarbe oder das Färbemittel abgegeben wird, wenn ein grünfarbener oder blaufarbener Farbton erforderlich ist.

2. Ein System nach Anspruch 1, wobei der Spender eine Mindestfluidabgabemenge von weniger als 0,007 Fluidunzen (<0,2 cm³) aufweist.
3. Ein System nach Anspruch 1, wobei der Spender eine Mindestfluidabgabemenge von weniger als 0,005 Fluidunzen (<0,15 cm³) aufweist, der grünfarbene farbgebende Stoff eine Farbstärke vergleichbar zu der eines 20 bis 48 Gew.-% PG7 Pigment enthaltenden farbgebenden Vergleichsstoffs aufweist und der blaufarbene farbgebende Stoff eine Farbstärke vergleichbar zu der eines 12 bis 28 Gew.-% PB15:2 Pigment enthaltenden farbgebenden Vergleichsstoffs aufweist.
4. Ein System nach Anspruch 3, wobei der rotfarbene farbgebende Stoff eine Farbstärke vergleichbar zu der eines 29 bis 68 Gew.-% PR209 Pigment enthaltenden farbgebenden Vergleichsstoffs aufweist.
5. Ein System nach Anspruch 1, wobei die Reihe von farbgebenden Stoffen nicht mehr als 12 farbgebende Stoffe enthält.
6. Ein System nach Anspruch 1, wobei der Spender farbgebende Stoffe in Basisfarben- oder Färbemittelbehälter von 0,9 bis 20 L platziert.
7. Ein System nach Anspruch 1, wobei ein Gemisch der schwarzen, rotoxischen und gelboxidischen farbgebenden Stoffe in die Basisfarbe oder das Färbemittel abgegeben wird, wenn ein braunoxidischer oder Raw Umbra-Farbton erforderlich ist.
8. Ein System nach Anspruch 1, wobei der Spender eine Schaltung mit niedriger Fließrate, geringer Mindestabgabemenge, und eine Schaltung mit hoher Fließrate, hoher Mindestabgabemenge, für mindestens einige der farbgebenden Stoffe in dem Spender enthält.
9. Ein Verfahren für das Färben von Point-of-Sale kundenspezifischer Farbe oder Färbemittel, wobei das Verfahren den Schritt des Abgebens des farbgebenden Stoffes in weiß-pigmentierte oder unpigmentierte Basisfarben oder Färbemittel umfasst, wobei das System einen automatisierten Spender für farbgebende Stoffe mit einer Mindestfluidabgabemenge von weniger als 0,01 Fluidunzen (<0,3 cm³) und eine Reihe von farbgebenden Stoffen einschließlich weißen farbgebenden Stoff, schwarzen farbgebenden Stoff, gelbfarbenen farbgebenden Stoff, grünfarbenen farbgebenden Stoff mit einer Farbstärke größer als die eines 12 Gew.-% PG7 Pigment enthaltenden farbgebenden Vergleichsstoffs, blaufarbenen farbgebenden Stoff mit einer Farbstärke größer als die eines 7 Gew.-% PB15:2 Pigment enthaltenden farbgebenden Vergleichsstoffs, und rotfarbenen farbgebenden Stoff mit einer Farbstärke größer als die eines 17 Gew.-% PR209 Pigment enthaltenden farbgebenden Vergleichsstoffs, verwendet, wobei der grünfarbene oder blaufarbene farbgebende Stoff in die Basisfarbe oder Färbemittel abgegeben wird, wenn ein grünfarbener oder blaufarbener Farbton erforderlich ist.
10. Ein Verfahren nach Anspruch 9, umfassend die Abgabe eines farbgebendes Stoffes, wobei ein Spender mit einer Mindestfluidabgabemenge von weniger als 0,007 Fluidunzen (<0,2 cm³) verwendet wird.
11. Ein Verfahren nach Anspruch 9, umfassend die Abgabe eines grünfarbenen farbgebenden Stoffs mit einer Farbstärke vergleichbar zu der eines 20 bis 48 Gew.-% PG7 Pigment enthaltenden farbgebenden Vergleichsstoffs.
12. Ein Verfahren nach Anspruch 9, umfassend die Abgabe eines blaufarbenen farbgebenden Stoffs mit einer Farbstärke vergleichbar zu der eines 12 bis 28 Gew.-% PB15:2 Pigment enthaltenden farbgebenden Vergleichsstoffs.

13. Ein Verfahren nach Anspruch 9, umfassend die Abgabe eines rotfarbenen farbgebenden Stoffs mit einer Farbstärke vergleichbar zu der eines 29 bis 68 Gew.-% PR209 Pigment enthaltenden farbgebenden Vergleichsstoffs.

5 14. Ein Verfahren nach Anspruch 9, umfassend die Abgabe der farbgebenden Stoffe in Basisfarben- oder Färbemittel- behälter von 0,9 bis 20 L.

10 15. Ein Verfahren nach Anspruch 9, umfassend die Abgabe eines Gemisches der schwarzen, rotoxischen und gelbo- xidischen farbgebenden Stoffe in die Basisfarbe oder Färbemittel, wenn ein braunoxidischer oder Raw Umbra- Farbton erforderlich ist.

Revendications

15 1. Système de couleur personnalisé d'un point de vente pour teinter des peintures et colorations de base pigmentée en blanc et non-pigmentée, le système comprenant un distributeur colorant automatisé ayant une quantité de distribution de fluide minimale inférieure à 0,01 once de fluide ($< 0,3 \text{ cm}^3$) pour placer du colorant dans la peinture de base ou la coloration, le distributeur fournissant une série de colorants comprenant :

20 a) un colorant blanc,
b) un colorant noir,
c) un colorant teinté en jaune,
d) un colorant teinté de vert ayant un pouvoir colorant supérieur à celui d'un colorant de comparaison contenant 12% en poids de pigment PG7,
25 e) un colorant teinté de bleu ayant un pouvoir colorant supérieur à celui d'un colorant de comparaison contenant 7% en poids d'un pigment PB15:2, et
f) un colorant teinté de rouge ayant un pouvoir colorant supérieur à celui d'un colorant de comparaison contenant 17% en poids d'un pigment PR209,

30 dans lequel ledit colorant teinté de vert ou teinté de bleu est distribué dans la peinture de base ou coloration quand une teinte verte ou bleue est requise.

2. Système selon la revendication 1, dans lequel le distributeur a une quantité de distribution de fluide minimale inférieure à 0,007 once de fluide ($< 0,2 \text{ cm}^3$).

35 3. Système selon la revendication 1, dans lequel le distributeur a une quantité de distribution de fluide minimale inférieure à 0,005 once de fluide ($< 0,15 \text{ cm}^3$), le colorant teinté de vert a un pouvoir colorant comparable à celui d'un colorant de comparaison contenant 20 à 48% en poids de pigment PG7 et le colorant teinté de bleu a un pouvoir colorant comparable à celui d'un colorant de comparaison contenant 12 à 28% en poids de pigment PB15:2.

40 4. Système selon la revendication 3, dans lequel le colorant teinté de rouge a un pouvoir colorant comparable à celui d'un colorant de comparaison contenant 29 à 68% en poids de pigment PR209.

5 5. Système selon la revendication 1, dans lequel la série de colorants contient au plus 12 colorants.

45 6. Système selon la revendication 1, dans lequel le distributeur place des colorants dans des récipients de peinture de base ou coloration de 0,9 à 20 L.

7. Système selon la revendication 1, dans lequel un mélange de colorants noir, d'oxyde rouge et d'oxyde jaune est distribué dans la peinture de base ou coloration lorsqu'une teinte oxyde marron ou ombre brute est requise.

50 8. Système selon la revendication 1, dans lequel le distributeur comprend un circuit de quantité de distribution minimum faible, à bas débit, et un circuit de quantité de distribution minimum élevée, à débit élevé, pour au moins certains des colorants dans le distributeur.

55 9. Procédé pour la teinture de peinture ou coloration personnalisée d'un point de vente, le procédé comprenant l'étape consistant à distribuer du colorant dans une peinture de base ou coloration pigmentée en blanc ou non pigmentée en utilisant un distributeur de colorant automatisé ayant une quantité de distribution de fluide minimale inférieure à 0,01 once de fluide ($< 0,3 \text{ cm}^3$) et une série de colorants comprenant un colorant blanc, un colorant noir, un colorant

teinté de jaune, un colorant teinté de vert ayant un pouvoir colorant supérieur à celui d'un colorant de comparaison contenant 12% en poids de pigment PG7, un colorant teinté de bleu ayant un pouvoir colorant supérieur à celui d'un colorant de comparaison contenant 7% en poids de pigment PB15:2 et un colorant teinté de rouge ayant un pouvoir colorant supérieur à celui d'un colorant de comparaison contenant 17% en poids de pigment PR209, dans lequel ledit colorant teinté de vert ou teinté de bleu est distribué dans la peinture de base ou coloration quand une teinte verte ou bleue est requise.

- 5 10. Procédé selon la revendication 9, comprenant la distribution de colorant en utilisant un distributeur ayant une quantité de distribution de fluide minimale inférieure à 0,007 once de fluide (< 0,2 cm³).
- 10 11. Procédé selon la revendication 9, comprenant la distribution d'un colorant teinté de vert ayant un pouvoir colorant comparable à celui d'un colorant de comparaison contenant 20 à 48% en poids de pigment PG7.
- 15 12. Procédé selon la revendication 9, comprenant la distribution d'un colorant teinté de bleu ayant un pouvoir colorant comparable à celui d'un colorant de comparaison contenant 12 à 28% en poids de pigment PB15:2.
13. Procédé selon la revendication 9, comprenant la distribution d'un colorant teinté de rouge ayant un pouvoir colorant comparable à celui d'un colorant de comparaison contenant 29 à 68% en poids de pigment PR209.
- 20 14. Procédé selon la revendication 9, comprenant la distribution des colorants dans des récipients de peinture de base ou coloration de 0,9 à 20 1.
- 25 15. Procédé selon la revendication 9, comprenant la distribution d'un mélange des colorants noirs, oxyde rouge et oxyde jaune dans la peinture de base ou coloration quand une teinte oxyde marron ou ombre brute est requise.

30

35

40

45

50

55

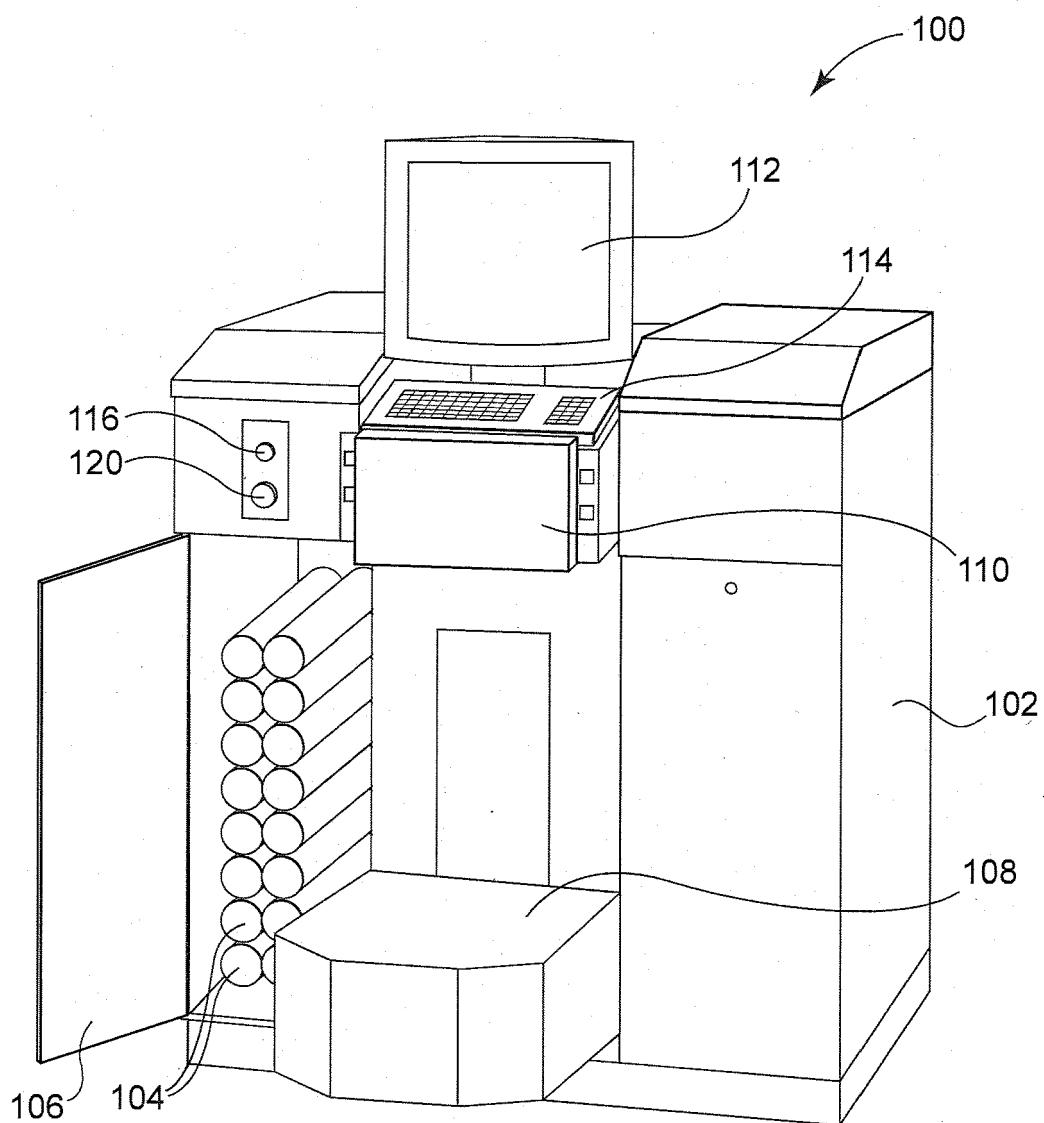


Fig. 1

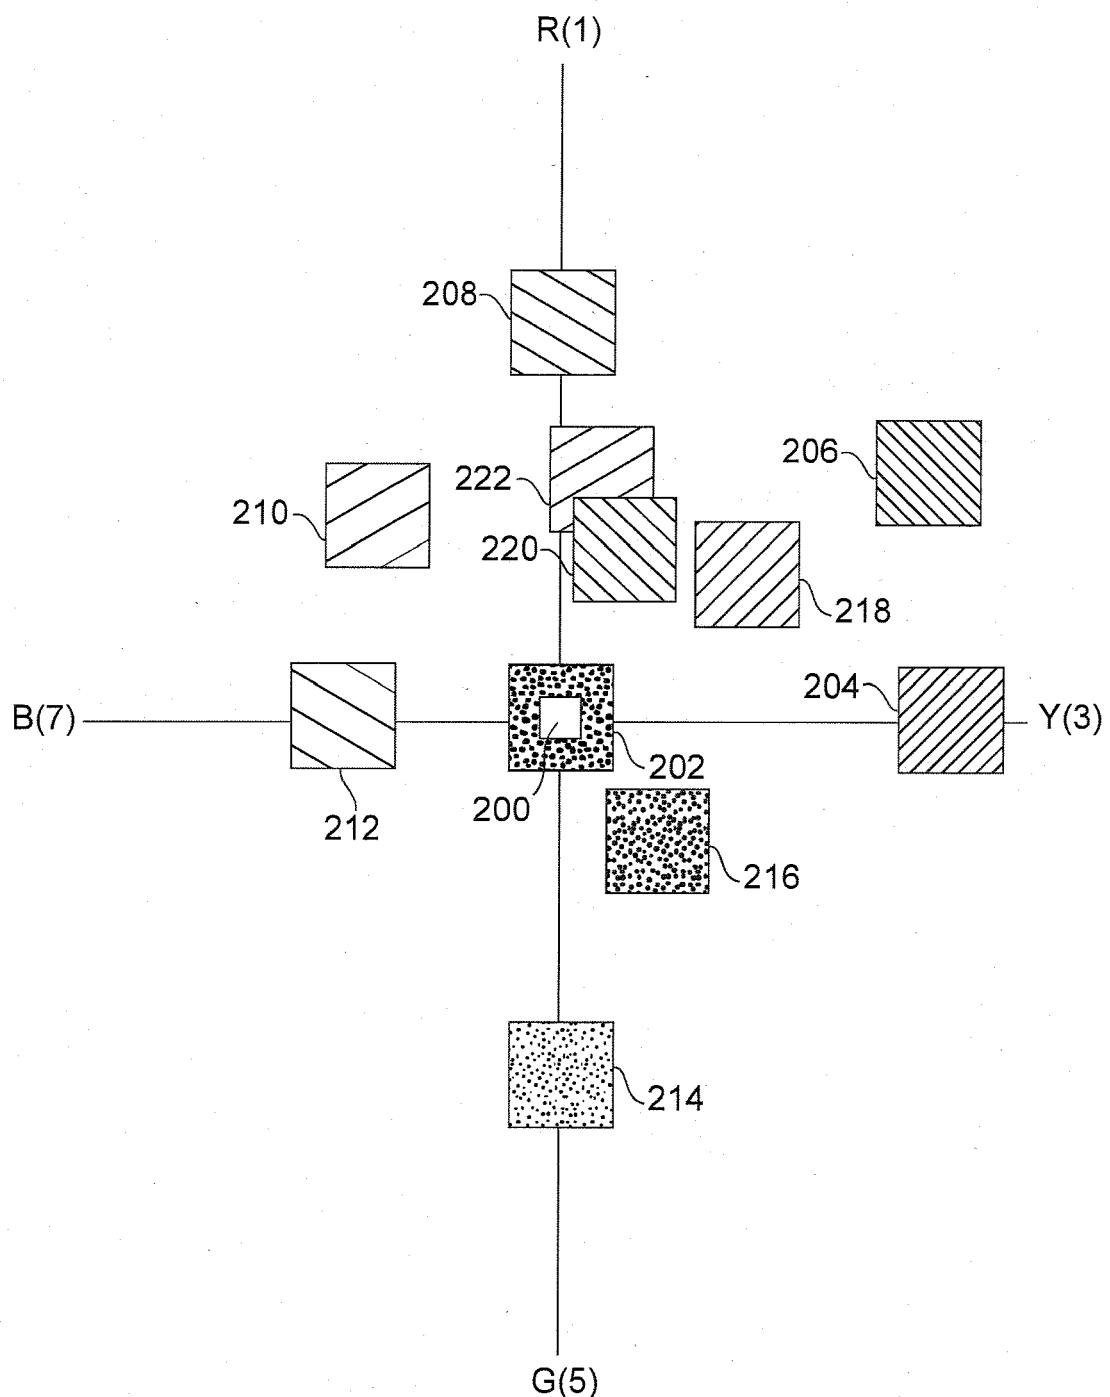


Fig. 2A

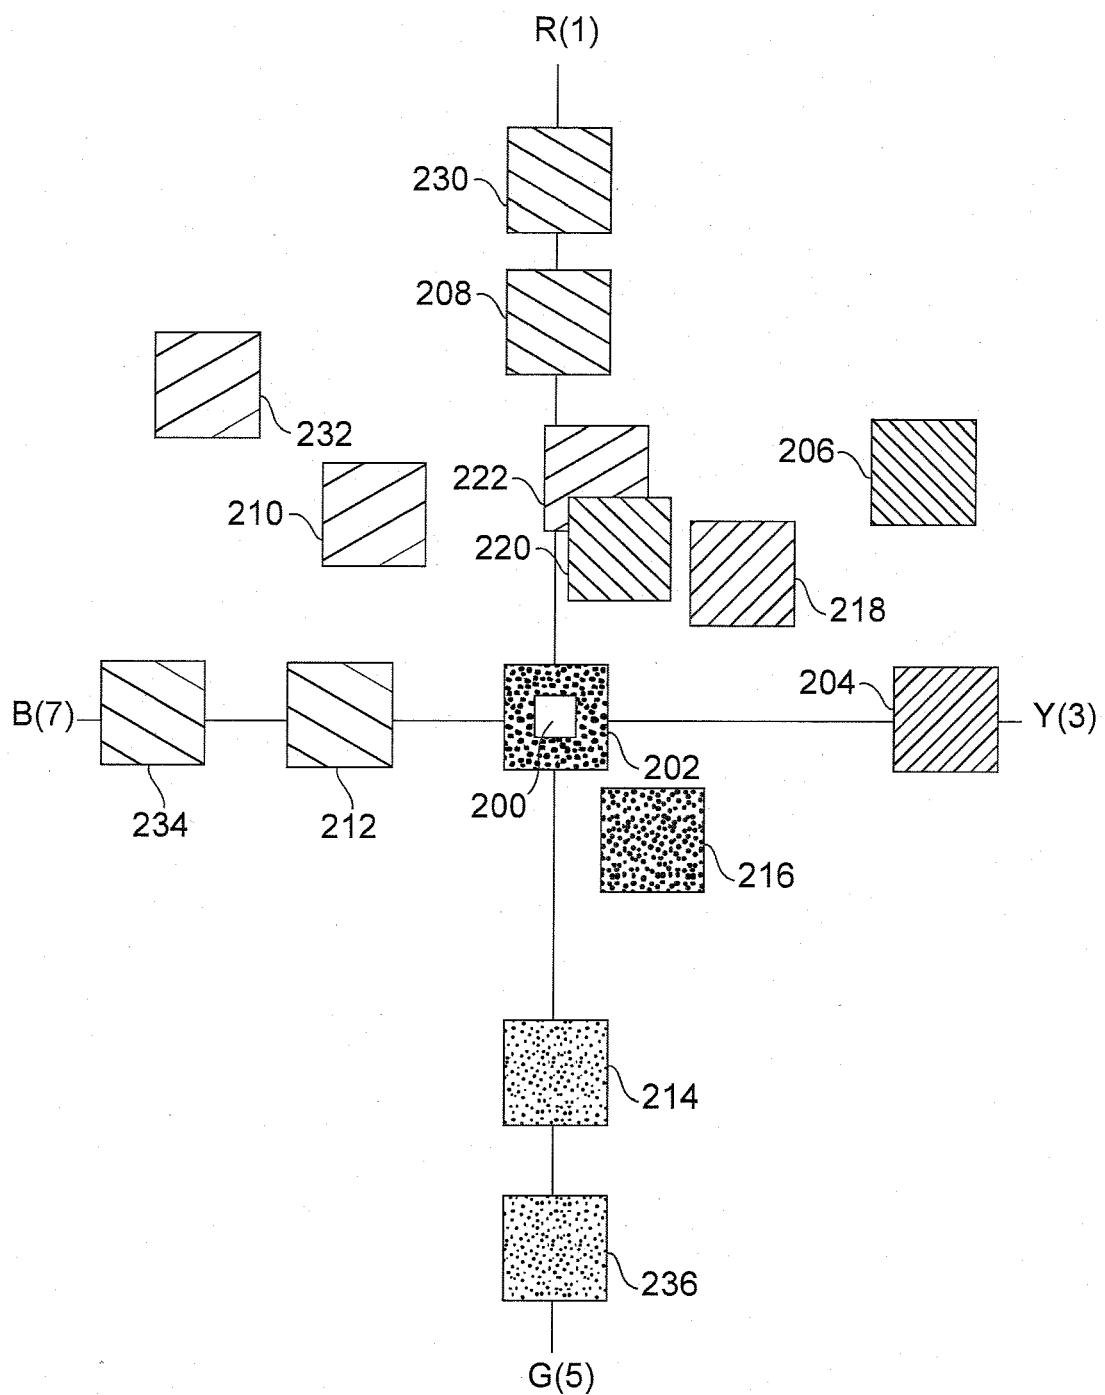


Fig. 2B

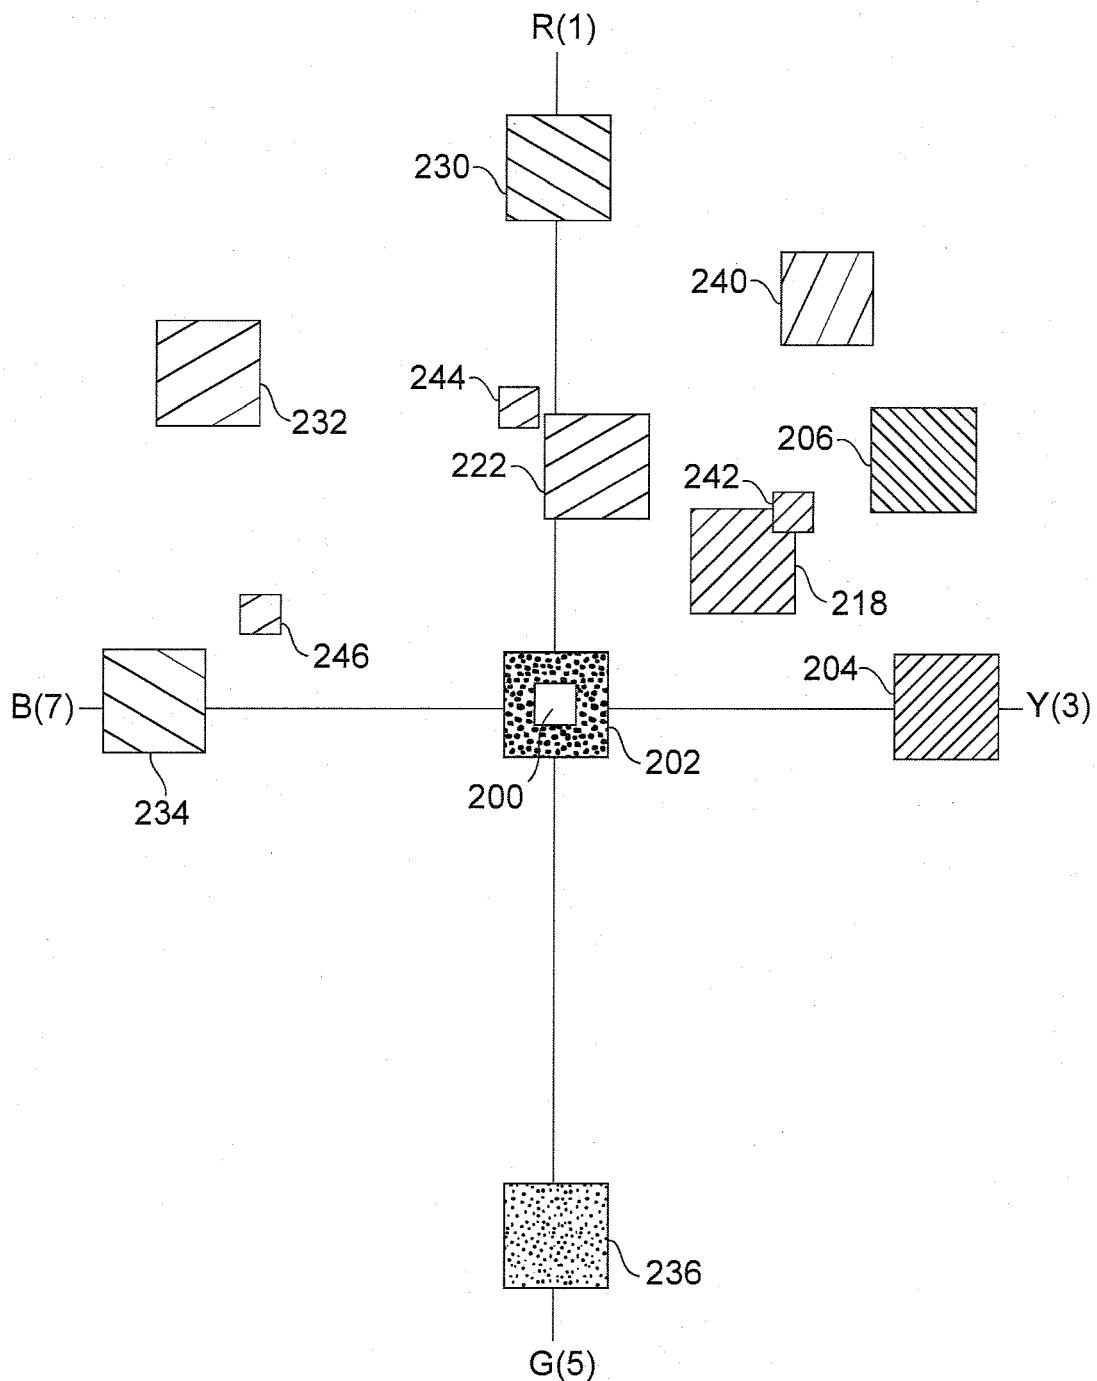


Fig. 2C

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 0846149 A [0008]
- US 6488760 B1, Binns [0037]
- WO 2006102011 A1 [0037]