



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
11.05.2011 Bulletin 2011/19

(51) Int Cl.:
C21D 11/00 (2006.01) **C21D 9/00** (2006.01)
B22D 46/00 (2006.01) **F27B 9/02** (2006.01)

(21) Application number: **10197136.4**

(22) Date of filing: **01.06.2005**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR

- **Crafton, Paul, M.**
Kennesaw, GA 30144 (US)
- **Lewis, James, L., Jr.**
Calabash, NC 28467 (US)
- **French, Ian**
Kennesaw, GA 30144 (US)

(30) Priority: **02.06.2004 US 576107 P**

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
05756565.7 / 1 766 100

(74) Representative: **Hofstetter, Alfons J.**
Hofstetter, Schurack & Skora
Balanstrasse 57
81541 München (DE)

(27) Previously filed application:
01.06.2005 US 19161

(71) Applicant: **Consolidated Engineering Company, Inc.**
Kennesaw, GA 30144 (US)

Remarks:

This application was filed on 28.12.2010 as a divisional application to the application mentioned under INID code 62.

(72) Inventors:
• **Crafton, Scott, P.**
Marietta, GA 30064 (US)

(54) **Integrated metal processing facility**

(57) A integrated facility for forming and heat treating a metal casting is provided, the facility comprising: a pouring station for pouring a molten metal into a mold to form a casting; a process temperature control station downstream from said pouring station, said process temperature control station comprising a temperature sensing

device in a heat treatment furnace; wherein said the temperature sensing device and said heat source are adapted to maintain the temperature of the casting at or above a process control temperature for the metal of the casting, and wherein upon receipt of a rejection signal from said temperature sensing device, said transfer mechanism removes the casting prior to entry into said furnace.



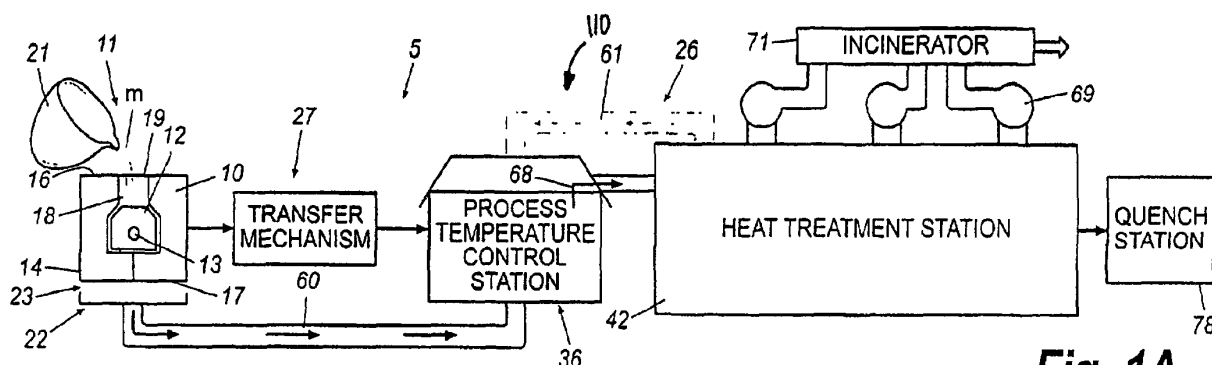


Fig. 1A

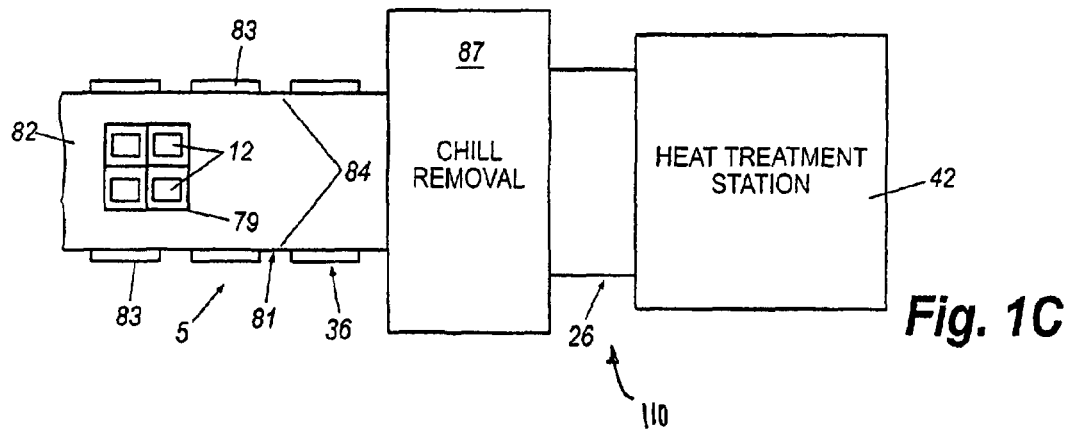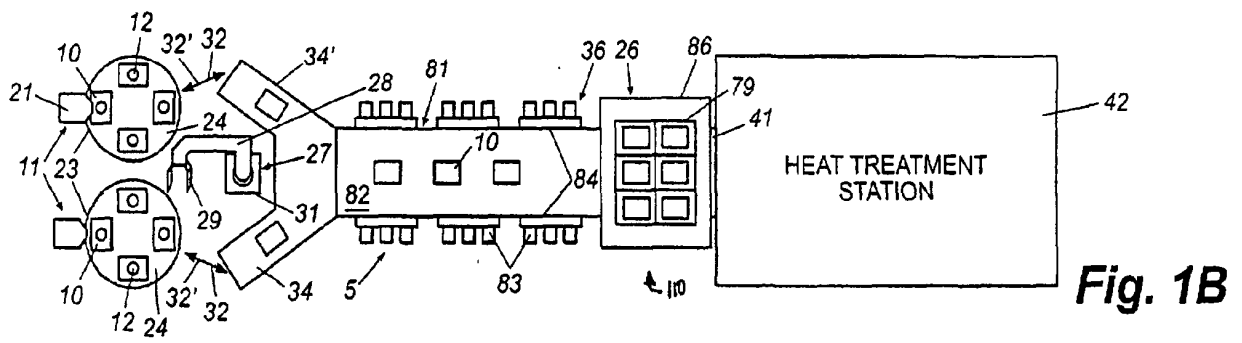

Description

BACKGROUND

[0001] Traditionally, in conventional processes for forming metal castings, a mold, such as a metal die or sand mold having an interior chamber with the exterior features of a desired casting defined therein, is filled with a molten metal. A sand core that defines interior features of the casting is received and or positioned within the mold to form the interior detail of the casting as the molten metal solidifies about the core. After the molten metal of the casting has solidified, the casting generally is moved to a treatment furnace(s) for heat treatment of the castings, removal of sand from the sand cores and/or molds, and other processing as required. The heat treatment processes condition the metal or metal alloys of the castings to achieve the desired physical characteristics for a given application.

[0002] Typically, during the transfer of the castings from the pouring station to a heat treatment station, and especially if the castings are allowed to sit for any appreciable amount of time, the castings may be exposed to the ambient environment of the foundry or metal processing facility. As a result, the castings tend to rapidly cool down from a molten or semi-molten temperature. While some cooling of the castings is necessary to allow the castings to solidify, the more the temperature of the castings drops, and the longer the castings remain below a process critical temperature (also referred to herein as the "process control temperature") of the castings, the more time is required to heat the castings up to a desired heat treatment temperature and to heat treat the castings. For example, it has been found that for certain types of metals, for every minute of time that the casting drops below its process control temperature, at least about 4 minutes of extra heat treatment time is required to achieve the desired results. Thus, even dropping below the process control temperature for the metal of the casting for as few as ten minutes may require at least about 40 minutes of additional heat treatment time to achieve the desired physical properties. Typically, therefore, the castings are heat treated for 2 to 6 hours, in some cases longer, to achieve the desired heat treatment effects. This results in greater utilization of energy and, therefore, greater heat treatment costs.

SUMMARY

[0003] Briefly described, the present invention generally comprises an integrated metal processing facility for pouring, forming, heat treating, and further processing castings formed from metals or metal alloys. The integrated metal processing facility generally includes a pouring station at which a molten metal such as aluminum or iron, or a metal alloy, is poured into a mold or die, such as a permanent metal mold, semi permanent mold, or a sand mold. The molds then are transitioned from a pour-

ing or casting position of the pouring station to a transfer position, where the casting is either removed from its mold or transferred to a heat treatment line. The transfer mechanism typically includes a robotic arm, crane, overhead hoist or lift, pusher, conveyor, or similar conveying mechanism. The same mechanism also may be used to remove the castings from their molds and transfer the castings to the heat treatment line. During this transition from the pouring station to the transfer position and/or to the heat treatment line, the molten metal of the castings is permitted to cool to an extent sufficient to form the castings.

[0004] The heat treatment line or unit generally includes a process temperature control station and a heat treatment station or furnace typically having one or more furnace chambers and, optionally, a quench station generally located downstream from the heat treatment station. The process temperature control station generally may be an elongated chamber or tunnel through which the castings are received prior to their introduction into the heat treatment station. The chamber may include a series of heat sources, such as radiant heaters, infrared, inductive, convection, conduction, or other types of heating elements. The walls and ceiling of the process temperature control station also may include a radiant material that tends to radiate or direct heat toward the castings and/or molds as they move through the chamber. Alternatively, a series of heat sources, including radiant heating elements such as infrared and inductive heating elements, convection, conduction, or other types of heat sources may be used to direct heat at the castings or molds as the castings or molds are transferred from the pouring station to the heat treatment station. In addition, a heating element or heat source can be mounted directly to the transfer mechanism to heat the castings and/or the sand molds.

[0005] As the castings and/or the molds with the castings therein pass through the process temperature control station, cooling of the castings is arrested at or above a process control temperature. The process control temperature generally is a temperature below the solution heat treatment temperature required for the metal of the castings, such that the castings are cooled to a sufficient amount or extent to enable them to solidify, but below which the time required to raise the castings up to their solution heat treatment temperature and thereafter heat-treat the castings is increased exponentially. The castings are maintained at or above their process control temperature until the castings enter the heat treatment station.

[0006] By arresting the cooling of the castings and thereafter maintaining the castings at a temperature that is substantially at or above the process control temperature for the metal of the castings, the time required to heat treat the castings can be significantly reduced. Accordingly, the output of the pouring station for the castings can be increased and the overall processing and heat treatment time for the castings can be reduced.

[0007] Prior to entry into the heat treatment furnace, the castings pass through an entry zone. The temperature of the casting may be monitored to determine whether the temperature has dropped below a pre-set or pre-defined rejection temperature. If the temperature of the casting is equal to or less than the rejection temperature, the casting may be removed from the heat treatment line using any suitable means. If the casting is accepted, it proceeds to the heat treatment furnace for heat treatment.

[0008] The heat treatment unit may include features that assist with the removal and/or reclamation of sand core and/or mold. Thereafter, the castings may undergo additional processing, for example, quenching, aging, and/or further heat treatment.

[0009] Various objects, features, and advantages of the present invention will become apparent to those skilled in the art upon a review of the following detailed description when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010]

FIG. 1A is a schematic illustration of an exemplary metal processing system according to various aspects of the present invention;

FIG. 1B is a schematic illustration of another exemplary metal processing system illustrating the collection and transfer of castings from multiple pouring stations to a heat treatment unit according to various aspects of the present invention;

FIG. 1C is a schematic illustration of yet another exemplary metal processing system with chill removal from the molds according to various aspects of the present invention;

FIG. 1D is a schematic illustration of still another exemplary system according to various aspects of the present invention, illustrating a transfer mechanism including a heating device;

FIG. 2A is a top plan view of an exemplary process temperature control station and heat treatment station according to various aspects of the invention;

FIG. 2B is a side elevation view of the process temperature control station and heat treatment station depicted in **FIG. 2A**;

FIG. 3 is a perspective view of an exemplary batch processing system according to various aspects of the present invention;

FIGS. 4A and 4B illustrate an exemplary process temperature control station including a convection heat source according to various aspects of the present invention;

FIGS. 5A and 5B illustrate another exemplary process temperature control station including a direct heat/impingement heat source according to various aspects of the present invention; and

FIGS. 6A and 6B illustrate another exemplary process temperature control station including a radiant heat source according to various aspects of the present invention.

DETAILED DESCRIPTION

[0011] Referring now in greater detail to the drawings in which like numerals refer to like parts throughout the several views, **FIG. 1A** through **FIG. 3** schematically illustrate an exemplary integrated metal processing facility or system **5** for and method of processing metallurgical castings. Metal casting processes generally are known to those skilled in the art and a traditional casting process will be described only briefly for reference purposes. It will be understood by those skilled in the art that the present invention can be used in any type of casting process, including metal casting processes for forming aluminum, iron, steel, and/or other types of metal and metal alloy castings. The present invention thus is not and should not be limited solely for use with a particular casting process or a particular type or types of metals or metal alloys.

[0012] As illustrated in **FIG. 1A**, a molten metal or metallic alloy **M** typically is poured into a die or mold **10** at a pouring or casting station **11** for forming a casting **12**, such as a cylinder head, engine block, or similar cast part. A casting core **13** formed from sand and an organic binder, such as a phenolic resin, is received or placed within the mold **10** to create hollow cavities and/or casting details or core prints within the casting. Each of the molds alternatively can be a permanent mold or die, typically formed from a metal such as steel, cast iron, or other material as is known in the art. Such molds may have a clam-shell style design for ease of opening and removal of the casting therefrom. Alternatively still, the molds can be "precision sand mold" type molds and/or "green sand molds", which generally are formed from a sand material such as silica sand or zircon sand mixed with a binder such as a phenolic resin or other binder as is known in the art, similar to the sand casting cores **13**. The molds further may be semi-permanent sand molds, which typically have an outer mold wall formed from sand and a binder material, a metal such as steel, or a combination of both types of materials.

[0013] It will be understood that the term "mold" will be used hereafter to refer generally to all types of molds as discussed above, including permanent or metal dies, semi-permanent and precision sand mold type molds, and other metal casting molds, except where a particular type mold is indicated. It further will be understood that in the various embodiments discussed below, unless a particular type of mold and/or heat treatment process is indicated, the present invention can be used for heat treating castings that have been removed from their permanent molds, or that remain within a sand mold for the combined heat treatment and sand mold break-down and sand reclamation.

[0014] As shown in FIG. 1A, each of the molds 10 generally includes side walls 14, an upper wall or top 16, and a lower wall or bottom 17 that collectively define an internal cavity 18 in which the molten metal is received and formed into the casting 12. A pour opening 19 generally is formed in the upper wall or top 16 of each mold and communicates with the internal cavity for passage of the molten metal through each mold and into the internal cavity 18 at the pouring station 11. As indicated in FIGS. 1A through 1C, the pouring station 11 generally includes a ladle or similar mechanism 21 for pouring the molten metal M into the molds. The pouring station 11 further includes a conveyor 22, such as a carousel, piston, indexing, or similar conveying mechanism that moves one or more molds from a pouring or casting position 23, where the molten metal is poured into the molds, to a transfer point or position 24, at which the castings are removed from their molds, or at which the molds with their castings therein are transferred from the pouring station to a heat treatment unit 26 or line for heat treatment. After the molten metal is poured into the mold, the mold is conveyed to the transfer position, where the metal is allowed to cool to a desired extent or temperature within the die as needed for the metal to solidify into the casting. The casting then is heat treated at a desired heat treatment temperature.

[0015] It has been discovered that, as the metal of the casting is cooled down, it reaches a temperature or range of temperatures referred to herein as the "process control temperature" or "process critical temperature", below which the time required to both raise the castings to the heat treating temperature and perform the heat treatment is significantly increased. It will be understood by those skilled in the art that the process control temperature for the castings being processed by the present invention will vary depending upon the particular metal and/or metal alloys being used for the castings, the size and shape of the castings, and numerous other factors.

[0016] In one aspect, the process control temperature may be about 400°C for some alloys or metals. In another aspect, the process control temperature may be from about 400°C to about 600°C. In another aspect, the process control temperature may be from about 600°C to about 800°C. In yet another aspect, the process control temperature may be from about 800°C to about 1100°C. In still another aspect, the process control temperature may be from about 1000°C to about 1300°C for some alloys or metals, for example, iron. In one particular example, an aluminum/copper alloy may have a process control temperature of from about 400°C to about 470°C. In this example, the process control temperature generally is below the solution heat treatment temperature for most copper alloys, which typically is from about 475°C to about 495°C. While particular examples are provided herein, it will be understood that the process control temperature may be any temperature, depending upon the particular metal and/or metal alloys being used for the castings, the size and shape of the castings, and numer-

ous other factors.

[0017] When the metal of the casting is within the desired process control temperature range, the casting typically will be cooled sufficiently to solidify as desired. However, if the metal of the casting is permitted to cool below its process control temperature, it has been found that the casting may need to be heated for at least about 4 additional minutes for each minute that the metal of the casting is cooled below the process control temperature to reach the desired heat treatment temperature, for example, from about 475°C to about 495°C for aluminum/copper alloys, or from about 510°C to about 570°C for aluminum/magnesium alloys. Thus, if the castings cool below their process control temperature for even a short time, the time required to heat treat the castings properly and completely may be increased significantly. In addition, it should be recognized that in a batch processing system, such as illustrated in FIGS. 1B, 1C, and 1D, where several castings are processed through the heat treatment station in a single batch, the heat treatment time for the entire batch of castings generally is based on the heat treatment time required for the casting(s) with the lowest temperature in the batch. As a result, if one of the castings in the batch being processed has cooled to a temperature below its process control temperature, for example, for about 10 minutes, the entire batch typically will need to be heat treated, for example, for at least an additional 40 minutes to ensure that all of the castings are heat treated properly and completely.

[0018] Various aspects of the present invention therefore are directed to an integrated processing facility or system 5 (FIG. 1A through FIG. 3) and methods of processing metal castings. The various systems are designed to move and/or transition the castings (within or apart from their molds) from the pouring station 11 to the heat treatment system or unit 26, while arresting cooling of the molten metal to a temperature at or above the process control temperature of the metal, but below or equal to the desired heat treatment temperatures thereof to allow the castings to solidify. Accordingly, various aspects of the present invention include systems for monitoring the temperature of the castings to ensure that the castings are maintained substantially at or above the process control temperature. For example, thermocouples or other similar temperature sensing devices or systems can be placed on or adjacent the castings or at spaced locations along the path of travel of the castings from the pouring station to a heat treatment furnace to provide substantially continuous monitoring. Alternatively, periodic monitoring at intervals determined to be sufficiently frequent may be used. Such devices may be in communication with a heat source, such that the temperature measuring or sensing device and the heat source may cooperate to maintain the temperature of the casting substantially at or above the process control temperature for the metal of the casting. It will be understood that the temperature of the casting may be measured at one particular location on or in the casting, may be an average

temperature calculated by measuring the temperature at a plurality of locations on or in the casting, or may be measured in any other manner as needed or desired for a particular application. Thus, for example, the temperature of the casting may be measured in multiple locations on or in the casting, and an overall temperature value may be calculated or determined to be the lowest temperature detected, the highest temperature detected, the median temperature detected, the average temperature detected, or any combination or variation thereof.

[0019] Additionally, prior to entry into the heat treatment furnace, the castings may pass through an entry or rejection zone **110**, where the temperature of each casting is monitored to determine whether the casting has cooled to an extent that would require and an excessive amount of energy to raise the temperature to the heat treatment temperature. The entry zone may be included in the process control temperature station, or may be a separate zone, as indicated generally throughout the various figures. The temperature of the casting may be monitored by any suitable temperature sensing or measuring device, such as a thermocouple, to determine whether the temperature of the casting has reached or dropped below a pre-set or predefined rejection temperature. In one aspect, the predefined rejection temperature may be a temperature (for example, from about 10°C to about 20°C) below the process control temperature for the metal of the casting. In another aspect, the predefined rejection temperature may be a temperature (for example, from about 10°C to about 20°C) below the heat treatment temperature of the heat treatment furnace or oven. If the casting has cooled to a temperature equal to or below the predefined temperature, the control system may send a rejection signal to a transfer or removal mechanism. In response to the detection of a defect condition or signal, the subject casting may be identified for further evaluation or may be removed from the transfer line. The casting may be removed by any suitable mechanism or device including, but not limited to, a robotic arm or other automated device, or the casting may be removed manually by an operator.

[0020] As with the above, it will be understood that the temperature of the casting may be measured at one particular location on or in the casting, may be an average temperature calculated by measuring the temperature at a plurality of locations on or in the casting, or may be measured in any other manner as needed or desired for a particular application. Thus, for example, the temperature of the casting may be measured in multiple locations on or in the casting, and an overall value may be calculated or determined to be the lowest temperature detected, the highest temperature detected, the median temperature detected, the average temperature detected, or any combination or variation thereof.

[0021] A first embodiment of the integrated facility **5** and process for moving and/or processing castings therethrough is illustrated in **FIGS. 1A, 2A, and 2B**. **FIG. 1B** and **FIG. 3** illustrate an additional, alternative embod-

iment of the integrated facility **5** and process for forming and treating castings where the castings are being collected and processed through heat treatment in a batch processing type arrangement. It will, however, be understood by those skilled in the art that the principles of the present invention can be applied equally to batch type and continuous processing type facilities in which the castings are processed individually through the facility and therefore the present invention. The embodiments described hereinafter therefore are not and should not be limited to continuous or batch-type processing facilities. **FIG. 1C** and **FIG. 1D** illustrate further alternative embodiments of the present invention for performing additional processing steps such as chill removal from castings (**FIG. 1C**) and feeding the castings to multiple heat treatment furnaces (**FIG. 1D**). In addition, it will be understood by those skilled in the art that various features of the embodiments discussed hereafter and illustrated in the drawings can be combined to form additional embodiments of the present invention.

[0022] In the exemplary system illustrated in **FIGS. 1A, 2A, and 2B**, the castings **12** generally are removed from their molds **10** at the transfer or pouring station **11** by a transfer mechanism **27**. As indicated in **FIGS. 2A** and **2B**, the transfer system or mechanism **27** typically includes a robotic arm or crane **28**, although it will be understood by those skilled in the art that various other systems and devices for moving the castings and/or molds, such as an overhead boom or hoist, conveyor, pusher rods, or other similar material handling mechanisms also can be used. As indicated in **FIGS. 1A, 1B, and 2A**, the robotic arm **28** generally includes an engaging or gripping portion or clamp **29** for engaging and holding the molds or castings, and a base **31** on which the arm **28** is pivotally mounted to be movable between the transfer point **24** of the pouring station and the heat treatment line as indicated by arrows **32** and **32'** (**FIG. 2A**). In addition, as shown in **FIG. 1B**, the transfer mechanism can be used to transfer molds and/or castings from multiple pouring stations **11** and **11'** and can transfer the molds and/or castings to multiple heat treatment lines or units **26** (**FIG. 1C**).

[0023] The molds with castings therein typically are moved from the pouring station **11** to the pickup or transfer point **24** (**FIG. 2A**), where the transfer mechanism **27** generally will pick up the molds with their castings contained therein, or will remove the castings **12** from their molds and transport the castings to the heat treatment unit **26**. Thus, the same manipulator or transfer mechanism can be used for removing the castings from the pouring station and for introducing the castings to the heat treatment unit. Typically, a heat source or heating element **33** will be positioned adjacent the transfer point **28** for the castings for applying heat thereto. The heat source typically can include any type of heating element or source such as conductive, radiant, infrared, conductive, convective, and direct impingement types of heat sources. As illustrated in **FIG. 2A**, multiple heat sources

33 can be used, positioned to most effectively apply heat to the castings during a transfer operation from the pouring station to the heat treatment line.

[0024] Typically, in the case of permanent or metal dies or molds, the molds will be opened at the transfer point and the castings removed by the transfer mechanism, as shown in **FIG. 1D**. The transfer mechanism then transfers the castings to one or more inlet conveyors **34** (**FIGS. 1B** and **2A**) of the heat treatment unit, line(s), or system (s) **26** of the integrated processing facility **5**. As the molds are opened and the castings removed, the heat sources **33** (**FIG. 2A**) apply heat directly to the castings to arrest or otherwise control the cooling of the castings during their exposure to the ambient environment of the foundry or plant, as the castings are being transferred to the heat treatment unit, to maintain the castings substantially at or above the process control temperature of the metal of the castings.

[0025] For the processing of castings that are being formed in semi-permanent or sand molds in which the castings typically remain within their molds during heat treatment, during which the molds are broken down by the thermal degradation of the binder material holding the sand of the mold, the transfer mechanism **27** may transfer the entire mold with the casting contained therein, from the transfer point to the inlet conveyor **34**. The heat sources **33** thus may continue to apply heat to the mold itself, with the amount of heat applied being controlled to maintain the temperature of the castings inside the mold at levels substantially at or above the process control temperature of the metal of the castings without causing excessive or premature degradation of the molds.

[0026] Hereinafter, when reference is made to transport, heating, treating, or otherwise moving or processing the "castings", except where otherwise indicated, it will be understood that such discussion includes both the removal and processing of the castings by themselves, without their molds, and processes wherein the castings remain in their sand molds for heat treatment, mold and core breakdown, and sand reclamation as disclosed in U.S. Patent Nos. 5,294,994; 5,565,046; 5,738,162; 6,217,317; and pending U.S. Patent Application Serial Nos. 09/665,354, filed September 9, 2000, and 10/051,666, filed January 18, 2002, the disclosures of which are incorporated herein by reference in their entirety.

[0027] As illustrated in **FIGS. 1A, 2A, and 2B**, the castings initially are indexed or conveyed by the inlet conveyor **34** (**FIGS. 2A** and **2B**), or conveyors **34** and **34'** (**FIG. 1B**) into a pre-chamber or process temperature control station or module **36**. As indicated in **FIGS. 2A** and **2B**, the process temperature control station or module generally includes a heated inner chamber **37** through which the castings and/or molds with the castings therein are conveyed along their processing path along the heat treatment line on a chain conveyor, rollers, or similar conveying mechanism **38**. The castings enter the chamber

37 at an upstream or inlet end **39**, and exit the chamber **37** through a downstream or outlet end **41** and generally are introduced directly into a heat treatment furnace or station **42** of the heat treatment line **26**. The inlet and outlet ends **39** and **41** of the process temperature control station can be open, or can include doors or similar closure structures, such as indicated at **43** in **FIG. 2B**, to help seal the chamber **37** to avoid undue loss of heat therefrom. Typically, the castings will be fed directly from the process temperature control station **36** into the heat treatment station **42**, with the heat treatment and process temperature control stations being connected to further avoid potential loss of heat and, if desired, allow the sharing of heat.

[0028] The chamber **37** generally is a radiant chamber and includes a series of heat sources **45** mounted there-within, including being positioned along the walls **46** and/or ceiling **47** of the chamber. Typically, multiple heat sources **45** may be used and may include one or more various different types of heat sources or heating elements, including radiant heating sources such as infrared, electromagnetic and inductive energy sources, conductive, convective, and direct impingement type heat sources, such as gas fired burner tubes introducing a gas flame into the chamber. In addition, the side walls and ceiling of the radiant chamber **37** may be formed from or coated with a high temperature radiant material, such as a metal, metallic film or similar material, ceramic, or composite material capable of radiating heat. The radiant coating generally forms a non-stick surface on the walls and ceilings. As the walls and ceiling of the chamber are heated, the walls and ceiling tend to radiate heat toward the castings, and at the same time, the surfaces generally is heated to a temperature sufficient to burn off waste gases and residue such as soot, etc., from the combustion of the binders of the sand molds and/or cores to prevent collection and buildup thereof on the walls and ceiling of the chamber.

[0029] **FIG. 4A** through **FIG. 6B** illustrate various exemplary process temperature control stations. **FIG. 4A** and **FIG. 4B** illustrate a process temperature control station **36** including convection type heat sources **45**. Each of the convection heat sources generally includes one or more nozzles or blowers **51** connected to a source of heated media by conduits **52**. In this aspect, the blowers **51** are arranged or positioned about the ceiling **47** and side walls **46** of the chamber **37** to direct a heated media such as air or other gases, and/or fluids into the chamber and against the castings and/or molds contained therein. The convection blowers generally tend to create a turbulent heated fluid flow about the castings, as indicated by arrows **53**, to apply heat substantially to all sides of the castings and/or sand molds. As a result, the temperature of the castings is maintained substantially at or above the process control temperature of the metal thereof. In addition, where the castings are processed in their sand molds, the application of heat within the process temperature control station tends to heat the molds, raising their

temperature towards a decomposition or combustion temperature at which the binder materials therein start to combust, pyrolyze, or otherwise be driven off.

[0030] In another aspect, the blowers or nozzles **52** are positioned at the front of the process temperature control station adjacent the inlet end thereof, operating at higher velocities and/or temperatures to arrest more quickly the cooling of the castings and/or molds. The nozzles or blowers **52** positioned toward the middle and/or end of the chamber, such as at the outlet of the process temperature control station, can be run at lower temperatures and velocities to prevent complete degradation of the sand molds while allowing the castings to solidify.

[0031] Alternatively, **FIGS. 5A** and **5B** illustrate another exemplary process temperature control station **36'** in which the heat sources **45'** generally comprise one or more radiant heaters **54**, such as infrared heating elements, electromagnetic energy sources, or similar radiant heating sources. In one aspect, the radiant heaters **54** are arranged in multiple positions or sets at desired locations and orientations about the walls and ceiling **46** and **47** of the radiant chamber **37** of the process temperature control station **36**, for example, similar to the arrangement of the convection blowers **51**. As with the convection heat sources **52**, the radiant heaters adjacent the inlet end of the chamber can be operated at higher temperatures to more quickly arrest the cooling of the castings in their sand molds as they enter the process temperature control station. In addition, vacuum blowers, pumps, or exhaust fans/systems **56** may be connected to the radiant chamber through conduits **57** to create a negative pressure within the radiant chamber **37**. In doing so, heat and/or waste gases generated from the burning or combustion of the binder of the sand cores and/or sand molds are drawn from the chamber to prevent overheating of the radiant heater elements.

[0032] Still another exemplary process temperature control station **36''** is provided in **FIGS. 6A** and **6B**, which illustrate a direct impingement type of heating source **45''**. The direct impingement heat source includes a series of burners or nozzles **58** arranged in sets or arrays at selected positions or orientations within the radiant chamber **37**. These burners **58** generally are connected to a fuel source, such as natural gas or the like, by conduits **59**. The nozzles or burner elements of the direct impingement heat source direct and apply heat substantially toward the sides, the top, and the bottom of the castings. The castings thus are heated substantially uniformly, and the sand material released therefrom further can be exposed to direct heating for burning off of the binder material thereof.

[0033] It will be understood by those skilled in the art that different heating sources can be combined for use in the radiant chamber. Further, multiple chambers can be used in series to arrest the cooling of the castings substantially at or above the process control temperature, and thereafter maintain the temperature of the castings prior to entry into the heat treatment station.

[0034] In another aspect, the off-gases generated when pouring the molten metal may be directed into the radiant chamber of the process temperature control station **36**, as indicated by arrows **60** to allow for shared heating and recuperation of energy from the heating of the metal for the castings. In yet another aspect, excess heat generated as a result of the break-down and combustion of the binder for the sand cores of the castings and/or sand molds within the heat treatment station **42** and the heat treatment of the castings also can be routed back to the process temperature control station, as indicated by dashed arrows **61** in **FIG. 1A**, to help heat the interior environment of the radiant chamber of the process temperature control station. Such recapture of waste gases and heat helps reduce the amount of energy required to heat the chamber of the process temperature control station to a desired or necessary temperature to arrest the cooling of the castings passing therethrough.

[0035] As additionally indicated in **FIGS. 2B, 4A, 5A** and **6A**, a collection hopper or chute **62** may be formed along the bottom of the process temperature control station **36**, positioned below the radiant chamber **37** thereof. This hopper **62** generally includes side walls **63** that slope downwardly at the lower ends **64** thereof. The sloping side walls collect sand dislodged from the sand cores of the castings and/or sand molds as the thermal degradation of the binder thereof begins within the process temperature control station. The sand typically is directed downwardly to a collection conveyor **66** positioned below the open lower end of the hopper **62**. Typically, a fluidizing system or mechanism **67** is positioned along lower portions **64** of the walls of the hopper **62**. The fluidizer(s) typically includes burners, blowers, distributors or similar fluidizing units, such as disclosed and claimed in U.S. Patent Nos. 5,294,994; 5,565,046; and 5,738,162, incorporated herein by reference, that apply a flow of a heated media such as air or other fluids to the sand to promote further degradation of the binder to help break up any clumps of sand and binder that may be dislodged from the castings to help reclaim the sand of the sand cores and/or sand molds for the castings in a substantially pure form. The reclaimed sand is collected on the conveyor **66** and conveyed away from the process temperature control station.

[0036] In addition, as illustrated in **FIG. 1A, 2A, 2B, 4A, 5A**, and **6A**, excess heat and waste gases generated by the combustion of the binder materials for the sand cores and/or sand molds of the castings can be collected or drawn out of the radiant chamber **37** of the process temperature control station **36** and routed into the heat treatment station **42** as indicated by arrows **68** in **FIG. 1A**. This channeling of excess heat and waste gases from the process temperature control station into the heat treatment station enables both the potential recouping of heat generated within the chamber of the process temperature control station and the further heating and/or combustion of waste gases resulting from the degradation of the binders of the sand molds and/or cores within

the heat treatment chamber. As indicated in **FIG. 1A**, blowers or similar air distribution mechanisms **69** further generally are mounted along the heat treatment station and typically will draw off waste gases generated during the heat treatment of the castings and the resulting burn-off of the binder materials from the sand cores and/or sand molds of the castings. These waste gases are collected by the blowers and typically are routed to an incinerator **71** for further treating and burning these waste gases to reprocess these gases and reduce the amount of pollution produced by the casting and heat treatment process. It is also possible to utilize filters to further filter the waste gases coming from either the process temperature control station prior to their being introduced into the heat treatment station and/or for filtering gases coming from the heat treatment station to the incinerator.

[0037] The process temperature control station consequently functions as a nesting area in front of the heat treatment station or chamber in which the castings can be maintained or arrested at or above the process control temperature, but below a desired heat treating temperature while they await introduction into the heat treatment station. Thus, the system allows the pouring line or lines to be operated at a faster or more efficient rate without the castings having to sit in a queue or line waiting to be fed into the heat treatment station while exposed to the ambient environment, resulting in the castings cooling down below their process control temperature. The castings thereafter can be fed individually, as indicated in **FIGS. 1A, 1C, 2A, and 2B**, or in batches, as shown in **FIGS. 1B, 1C and 3**, into the heat treatment station **42** for heat treatment, sand core and/or sand mold breakdown and removal, and, in some instances, for sand reclamation.

[0038] The heat treatment station **42 (FIG. 2B)** may be an elongated furnace that includes one or more furnace chambers **75** mounted in series, through which a conveyor **76** is extended for transport of the castings therethrough. Heat sources **77 (FIG. 2A)** including convection heat sources such as blowers or nozzles that apply heated media such as air or other fluids, conduction heat sources such as a fluidized bed, inductive, radiant and/or other types of heat sources may be mounted within the walls and/or ceiling of the chamber **75** for providing heat and optional airflow about the castings in varying degrees and amounts to heat the castings to the proper heat treating temperatures. Such desired heat treating temperatures and heat treatment times will vary according to the type of metal or metal alloy from which the castings are being formed, as will be known to those skilled in the art.

[0039] Examples of various heat treatment furnaces that may be suitable for use with the present invention include those described in U.S. Patent Nos. 5,294,994; 5,565,046; and 5,738,162, the disclosures of which are hereby incorporated by reference. A further example of a heat treatment furnace or station for use with the present invention is illustrated and disclosed in U.S. Pat-

ent No. 6,217,317 and U.S. Patent Application Serial Nos. 09/665,354, filed September 9, 2000, and 10/051,666, filed January 18, 2002, the disclosures of which are likewise incorporated herein by reference in their entirety. Such heat treatment stations or furnaces may include features for reclaiming the sand from the cores and/or molds dislodged during heat treatment of the castings.

[0040] After heat treating, the castings typically are removed from the heat treatment station and moved to a quenching station **78 (FIG. 1A)** for cleaning and further processing. The quenching station typically includes a quench tank having a cooling fluid such as water or other known coolant, or can comprise a chamber having a series of nozzles that apply cooling fluids such as air, water, or similar cooling media. Thereafter, the castings may be removed for further cleaning and processing as needed.

[0041] Another exemplary integrated facility **5** is illustrated in **FIG. 1B**. The facility **5** includes a transfer mechanism **27**, illustrated as a crane or robotic arm **28**, that removes the castings from multiple pouring lines or stations **11** and **11'**. In this example, the pouring lines or stations **11** and **11'** are illustrated as a carousel type system in which the molds are rotated between pouring or casting positions **23** and a transfer point **24**. The transfer mechanism **27** either engages and transports the sand molds with their castings therein, or removes the castings from the molds and transfers the castings to one or more inlet conveyors **34** and **34'** of the heat treatment unit **26**. The castings can be moved individually into and through the process temperature control station **36** for introduction into the heat treatment station **42**, or can be collected in baskets or conveying trays **79** for processing the castings in batches.

[0042] In the exemplary system **5** illustrated in **FIG. 1B**, the process temperature control station **36** generally is formed as an elongated radiant tunnel **81** defining a chamber **82** through which the castings and/or sand molds with castings contained therein are moved or conveyed. The radiant tunnel **81** includes a series of heat sources **83** mounted therealong, such as the various different heating sources **45, 45', and 45''** discussed above with respect to the embodiments of **FIGS. 2A, 2B, and 4A through 6B**. Typically, the walls **84** and ceiling of the chamber **82** of the radiant tunnel **81** are formed from or are coated with a refractory material so that the heat generated within the radiant tunnel is reflected and/or radiated towards the castings. The castings may be collected and/or deposited into a basket **79** or similar conveying tray in a collection station **86** at the end of the radiant tunnel **81**. Such baskets **79** or trays may be used to contain the casting and/or molds through the heat treatment station **42**. The castings alternatively may be collected within the baskets for batch processing in the heat treatment station before the castings are passed through the radiant chamber or tunnel of the process temperature control station **36**, as indicated in **FIG. 1C** and **FIG. 3**.

[0043] Still another exemplary integrated facility **5** ac-

cording to the present invention is illustrated schematically in **FIG. 1C**. In this embodiment, the process temperature control station **36**, shown as an elongated radiant tunnel or chamber **81** (as discussed with respect to **FIG. 1B**), connects or feeds into a chill removal station **87**. The chill removal station **87** is in communication with and feeds the castings into the heat treatment station **42**. Typically, the castings will be moved and heat-treated or processed while still contained within their semi-permanent or sand molds, which further include "chills" mounted therein. Chills generally are metal plates, typically formed from steel or similar material, having a design relief for forming desired design features of a casting surface and are placed within the molds at or prior to the pouring of the molten metal material therein. The chills consequently must be removed prior to heat treatment of the castings or reclamation of the chills and reuse. After passing through the chamber **82** of the radiant tunnel **81** during which the combustion of the sand molds generally will at least partially have begun, the chills easily can be removed without significantly delaying the movement of the molds and castings into the heat treatment station **42**. Following the removal of the chills in the chill removal station, the molds with their castings within generally are passed directly into the heat treatment station for heat treatment, sand core and sand mold breakdown, and sand reclamation.

[0044] **FIG. 1D** illustrates yet another exemplary facility according to the present invention. In this embodiment, the castings generally can be removed from their molds and transported to an inlet conveyor **90** or **91** for being fed directly into one or more heat treatment furnaces or stations **92**. Alternatively, if the castings are being formed within sand molds, the entire mold will be transported from the transfer point **28** to one of the inlet conveyors **90** or **91**. As indicated in **FIG. 1D**, the removal of the castings from their molds and subsequent transfer of the castings, or the removal of the molds with the castings remaining therein from the pouring station and transport to the heat treatment stations **92**, generally can be done by the same transport mechanism or manipulator.

[0045] In this embodiment, a heat source **93** is mounted to the transfer mechanism **27** for applying heat directly to the castings and/or sand molds as the castings are moved from the transfer points of the pouring lines to one of the inlet conveyors **90** or **91** for a heat treatment furnace **92**. The heat source, as discussed above, may include a radiant energy source such as infrared or electromagnetic emitters, inductive, convective, and/or conductive heat sources, or other types of heat sources as will be apparent to those skilled in the art. The heat from the heat source **93** mounted to the transfer mechanism **27** is directed at one or more surfaces such as the top and/or sides of the castings or molds as the castings or molds are transferred to the inlet conveyor to arrest the cooling of the castings and/or molds, and thus maintain the temperature of the casting metal substantially at or above the process control temperature of the metal.

[0046] Additional heat sources **94** may be mounted above or adjacent the inlet conveyors **90** and **91** as indicated in **FIG. 1D**, or along the paths of travel of the transfer mechanism as indicated by arrows **96**, **96'**, **97**, and **97'** to maintain the temperature of the castings. In addition, blowers, fans or other similar air movement devices (not shown) also can be positioned adjacent the transfer mechanism or along its path of movement **96**, **96'**, **97**, and **97'** for applying a heated media, such as air or other heated fluids, thereto. The blowers distribute the heat applied to the casting and/or mold to minimize uneven heating or cooling of the castings during transfer from the pouring line to the heat treatment furnace(s) **92**. The use of such heat sources or elements mounted on the transfer mechanism and, in some arrangements, along the path of travel of the castings, thus performs the function of the process temperature control station to help arrest cooling and maintain the castings substantially at or above the process control temperature.

[0047] Still another aspect of the present invention is illustrated in **FIG. 3**. In this example, the castings and/or sand molds are placed directly within collection baskets or conveying tray **100** by the transfer mechanism **27** and fed into the process temperature control station for a batch heating process. In such an arrangement, the castings **12** generally will be loaded into a series of compartments or chambers **101** of the conveying tray **100**, with the castings located in known, indexed positions for directed application of heat for de-coring and other functions as the castings are moved into and through a process temperature control station **102** and heat treatment station **103**, as disclosed and claimed in U.S. Patent Application Serial No. 09/665,354, filed September 9, 2000, incorporated herein by reference in its entirety. In this embodiment, the trays **100** typically will be indexed into and out of the chamber **104** of the process temperature control station as indicated by arrows **106** and **106'** as the castings are loaded therein. As a result, the exposure of the castings to the ambient environment, which would allow them to cool down below their process control or critical temperature, is minimized while the various other compartments **101** of the tray are loaded with the remaining castings of the batch.

[0048] In addition, as indicated in **FIG. 3**, it is further possible to provide directed heat sources **107** for each of the compartments **101** of the trays **100**. For example, as a first compartment **101'** is loaded with a casting **12'** and indexed into the process temperature control station **102**, a first heat source **107'** directs heat toward the casting and/or sand mold within that particular chamber. Thereafter, as successive castings or molds are loaded into the other chambers or compartments of the basket, additional heat sources **107** directed to those compartments are engaged. Thus, the heating of the chamber **104** of the process temperature control station can be limited or directed to specific regions or zones as needed for more efficient heating of the castings.

[0049] As **FIG. 3** further illustrates, a series of blowers

or other similar air movement devices **108** may be mounted to the roof of the process temperature control station for drawing off waste gases generated by the degradation of the sand core and/or sand mold binder materials. The gases and additional waste heat then may be directed via conduits **109** to the heat treatment station **103** for heat reclamation and pollution reduction, and to help prevent the collection of combustible wastes on the sides and ceiling of the chamber of the process temperature control station **102**.

[0050] Accordingly, it will be readily understood by those persons skilled in the art that, in view of the above detailed description of the invention, the present invention is susceptible of broad utility and application. Many adaptations of the present invention other than those herein described, as well as many variations, modifications, and equivalent arrangements will be apparent from or reasonably suggested by the present invention and the above detailed description thereof, without departing from the substance or scope of the present invention.

[0051] While the present invention is described herein in detail in relation to specific aspects, it is to be understood that this detailed description is only illustrative and exemplary of the present invention and is made merely for purposes of providing a full and enabling disclosure of the present invention. The detailed description set forth herein is not intended nor is to be construed to limit the present invention or otherwise to exclude any such other embodiments, adaptations, variations, modifications, and equivalent arrangements of the present invention, the present invention being limited solely by the claims appended hereto and the equivalents thereof.

Claims

1. A system for forming and heat treating a metal casting, the system comprising: a process control temperature station positioned upstream from a heat treatment station, said process s temperature control station comprising a temperature sensing device in communication with a heat source, wherein said temperature sensing device and said heat source communicate to maintain the temperature of the casting at or above a process control temperature for the metal of the casting.
2. The system of claim 1, wherein said process control temperature station further comprises a controller in communication with said temperature sensing device and said heat source, said controller controlling the amount of heat applied to the casting to maintain the temperature of the castings at or above the process control temperature for the metal of the casting.
3. The system of claim 1, wherein said heat source applies heat to the casting sufficient to arrest the cooling of the casting without heating the casting above the

heat treatment temperature for the metal of the casting.


4. The system of claim 1, wherein the process control temperature is less than the heat treatment temperature for the metal of the casting.
5. The system of claim 1, wherein the process control temperature is the temperature below which for every one minute of time the temperature of the casting decreases, more than one minute of heat treatment is required to attain the desired properties of the casting.
6. The system of claim 1, wherein the process control temperature is the temperature below which for every one minute of time the temperature of the casting decreases, at least about four minutes of heat treatment is required to attain the desired properties of the casting.
7. The system of claim 1, wherein the metal is an aluminum/copper alloy and the process control temperature is from about 400°C to about 470°C or wherein the metal is an iron alloy and the process control temperature is from about 1000°C to about 1300°C.
8. A system for forming and heat treating a metal casting, the system comprising: a heat treatment station including a heat treatment furnace having an entry zone for a casting; a temperature measuring device within said entry zone; and a transfer mechanism in communication with said temperature measuring device, wherein upon detection of a rejection temperature by said temperature measuring device, said transfer mechanism removes the casting prior to entry into said furnace.
9. The system of claim 8, wherein the rejection temperature is from about 10°C to about 20°C below a process control temperature for the metal of the casting, where the process control temperature is the temperature below which for every one minute of time the temperature of the casting decreases, more than one minute of heat treatment is required to attain the desired properties of the casting or wherein the rejection temperature is from about 10°C to about 20°C below the temperature of the heat treatment furnace.
10. An integrated facility for forming and heat treating a metal casting, comprising: a pouring station for pouring a molten metal into a mold to form a casting; a process control temperature station downstream from said pouring station, said process control temperature station comprising a temperature sensing device in communication with a heat source and a transfer mechanism; and a heat treatment furnace upstream from said process temperature control sta-

tion, wherein said temperature sensing device and said heat source are adapted to maintain the temperature of the casting at or above a process control temperature for the metal of the casting, and wherein upon receipt of a rejection signal from said temperature sensing device, said transfer mechanism removes the casting prior to entry into said furnace.

11. The integrated facility of claim 10, wherein said process control temperature station further comprises a controller in communication with said temperature sensing device and said heat source, said controller controlling the amount of heat applied to the casting to maintain the temperature of the castings at or above the process control temperature for the metal of the casting.
12. The integrated facility of claim 10, wherein said transfer mechanism receives the rejection signal when the temperature of the casting is from about 10°C to about 20°C below: (a) the process control temperature for the metal of the casting, where the process control temperature is the temperature below which for every one minute of time the temperature of the casting decreases, more than one minute of heat treatment is required to attain the desired properties of the casting, or (b) the temperature of the heat treatment furnace.
13. A method of forming a casting having a reduced heat treatment time comprising: pouring a molten metal into a mold to form a casting; monitoring the temperature of the casting; comparing the temperature of the casting to a predetermined process control temperature; applying heat to the casting if the temperature of the casting is less than the process control temperature; placing the casting into a heat treatment furnace; and heat treating the casting, wherein applying heat to the casting comprises applying sufficient heat to the casting to allow the molten metal to solidify while the temperature of the casting is maintained at or above said process control temperature, and wherein the process control temperature is the temperature below which for every one minute of time the temperature of the casting decreases, more than one minute of heat treatment is required to attain the desired properties of the casting.
14. A method of forming and heat treating a casting comprising: pouring a molten metal into a mold to form a casting; monitoring the temperature of the casting; comparing the temperature of the casting to a predefined rejection temperature and, if the temperature is equal to or less than the rejection temperature, rejecting the casting; comparing the temperature of the casting to a predetermined process control temperature and, if the temperature is greater than the rejection temperature but less the process control

temperature, applying heat to the casting; and heat treating the casting.

15. The method of claim 14, wherein the rejection temperature is from about 10°C to about 20°C below a process control temperature for the metal of the casting, where the process control temperature is the temperature below which for every one minute of time the temperature of the casting decreases, more than one minute of heat treatment is required to attain the desired properties of the casting, or wherein the rejection temperature is from about 10°C to about 20°C below the temperature of the heat treatment furnace.

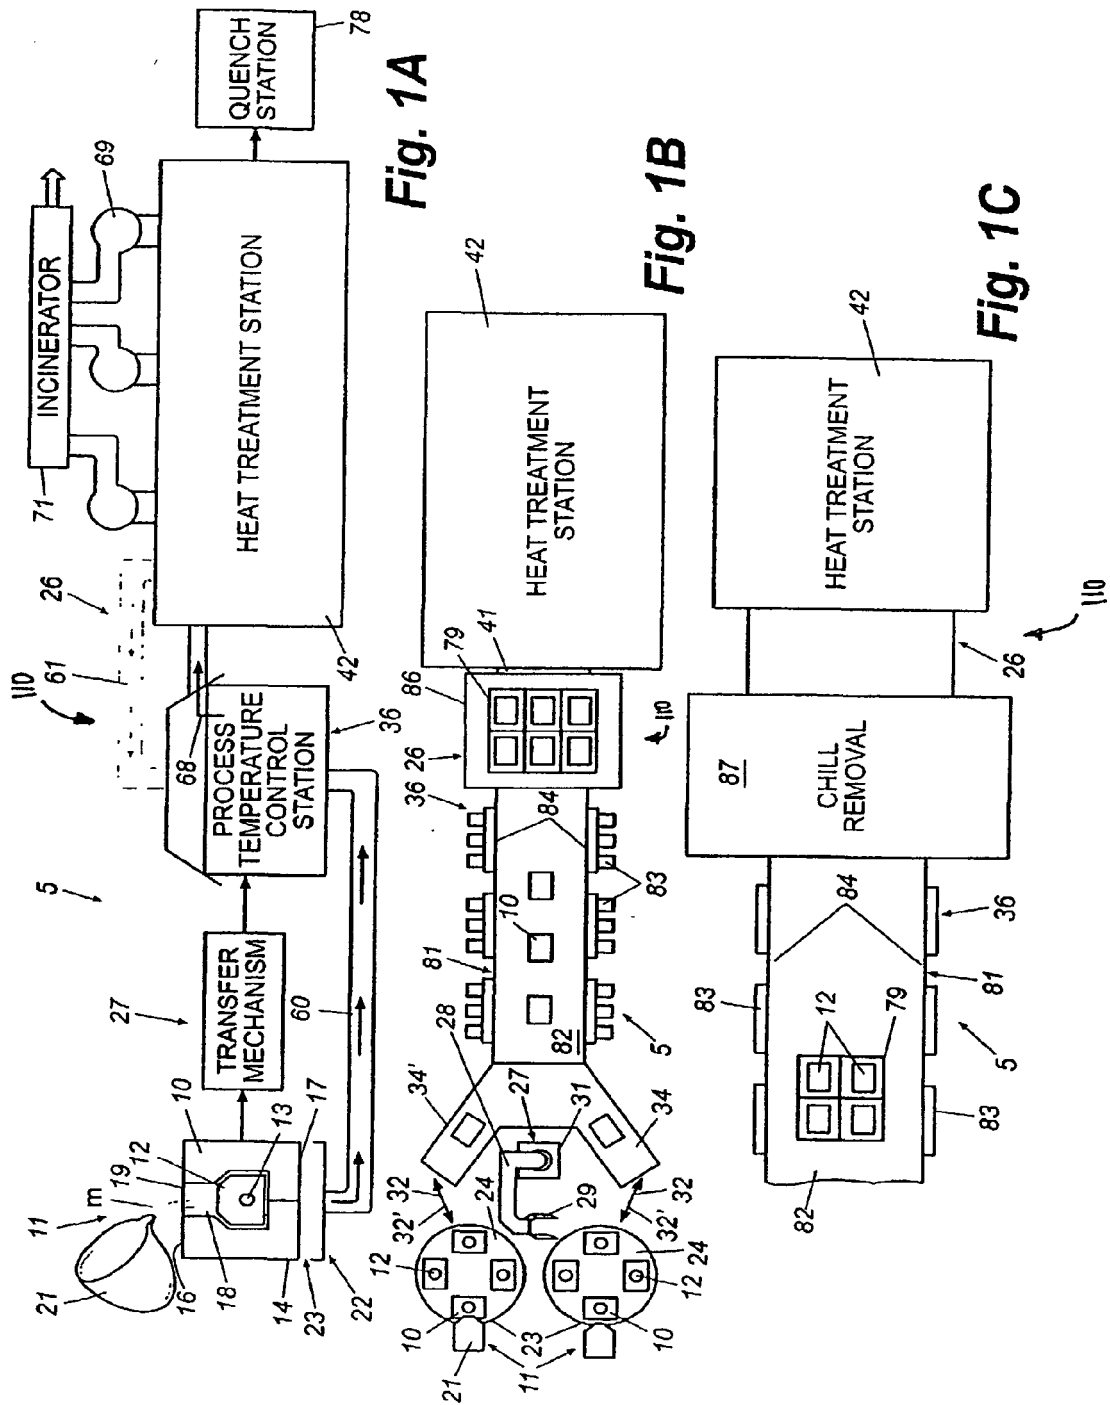

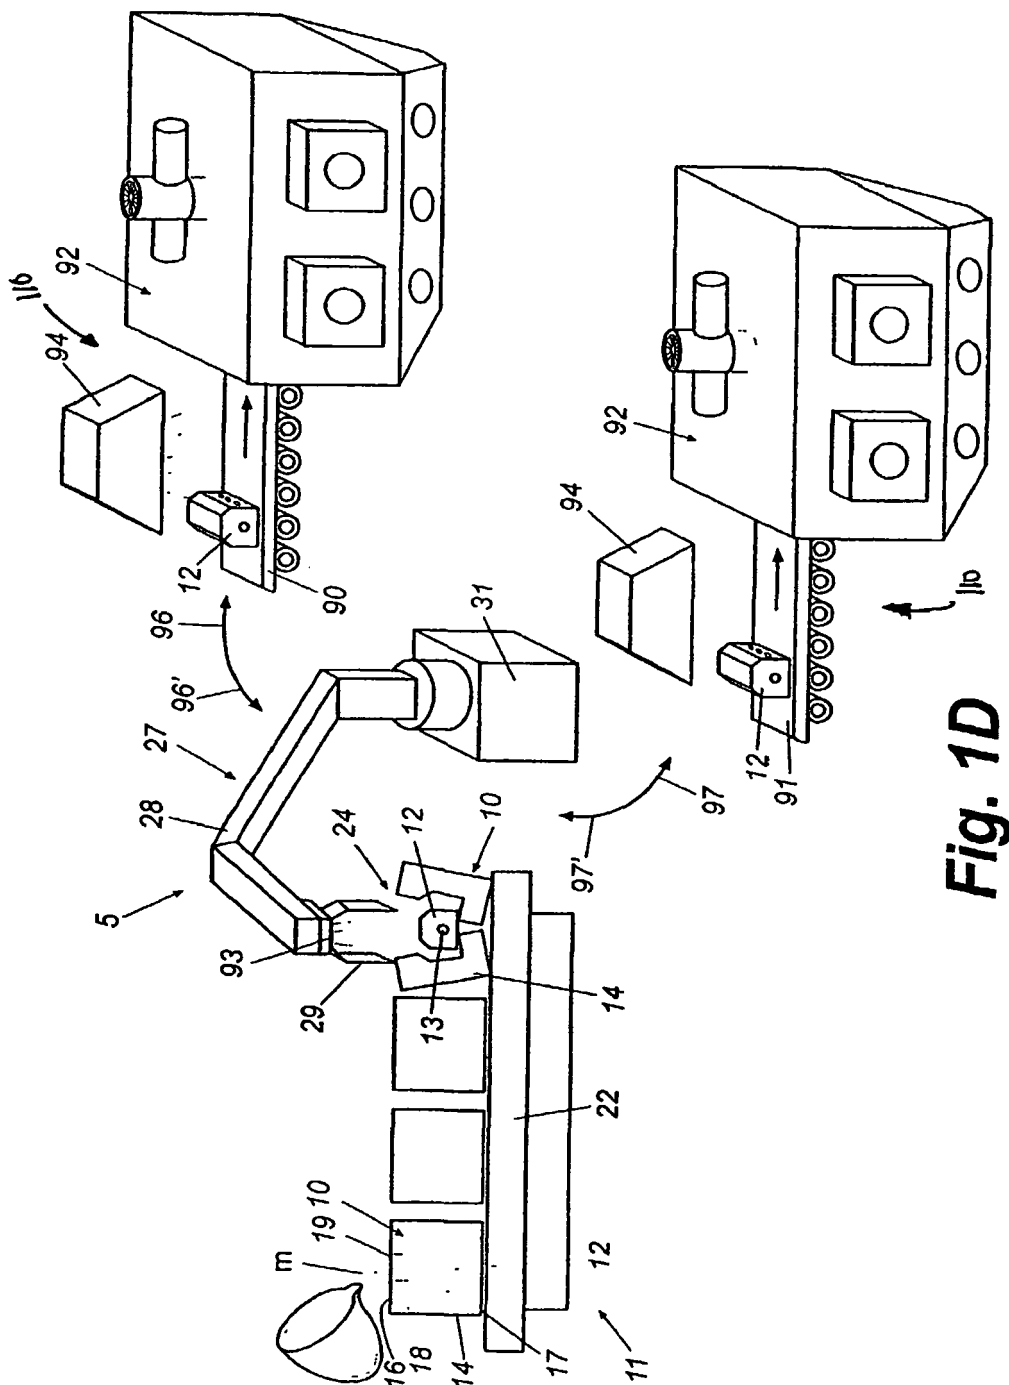
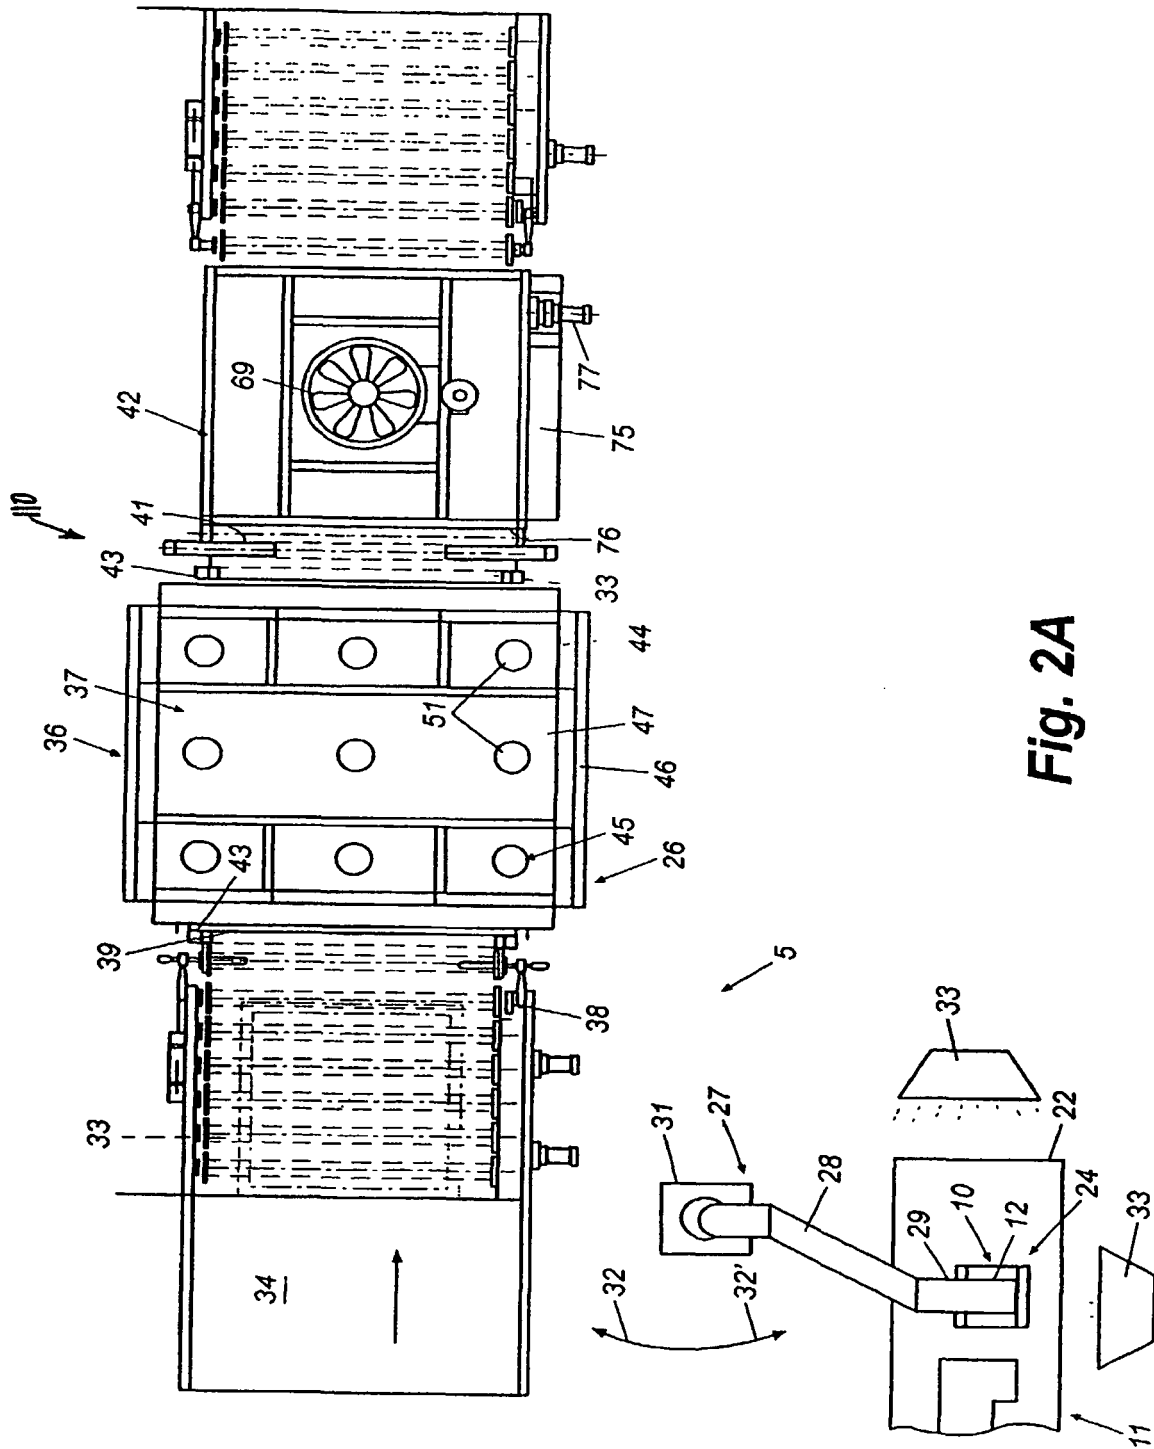


Fig. 1D



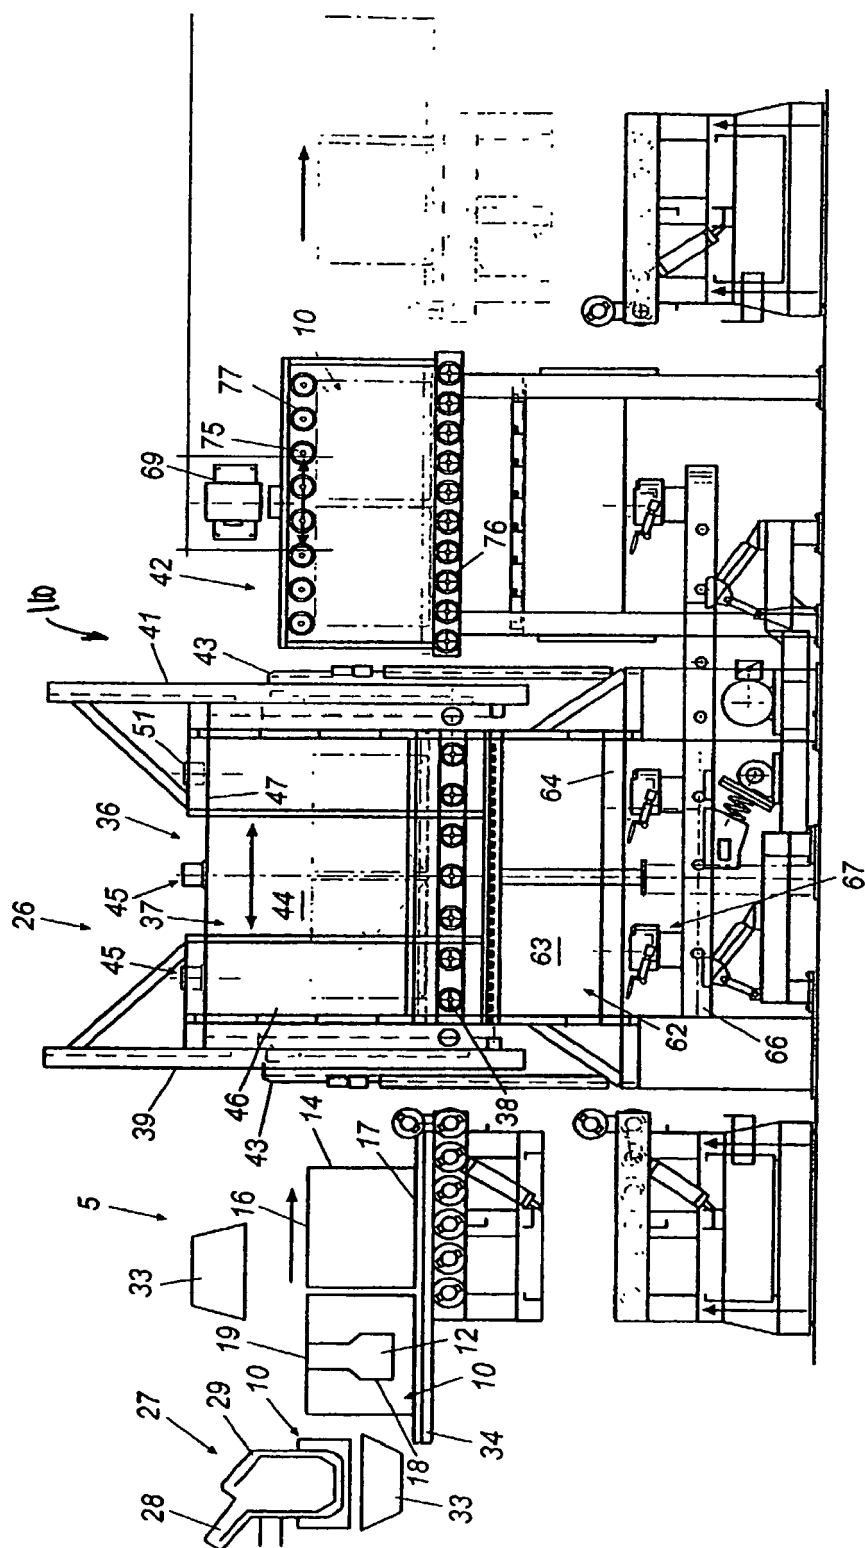
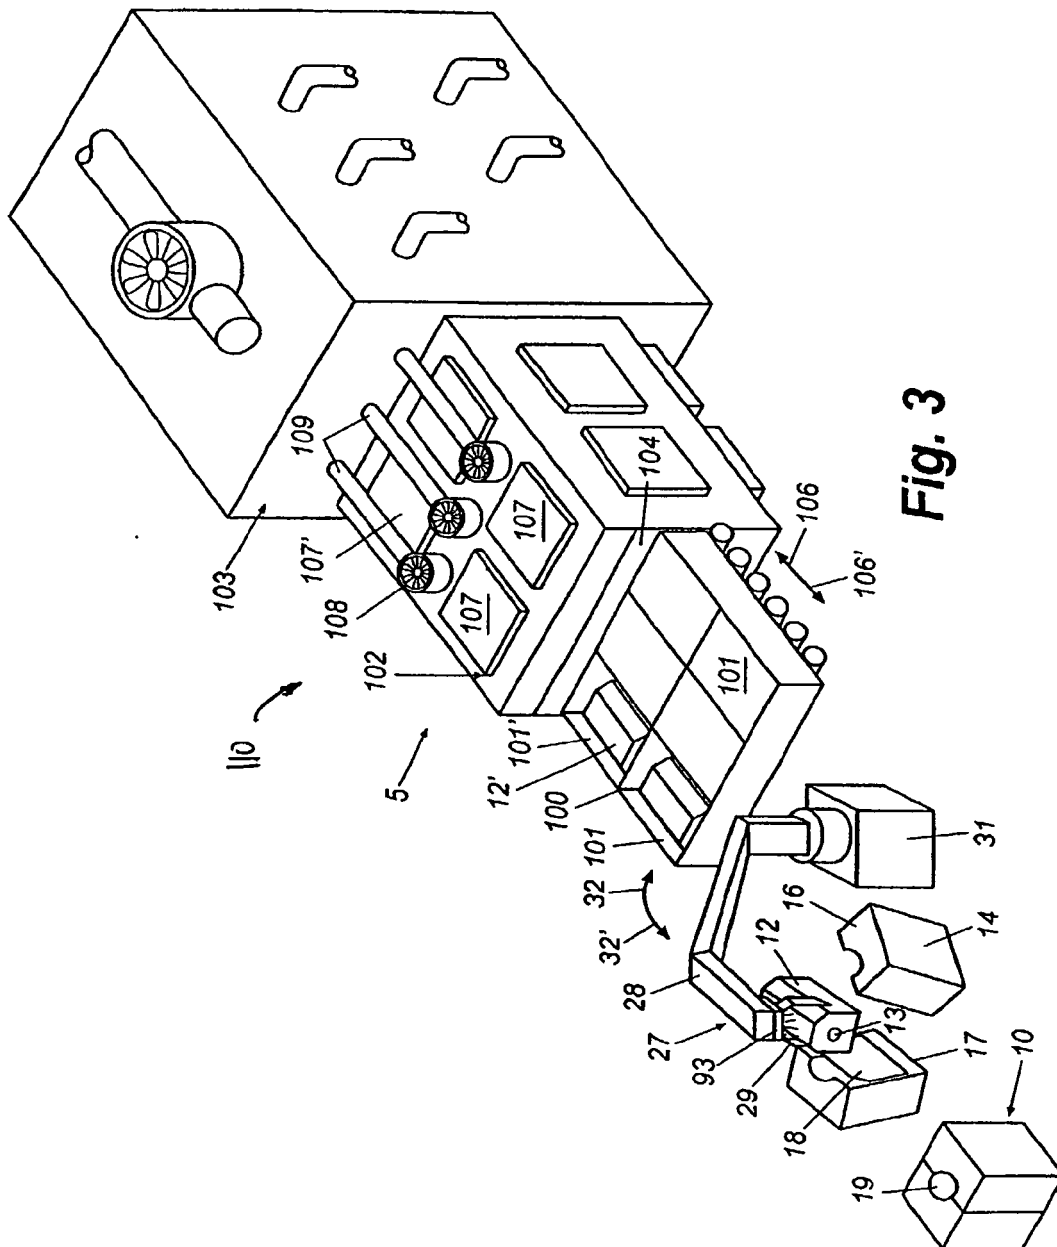


Fig. 2B



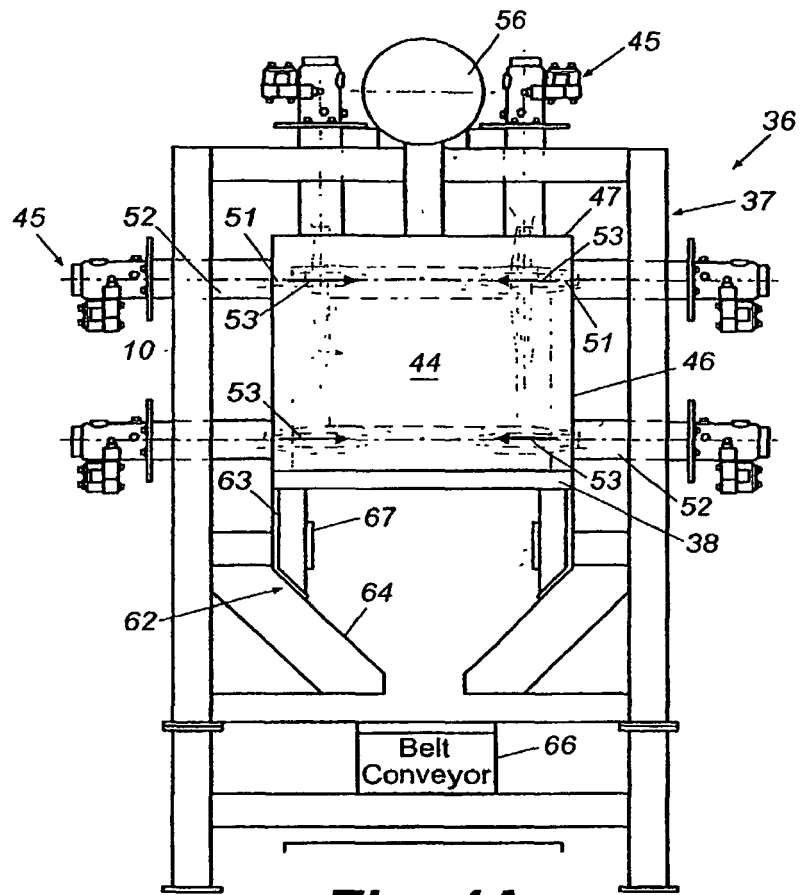


Fig. 4A

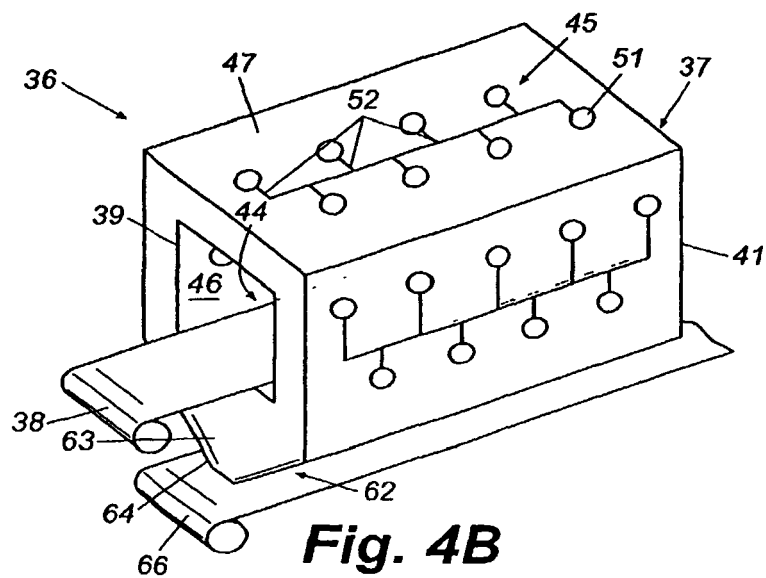


Fig. 4B

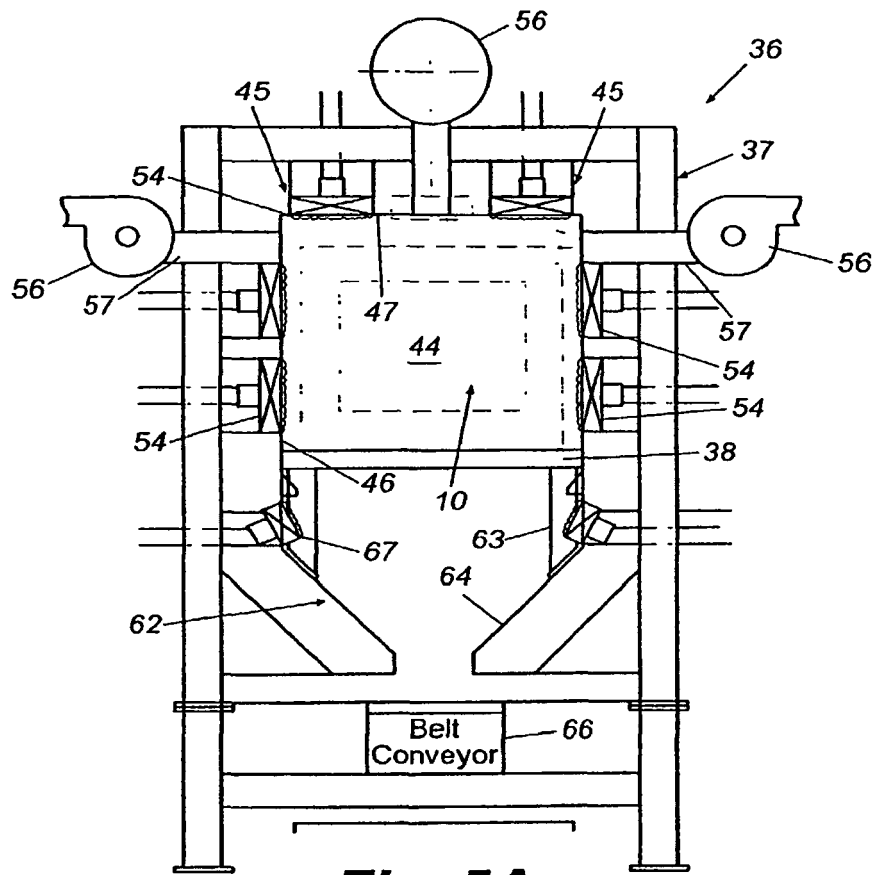


Fig. 5A

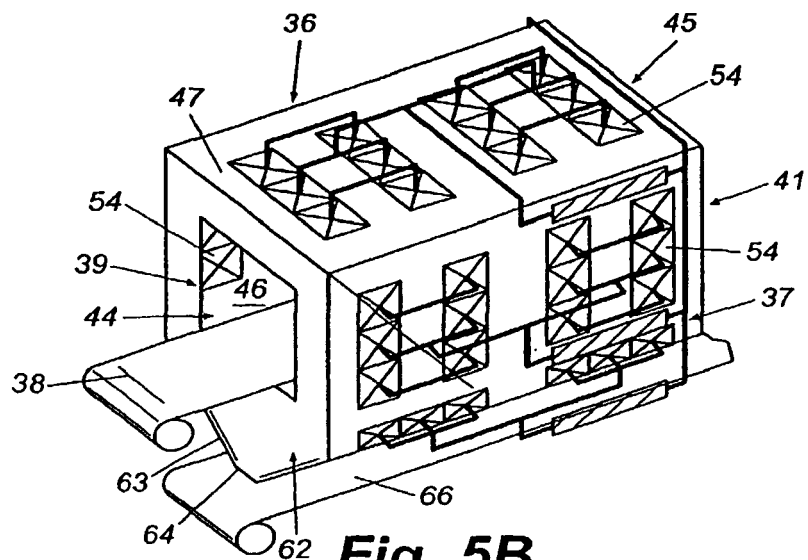


Fig. 5B

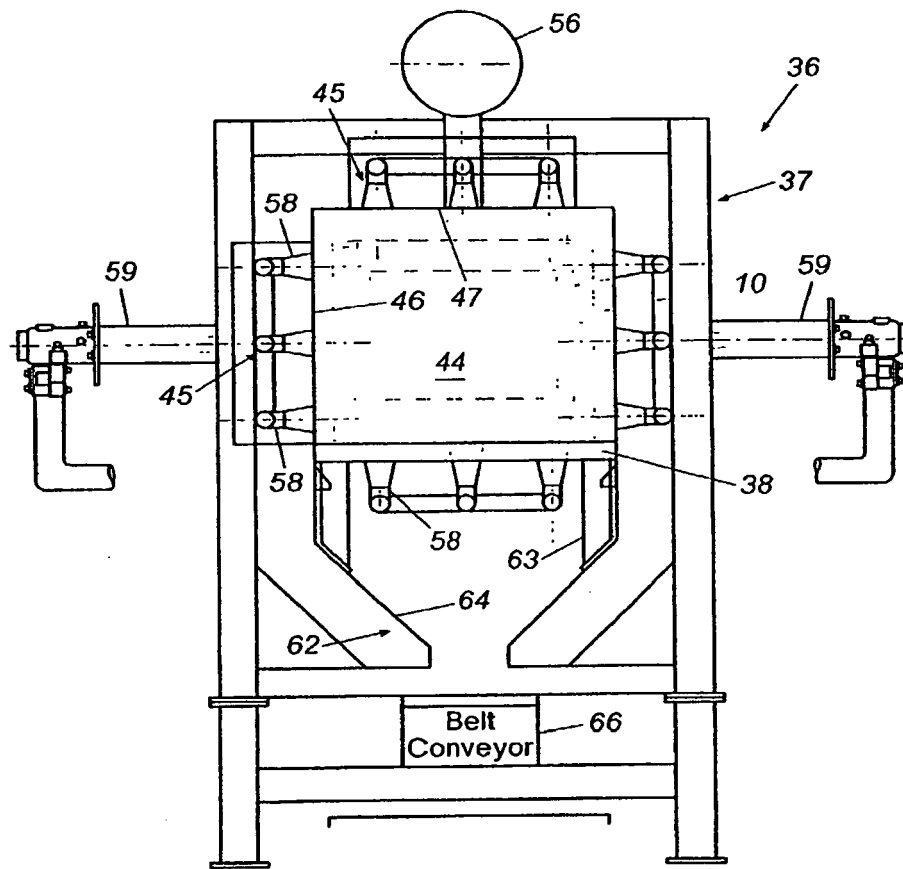


Fig. 6A

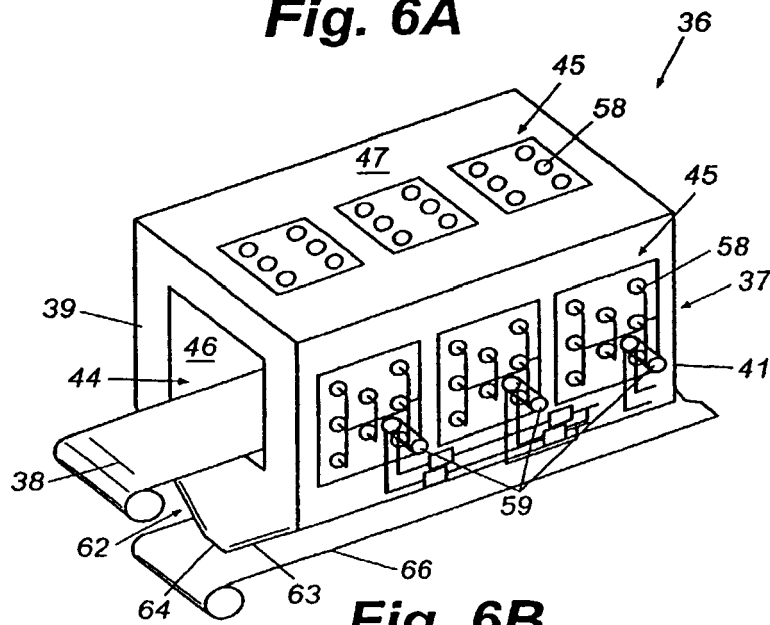


Fig. 6B

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5294994 A [0026] [0035] [0039]
- US 5565046 A [0026] [0035] [0039]
- US 5738162 A [0026] [0035] [0039]
- US 6217317 A [0026]
- US 66535400 A [0026] [0039] [0047]
- US 10051666 A [0026] [0039]
- US 6217317 B [0039]