



(11) **EP 2 319 945 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
13.03.2013 Bulletin 2013/11

(21) Application number: **10197136.4**

(22) Date of filing: **01.06.2005**

(51) Int Cl.:
C21D 11/00 ^(2006.01) **C21D 9/00** ^(2006.01)
B22D 46/00 ^(2006.01) **F27B 9/02** ^(2006.01)
F27B 9/20 ^(2006.01) **F27D 21/00** ^(2006.01)
F27B 9/40 ^(2006.01) **F27D 19/00** ^(2006.01)
C22F 1/00 ^(2006.01)

(54) **Integrated metal processing facility**
Integrierte Metallbehandlungsanlage
Installation de traitement de métal intégrée

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR**

(30) Priority: **02.06.2004 US 576107 P**

(43) Date of publication of application:
11.05.2011 Bulletin 2011/19

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
05756565.7 / 1 766 100

(73) Proprietor: **Consolidated Engineering Company,
Inc.
Kennesaw, GA 30144 (US)**

(72) Inventors:
• **Crafton, Scott, P.
Marietta, GA 30064 (US)**

- **Crafton, Paul, M.
Kennesaw, GA 30144 (US)**
- **Lewis, James, L., Jr.
Calabash, NC 28467 (US)**
- **French, Ian
Kennesaw, GA 30144 (US)**

(74) Representative: **Hofstetter, Schurack & Partner
Patent- und Rechtsanwälte
Balanstrasse 57
81541 München (DE)**

(56) References cited:
WO-A-02/063051 US-A- 4 419 143
US-A- 5 306 359 US-A- 5 536 337
US-A1- 2004 035 546

- **LAMPMAN S.R. & ZORC T.B.: "ASM HANDBOOK
- HEAT TREATING, VOL.4", 1991, ASM
INTERNATIONAL, USA, XP002357244, * page 529
- page 541 ***

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 319 945 B1

Description

BACKGROUND

[0001] Traditionally, in conventional processes for forming metal castings, a mold, such as a metal die or sand mold having an interior chamber with the exterior features of a desired casting defined therein, is filled with a molten metal. A sand core that defines interior features of the casting is received and or positioned within the mold to form the interior detail of the casting as the molten metal solidifies about the core. After the molten metal of the casting has solidified, the casting generally is moved to a treatment furnace(s) for heat treatment of the castings, removal of sand from the sand cores and/or molds, and other processing as required. The heat treatment processes condition the metal or metal alloys of the castings to achieve the desired physical characteristics for a given application.

[0002] Typically, during the transfer of the castings from the pouring station to a heat treatment station, and especially if the castings are allowed to sit for any appreciable amount of time, the castings may be exposed to the ambient environment of the foundry or metal processing facility. As a result, the castings tend to rapidly cool down from a molten or semi-molten temperature. While some cooling of the castings is necessary to allow the castings to solidify, the more the temperature of the castings drops, and the longer the castings remain below a process critical temperature (also referred to herein as the "process control temperature") of the castings, the more time is required to heat the castings up to a desired heat treatment temperature and to heat treat the castings. For example, it has been found that for certain types of metals, for every minute of time that the casting drops below its process control temperature, at least about 4 minutes of extra heat treatment time is required to achieve the desired results. Thus, even dropping below the process control temperature for the metal of the casting for as few as ten minutes may require at least about 40 minutes of additional heat treatment time to achieve the desired physical properties. Typically, therefore, the castings are heat treated for 2 to 6 hours, in some cases longer, to achieve the desired heat treatment effects. This results in greater utilization of energy and, therefore, greater heat treatment costs.

[0003] There additionally now are heat treatment systems that have been developed to accomplish more rapid heat treatment of metal castings. For example, WO 02/063051 A shows a heat treatment system in which the castings are subjected to heating sufficient to arrest cooling of the castings at or above a process control temperature for the metal thereof prior to entry of the castings into the heat treatment station, and prior to the beginning of a heat treatment operation for the castings.

SUMMARY

[0004] The present invention is directed to an integrated system for forming and heat treating a metal casting with the features of claim 1. Especially, the inventive system comprises a process control temperature station positioned upstream from a heat treatment station, said process temperature control station comprising a temperature sensing device in communication with a heat source, wherein said temperature sensing device and said heat source communicate to maintain the temperature of the casting at or above a process control temperature for the metal of the casting. Further, said process control temperature station comprises a controller in communication with said temperature sensing device and said heat source, said controller controlling the amount of heat applied to the casting to maintain the temperature of the castings at or above the process control temperature for the metal of the casting. The present invention is further directed to a method of forming a casting with the steps of claim 10.

[0005] Briefly described, the present invention generally comprises an integrated metal processing facility for pouring, forming, heat treating, and further processing castings formed from metals or metal alloys. The integrated metal processing facility generally includes a pouring station at which a molten metal such as aluminum or iron, or a metal alloy, is poured into a mold or die, such as a permanent metal mold, semi permanent mold, or a sand mold. The molds then are transitioned from a pouring or casting position of the pouring station to a transfer position, where the casting is either removed from its mold or transferred to a heat treatment line. The transfer mechanism typically includes a robotic arm, crane, overhead hoist or lift, pusher, conveyor, or similar conveying mechanism. The same mechanism also may be used to remove the castings from their molds and transfer the castings to the heat treatment line. During this transition from the pouring station to the transfer position and/or to the heat treatment line, the molten metal of the castings is permitted to cool to an extent sufficient to form the castings.

[0006] The heat treatment line or unit generally includes a process temperature control station and a heat treatment station or furnace typically having one or more furnace chambers and, optionally, a quench station generally located downstream from the heat treatment station. The process temperature control station generally may be an elongated chamber or tunnel through which the castings are received prior to their introduction into the heat treatment station. The chamber may include a series of heat sources, such as radiant heaters, infrared, inductive, convection, conduction, or other types of heating elements.

[0007] The walls and ceiling of the process temperature control station also may include a radiant material that tends to radiate or direct heat toward the castings and/or molds as they move through the chamber. Alter-

natively, a series of heat sources, including radiant heating elements such as infrared and inductive heating elements, convection, conduction, or other types of heat sources may be used to direct heat at the castings or molds as the castings or molds are transferred from the pouring station to the heat treatment station. In addition, a heating element or heat source can be mounted directly to the transfer mechanism to heat the castings and/or the sand molds.

[0008] As the castings and/or the molds with the castings therein pass through the process temperature control station, cooling of the castings is arrested at or above a process control temperature. The process control temperature generally is a temperature below the solution heat treatment temperature required for the metal of the castings, such that the castings are cooled to a sufficient amount or extent to enable them to solidify, but below which the time required to raise the castings up to their solution heat treatment temperature and thereafter heat-treat the castings is increased exponentially. The castings are maintained at or above their process control temperature until the castings enter the heat treatment station.

[0009] By arresting the cooling of the castings and thereafter maintaining the castings at a temperature that is substantially at or above the process control temperature for the metal of the castings, the time required to heat treat the castings can be significantly reduced. Accordingly, the output of the pouring station for the castings can be increased and the overall processing and heat treatment time for the castings can be reduced.

[0010] Prior to entry into the heat treatment furnace, the castings pass through an entry zone. The temperature of the casting may be monitored to determine whether the temperature has dropped below a pre-set or pre-defined rejection temperature. If the temperature of the casting is equal to or less than the rejection temperature, the casting may be removed from the heat treatment line using any suitable means. If the casting is accepted, it proceeds to the heat treatment furnace for heat treatment.

[0011] The heat treatment unit may include features that assist with the removal and/or reclamation of sand core and/or mold. Thereafter, the castings may undergo additional processing, for example, quenching, aging, and/or further heat treatment.

[0012] Various objects, features, and advantages of the present invention will become apparent to those skilled in the art upon a review of the following detailed description when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013]

FIG. 1A is a schematic illustration of an exemplary metal processing system according to various as-

pects of the present invention;

FIG. 1B is a schematic illustration of another exemplary metal processing system illustrating the collection and transfer of castings from multiple pouring stations to a heat treatment unit according to various aspects of the present invention;

FIG. 1C is a schematic illustration of yet another exemplary metal processing system with chill removal from the molds according to various aspects of the present invention;

FIG. 1D is a schematic illustration of still another exemplary system according to various aspects of the present invention, illustrating a transfer mechanism including a heating device;

FIG. 2A is a top plan view of an exemplary process temperature control station and heat treatment station according to various aspects of the invention;

FIG. 2B is a side elevation view of the process temperature control station and heat treatment station depicted in **FIG. 2A**;

FIG. 3 is a perspective view of an exemplary batch processing system according to various aspects of the present invention;

FIGS. 4A and **4B** illustrate an exemplary process temperature control station including a convection heat source according to various aspects of the present invention;

FIGS. 5A and **5B** illustrate another exemplary process temperature control station including a direct heat/impingement heat source according to various aspects of the present invention; and

FIGS. 6A and **6B** illustrate another exemplary process temperature control station including a radiant heat source according to various aspects of the present invention.

DETAILED DESCRIPTION

[0014] Referring now in greater detail to the drawings in which like numerals refer to like parts throughout the several views, **FIG. 1A** through **FIG. 3** schematically illustrate an exemplary integrated metal processing facility or system **5** for and method of processing metallurgical castings. Metal casting processes generally are known to those skilled in the art and a traditional casting process will be described only briefly for reference purposes. It will be understood by those skilled in the art that the present invention can be used in any type of casting process, including metal casting processes for forming aluminum, iron, steel, and/or other types of metal and metal alloy castings. The present invention thus is not and should not be limited solely for use with a particular casting process or a particular type or types of metals or metal alloys.

[0015] As illustrated in **FIG. 1A**, a molten metal or metallic alloy **M** typically is poured into a die or mold **10** at a pouring or casting station **11** for forming a casting **12**, such as a cylinder head, engine block, or similar cast

part. A casting core **13** formed from sand and an organic binder, such as a phenolic resin, is received or placed within the mold **10** to create hollow cavities and/or casting details or core prints within the casting. Each of the molds alternatively can be a permanent mold or die, typically formed from a metal such as steel, cast iron, or other material as is known in the art. Such molds may have a clam-shell style design for ease of opening and removal of the casting therefrom. Alternatively still, the molds can be "precision sand mold" type molds and/or "green sand molds", which generally are formed from a sand material such as silica sand or zircon sand mixed with a binder such as a phenolic resin or other binder as is known in the art, similar to the sand casting cores **13**. The molds further may be semi-permanent sand molds, which typically have an outer mold wall formed from sand and a binder material, a metal such as steel, or a combination of both types of materials.

[0016] It will be understood that the term "mold" will be used hereafter to refer generally to all types of molds as discussed above, including permanent or metal dies, semi-permanent and precision sand mold type molds, and other metal casting molds, except where a particular type mold is indicated. It further will be understood that in the various embodiments discussed below, unless a particular type of mold and/or heat treatment process is indicated, the present invention can be used for heat treating castings that have been removed from their permanent molds, or that remain within a sand mold for the combined heat treatment and sand mold break-down and sand reclamation.

[0017] As shown in **FIG. 1A**, each of the molds **10** generally includes side walls **14**, an upper wall or top **16**, and a lower wall or bottom **17** that collectively define an internal cavity **18** in which the molten metal is received and formed into the casting **12**. A pour opening **19** generally is formed in the upper wall or top **16** of each mold and communicates with the internal cavity for passage of the molten metal through each mold and into the internal cavity **18** at the pouring station **11**. As indicated in **FIGS. 1A** through **1C**, the pouring station **11** generally includes a ladle or similar mechanism **21** for pouring the molten metal **M** into the molds. The pouring station **11** further includes a conveyor **22**, such as a carousel, piston, indexing, or similar conveying mechanism that moves one or more molds from a pouring or casting position **23**, where the molten metal is poured into the molds, to a transfer point or position **24**, at which the castings are removed from their molds, or at which the molds with their castings therein are transferred from the pouring station to a heat treatment unit **26** or line for heat treatment. After the molten metal is poured into the mold, the mold is conveyed to the transfer position, where the metal is allowed to cool to a desired extent or temperature within the die as needed for the metal to solidify into the casting. The casting then is heat treated at a desired heat treatment temperature.

[0018] It has been discovered that, as the metal of the

casting is cooled down, it reaches a temperature or range of temperatures referred to herein as the "process control temperature" or "process critical temperature", below which the time required to both raise the castings to the heat treating temperature and perform the heat treatment is significantly increased. It will be understood by those skilled in the art that the process control temperature for the castings being processed by the present invention will vary depending upon the particular metal and/or metal alloys being used for the castings, the size and shape of the castings, and numerous other factors.

[0019] In one aspect, the process control temperature may be about 400°C for some alloys or metals. In another aspects, the process control temperature may be from about 400°C to about 600°C. In another aspect, the process control temperature may be from about 600°C to about 800°C. In yet another aspect, the process control temperature may be from about 800°C to about 1100°C. In still another aspect, the process control temperature may be from about 1000°C to about 1300°C for some alloys or metals, for example, iron. In one particular example, an aluminum/copper alloy may have a process control temperature of from about 400°C to about 470°C. In this example, the process control temperature generally is below the solution heat treatment temperature for most copper alloys, which typically is from about 475°C to about 495°C. While particular examples are provided herein, it will be understood that the process control temperature may be any temperature, depending upon the particular metal and/or metal alloys being used for the castings, the size and shape of the castings, and numerous other factors.

[0020] When the metal of the casting is within the desired process control temperature range, the casting typically will be cooled sufficiently to solidify as desired. However, if the metal of the casting is permitted to cool below its process control temperature, it has been found that the casting may need to be heated for at least about 4 additional minutes for each minute that the metal of the casting is cooled below the process control temperature to reach the desired heat treatment temperature, for example, from about 475°C to about 495°C for aluminum/copper alloys, or from about 510°C to about 570°C for aluminum/magnesium alloys. Thus, if the castings cool below their process control temperature for even a short time, the time required to heat treat the castings properly and completely may be increased significantly. In addition, it should be recognized that in a batch processing system, such as illustrated in **FIGS. 1B, 1C, and 1D**, where several castings are processed through the heat treatment station in a single batch, the heat treatment time for the entire batch of castings generally is based on the heat treatment time required for the casting (s) with the lowest temperature in the batch. As a result, if one of the castings in the batch being processed has cooled to a temperature below its process control temperature, for example, for about 10 minutes, the entire batch typically will need to be heat treated, for example,

for at least an additional 40 minutes to ensure that all of the castings are heat treated properly and completely.

[0021] Various aspects of the present invention therefore are directed to an integrated processing facility or system **5** (**FIG. 1A** through **FIG. 3**) and methods of processing metal castings. The various systems are designed to move and/or transition the castings (within or apart from their molds) from the pouring station **11** to the heat treatment system or unit **26**, while arresting cooling of the molten metal to a temperature at or above the process control temperature of the metal, but below or equal to the desired heat treatment temperatures thereof to allow the castings to solidify. Accordingly, various aspects of the present invention include systems for monitoring the temperature of the castings to ensure that the castings are maintained substantially at or above the process control temperature. For example, thermocouples or other similar temperature sensing devices or systems can be placed on or adjacent the castings or at spaced locations along the path of travel of the castings from the pouring station to a heat treatment furnace to provide substantially continuous monitoring. Alternatively, periodic monitoring at intervals determined to be sufficiently frequent may be used. Such devices may be in communication with a heat source, such that the temperature measuring or sensing device and the heat source may cooperate to maintain the temperature of the casting substantially at or above the process control temperature for the metal of the casting. It will be understood that the temperature of the casting may be measured at one particular location on or in the casting, may be an average temperature calculated by measuring the temperature at a plurality of locations on or in the casting, or may be measured in any other manner as needed or desired for a particular application. Thus, for example, the temperature of the casting may be measured in multiple locations on or in the casting, and an overall temperature value may be calculated or determined to be the lowest temperature detected, the highest temperature detected, the median temperature detected, the average temperature detected, or any combination or variation thereof.

[0022] Additionally, prior to entry into the heat treatment furnace, the castings may pass through an entry or rejection zone **110**, where the temperature of each casting is monitored to determine whether the casting has cooled to an extent that would require and an excessive amount of energy to raise the temperature to the heat treatment temperature. The entry zone may be included in the process control temperature station, or may be a separate zone, as indicated generally throughout the various figures. The temperature of the casting may be monitored by any suitable temperature sensing or measuring device, such as a thermocouple, to determine whether the temperature of the casting has reached or dropped below a pre-set or predefined rejection temperature. In one aspect, the predefined rejection temperature may be a temperature (for example, from about 10°C to about 20°C) below the process control temperature for the metal

of the casting. In another aspect, the predefined rejection temperature may be a temperature (for example, from about 10°C to about 20°C) below the heat treatment temperature of the heat treatment furnace or oven. If the casting has cooled to a temperature equal to or below the predefined temperature, the control system may send a rejection signal to a transfer or removal mechanism. In response to the detection of a defect condition or signal, the subject casting may be identified for further evaluation or may be removed from the transfer line. The casting may be removed by any suitable mechanism or device including, but not limited to, a robotic arm or other automated device, or the casting may be removed manually by an operator.

[0023] As with the above, it will be understood that the temperature of the casting may be measured at one particular location on or in the casting, may be an average temperature calculated by measuring the temperature at a plurality of locations on or in the casting, or may be measured in any other manner as needed or desired for a particular application. Thus, for example, the temperature of the casting may be measured in multiple locations on or in the casting, and an overall value may be calculated or determined to be the lowest temperature detected, the highest temperature detected, the median temperature detected, the average temperature detected, or any combination or variation thereof.

[0024] A first embodiment of the integrated facility **5** and process for moving and/or processing castings therethrough is illustrated in **FIGS. 1A, 2A, and 2B**. **FIG. 1B** and **FIG. 3** illustrate an additional, alternative embodiment of the integrated facility **5** and process for forming and treating castings where the castings are being collected and processed through heat treatment in a batch processing type arrangement. It will, however, be understood by those skilled in the art that the principles of the present invention can be applied equally to batch type and continuous processing type facilities in which the castings are processed individually through the facility and therefore the present invention. The embodiments described hereinafter therefore are not and should not be limited to continuous or batch-type processing facilities. **FIG. 1C** and **FIG. 1D** illustrate further alternative embodiments of the present invention for performing additional processing steps such as chill removal from castings (**FIG. 1C**) and feeding the castings to multiple heat treatment furnaces (**FIG. 1D**). In addition, it will be understood by those skilled in the art that various features of the embodiments discussed hereafter and illustrated in the drawings can be combined to form additional embodiments of the present invention.

[0025] In the exemplary system illustrated in **FIGS. 1A, 2A, and 2B**, the castings **12** generally are removed from their molds **10** at the transfer or pouring station **11** by a transfer mechanism **27**. As indicated in **FIGS. 2A** and **2B**, the transfer system or mechanism **27** typically includes a robotic arm or crane **28**, although it will be understood by those skilled in the art that various other sys-

tems and devices for moving the castings and/or molds, such as an overhead boom or hoist, conveyor, pusher rods, or other similar material handling mechanisms also can be used. As indicated in **FIGS. 1A, 1B, and 2A**, the robotic arm **28** generally includes an engaging or gripping portion or clamp **29** for engaging and holding the molds or castings, and a base **31** on which the arm **28** is pivotally mounted to be movable between the transfer point **24** of the pouring station and the heat treatment line as indicated by arrows **32** and **32'** (**FIG. 2A**). In addition, as shown in **FIG. 1B**, the transfer mechanism can be used to transfer molds and/or castings from multiple pouring stations **11** and **11'** and can transfer the molds and/or castings to multiple heat treatment lines or units **26** (**FIG. 1C**).

[0026] The molds with castings therein typically are moved from the pouring station **11** to the pickup or transfer point **24** (**FIG. 2A**), where the transfer mechanism **27** generally will pick up the molds with their castings contained therein, or will remove the castings **12** from their molds and transport the castings to the heat treatment unit **26**. Thus, the same manipulator or transfer mechanism can be used for removing the castings from the pouring station and for introducing the castings to the heat treatment unit. Typically, a heat source or heating element **33** will be positioned adjacent the transfer point **28** for the castings for applying heat thereto. The heat source typically can include any type of heating element or source such as conductive, radiant, infrared, conductive, convective, and direct impingement types of heat sources. As illustrated in **FIG. 2A**, multiple heat sources **33** can be used, positioned to most effectively apply heat to the castings during a transfer operation from the pouring station to the heat treatment line.

[0027] Typically, in the case of permanent or metal dies or molds, the molds will be opened at the transfer point and the castings removed by the transfer mechanism, as shown in **FIG. 1D**. The transfer mechanism then transfers the castings to one or more inlet conveyors **34** (**FIGS. 1B and 2A**) of the heat treatment unit, line(s), or system (s) **26** of the integrated processing facility **5**. As the molds are opened and the castings removed, the heat sources **33** (**FIG. 2A**) apply heat directly to the castings to arrest or otherwise control the cooling of the castings during their exposure to the ambient environment of the foundry or plant, as the castings are being transferred to the heat treatment unit, to maintain the castings substantially at or above the process control temperature of the metal of the castings.

[0028] For the processing of castings that are being formed in semi-permanent or sand molds in which the castings typically remain within their molds during heat treatment, during which the molds are broken down by the thermal degradation of the binder material holding the sand of the mold, the transfer mechanism **27** may transfer the entire mold with the casting contained therein, from the transfer point to the inlet conveyor **34**. The heat sources **33** thus may continue to apply heat to the

mold itself, with the amount of heat applied being controlled to maintain the temperature of the castings inside the mold at levels substantially at or above the process control temperature of the metal of the castings without causing excessive or premature degradation of the molds.

[0029] Hereinafter, when reference is made to transport, heating, treating, or otherwise moving or processing the "castings", except where otherwise indicated, it will be understood that such discussion includes both the removal and processing of the castings by themselves, without their molds, and processes wherein the castings remain in their sand molds for heat treatment, mold and core breakdown, and sand reclamation as disclosed in U.S. Patent Nos. 5,294,994; 5,565,046; 5,738,162; 6,217,317; and pending U.S. Patent Application Serial Nos. 09/665,354, filed September 9, 2000, and 10/051,666, filed January 18, 2002.

[0030] As illustrated in **FIGS. 1A, 2A, and 2B**, the castings initially are indexed or conveyed by the inlet conveyor **34** (**FIGS. 2A and 2B**), or conveyors **34** and **34'** (**FIG. 1B**) into a pre-chamber or process temperature control station or module **36**. As indicated in **FIGS. 2A and 2B**, the process temperature control station or module generally includes a heated inner chamber **37** through which the castings and/or molds with the castings therein are conveyed along their processing path along the heat treatment line on a chain conveyor, rollers, or similar conveying mechanism **38**. The castings enter the chamber **37** at an upstream or inlet end **39**, and exit the chamber **37** through a downstream or outlet end **41** and generally are introduced directly into a heat treatment furnace or station **42** of the heat treatment line **26**. The inlet and outlet ends **39** and **41** of the process temperature control station can be open, or can include doors or similar closure structures, such as indicated at **43** in **FIG. 2B**, to help seal the chamber **37** to avoid undue loss of heat therefrom. Typically, the castings will be fed directly from the process temperature control station **36** into the heat treatment station **42**, with the heat treatment and process temperature control stations being connected to further avoid potential loss of heat and, if desired, allow the sharing of heat.

[0031] The chamber **37** generally is a radiant chamber and includes a series of heat sources **45** mounted therein, including being positioned along the walls **46** and/or ceiling **47** of the chamber. Typically, multiple heat sources **45** may be used and may include one or more various different types of heat sources or heating elements, including radiant heating sources such as infrared, electromagnetic and inductive energy sources, conductive, convective, and direct impingement type heat sources, such as gas fired burner tubes introducing a gas flame into the chamber. In addition, the side walls and ceiling of the radiant chamber **37** may be formed from or coated with a high temperature radiant material, such as a metal, metallic film or similar material, ceramic, or composite material capable of radiating heat. The ra-

diant coating generally forms a non-stick surface on the walls and ceilings. As the walls and ceiling of the chamber are heated, the walls and ceiling tend to radiate heat toward the castings, and at the same time, the surfaces generally is heated to a temperature sufficient to burn off waste gases and residue such as soot, etc., from the combustion of the binders of the sand molds and/or cores to prevent collection and buildup thereof on the walls and ceiling of the chamber.

[0032] FIG. 4A through FIG. 6B illustrate various exemplary process temperature control stations. FIG. 4A and FIG. 4B illustrate a process temperature control station 36 including convection type heat sources 45. Each of the convection heat sources generally includes one or more nozzles or blowers 51 connected to a source of heated media by conduits 52. In this aspect, the blowers 51 are arranged or positioned about the ceiling 47 and side walls 46 of the chamber 37 to direct a heated media such as air or other gases, and/or fluids into the chamber and against the castings and/or molds contained therein. The convection blowers generally tend to create a turbulent heated fluid flow about the castings, as indicated by arrows 53, to apply heat substantially to all sides of the castings and/or sand molds. As a result, the temperature of the castings is maintained substantially at or above the process control temperature of the metal thereof. In addition, where the castings are processed in their sand molds, the application of heat within the process temperature control station tends to heat the molds, raising their temperature towards a decomposition or combustion temperature at which the binder materials therein start to combust, pyrolyze, or otherwise be driven off.

[0033] In another aspect, the blowers or nozzles 52 are positioned at the front of the process temperature control station adjacent the inlet end thereof, operating at higher velocities and/or temperatures to arrest more quickly the cooling of the castings and/or molds. The nozzles or blowers 52 positioned toward the middle and/or end of the chamber, such as at the outlet of the process temperature control station, can be run at lower temperatures and velocities to prevent complete degradation of the sand molds while allowing the castings to solidify.

[0034] Alternatively, FIGS. 5A and 5B illustrate another exemplary process temperature control station 36' in which the heat sources 45' generally comprise one or more radiant heaters 54, such as infrared heating elements, electromagnetic energy sources, or similar radiant heating sources. In one aspect, the radiant heaters 54 are arranged in multiple positions or sets at desired locations and orientations about the walls and ceiling 46 and 47 of the radiant chamber 37 of the process temperature control station 36, for example, similar to the arrangement of the convection blowers 51. As with the convection heat sources 52, the radiant heaters adjacent the inlet end of the chamber can be operated at higher temperatures to more quickly arrest the cooling of the castings in their sand molds as they enter the process temperature control station. In addition, vacuum blowers,

pumps, or exhaust fans/systems 56 may be connected to the radiant chamber through conduits 57 to create a negative pressure within the radiant chamber 37. In doing so, heat and/or waste gases generated from the burning or combustion of the binder of the sand cores and/or sand molds are drawn from the chamber to prevent overheating of the radiant heater elements.

[0035] Still another exemplary process temperature control station 36'' is provided in FIGS. 6A and 6B, which illustrate a direct impingement type of heating source 45''. The direct impingement heat source includes a series of burners or nozzles 58 arranged in sets or arrays at selected positions or orientations within the radiant chamber 37. These burners 58 generally are connected to a fuel source, such as natural gas or the like, by conduits 59. The nozzles or burner elements of the direct impingement heat source direct and apply heat substantially toward the sides, the top, and the bottom of the castings. The castings thus are heated substantially uniformly, and the sand material released therefrom further can be exposed to direct heating for burning off of the binder material thereof.

[0036] It will be understood by those skilled in the art that different heating sources can be combined for use in the radiant chamber. Further, multiple chambers can be used in series to arrest the cooling of the castings substantially at or above the process control temperature, and thereafter maintain the temperature of the castings prior to entry into the heat treatment station.

[0037] In another aspect, the off-gases generated when pouring the molten metal may be directed into the radiant chamber of the process temperature control station 36, as indicated by arrows 60 to allow for shared heating and recuperation of energy from the heating of the metal for the castings. In yet another aspect, excess heat generated as a result of the break-down and combustion of the binder for the sand cores of the castings and/or sand molds within the heat treatment station 42 and the heat treatment of the castings also can be routed back to the process temperature control station, as indicated by dashed arrows 61 in FIG. 1A, to help heat the interior environment of the radiant chamber of the process temperature control station. Such recapture of waste gases and heat helps reduce the amount of energy required to heat the chamber of the process temperature control station to a desired or necessary temperature to arrest the cooling of the castings passing therethrough.

[0038] As additionally indicated in FIGS. 2B, 4A, 5A and 6A, a collection hopper or chute 62 may be formed along the bottom of the process temperature control station 36, positioned below the radiant chamber 37 thereof. This hopper 62 generally includes side walls 63 that slope downwardly at the lower ends 64 thereof. The sloping side walls collect sand dislodged from the sand cores of the castings and/or sand molds as the thermal degradation of the binder thereof begins within the process temperature control station. The sand typically is directed downwardly to a collection conveyor 66 positioned below

the open lower end of the hopper **62**. Typically, a fluidizing system or mechanism **67** is positioned along lower portions **64** of the walls of the hopper **62**. The fluidizer(s) typically includes burners, blowers, distributors or similar fluidizing units, such as disclosed and claimed in U.S. Patent Nos. 5,294,994; 5,565,046; and 5,738,162, that apply a flow of a heated media such as air or other fluids to the sand to promote further degradation of the binder to help break up any clumps of sand and binder that may be dislodged from the castings to help reclaim the sand of the sand cores and/or sand molds for the castings in a substantially pure form. The reclaimed sand is collected on the conveyor **66** and conveyed away from the process temperature control station.

[0039] In addition, as illustrated in **FIG. 1A, 2A, 2B, 4A, 5A, and 6A**, excess heat and waste gases generated by the combustion of the binder materials for the sand cores and/or sand molds of the castings can be collected or drawn out of the radiant chamber **37** of the process temperature control station **36** and routed into the heat treatment station **42** as indicated by arrows **68** in **FIG. 1A**. This channeling of excess heat and waste gases from the process temperature control station into the heat treatment station enables both the potential recouping of heat generated within the chamber of the process temperature control station and the further heating and/or combustion of waste gases resulting from the degradation of the binders of the sand molds and/or cores within the heat treatment chamber. As indicated in **FIG. 1A**, blowers or similar air distribution mechanisms **69** further generally are mounted along the heat treatment station and typically will draw off waste gases generated during the heat treatment of the castings and the resulting burn-off of the binder materials from the sand cores and/or sand molds of the castings. These waste gases are collected by the blowers and typically are routed to an incinerator **71** for further treating and burning these waste gases to reprocess these gases and reduce the amount of pollution produced by the casting and heat treatment process. It is also possible to utilize filters to further filter the waste gases coming from either the process temperature control station prior to their being introduced into the heat treatment station and/or or for filtering gases coming from the heat treatment station to the incinerator.

[0040] The process temperature control station consequently functions as a nesting area in front of the heat treatment station or chamber in which the castings can be maintained with the temperature thereof being maintained or arrested at or above the process control temperature, but below a desired heat treating temperature while they await introduction into the heat treatment station. Thus, the system allows the pouring line or lines to be operated at a faster or more efficient rate without the castings having to sit in a queue or line waiting to be fed into the heat treatment station while exposed to the ambient environment, resulting in the castings cooling down below their process control temperature. The castings thereafter can be fed individually, as indicated in **FIGS.**

1A, 1C, 2A, and 2B, or in batches, as shown in **FIGS. 1B, 1C and 3**, into the heat treatment station **42** for heat treatment, sand core and/or sand mold breakdown and removal, and, in some instances, for sand reclamation.

[0041] The heat treatment station **42** (**FIG. 2B**) may be an elongated furnace that includes one or more furnace chambers **75** mounted in series, through which a conveyor **76** is extended for transport of the castings there-through. Heat sources **77** (**FIG. 2A**) including convection heat sources such as blowers or nozzles that apply heated media such as air or other fluids, conduction heat sources such as a fluidized bed, inductive, radiant and/or other types of heat sources may be mounted within the walls and/or ceiling of the chamber **75** for providing heat and optional airflow about the castings in varying degrees and amounts to heat the castings to the proper heat treating temperatures. Such desired heat treating temperatures and heat treatment times will vary according to the type of metal or metal alloy from which the castings are being formed, as will be known to those skilled in the art.

[0042] Examples of various heat treatment furnaces that may be suitable for use with the present invention include those described in U.S. Patent Nos. 5,294,994; 5,565,046; and 5,738,162. A further example of a heat treatment furnace or station for use with the present invention is illustrated and disclosed in U.S. Patent No. 6,217,317 and U.S. Patent Application Serial Nos. 09/665,354, filed September 9, 2000, and 10/051,666, filed January 18, 2002. Such heat treatment stations or furnaces may include features for reclaiming the sand from the cores and/or molds dislodged during heat treatment of the castings.

[0043] After heat treating, the castings typically are removed from the heat treatment station and moved to a quenching station **78** (**FIG. 1A**) for cleaning and further processing. The quenching station typically includes a quench tank having a cooling fluid such as water or other known coolant, or can comprise a chamber having a series of nozzles that apply cooling fluids such as air, water, or similar cooling media. Thereafter, the castings may be removed for further cleaning and processing as needed.

[0044] Another exemplary integrated facility **5** is illustrated in **FIG. 1B**. The facility **5** includes a transfer mechanism **27**, illustrated as a crane or robotic arm **28**, that removes the castings from multiple pouring lines or stations **11** and **11'**. In this example, the pouring lines or stations **11** and **11'** are illustrated as a carousel type system in which the molds are rotated between pouring or casting positions **23** and a transfer point **24**. The transfer mechanism **27** either engages and transports the sand molds with their castings therein, or removes the castings from the molds and transfers the castings to one or more inlet conveyors **34** and **34'** of the heat treatment unit **26**. The castings can be moved individually into and through the process temperature control station **36** for introduction into the heat treatment station **42**, or can be collected in baskets or conveying trays **79** for processing the castings in batches.

[0045] In the exemplary system **5** illustrated in **FIG. 1B**, the process temperature control station **36** generally is formed as an elongated radiant tunnel **81** defining a chamber **82** through which the castings and/or sand molds with castings contained therein are moved or conveyed. The radiant tunnel **81** includes a series of heat sources **83** mounted therealong, such as the various different heating sources **45**, **45'**, and **45''** discussed above with respect to the embodiments of **FIGS. 2A**, **2B**, and **4A** through **6B**. Typically, the walls **84** and ceiling of the chamber **82** of the radiant tunnel **81** are formed from or are coated with a refractory material so that the heat generated within the radiant tunnel is reflected and/or radiated towards the castings. The castings may be collected and/or deposited into a basket **79** or similar conveying tray in a collection station **86** at the end of the radiant tunnel **81**. Such baskets **79** or trays may be used to contain the casting and/or molds through the heat treatment station **42**. The castings alternatively may be collected within the baskets for batch processing in the heat treatment station before the castings are passed through the radiant chamber or tunnel of the process temperature control station **36**, as indicated in **FIG. 1C** and **FIG. 3**.

[0046] Still another exemplary integrated facility **5** according to the present invention is illustrated schematically in **FIG. 1C**. In this embodiment, the process temperature control station **36**, shown as an elongated radiant tunnel or chamber **81** (as discussed with respect to **FIG. 1B**), connects or feeds into a chill removal station **87**. The chill removal station **87** is in communication with and feeds the castings into the heat treatment station **42**. Typically, the castings will be moved and heat-treated or processed while still contained within their semi-permanent or sand molds, which further include "chills" mounted therein. Chills generally are metal plates, typically formed from steel or similar material, having a design relief for forming desired design features of a casting surface and are placed within the molds at or prior to the pouring of the molten metal material therein. The chills consequently must be removed prior to heat treatment of the castings or reclamation of the chills and reuse. After passing through the chamber **82** of the radiant tunnel **81** during which the combustion of the sand molds generally will at least partially have begun, the chills easily can be removed without significantly delaying the movement of the molds and castings into the heat treatment station **42**. Following the removal of the chills in the chill removal station, the molds with their castings within generally are passed directly into the heat treatment station for heat treatment, sand core and sand mold breakdown, and sand reclamation.

[0047] **FIG. 1D** illustrates yet another exemplary facility according to the present invention. In this embodiment, the castings generally can be removed from their molds and transported to an inlet conveyor **90** or **91** for being fed directly into one or more heat treatment furnaces or stations **92**. Alternatively, if the castings are being formed within sand molds, the entire mold will be transported

from the transfer point **28** to one of the inlet conveyors **90** or **91**. As indicated in **FIG. 1D**, the removal of the castings from their molds and subsequent transfer of the castings, or the removal of the molds with the castings remaining therein from the pouring station and transport to the heat treatment stations **92**, generally can be done by the same transport mechanism or manipulator.

[0048] In this embodiment, a heat source **93** is mounted to the transfer mechanism **27** for applying heat directly to the castings and/or sand molds as the castings are moved from the transfer points of the pouring lines to one of the inlet conveyors **90** or **91** for a heat treatment furnace **92**. The heat source, as discussed above, may include a radiant energy source such as infrared or electromagnetic emitters, inductive, convective, and/or conductive heat sources, or other types of heat sources as will be apparent to those skilled in the art. The heat from the heat source **93** mounted to the transfer mechanism **27** is directed at one or more surfaces such as the top and/or sides of the castings or molds as the castings or molds are transferred to the inlet conveyor to arrest the cooling of the castings and/or molds, and thus maintain the temperature of the casting metal substantially at or above the process control temperature of the metal.

[0049] Additional heat sources **94** may be mounted above or adjacent the inlet conveyors **90** and **91** as indicated in **FIG. 1D**, or along the paths of travel of the transfer mechanism as indicated by arrows **96**, **96'**, **97**, and **97'** to maintain the temperature of the castings. In addition, blowers, fans or other similar air movement devices (not shown) also can be positioned adjacent the transfer mechanism or along its path of movement **96**, **96'**, **97**, and **97'** for applying a heated media, such as air or other heated fluids, thereto. The blowers distribute the heat applied to the casting and/or mold to minimize uneven heating or cooling of the castings during transfer from the pouring line to the heat treatment furnace(s) **92**. The use of such heat sources or elements mounted on the transfer mechanism and, in some arrangements, along the path of travel of the castings, thus performs the function of the process temperature control station to help arrest cooling and maintain the castings substantially at or above the process control temperature.

[0050] Still another aspect of the present invention is illustrated in **FIG. 3**. In this example, the castings and/or sand molds are placed directly within collection baskets or conveying tray **100** by the transfer mechanism **27** and fed into the process temperature control station for a batch heating process. In such an arrangement, the castings **12** generally will be loaded into a series of compartments or chambers **101** of the conveying tray **100**, with the castings located in known, indexed positions for directed application of heat for de-coring and other functions as the castings are moved into and through a process temperature control station **102** and heat treatment station **103**, as disclosed and claimed in U.S. Patent Application Serial No. 09/665,354, filed September 9, 2000. In this embodiment, the trays **100** typically will be indexed

into and out of the chamber **104** of the process temperature control station as indicated by arrows **106** and **106'** as the castings are loaded therein. As a result, the exposure of the castings to the ambient environment, which would allow them to cool down below their process control or critical temperature, is minimized while the various other compartments **101** of the tray are loaded with the remaining castings of the batch.

[0051] In addition, as indicated in **FIG. 3**, it is further possible to provide directed heat sources **107** for each of the compartments **101** of the trays **100**. For example, as a first compartment **101'** is loaded with a casting **12'** and indexed into the process temperature control station **102**, a first heat source **107'** directs heat toward the casting and/or sand mold within that particular chamber. Thereafter, as successive castings or molds are loaded into the other chambers or compartments of the basket, additional heat sources **107** directed to those compartments are engaged. Thus, the heating of the chamber **104** of the process temperature control station can be limited or directed to specific regions or zones as needed for more efficient heating of the castings.

[0052] As **FIG. 3** further illustrates, a series of blowers or other similar air movement devices **108** may be mounted to the roof of the process temperature control station for drawing off waste gases generated by the degradation of the sand core and/or sand mold binder materials. The gases and additional waste heat then may be directed via conduits **109** to the heat treatment station **103** for heat reclamation and pollution reduction, and to help prevent the collection of combustible wastes on the sides and ceiling of the chamber of the process temperature control station **102**.

[0053] While the present invention is described herein in detail in relation to specific aspects, it is to be understood that this detailed description is only illustrative and exemplary of the present invention and is made merely for purposes of providing a full and enabling disclosure of the present invention. The detailed description set forth herein is not intended nor is to be construed to limit the present invention or otherwise to exclude any such other embodiments, adaptations, variations, modifications, and equivalent arrangements of the present invention, the present invention being limited solely by the claims appended hereto and the equivalents thereof.

Claims

1. An integrated system for forming and heat treating a metal casting (12), the system comprising:

a pouring station (11, 11') for pouring molten metal into a mold (10) to form the casting (12), and a heat treatment station (26) downstream from said pouring station (11, 11') for receiving and heat treating the casting (12),
a series of heat sources (33, 45, 45', 45'') posi-

tioned along a path of travel of the casting (12) between said pouring station (11, 11') and said heat treatment station (26) for applying heat to the casting (12) as needed to maintain the casting (12) at or above a predetermined process control temperature for the metal of the casting (12) which is a temperature below a heat treatment temperature thereof sufficient to accommodate necessary solidification cooling of the casting (12) but below which the time required to both raise the casting (12) to its heat treating temperature and perform the heat treatment is significantly increased and

a process control temperature station (36, 36') positioned upstream from the heat treatment station (26),

characterized in that

said process temperature control station (36, 36') comprising

a temperature sensing device in communication with the heat sources (33, 45, 45', 45'') and

a controller in communication with said temperature sensing device and said heat sources (33, 45, 45', 45''), said controller controlling the amount of heat applied to the casting (12) to maintain the temperature of the casting (12) at or above the process control temperature for the metal of the casting (12) as the casting (12) is transferred from the pouring station (11, 11') to the heat treatment station (26).

2. The integrated system of claim 1, and further comprising a plurality of temperature sensing devices adjacent the casting (12) or at spaced locations along the path of travel of the casting (12) for monitoring the temperature of the casting (12) as the casting (12) is transferred from said pouring station (11, 11') to said heat treatment station (26).
3. The integrated system of claim 1, wherein said heat source (33, 45, 45', 45'') applies heat to the casting (12) sufficient to arrest the cooling of the casting (12) without heating the casting (12) above the heat treatment temperature for the metal of the casting (12).
4. The integrated system of claim 1, wherein the process control temperature is the temperature below which for every one minute of time the temperature of the casting (12) decreases, more than one minute of heat treatment is required to attain the desired properties of the casting (12).
5. The integrated system of claim 1, wherein the process control temperature is the temperature below which for every one minute of time the temperature of the casting (12) decreases, at least about four minutes of heat treatment is required to attain the desired properties of the casting (12).

6. The integrated system of claim 1, wherein the metal is an aluminum/copper alloy and the process control temperature is from about 400°C to about 470°C or wherein the metal is an iron alloy and the process control temperature is from about 1000°C to about 1300°C. 5

7. The integrated system of claim 1, further comprising a heat source mounted directly to a transfer mechanism (27) for transferring the casting (12) from the pouring station (11, 11') to the heat treatment station (26). 10

8. The integrated system of claim 1, wherein the heat treatment station (26) including a heat treatment furnace (42) having an entry zone (110) for a casting (12); a temperature measuring device within said entry zone (110); and a transfer mechanism in communication with said temperature measuring device, wherein upon detection of a rejection temperature by said temperature measuring device, said transfer mechanism removes the casting (12) prior to entry into said furnace (42). 15
20

9. The integrated system of claim 8, wherein the rejection temperature is from about 10°C to about 20°C below the process control temperature for the metal of the casting (12), where the process control temperature is the temperature below which for every one minute of time the temperature of the casting (12) decreases, more than one minute of heat treatment is required to attain the desired properties of the casting (12) or wherein the rejection temperature is from about 10°C to about 20°C below the temperature of the heat treatment furnace (42). 25
30
35

10. A method of forming a casting (12) having a reduced heat treatment time comprising:

pouring a molten metal into a mold (10) to form the casting (2); 40

transferring the casting (12) to a heat treatment furnace (42);

monitoring the temperature of the casting (12) with at least one temperature sensing device as the casting (12) is moved along a path of travel from a pouring station (11, 11') to the heat treatment furnace (42) and allowing the molten metal to solidify within the mold (10) sufficient to form the casting (12); 45
50

comparing the monitored temperature of the casting (12) to a predetermined process control temperature for the metal of the casting (12), wherein the process control temperature is a temperature below a solution heat treatment temperature for the metal of the casting (12) sufficient to enable the molten metal within the mold (10) to at least partially solidify, and below which

- for every one minute of time the temperature of the casting (12) decreases, more than one minute of additional heat treatment time for the casting (12) is required to attain the desired properties of the casting (12);
- in response to the comparison of the monitored temperature to the predetermined process control temperature for the metal of the casting (12), controlling one or more heat sources (33, 45, 45', 45'') along the path of travel of the casting (12) from the pouring station (11, 11') to the heat treatment station (26) to apply heat to the casting (12) as needed to maintain the temperature of the casting (12) at or above the process control temperature for the metal of the casting (12) prior to entry of the casting (12) into the heat treatment furnace (42) if the temperature of the casting (12) monitored by the temperature sensing device is less than the process control temperature;
- placing the casting into the heat treatment furnace (42); and
- heat treating the casting (12).

11. The method of claim 10 further comprising comparing the monitored temperature of the casting (12) to a predefined rejection temperature and, if the temperature is equal to or less than the rejection temperature, rejecting the casting (12).

12. The method of claim 11, wherein the rejection temperature is from about 10°C to about 20°C below a process control temperature for the metal of the casting (12) or wherein the rejection temperature is from about 10°C to about 20°C below the temperature of the heat treatment furnace (42).

13. The method of claim 10, wherein the temperature of the casting (12) is monitored periodically at intervals determined to be sufficiently frequent or is monitored substantially continuously.

14. The method of claim 10, wherein the temperature of the casting (12) is measured in multiple locations on or in the casting (12), and an overall temperature value may be calculated or determined to be the lowest temperature detected, the highest temperature detected, the median temperature detected, the average temperature detected, or any combination or variation thereof.

15. The method of claim 10, wherein the temperature of the casting (12) is measured at one particular location on or in the casting (12).

Patentansprüche

1. Integriertes System zum Ausbilden und Wärmebehandeln eines Metallgussstücks (12), wobei das System umfasst:

eine Gießstation (11, 11') zum Gießen von geschmolzenem Metall in eine Form (10), um das Gussstück (12) auszubilden, und eine Wärmebehandlungsstation (26) stromabwärts von der Gießstation (11, 11') zum Aufnehmen und Wärmebehandeln des Gussstücks (12),
eine Reihe von Wärmequellen (33, 45, 45', 45''), die entlang eines Bewegungsweges des Gussstücks (12) zwischen der Gießstation (11, 11') und der Wärmebehandlungsstation (26) angeordnet sind, zum Aufbringen von Wärme auf das Gussstück (12), wie erforderlich, um das Gussstück (12) auf oder über einer vorbestimmten Prozesssteuertemperatur für das Metall des Gussstücks (12) zu halten, die eine Temperatur unterhalb einer Wärmebehandlungstemperatur davon ist, die ausreicht, um eine erforderliche Verfestigungskühlung des Gussstücks (12) zu schaffen, aber unterhalb der die Zeit, die erforderlich ist, um sowohl das Gussstück (12) auf seine Wärmebehandlungstemperatur zu bringen als auch die Wärmebehandlung durchzuführen, deutlich erhöht wird, und
eine Prozesstemperatursteuervorrichtung (36, 36'), die stromaufwärts von der Wärmebehandlungsstation (26) angeordnet ist,
gekennzeichnet dadurch dass
die Prozesstemperatursteuervorrichtung (36, 36') umfasst:

eine Temperaturmessfühlvorrichtung, die in Kommunikation mit den Wärmequellen (33, 45, 45', 45'') steht, und
eine Steuereinrichtung, die in Kommunikation mit der Temperaturmessfühlvorrichtung und den Wärmequellen (33, 45, 45', 45'') steht, wobei die Steuereinrichtung die Wärmemenge steuert, die auf das Gussstück (12) aufgebracht wird, um die Temperatur des Gussstücks (12) auf oder über der Prozesssteuertemperatur für das Metall des Gussstücks (12) zu halten, während das Gussstück (12) von der Gießstation (11, 11') zur Wärmebehandlungsstation (26) transportiert wird.

2. Integriertes System nach Anspruch 1, und des Weiteren umfassend eine Vielzahl von Temperaturmessfühlvorrichtungen, die an das Gussstück (12) angrenzen oder an beabstandeten Stellen entlang des Bewegungsweges des Gussstücks (12) vorhanden sind, um die Temperatur des Gussstücks (12)

zu überwachen, während das Gussstück (12) von der Gießstation (11, 11') zur Wärmebehandlungsstation (26) transportiert wird.

3. Integriertes System nach Anspruch 1, wobei die Wärmequelle (33, 45, 45', 45'') ausreichend Wärme auf das Gussstück (12) aufbringt, um die Abkühlung des Gussstücks (12) aufzuhalten, ohne das Gussstück (12) auf eine Temperatur über der Wärmebehandlungstemperatur für das Metall des Gussstücks (12) zu erhitzen.
4. Integriertes System nach Anspruch 1, wobei die Prozesssteuertemperatur die Temperatur ist, unterhalb der für jede eine Minute der Zeit, die die Temperatur des Gussstücks (12) abnimmt, mehr als eine Minute Wärmebehandlung erforderlich ist, um die gewünschten Eigenschaften des Gussstücks (12) zu erreichen.
5. Integriertes System nach Anspruch 1, wobei die Prozesssteuertemperatur die Temperatur ist, unterhalb der für jede eine Minute der Zeit, die die Temperatur des Gussstücks (12) abnimmt, mindestens etwa vier Minuten Wärmebehandlung erforderlich sind, um die gewünschten Eigenschaften des Gussstücks (12) zu erreichen.
6. Integriertes System nach Anspruch 1, wobei das Metall eine Aluminium/KupferLegierung ist und die Prozesssteuertemperatur etwa 400 °C bis etwa 470 °C ist oder wobei das Metall eine Eisenlegierung ist und die Prozesssteuertemperatur etwa 1000 °C bis etwa 1300 °C ist.
7. Integriertes System nach Anspruch 1, des Weiteren umfassend eine Wärmequelle, die direkt an einem Transportmechanismus (27) zum Transportieren des Gussstücks (12) von der Gießstation (11, 11') zur Wärmebehandlungsstation (26) angebracht ist.
8. Integriertes System nach Anspruch 1, wobei die Wärmebehandlungsstation (26) einen Wärmebehandlungsofen (42) mit einer Eintrittszone (110) für ein Gussstück (12); eine Temperaturmessvorrichtung innerhalb der Eintrittszone (110); und einen Transportmechanismus, der in Kommunikation mit der Temperaturmessvorrichtung steht, umfasst, wobei bei der Detektion einer Ausmusterungstemperatur durch die Temperaturmessvorrichtung, der Transportmechanismus das Gussstück (12) vor dem Eintritt in den Ofen (42) entfernt.
9. Integriertes System nach Anspruch 8, wobei die Ausmusterungstemperatur zwischen etwa 10 °C bis etwa 20 °C unter der Prozesssteuertemperatur für das Metall des Gussstücks (12) liegt, wobei die Prozesssteuertemperatur die Temperatur ist, unterhalb wel-

cher für jede eine Minute der Zeit, die die Temperatur des Gussstücks (12) abnimmt, mehr als eine Minute benötigt wird, um die gewünschten Eigenschaften des Gussstücks (12) zu erreichen, oder wobei die Ausmusterungstemperatur zwischen etwa 10°C bis etwa 20°C unter der Temperatur des Wärmebehandlungssofens (42) liegt.

10. Verfahren zum Ausbilden eines Gussstücks (12) mit verringerter Wärmebehandlungszeit, das umfasst:

Gießen eines geschmolzenen Metalls in eine Form (10), um das Gussstück (12) auszubilden; Transportieren des Gussstücks (12) zu einem Wärmebehandlungssofen (42); Überwachen der Temperatur des Gussstücks (12) mit mindestens einer Temperaturmessfühler-
 15
 20
 25
 30
 35
 40
 45
 50
 55

lervorrichtung, während das Gussstück (12) entlang eines Bewegungsweges von der Gießstation (11, 11') zum Wärmebehandlungssofen (42) transportiert wird und Ermöglichen einer ausreichenden Verfestigung des geschmolzenen Metalls innerhalb der Form (10), um das Gussstück (12) auszubilden;
 25
 30
 35
 40
 45
 50
 55

Vergleichen der Temperatur des Gussstücks (12) mit einer vorbestimmten Prozesssteuertemperatur für das Metall des Gussstücks (12), wobei die Prozesssteuertemperatur eine Temperatur unterhalb einer Lösungswärmebehandlungstemperatur für das Metall des Gussstücks (12) ist, die für eine zumindest teilweise Verfestigung des geschmolzenen Metalls in der Form (10) ausreicht und unterhalb der für jede eine Minute der Zeit, die die Temperatur des Gussstücks (12) abnimmt, mehr als eine Minute zusätzliche Wärmebehandlungszeit für das Gussstück (12) erforderlich ist, um die gewünschten Eigenschaften des Gussstücks (12) zu erreichen;
 40
 45
 50
 55

als Reaktion auf den Vergleich der überwachten Temperatur mit der vorbestimmten Prozesssteuertemperatur für das Metall des Gussstückes (12), Kontrollieren einer oder mehrerer Wärmequellen (33, 45, 45', 45'') entlang des Bewegungswegs des Gussstücks (12) von der Gießstation (11, 11') zur Wärmebehandlungsstation (26) zum Aufbringen von Wärme auf das Gussstück (12), wie erforderlich, um die Temperatur des Gussstücks (12) vor dem Eintritt des Gussstücks (12) in den Wärmebehandlungssofen (42) auf oder über der Prozesssteuertemperatur für das Metall des Gussstücks (12) zu halten, wenn die Temperatur des Gussstücks (12), die von der Temperaturmessfühler-
 50
 55

vorrichtung überwacht wird, geringer ist als die Prozesssteuertemperatur;
 Anordnen des Gussstücks in dem Wärmebehandlungssofen (42); und

Wärmebehandeln des Gussstücks (12).

11. Verfahren nach Anspruch 10, des Weiteren umfassend das Vergleichen der überwachten Temperatur des Gussstücks (12) mit einer vorbestimmten Ausmusterungstemperatur und, wenn die Temperatur gleich oder geringer als die Ausmusterungstemperatur ist, Ausmustern des Gussstücks (12).
 5
 10
 15
 20
 25
 30
 35
 40
 45
 50
 55
12. Verfahren nach Anspruch 11, wobei die Ausmusterungstemperatur zwischen etwa 10°C bis etwa 20°C unter einer Prozesssteuertemperatur für das Metall des Gussstücks (12) liegt oder wobei die Ausmusterungstemperatur zwischen etwa 10°C bis etwa 20°C unter der Temperatur des Wärmebehandlungssofens (42) liegt.
13. Verfahren nach Anspruch 10, wobei die Temperatur des Gussstücks (12) periodisch überwacht wird in Intervallen, die so bestimmt sind, dass sie ausreichend häufig sind, oder im Wesentlichen durchgängig überwacht wird.
14. Verfahren nach Anspruch 10, wobei die Temperatur des Gussstücks (12) an mehreren Stellen auf oder in dem Gussstück (12) gemessen wird, und ein Gesamttemperaturwert als geringste gemessene Temperatur, als höchste gemessene Temperatur, als mittlere gemessene Temperatur, als durchschnittliche gemessene Temperatur oder als eine Kombination oder Variation davon berechnet oder bestimmt werden kann.
15. Verfahren nach Anspruch 10, wobei die Temperatur des Gussstücks (12) an einer bestimmten Stelle auf oder in dem Gussstück (12) gemessen wird.

Revendications

1. Système intégré, destiné à former et à traiter thermiquement une coulée de métal (12), le système comprenant :

un poste de coulée (11, 11'), destiné à verser le métal fondu dans un moule (10) pour former la coulée (12) et un poste de traitement thermique (26), en aval dudit poste de coulée (11, 11'), destiné à recevoir et à traiter thermiquement la coulée (12),

une série de sources de chaleur (33, 45, 45', 45''), positionnée le long d'un trajet de déplacement de la coulée (12) entre ledit poste de coulée (11, 11') et ledit poste de traitement thermique (26), destinée à appliquer de la chaleur à la coulée (12), si nécessaire, pour maintenir la coulée (12) à une ou au-dessus d'une température prédéterminée de commande de processus du

- métal de la coulée (12), qui est une température au-dessous d'une température de traitement thermique de celle-ci, suffisante pour tolérer le refroidissement nécessaire de solidification de la coulée (12) mais au-dessous de laquelle le temps, requis à la fois pour élever la coulée (12) à sa température de traitement thermique et pour effectuer le traitement thermique, est accru de manière significative et
- un poste de température de commande de processus (36, 36'), positionné en amont du poste de traitement thermique (26),
- caractérisé en ce que**
- ledit poste de commande de température de processus (36, 36') comprend
- un dispositif de captage de température, en communication avec les sources de chaleur (33, 45, 45', 45'') et
- un dispositif de commande, en communication avec ledit dispositif de captage de température et lesdites sources de chaleur (33, 45, 45', 45''), ledit dispositif de commande commandant la quantité de chaleur, appliquée à la coulée (12), pour maintenir la température de la coulée (12) à la ou au-dessus de la température de commande de processus du métal de la coulée (12), lorsque la coulée (12) est transférée du poste de coulée (11, 11') au poste de traitement thermique (26).
2. Système intégré suivant la revendication 1, comprenant, en outre, une pluralité de dispositifs de captage de température, voisins de la coulée (12) ou à des endroits espacés, le long du trajet de déplacement de la coulée (12), pour surveiller la température de la coulée (12), lorsque la coulée (12) est transférée dudit poste de coulée (11, 11') audit poste de traitement thermique (26).
 3. Système intégré suivant la revendication 1, dans lequel ladite source de chaleur (33, 45, 45', 45'') applique de la chaleur à la coulée (12), en quantité suffisante pour arrêter le refroidissement de la coulée (12) sans chauffer la coulée (12) au-dessus de la température de traitement thermique du métal de la coulée (12).
 4. Système intégré suivant la revendication 1, dans lequel la température de commande de processus est la température au-dessous de laquelle, à chaque fois que la température de la coulée (12) diminue pendant une minute, il faut plus d'une minute de traitement thermique pour obtenir les propriétés désirées de la coulée (12).
 5. Système intégré suivant la revendication 1, dans lequel la température de commande de processus est la température au-dessous de laquelle, à chaque fois que la température de la coulée (12) diminue pendant une minute, il faut au moins environ quatre minutes de traitement thermique pour obtenir les propriétés désirées de la coulée (12).
 6. Système intégré suivant la revendication 1, dans lequel le métal est un alliage aluminium / cuivre et la température de commande de processus est d'environ 400° C à environ 470° C ou dans lequel le métal est un alliage ferreux et la température de commande de processus est d'environ 1000° C à environ 1300° C.
 7. Système intégré suivant la revendication 1, comprenant, en outre, une source de chaleur, montée directement sur un mécanisme de transfert (27), pour transférer la coulée (12) du poste de coulée (11, 11') au poste de traitement thermique (26).
 8. Système intégré suivant la revendication 1, dans lequel le poste de traitement thermique (26) comporte un four de traitement thermique (42), ayant une zone d'entrée (110) pour une coulée (12), un dispositif de mesure de température à l'intérieur de ladite zone d'entrée (110) et un mécanisme de transfert, en communication avec ledit dispositif de mesure de température, dans lequel, lors de la détection d'une température de rejet par ledit dispositif de mesure de température, ledit mécanisme de transfert enlève la coulée (12) avant son entrée dans ledit four (42).
 9. Système intégré suivant la revendication 8, dans lequel la température de rejet est d'environ 10° C à environ 20° C au-dessous de la température de commande de processus du métal de la coulée (12), là où la température de commande de processus est la température au-dessous de laquelle, à chaque fois que la température de la coulée (12) diminue pendant une minute, il faut plus d'une minute de traitement thermique pour obtenir les propriétés désirées de la coulée (12) ou dans lequel la température de rejet est environ 10° C à environ 20° C au-dessous de la température du four de traitement thermique (42).
 10. Procédé de formation d'une coulée (12), ayant un temps de traitement thermique réduit, comprenant les opérations, consistant à :
 - verser un métal fondu dans un moule (10), pour former la coulée (12) ;
 - transférer la coulée (12) à un four de traitement thermique (42) ;
 - surveiller la température de la coulée (12) avec au moins un dispositif de captage de température, lorsque la coulée (12) est mue le long d'un trajet de déplacement d'un poste de coulée (11, 11') au four de traitement thermique (42) et per-

mettre au métal fondu de se solidifier, dans le moule (10), suffisamment pour former la coulée (12) ;

comparer la température surveillée de la coulée (12) à une température prédéterminée de commande de processus du métal de la coulée (12), dans lequel la température de commande de processus est une température au-dessous d'une température de traitement thermique de mise en solution du métal de la coulée (12), suffisante pour permettre au métal fondu de se solidifier, au moins partiellement, dans le moule (10) et au-dessous de laquelle, à chaque fois que la température de la coulée (12) diminue pendant une minute, il faut plus d'une minute de temps supplémentaire de traitement thermique à la coulée (12), pour obtenir les propriétés désirées de la coulée (12) ;

en réponse à la comparaison de la température surveillée à la température prédéterminée de commande de processus du métal de la coulée (12), commander une ou plusieurs sources de chaleur (33, 45, 45', 45''), le long du trajet de déplacement de la coulée (12), du poste de coulée (11, 11') au poste de traitement thermique (26), pour appliquer de la chaleur à la coulée (12), si nécessaire, pour maintenir la température de la coulée (12) à ou au-dessus de la température de commande de processus du métal de la coulée (12), avant l'entrée de la coulée (12) dans le four de traitement thermique (42), si la température de la coulée (12), surveillée par le dispositif de captage de température, est inférieure à la température de commande de processus ;

placer la coulée dans le four de traitement thermique (42) et
traiter thermiquement la coulée (12).

11. Procédé suivant la revendication 10, comprenant, en outre, l'opération consistant à comparer la température surveillée de la coulée (12) à une température prédéfinie de rejet et, si la température est inférieure ou égale à la température de rejet, à rejeter la coulée (12).

12. Procédé suivant la revendication 11, dans lequel la température de rejet est environ 10° C à environ 20° C au-dessous d'une température de commande de processus du métal de la coulée (12) ou dans lequel la température de rejet est d'environ 10° C à environ 20° C au-dessous de la température du four de traitement thermique (42).

13. Procédé suivant la revendication 10, dans lequel la température de la coulée (12) est surveillée périodiquement, suivant des intervalles, déterminés pour être suffisamment fréquents ou est surveillée de ma-

nière sensiblement continue.

14. Procédé suivant la revendication 10, dans lequel la température de la coulée (12) est mesurée en de multiples endroits sur ou dans la coulée (12) et une valeur globale de température peut être calculée ou déterminée comme étant la température détectée la plus basse, la température détectée la plus haute, la température détectée médiane, la température détectée moyenne ou toute combinaison ou variation de celles-ci.

15. Procédé suivant la revendication 10, dans lequel la température de la coulée (12) est mesurée en un endroit particulier sur ou dans la coulée (12).

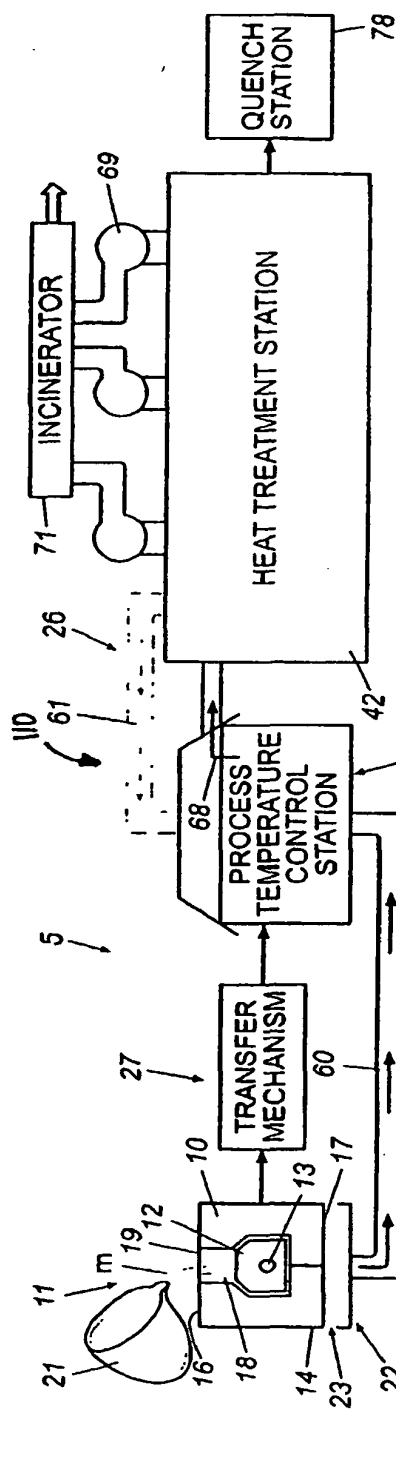


Fig. 1A

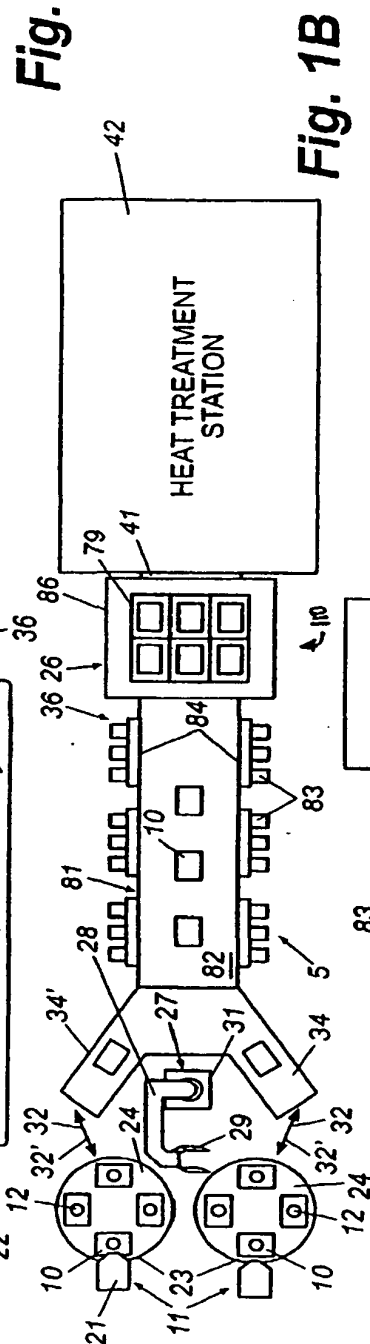


Fig. 1B

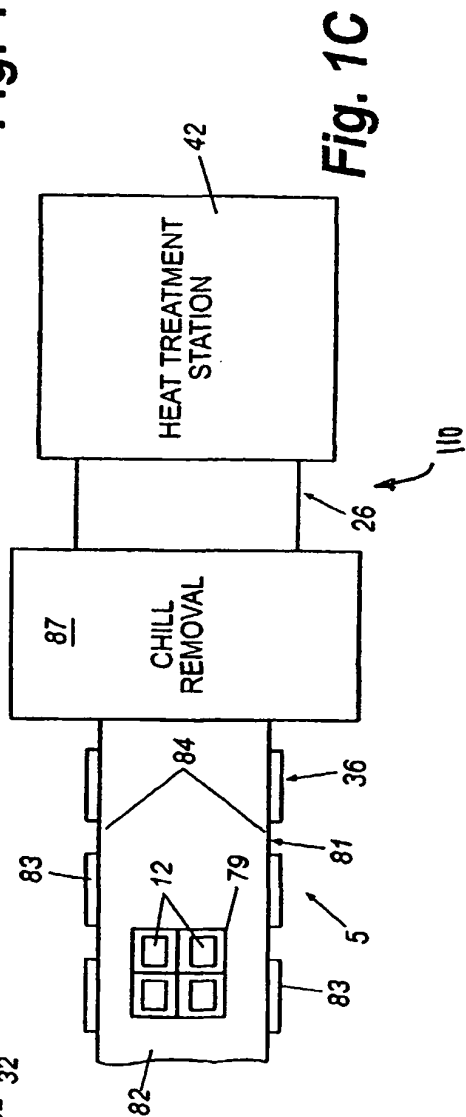
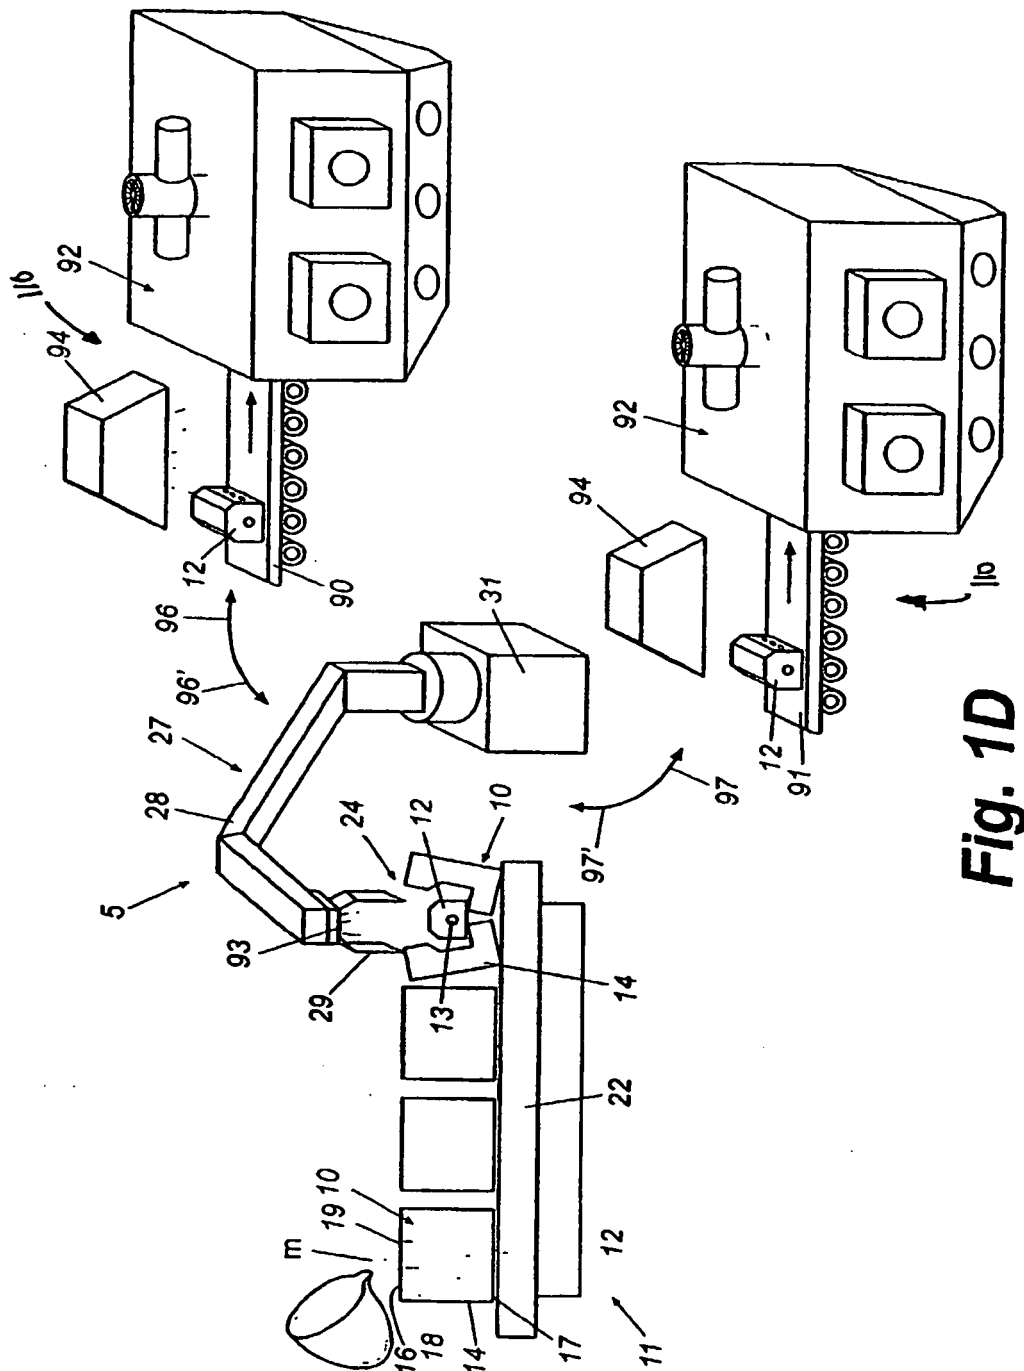


Fig. 1C



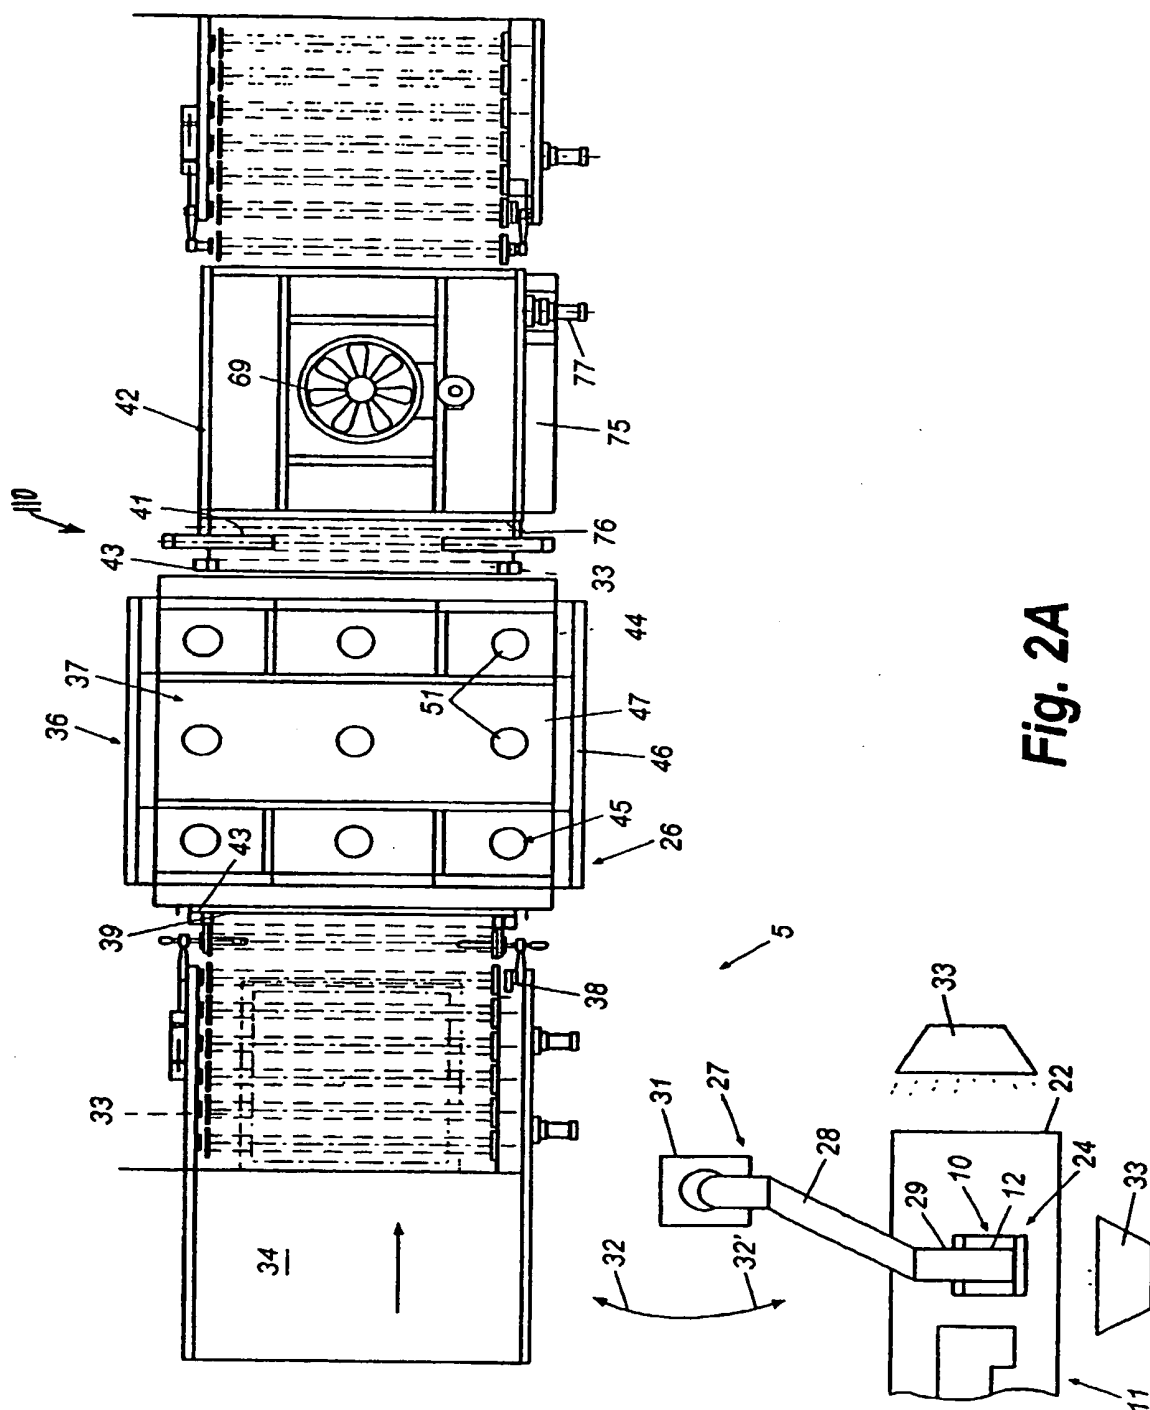


Fig. 2A

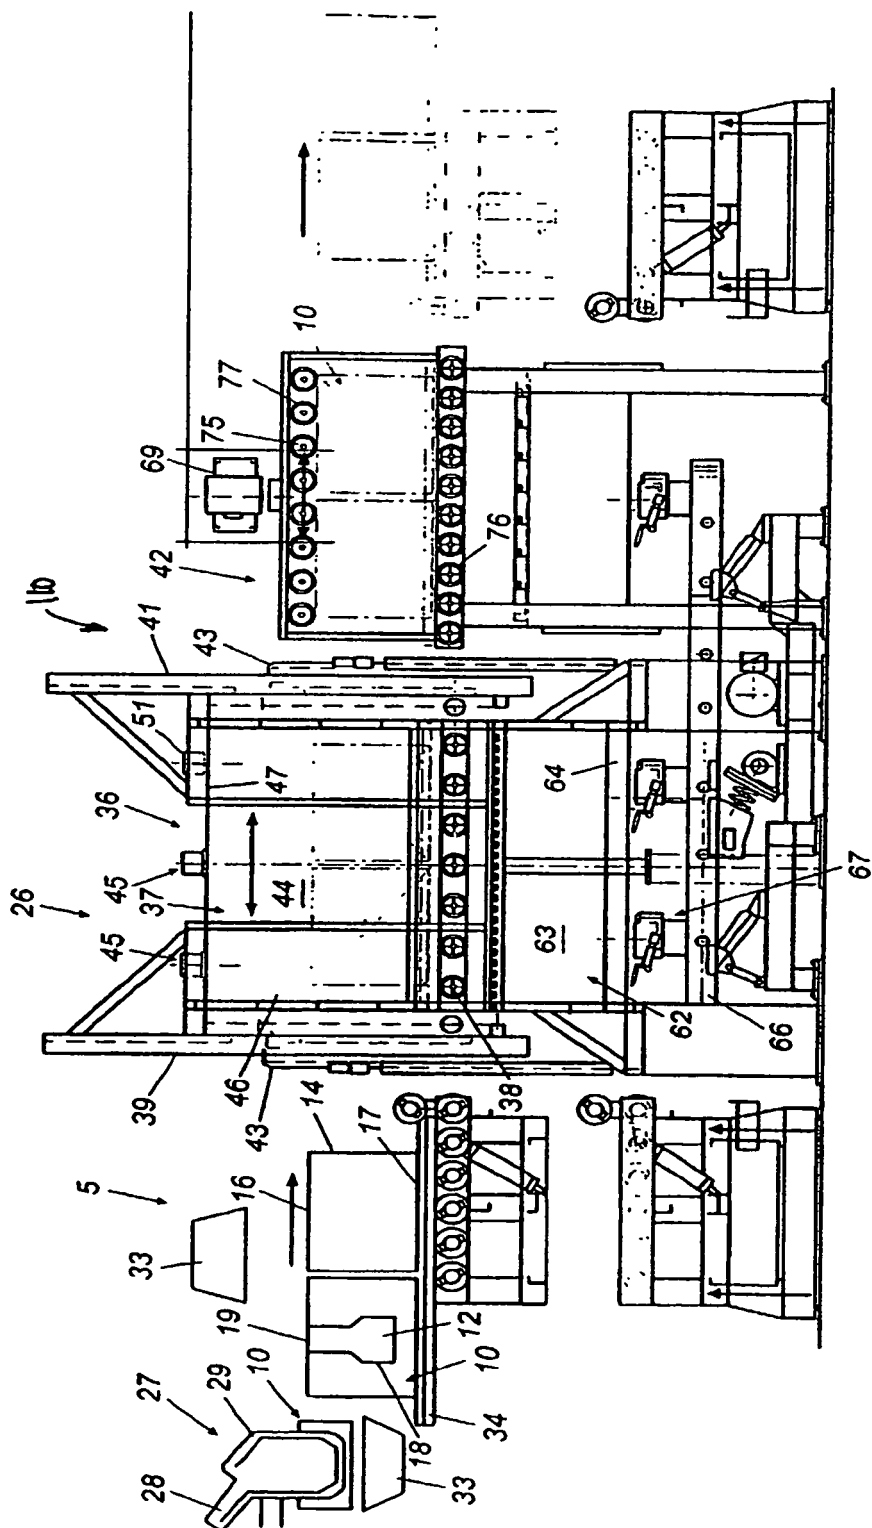
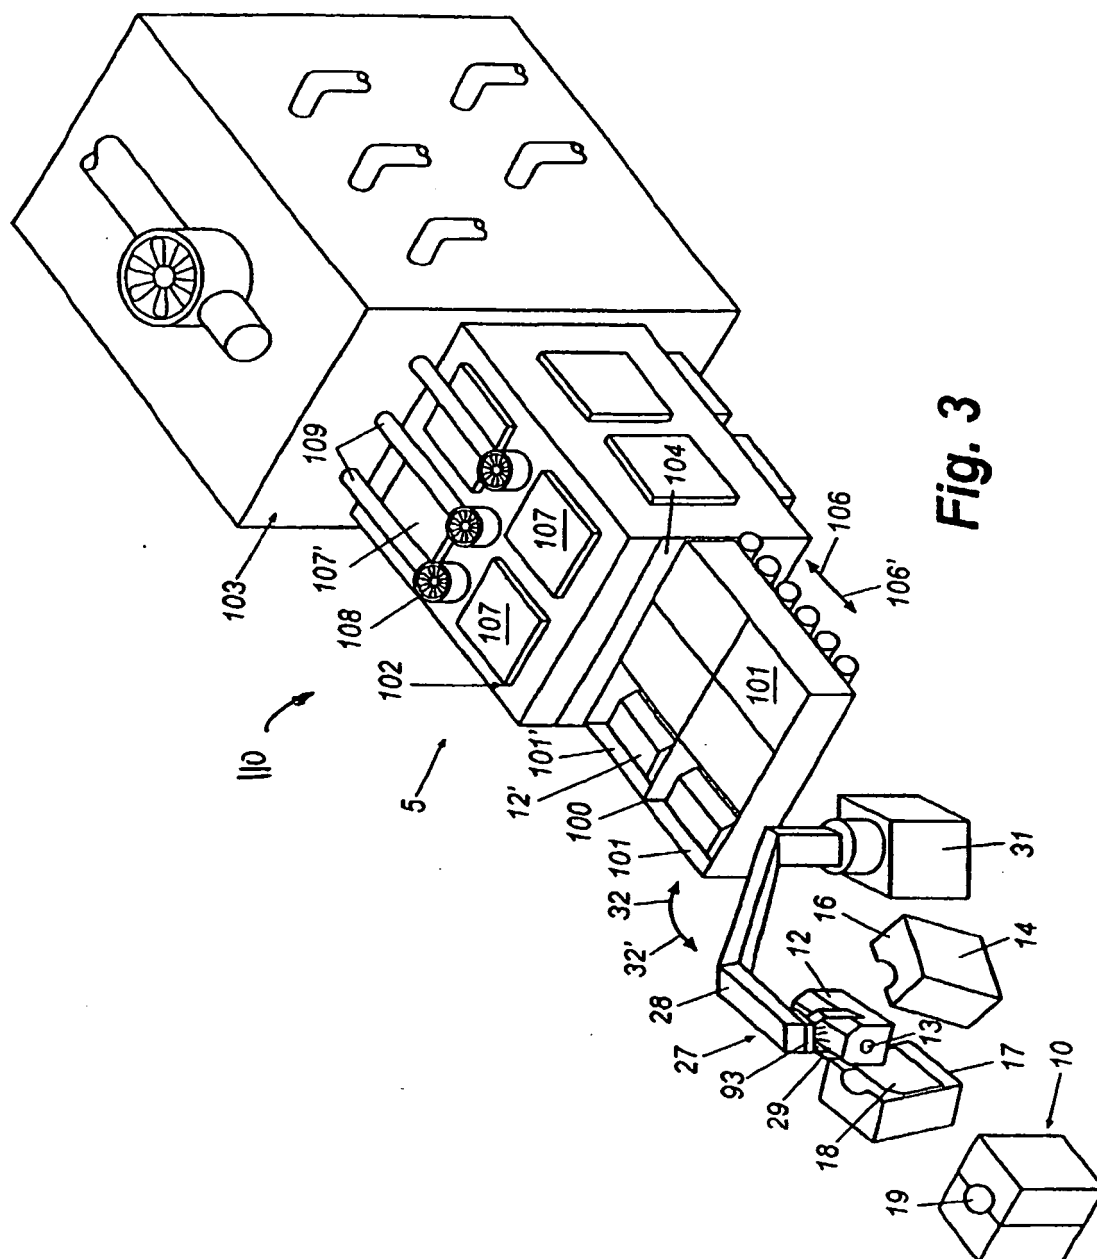


Fig. 2B



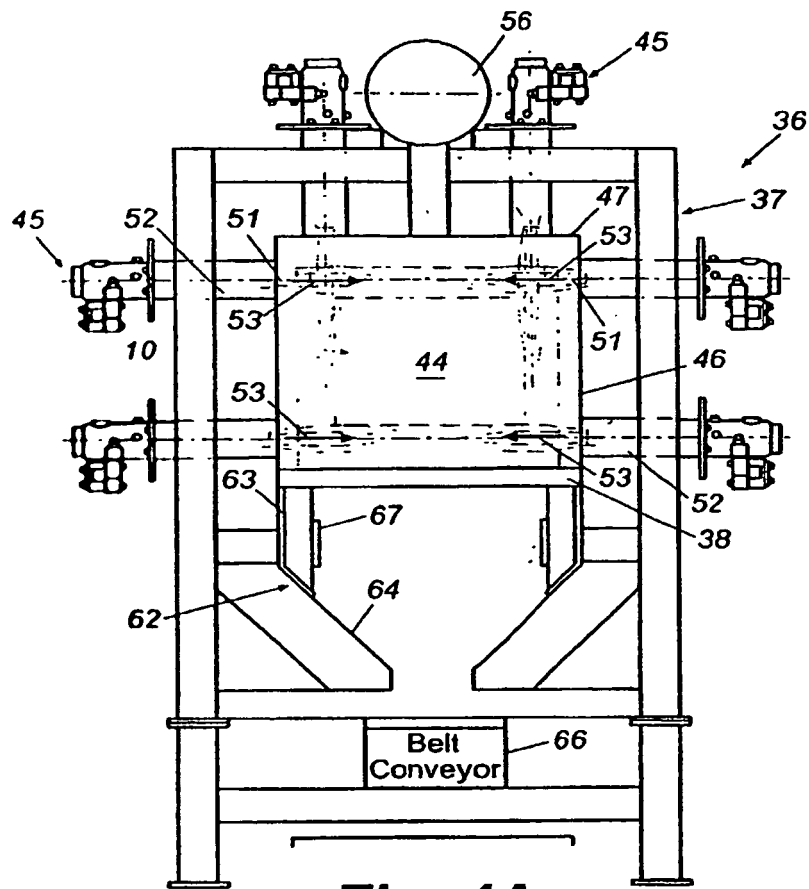


Fig. 4A

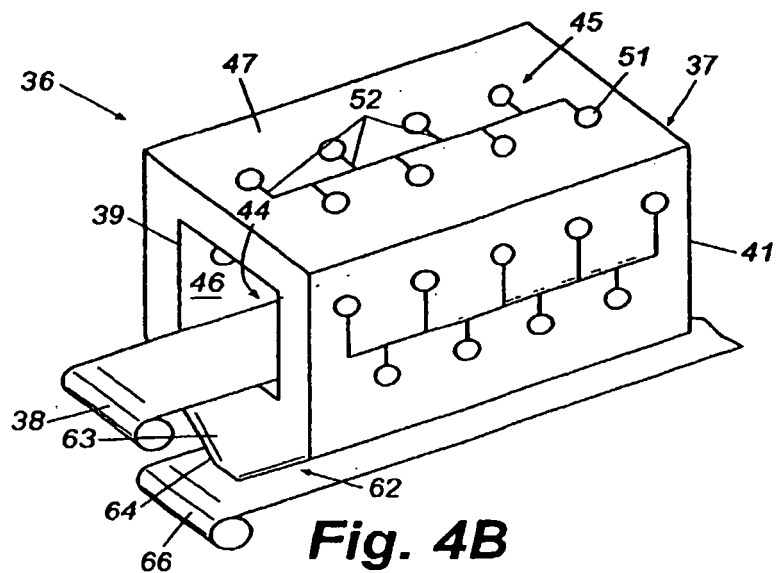


Fig. 4B

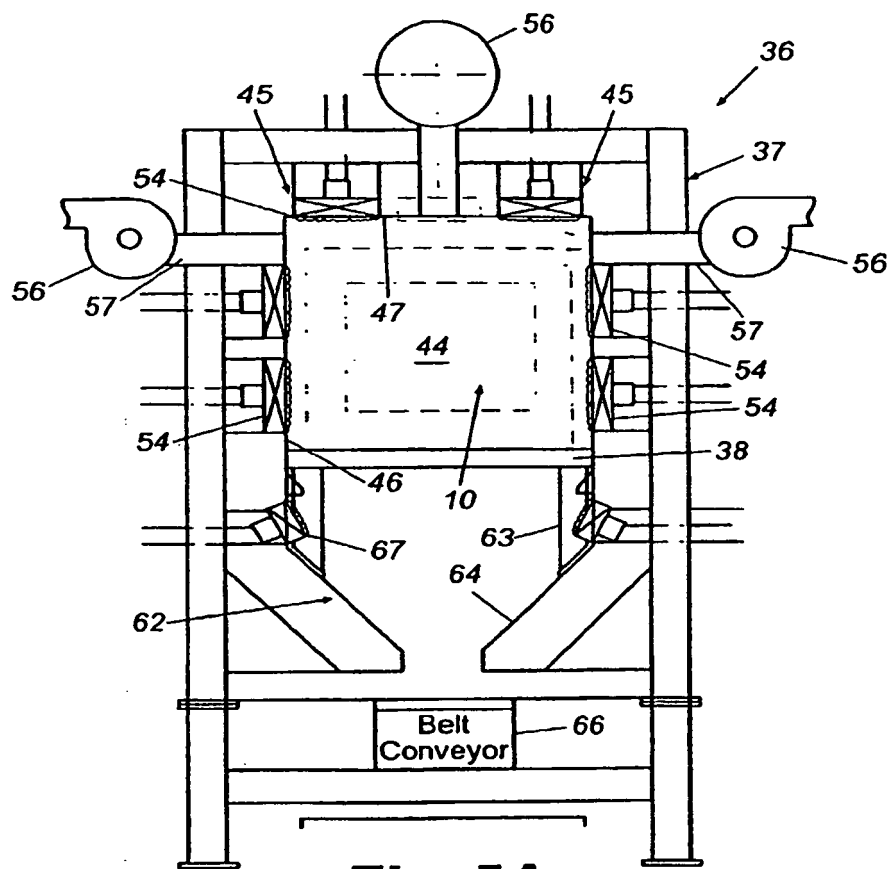


Fig. 5A

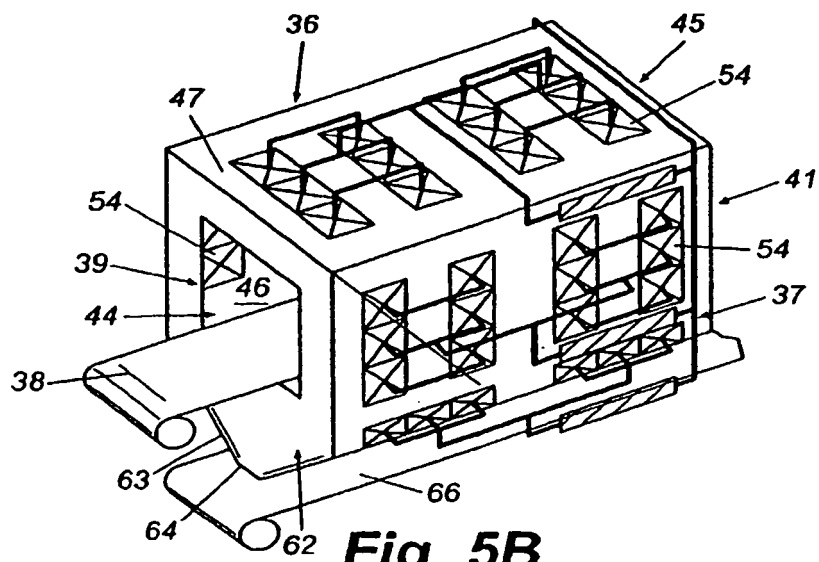


Fig. 5B

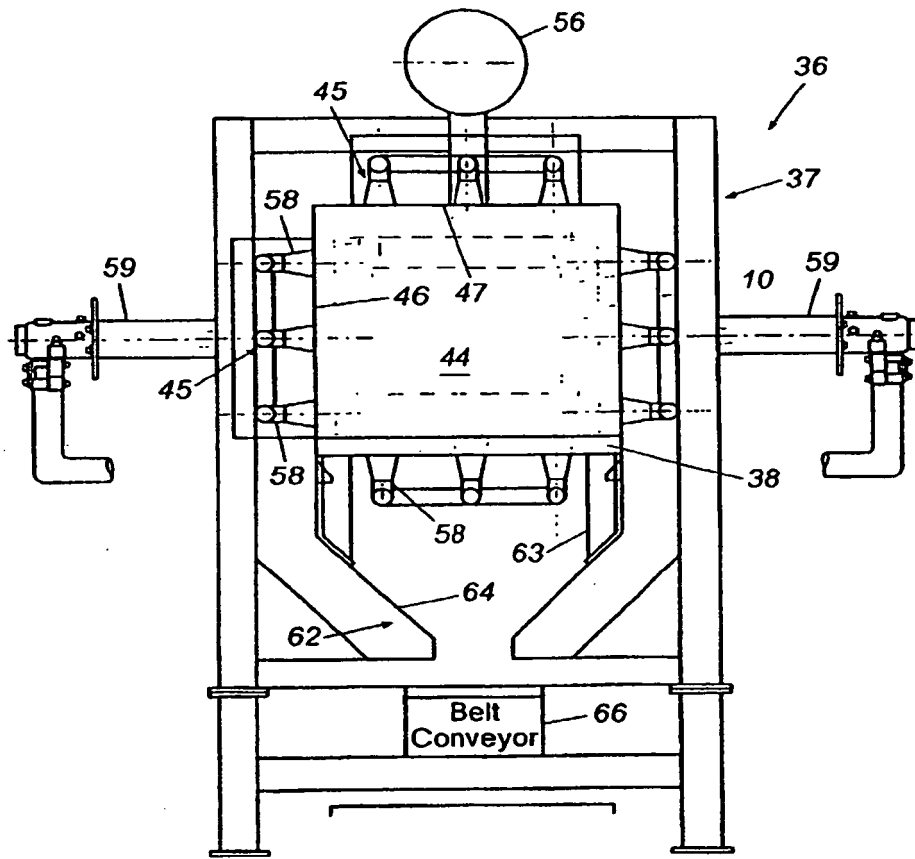


Fig. 6A

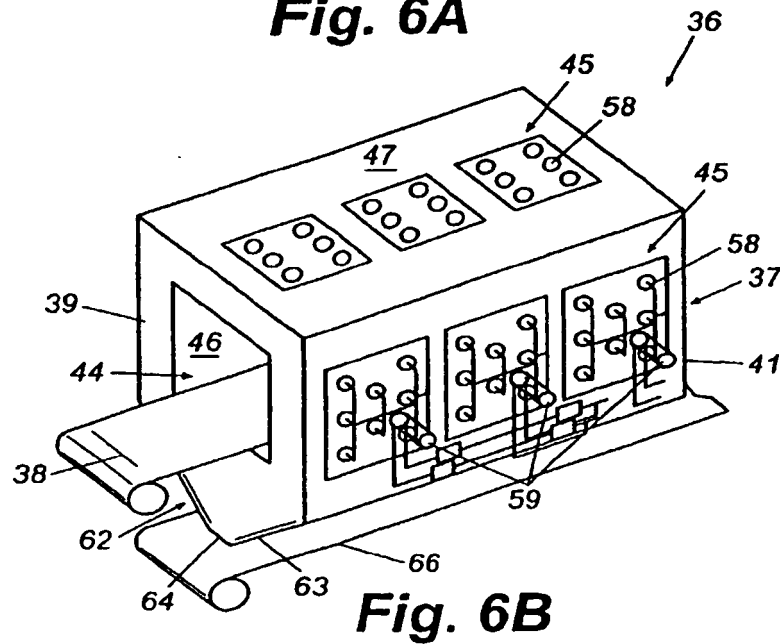


Fig. 6B

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 02063051 A [0003]
- US 5294994 A [0029] [0038] [0042]
- US 5565046 A [0029] [0038] [0042]
- US 5738162 A [0029] [0038] [0042]
- US 6217317 B [0029] [0042]
- US 66535400 A [0029] [0042] [0050]
- US 10051666 B [0029] [0042]