



(11) **EP 2 320 123 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
31.10.2012 Bulletin 2012/44

(51) Int Cl.:
F17C 1/12 ^(2006.01) **F17C 3/02** ^(2006.01)
F17C 13/00 ^(2006.01)

(21) Application number: **09014705.9**

(22) Date of filing: **25.11.2009**

(54) **Double barrier for liquefied gas storage tank and method of constructing the same**

Doppelsperrschicht für Flüssiggasspeichertank und Verfahren zum Bauen desselben

Double barrière pour réservoir de stockage de gaz liquéfié et son procédé de construction

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK SM TR**

(30) Priority: **05.11.2009 KR 20090106532**

(43) Date of publication of application:
11.05.2011 Bulletin 2011/19

(73) Proprietor: **Korea Gas Corporation
Gyeonggi-do 463-754 (KR)**

(72) Inventors:
• **Yang, Young Myung**
Ansan-si, 426-788
Gyeonggi-do (KR)
• **Lee, Yeong Beom**
121-770 Seoul-si (KR)

- **Kim, Young Kyun**
150-771 Seoul-si (KR)
- **Yoon, Ihn Soo**
406-725 Yeonsu-gu,
Incheon-si (KR)
- **Choi, Sung Hee**
405-783 Incheon-si (KR)

(74) Representative: **Bosch, Matthias et al**
Bosch Jehle
Patentanwalts-gesellschaft mbH
Flüggenstrasse 13
80639 München (DE)

(56) References cited:
EP-A2- 1 669 662 WO-A1-2006/014101
DE-A1- 3 717 020 DE-A1-102004 047 551
US-A- 3 773 604 US-A- 3 931 424
US-A- 3 948 406 US-A- 4 170 952

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

CROSS REFERENCE TO RELATED APPLICATION

[0001] This application claims priority from and the benefit of Korean Patent Application No. 10-2009-0106532, filed on November 5, 2009, which is hereby incorporated by reference for all purposes as if fully set forth herein.

BACKGROUND

Technical Field

[0002] The present disclosure relates to a double-barrier for a land-based liquefied gas storage tank and a method of constructing the same and, more particularly, to a double-barrier for a land-based liquefied gas storage tank and a method of constructing the same, which includes sealing and insulating barriers in a wall of the storage tank, thereby doubly preventing leakage of a liquefied gas without additional installation of a secondary barrier outside the storage tank.

Description of the Related Art

[0003] Generally, a liquefied gas storage tank on land has a substantially cylindrical flat bottom and is used to store liquefied gas for fuels, such as liquefied natural gas (LNG), liquefied petroleum gas, and the like, and other liquefied gases such as liquefied oxygen, liquefied nitrogen, and the like. Examples of such a cylindrical liquefied gas storage tank are disclosed in FR Patent No. 2398961 and JP Patent Laid-open Publication No. Hei 9-126393 and US-A-4 170 952.

[0004] Figure 1 shows one example of a conventional full-containment type land-based liquefied gas storage tank. Referring to Figure 1, the storage tank includes a cylindrical tank body 3 formed through concrete casting on a foundation 1 and having an approximately dome-shaped cover.

[0005] The tank body 3 is provided with an insulating wall 4 and a sealing wall 5 disposed inside the insulating wall 4 to contain a cryogenic liquefied gas in a sealed state.

[0006] Since the sealing wall 5 directly contacts the liquefied gas, it may be made of a material, e.g. stainless steel, which can endure cryogenic conditions.

[0007] In such a conventional liquefied gas storage tank on land, a cylindrical wall 7 is constructed outside the storage tank to restrict leakage of the liquefied gas as much as possible even when the liquefied gas leaks accidentally due to breakage of the tank body 3. Therefore, the conventional storage tank occupies a significant area on land due to its large volume and requires many materials and significant costs in construction of the cylindrical wall.

BRIEF SUMMARY

[0008] The present disclosure is directed to solving the problems of the related art as described above, and one embodiment includes a double-barrier for a land-based liquefied gas storage tank and a method of constructing the same, which includes sealing and insulating barriers in a wall of the storage tank, thereby doubly preventing leakage of a liquefied gas without additional installation of a secondary barrier outside the storage tank.

[0009] In accordance with one aspect, a double-barrier for a land-based liquefied gas storage tank is disclosed according to claim 1.

[0010] The insulating wall may include a plurality of primary insulating panels disposed outside the sealing wall and a plurality of secondary insulating panels disposed on the tank body.

[0011] The primary insulating panels may be disposed to define a primary gap between adjacent primary insulating panels, and an insulator may be inserted into the primary gap.

[0012] The secondary insulating panels may be disposed to define a secondary gap between adjacent secondary insulating panels, and the insulating material may be injected into the secondary gap.

[0013] A glass cloth may be interposed between the primary insulating panel and the secondary insulating panel.

[0014] The secondary insulating panels may be disposed to define a secondary gap between adjacent secondary insulating panels, and the primary insulating panels and the secondary insulating panels may be disposed to define the primary gap and the secondary gap at different locations.

[0015] The primary insulating panel may include a plurality of filling holes formed at a location corresponding to the secondary gap to allow the insulating material to be injected into the secondary gap.

[0016] The insulating material filling the space between the insulating panels may be a foamed material.

[0017] The insulating panel and the insulating material may include polyurethane foam, and an adhesive may be applied to a lateral side of the insulating panel to facilitate attachment of the insulating material thereto.

[0018] In accordance with another aspect, a method of constructing a double-barrier for a land-based liquefied gas storage tank includes: stacking a plurality of insulating panels inside a tank body of the storage tank to be separated from each other; injecting and foaming an insulating material between the insulating panels; and stacking a sealing wall inside the insulating wall.

[0019] The insulating panels are including primary and secondary insulating panels stacked in double layers, and a gap between the secondary insulating panels on the tank body is covered by the primary insulating panels on the sealing wall to define a space where the insulating material is foamed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020]

Figure 1 is a view of an example of a conventional full-containment type liquefied gas storage tank on land;

Figure 2 is a partial plan view of a double-barrier for a land-based liquefied gas storage tank in accordance with one embodiment of the present disclosure; and

Figure 3 is a partially cross-sectional view taken along line A-A of Figure 2.

DETAILED DESCRIPTION

[0021] Embodiments of the present disclosure will now be described in detail with reference to the accompanying drawings.

[0022] Referring to Figures 2 and 3, a double-barrier for a land-based liquefied gas storage tank includes a sealing wall 10 as a primary barrier which directly contacts a liquefied gas stored in the storage tank, and an insulating wall 20 as a secondary barrier which is disposed between a tank body 3 and the sealing wall 10 to prevent heat-transfer from an exterior of the tank and leakage of the liquefied gas.

[0023] The sealing wall 10, i.e. the primary barrier, is continuously formed of a metallic material such as SUS and the like, which can endure cryogenic conditions inside the storage tank. The sealing wall 10 may be formed with folds 11 to absorb thermal deformation of the storage tank which occurs during receipt of the liquefied gas.

[0024] The insulating wall 20 as the secondary barrier includes primary insulating panels 21 disposed outside the sealing wall 10 (i.e. an opposite side to the surface contacting the liquefied gas) and secondary insulating panels 25 disposed on the tank body 3. Herein, the term "inside" means a direction towards an inner space of the storage tank in which liquefied gas is stored, and the term "outside" means an opposite direction.

[0025] The primary and secondary insulating panels 21 and 25 may be composed of an insulating material such as polyurethane foam, hardened polyurethane foam, and the like. Protection layers 21a made of, for example, plywood or metal may be formed on an inner surface of the primary insulating panel 21 (i.e. a surface facing an outer surface of the sealing wall 10) and an outer surface of the secondary insulating panel 25 (i.e. a surface facing an inner surface of the tank body 3), respectively (in Figure 3, the protection layer 21a is shown as being disposed only on the inner surface of the primary insulating panel 21).

[0026] A glass cloth 29 may, for example, be disposed between the primary insulating panel 21 and the secondary insulating panel 25. The glass cloth 29 can be attached to the insulating panel in a PU bonding manner.

[0027] The plural secondary insulating panels 25 may

be stacked on the inner surface of the tank body 3, and the tank body 3 may be provided with an anchor member 3a to couple the secondary insulating panels 25 to the tank body 3.

[0028] The secondary insulating panels 25 may be separated from each other to define a secondary gap 26 between adjacent secondary insulating panels 25. In the secondary gap 26, as described below, a polyurethane-based insulating material may be foamed by injection via a filling hole 21b formed through the primary insulating panel 21. A filling member 21b, which is formed in the secondary gap 26 by foaming the insulating material, reliably prevents the liquefied gas from leaking outside via the insulating wall 20 even when leakage of the liquefied gas occurs due to breakage of the sealing wall 10, thereby allowing the insulating wall 20 to serve as the secondary barrier.

[0029] Inside the secondary insulating panels 25, the primary insulating panels 21 are stacked to be separated from each other to define a primary gap 22 between adjacent primary insulating panels 21 as in the secondary insulating panels 25. The primary gap 22 may be filled with an insulator 23 such as glass wool.

[0030] The primary insulating panels 21 and the secondary insulating panels 25 may be arranged in a different way such that the secondary gap 26 between the secondary insulating panels 25 and the primary gap 22 between the primary insulating panels 21 are formed at different locations, as shown in Figure 3.

[0031] In order to form the filling member 27 by injection-molding the polyurethane-based insulating material in the secondary gap 26 between the secondary insulating panels 25, as shown in Figure 2, the primary insulating panel 21 is formed with a plurality of filling holes 21b separated at constant intervals from each other along the secondary gap 26.

[0032] When injection-molding the insulating material into the secondary gap 26 to form the filling member 27, an operator can check how far filling of the insulating material into the secondary gap 26 has proceeded via another filling hole 21b adjacent to the filling hole 21b through which the insulating material is injected.

[0033] As described above, the polyurethane foam insulating material may be foamed in the secondary gap 26 via the filling hole 21b of the primary insulating panel 21. Here, an adhesive may be deposited between side surfaces of the secondary insulating panels 25 such that the foamed filling member 27 closely adheres to the side surfaces of the secondary insulating panels 25.

[0034] If the sealing wall 10 serving as the primary barrier is broken so as to cause leakage of the liquefied gas, the gas can flow towards the secondary gap 26 via the primary gap 22 and a gap between the primary and secondary insulating panels 21, 25. However, since the temperature around the secondary insulating panel 25 is higher than a liquefaction temperature of the liquefied gas, the leaking solution is vaporized, thereby increasing pressure in the secondary gap 26. Since the secondary

gap 26 is a closed space defined by the primary insulating panel 21, the secondary insulating panel 25, and the tank body 3, such an increase in pressure of the secondary gap 26 can restrict a flow of leaking solution into the secondary gap 26.

[0035] Even if leakage occurs as such and the leaking solution flows into the secondary gap 26, vaporization of the liquefied gas, which has previously leaked, causes an increase in pressure to prevent the leaking solution from continuously flowing, thereby allowing the insulating wall to serve as the secondary barrier.

[0036] As described above, according to the embodiment, in constructing one of two insulating layers (i.e. the secondary insulating layer near the concrete tank body undergoing minor thermal expansion), the same material as the insulating panels, which constitute the insulating layer, is foamed in-situ between the respective insulating panels (i.e. the secondary insulating panels), so that the insulating panels as well as the insulating panel and the concrete wall (i.e. tank body) can be integrated with each other. Therefore, the integrated insulating panels and the integrated insulating panel and concrete wall serve as the secondary barrier for preventing leakage of the liquefied gas.

[0037] Moreover, even when a crack is created in the secondary barrier, leakage of the liquefied gas can be sufficiently restricted because the insulating wall (i.e. the secondary insulating layer) is integrated with the concrete wall and because the leaking liquefied gas is vaporized due to a higher temperature of the concrete wall than the liquefaction temperature and causes an increase in pressure around the crack. Therefore, a very low temperature is not transferred through the tank body to prevent damage of the storage tank.

[0038] As described above, the secondary insulating panels are bonded together by foaming the same insulating material as the secondary insulating panel in-situ, and an adhesive or like may be applied onto the lateral side of the insulating panel so as not to create crack in the boundary between the foam insulating material and the insulating panel.

[0039] As such, according to the embodiments, leakage of a liquefied gas can be doubly prevented by the construction of the sealing and insulating walls which are attached inside the tank body.

[0040] Further, since there is no need for additional installation of a secondary barrier outside the storage tank, a space for a single storage tank is reduced and thus more storage tanks can be installed in the same space, which is advantageous in reduction in cost, time and efforts in construction of the storage tank.

[0041] The various embodiments described above can be combined to provide further embodiments. All patents, patent application publications, patent applications, and non-patent publications referred to in this specification and/or listed in the Application Data Sheet are incorporated herein by reference, in their entirety. Aspects of the embodiments can be modified, if necessary, to employ

concepts of the various patents, applications and publications to provide yet further embodiments.

[0042] These and other changes can be made to the embodiments in light of the above-detailed description. In general, in the following claims, the terms used should not be construed to limit the claims to the specific embodiments disclosed in the specification and the claims, but should be construed to include all possible embodiments along with the full scope of equivalents to which such claims are entitled. Accordingly, the claims are not limited by the disclosure.

Claims

1. A double-barrier for a land-based liquefied gas storage tank comprising:

an insulating wall (20) inside a tank body (3) of the storage tank, the insulating wall (20) comprising a plurality of insulating panels attached to the tank body and separated from each other; a sealing wall (10) disposed inside the insulating wall (20) to primarily prevent leakage of a liquefied gas while directly contacting the liquefied gas in the storage tank; and the insulating wall (20) comprising a plurality of primary insulating panels (21) disposed outside the sealing wall (10) and a plurality of secondary insulating panels (25) disposed on the tank body (3), the double-barrier is **characterized in that**, a space between the insulating panels is filled with an insulating material to secondarily prevent leakage of the liquefied gas; the secondary insulating panels (25) are disposed to define a secondary gap (26) between adjacent secondary insulating panels (25), and the insulating material (27) is injected into the secondary gap (26) and foamed in the secondary gap (26); and the same material as the secondary insulating panels (25) is foamed in the secondary gap (26) so that the secondary insulating panels (25) are integrated with each other.

2. The double-barrier according to claim 1, wherein the primary insulating panels (21) are disposed to define a primary gap (22) between adjacent primary insulating panels, and an insulator (23) is inserted into the primary gap.
3. The double-barrier according to claim 1, wherein a glass cloth (29) is interposed between the primary insulating panel (21) and the secondary insulating panel (25).
4. The double-barrier according to claim 2, wherein the secondary insulating panels (25) are disposed to de-

fine a secondary gap (26) between adjacent secondary insulating panels, and the primary insulating panels (21) and the secondary insulating panels (25) are disposed to define the primary gap (22) and the secondary gap (26) at different locations.

5. The double-barrier according to claim 4, wherein the primary insulating panel (21) comprises a plurality of filling holes (21 b) formed at a location corresponding to the secondary gap (26) to allow the insulating material (27) to be injected into the secondary gap (26).
6. The double-barrier according to claim 1, wherein the insulating panel and the insulating material comprise polyurethane foam, and an adhesive is applied to a lateral side of the insulating panel to facilitate attachment of the insulating material thereto.

Patentansprüche

1. Doppelsperre für einen landbasierten Flüssiggas-speichertank, mit:

einer Isolierwand (20) in einem Tankkörper (3) des Speichertanks, wobei die Isolierwand (20) eine Vielzahl von Isolierplatten aufweist, die an dem Tankkörper befestigt und voneinander getrennt sind;

einer Dichtungswand (10), die in der Isolierwand (20) angeordnet ist, um primär ein Lecken von Flüssiggas zu verhindern, während sie das Flüssiggas in dem Speichertank unmittelbar berührt; und

wobei die Isolierwand (20) eine Vielzahl primärer Isolierplatten (21), die außerhalb der Dichtungswand (10) angeordnet sind, aufweist, und eine Vielzahl sekundärer Isolierplatten (25), die an dem Tankkörper (3) angeordnet sind, wobei die Doppelsperre **dadurch gekennzeichnet ist, dass**

ein Raum zwischen den Isolierplatten mit einem Isoliermaterial gefüllt ist, um sekundär ein Lecken des Flüssiggases zu verhindern;

die sekundären Isolierplatten (25) angeordnet sind, um einen sekundären Zwischenraum (26) zwischen benachbarten sekundären Isolierplatten (25) zu definieren, und das Isoliermaterial (27) in den sekundären Zwischenraum (26) injiziert wird und in dem sekundären Zwischenraum (26) aufgeschäumt wird; und dasselbe Material wie die sekundären Isolierplatten (25) in dem sekundären Zwischenraum (26) aufgeschäumt wird, so dass die sekundären Isolierplatten (25) miteinander integriert werden.

2. Doppelsperre nach Anspruch 1, wobei die primären Isolierplatten (21) angeordnet sind, um einen primären Zwischenraum (22) zwischen benachbarten primären Isolierplatten zu definieren, und wobei ein Isolierstoff (23) in den primären Zwischenraum eingeführt wird.

3. Doppelsperre nach Anspruch 1, wobei ein Glasfasergewebe (29) zwischen die primäre Isolierplatte (21) und die sekundäre Isolierplatte (25) eingefügt wird.

4. Doppelsperre nach Anspruch 2, wobei die sekundären Isolierplatten (25) angeordnet sind, um einen sekundären Zwischenraum (26) zwischen benachbarten sekundären Isolierplatten zu definieren, und wobei die primären Isolierplatten (21) und die sekundären Isolierplatten (25) angeordnet sind, um den primären Zwischenraum (22) und den sekundären Zwischenraum (26) an verschiedenen Stellen zu definieren.

5. Doppelsperre nach Anspruch 4, wobei die primäre Isolierplatte (21) eine Vielzahl von Fülllöchern (21 b) aufweist, die an einer Stelle ausgebildet sind, die dem sekundären Zwischenraum (26) entspricht, um zu ermöglichen, dass das Isoliermaterial (27) in den sekundären Zwischenraum (26) injiziert wird.

6. Doppelsperre nach Anspruch 1, wobei die Isolierplatte und das Isoliermaterial Polyurethanschaum aufweisen, und wobei ein Klebstoff auf eine seitliche Seite der Isolierplatte aufgebracht wird, um die Befestigung des Isoliermaterials daran zu erleichtern.

Revendications

1. Double barrière pour un réservoir de stockage de gaz liquéfié au sol comprenant :

une paroi d'isolation (20) à l'intérieur d'un corps de réservoir (3) du réservoir de stockage, la paroi d'isolation (20) comprenant une pluralité de panneaux d'isolation fixés au corps de réservoir et séparés les uns des autres ;

une paroi d'étanchéité (10) disposée à l'intérieur de la paroi d'isolation (20) pour prévenir de manière principale une fuite d'un gaz liquéfié tout en étant directement au contact du gaz liquéfié dans le réservoir de stockage ; et

la paroi d'isolation (20) comprenant une pluralité de panneaux d'isolation principaux (21) disposés à l'extérieur de la paroi d'étanchéité (10) et une pluralité de panneaux d'isolation secondaires (25) disposés sur le corps de réservoir (3), la double barrière est **caractérisée en ce que**, un espace entre les panneaux d'isolation est

rempli avec un matériau d'isolation pour prévenir de manière secondaire une fuite du gaz liquéfié ;

les panneaux d'isolation secondaires (25) sont disposés de façon à définir un espace secondaire (26) entre panneaux d'isolation secondaires (25) adjacents, et le matériau d'isolation (27) est injecté dans l'espace secondaire (26) et expansé dans l'espace secondaire (26) ; et le même matériau que les panneaux d'isolation secondaires (25) est expansé dans l'espace secondaire (26) de telle sorte que les panneaux d'isolation secondaires (25) sont intégrés les uns avec les autres.

5

10

15

2. Double barrière selon la revendication 1, dans laquelle les panneaux d'isolation principaux (21) sont disposés de façon à définir un espace principal (22) entre panneaux d'isolation principaux adjacents, et un isolant (23) est inséré dans l'espace principal.

20

3. Double barrière selon la revendication 1, dans laquelle une toile de verre (29) est interposée entre le panneau d'isolation principal (21) et le panneau d'isolation secondaire (25).

25

4. Double barrière selon la revendication 2, dans laquelle les panneaux d'isolation secondaires (25) sont disposés de façon à définir un espace secondaire (26) entre panneaux d'isolation secondaires adjacents, et les panneaux d'isolation principaux (21) et les panneaux d'isolation secondaires (25) sont disposés de façon à définir l'espace principal (22) et l'espace secondaire (26) en des emplacements différents.

30

35

5. Double barrière selon la revendication 4, dans laquelle le panneau d'isolation principal (21) comprend une pluralité de trous de remplissage (21 b) formés en un emplacement correspondant à l'espace secondaire (26) pour permettre que le matériau d'isolation (27) soit injecté dans l'espace secondaire (26).

40


6. Double barrière selon la revendication 1, dans laquelle le panneau d'isolation et le matériau d'isolation comprennent une mousse de polyuréthane, et un adhésif est appliqué à un côté latéral du panneau d'isolation pour faciliter la fixation du matériau d'isolation à celui-ci.

45

50

55

Fig. 1

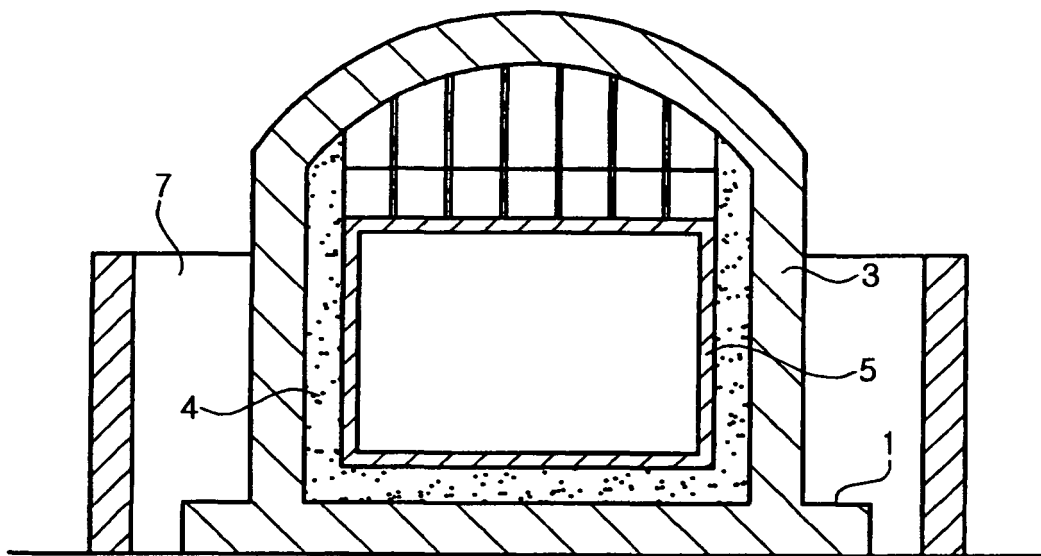

Prior Art

Fig. 2


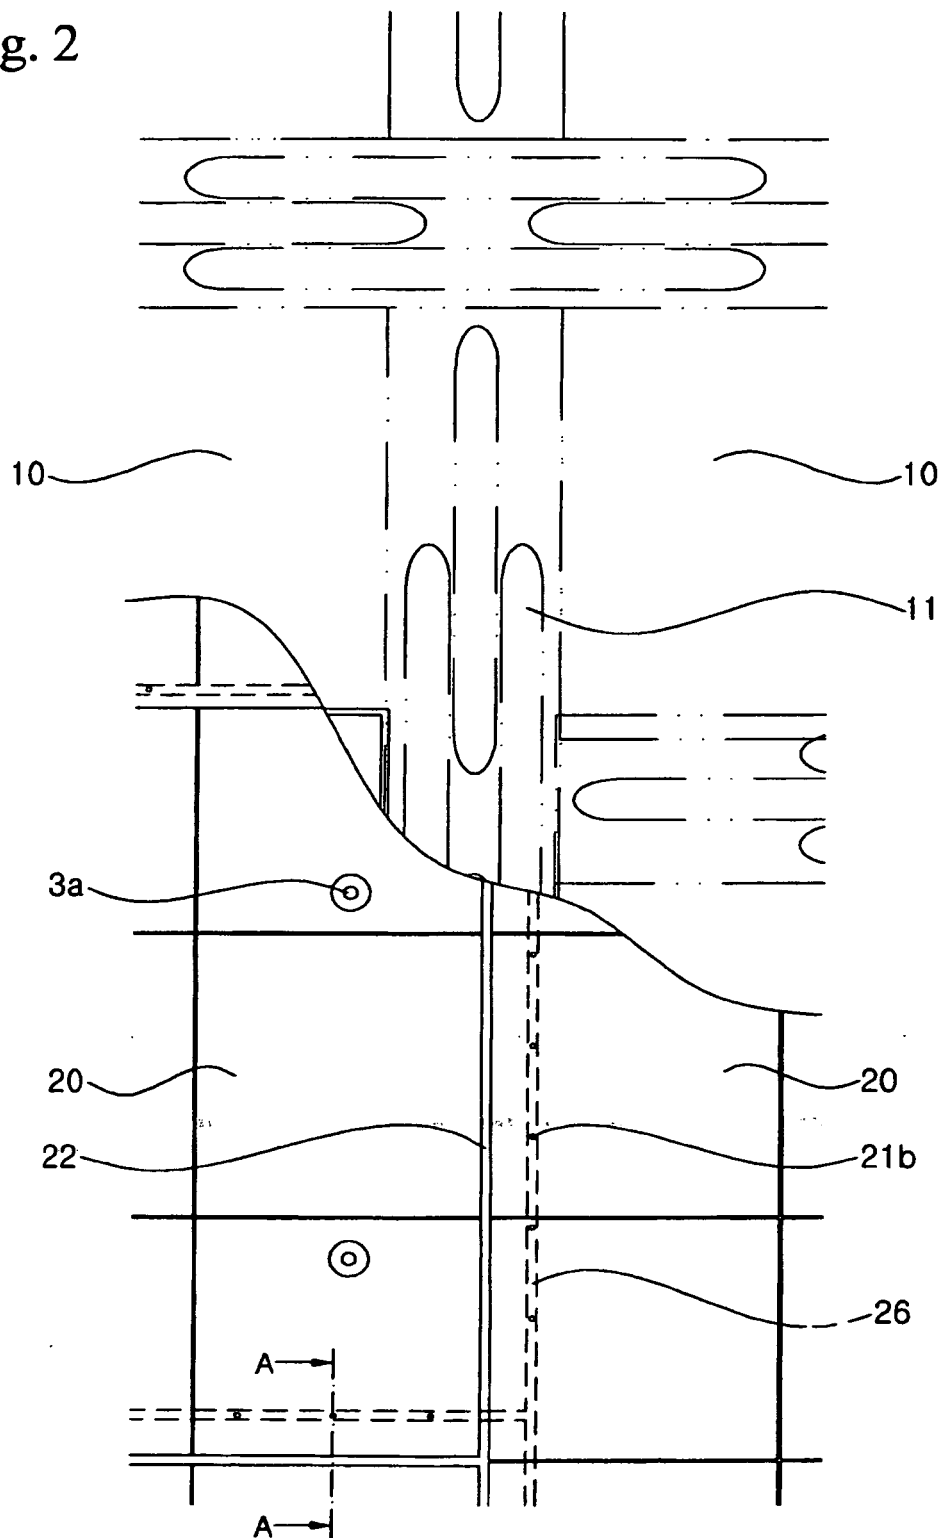


Fig. 3

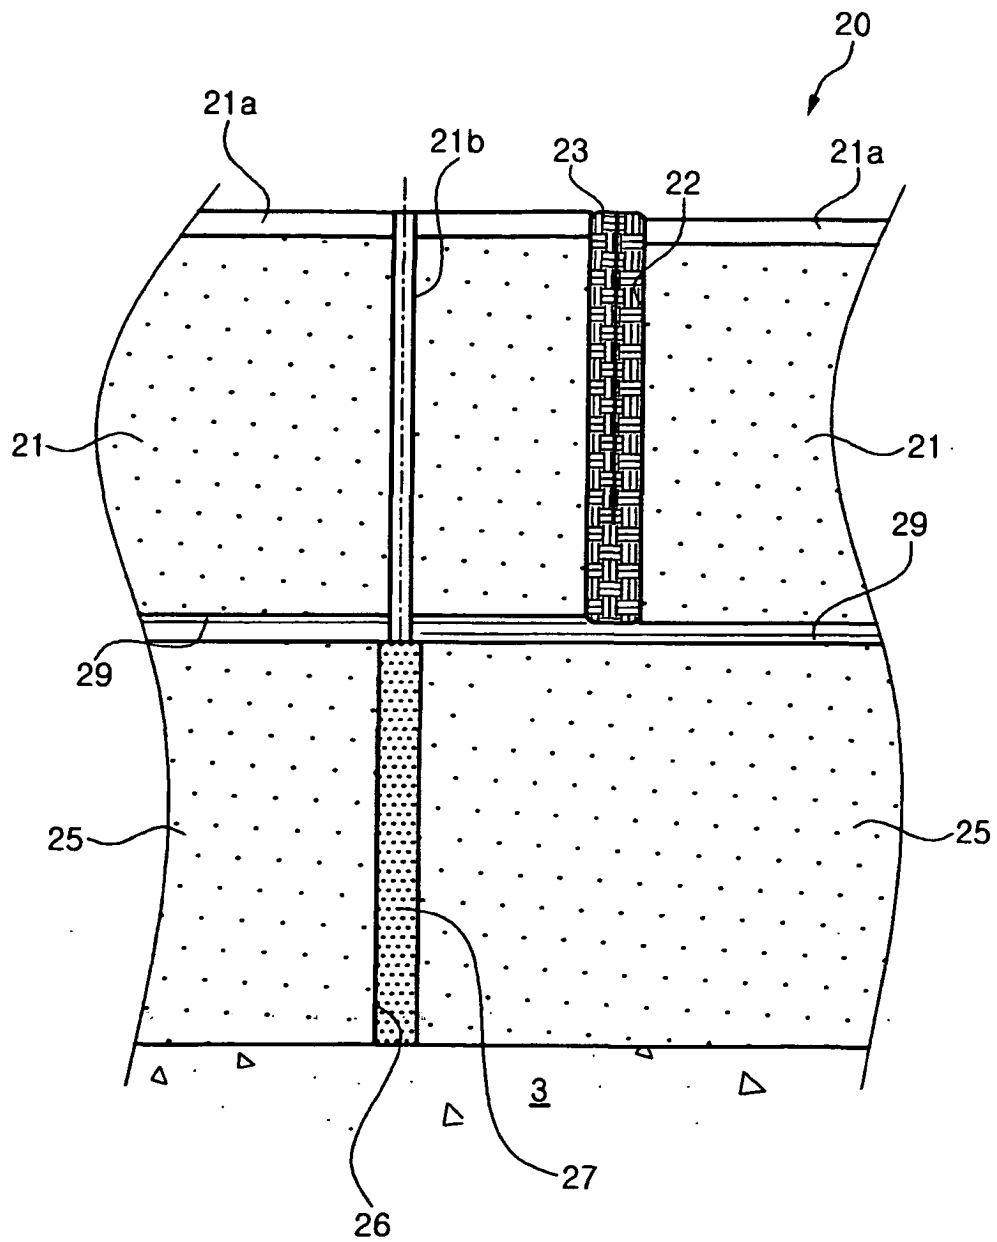

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- KR 1020090106532 [0001]
- FR 2398961 [0003]
- JP HEI9126393 A [0003]
- US 4170952 A [0003]