



(11) **EP 2 330 988 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
23.09.2020 Bulletin 2020/39

(51) Int Cl.:
A61B 17/14 (2006.01) **B27B 33/02** (2006.01)
B23D 61/12 (2006.01) **B27B 19/00** (2006.01)

(21) Application number: **09763249.1**

(86) International application number:
PCT/US2009/045378

(22) Date of filing: **28.05.2009**

(87) International publication number:
WO 2009/151958 (17.12.2009 Gazette 2009/51)

(54) **MICRO-SAW BLADE FOR BONE-CUTTING SURGICAL SAWS**

MIKROSÄGEBLATT FÜR CHIRURGISCHE KNOCHENSÄGEN

LAME DE MICRO-SCIE POUR DES SCIES CHIRURGICALES DE COUPE D'OS

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK TR

(30) Priority: **11.06.2008 US 136956**

(43) Date of publication of application:
15.06.2011 Bulletin 2011/24

(60) Divisional application:
20179802.2
20188879.9

(73) Proprietor: **Medtronic PS Medical, Inc.**
Goleta, CA 93117 (US)

(72) Inventor: **BOYKIN, Christopher, M.**
Athens, TX 75751 (US)

(74) Representative: **Dehns**
St. Bride's House
10 Salisbury Square
London EC4Y 8JD (GB)

(56) References cited:
WO-A-95/13020 **WO-A-2007/041027**
US-A- 5 366 312 **US-A- 5 403 318**
US-A1- 2003 199 880 **US-A1- 2004 243 136**
US-A1- 2006 206 100 **US-A1- 2007 260 252**

EP 2 330 988 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**FIELD OF THE INVENTION**

[0001] The present disclosure relates to a bone-cutting surgical system, and more particularly, to a micro-saw blade suitable for use with a surgical cutting saw.

BACKGROUND

[0002] Bone-cutting surgical saws, such as sagittal or oscillating type surgical saws, cut most effectively at very high speeds, such as for example, 10000-40000 cycles per minute. These high speeds introduce high levels of vibration and can cause blade wander during a cut. Accordingly, blade cuts typically have a thickness considerably greater than the width of the actual blade. For example, a cutting blade having a 0.381 mm (0.015 inch) thickness may be unable to cut a groove having a width of less than 0.762 mm (0.030 inch). In addition, because the saws operate at such high speeds, the excessive vibration can quickly fatigue a surgeon's hand or wrist. As fatigue sets in, maintaining the same preciseness and accuracy may become more difficult.

[0003] A contributing problem is the way the blade attaches to the saw. Conventional systems use pins located close to the centerline of the blade attachment portion, resulting in a short moment arm for driving the blade. Accordingly, during irregular cutting, such as a while making a curved cut or a cut not along the path of the normal oscillating path of the saw blade, the blade can become dislodged, possibly causing some blade loosening. This can result in cuts having a width considerably larger than the blade width.

[0004] Bone-cutting saws and blades are known from US 2003/199880, US 2004/243136 and WO 2007/041027.

[0005] The devices disclosed herein overcome one or more of the short-comings in the prior art.

SUMMARY

[0006] In one exemplary aspect, the present disclosure is directed to a surgical cutting blade as defined by claim 1.

[0007] In another exemplary aspect, the present disclosure is directed to a cutting blade set as defined by claim 14.

[0008] These and other features will become apparent from the following description.

BRIEF DESCRIPTION OF THE DRAWINGS**[0009]**

Fig. 1 is an illustration of an exemplary oscillating bone-cutting surgical system.

Fig. 2 is an illustration of an exemplary collet assembly from the surgical system of Fig. 1.

Fig. 3 is an illustration of a cross-section of the exemplary collet assembly of Fig. 2.

Fig. 4 is an illustration of an exemplary driving shaft of the collet assembly of Fig. 2.

Fig. 5 is an illustration of an exemplary sleeve of the collet assembly of Fig. 2.

Figs. 6 and 7 are illustrations of an exemplary micro-saw blade of the bone cutting surgical system of Fig. 1.

Fig. 8 is an illustration of the driving shaft of Fig. 3 with a micro-saw blade.

Fig. 9 is an illustration of the sleeve of Fig. 4 with an in-place micro-saw blade.

Figs. 10-12 are illustrations of additional exemplary micro-saw blades usable with the bone-cutting surgical system.

Fig. 13 is an illustration of an exemplary blade set having a plurality of micro-saw blades

Figs. 14 and 15 are illustrations of components of an alternative collet assembly.

Fig. 16 is an illustration of an exemplary sagittal bone-cutting surgical system.

DETAILED DESCRIPTION

[0010] For the purposes of promoting an understanding of the principles of the invention, reference will now be made to embodiments or examples illustrated in the drawings, and specific language will be used to describe the same. It will nevertheless be understood that no limitation of the scope of the invention is thereby intended. Any alteration and further modifications in the described embodiments, and any further applications of the principles of the invention as described herein are contemplated as would normally occur to one skilled in the art to which the disclosure relates.

[0011] Generally, the present disclosure relates to a bone cutting surgical system including a hand-held, high-speed, bone-cutting surgical saw, such as a sagittal or oscillating saw, and a cutting micro-saw blade. The saw includes a collet assembly with protruding pins or nubs that mesh with or extend into openings on the cutting blade, thereby securing the blade in place in the collet assembly. In order to minimize the moment forces on the interior of the blade when the blade is rotating, the protrusions on the collet assembly and the openings on the

saw blade are placed toward the exterior perimeter of the collet assembly and the exterior perimeter of the saw blade. In one embodiment, the openings are notches formed along the exterior edge of the saw blade. By moving moment forces toward the exterior of the saw blade, blade vibration may be reduced. Reducing vibration increases cutting accuracy, which can reduce patient trauma and speed recovery time, as well as reduce surgeon fatigue. In some embodiments, the micro-saw blades include a dampening overmold that interfaces with the collet assembly. This too may reduce blade vibration. In addition, the overmold may assist with blade identification.

[0012] Turning now to Fig. 1, the present disclosure is directed to a bone-cutting surgical system 100 including a surgical saw 102 and a selectively removable micro-saw blade 104. The surgical saw 102 includes a hand-piece 106, a cord 108, and a connector 110 configured to removably couple with a power source. The connector 110 is merely exemplary, and it should be apparent to one skilled in the art that any suitable connector may be used, and in some embodiments, the cord 108 itself may be coupled to the power source without the use of a connector. Additional contemplated embodiments include a power source as a part of the hand-piece 106, such as a battery powered hand-piece.

[0013] The hand-piece 106 includes a motor assembly 112, a grip 114, and a collet assembly 116. In some embodiments, the motor assembly 112 is housed within the grip 114, while in other embodiments, it is disposed adjacent to the grip 114. It is contemplated that any suitable system for controlling the surgical saw 102 may be used. For example, some embodiments include a trigger system disposed on the hand-piece 106 to provide hand-control of the cutting speed, or alternatively, a foot pedal associated with the hand-piece 106 through the power source to provide the controlling inputs. Other control systems also are contemplated.

[0014] Figs. 2-5 show a portion of the exemplary collet assembly 116. The collet assembly 116 secures the saw blade 104 to the surgical saw 102 and transfers a driving force from the motor to the blade. In this embodiment, it includes a driving shaft 118 and a sleeve 120 defining a longitudinal collet axis 122. The sleeve 120 receives and extends about the driving shaft 118 and is axially movable along the collet axis 122 relative to the driving shaft 118, enabling selective coupling with the blade 104.

[0015] The driving shaft 118 is shown in greater detail in Figs. 3 and 4. Here, the driving shaft includes a head 124 forming a distal end of the driving shaft and a shank 126 extending proximally from the head 124. These together define a shaft axis 127 (Fig. 4) extending longitudinally through the shaft.

[0016] Referring to Figs. 3 and 4, the head 124 includes a distally facing outer surface 128, a proximally facing blade contacting surface 130 adjacent the shank 126, and an outer perimeter 132 extending therebetween. The blade contacting surface 130 includes an inner edge 134,

which in this embodiment is defined where the shank 126 and the blade contacting surface 130 meet. It also includes an outer edge 136, which in this embodiment is defined where the outer perimeter 132 and the blade contacting surface 130 meet. These inner and outer edges 134, 136 define a reference mid-line 138 half-way between them on the blade contacting surface 130.

[0017] In this embodiment, the blade contacting surface 130 includes a receiving opening formed therein as a receiving recess 140 for receiving one or more protrusions to be discussed below relative to the sleeve 120. Here, the receiving recess 140 is formed as a single groove concentric about the shaft axis 127 and disposed closer to the outer perimeter 132 than to the shank 126. Accordingly, as shown in Fig. 4, the receiving recess 140 is offset from the mid-line 138 defined by the inner and outer edges 134, 136 of the blade contacting surface 130. In the example shown, the outermost edge of the receiving recess 140 (edge closest to the outer perimeter 132) is located toward the outer edge 136 at least half of the distance between the mid-line 138 and the outer edge 136. Said another way, the outermost edge of the receiving recess 140 is located toward the outer edge 136 at least three quarters or 75% of the distance from the inner edge 134 to the outer edge 136. In some embodiments, the outermost edge of the receiving recess is closer to 80% of the distance between the inner edge 134 and the outer edge 136. In the embodiment shown, the inner most edge of the receiving recess 140 (edge closest to the shank 126) is likewise located more than half the distance toward the outermost edge 136 so that the entire receiving recess 140 is disposed outwardly from the midline 138, or more than half of the distance of the inner edge 134 to the outer edge 136.

[0018] Furthermore, in the example of Fig. 4, the outermost edge of the receiving recess 140 is disposed toward the outer edge 136 more than 80% of the distance from the shaft axis 127 to the outer edge 136, and in some embodiments, more than 90% of the distance from the shaft axis 127 to the outer edge 136.

[0019] The shank 126 includes a distal end 142 either connected to or integral with the head 124 and a proximal end 144. At the distal end 142, the shank includes a blade receiving radial groove or recess 146 (Fig. 3). The groove 146 is formed such that the blade contacting surface 130 of the head 124 forms one side of the groove 146 while the opposing side is formed by a shoulder portion 148 (Fig. 3) of the shank 126. In the embodiment shown, the groove 146 is formed with a circular diameter sized to mate with and receive a portion of the saw blade 104. However, in other embodiments, the groove 146 is non-circular, and may be formed, for example, of a series of flat surfaces or may be formed of, for example, two grooves formed into opposing sides of the shank 126. An axially elongated slot 150 extends through the shank 126. This can receive a pin (not shown) connecting the shank 126 to the sleeve 120 while still permitting limited axial sliding between the sleeve 120 and shank 126. In

this embodiment, the proximal end 144 includes a motor coupling feature 147 shown as a pin-receiving through passage that connects either directly or cooperatively to the motor to provide the cutting oscillation required.

[0020] Figs. 3 and 5 show the sleeve 120 in greater detail. The sleeve 120, like the driving shaft 118, includes a head 152 and a shank 154, but is formed with a central bore 156 sized to receive the shank 126 of the driving shaft 118 as shown best in Fig. 3. The sleeve 120 defines a sleeve axis 158 shown in Fig. 5. The head 152 includes a substantially planar distally facing blade contacting surface 160, a proximally facing surface 162, and an outer perimeter 164. In this embodiment, the sleeve outer perimeter 164 is sized to have substantially the same diameter as the driving shaft outer perimeter 132. Further, as shown in Fig. 3, the distally facing blade contacting surface 160 of the sleeve 120 faces the proximally facing blade contacting surface 130 of the driving shaft 118.

[0021] The distally facing blade contacting surface 160 includes an inner edge 166, which in this embodiment is defined where the central bore 156 and the distally facing blade contacting surface 160 meet. It also includes an outer edge 168, which in this embodiment is defined where the outer perimeter 164 and the distally facing blade contacting surface 160 meet. These inner and outer edges 166, 168 define a reference midline 170 extending half-way between them on the distally facing blade contacting surface 160.

[0022] Referring now to Fig. 5, the distally facing blade contacting surface 160 of the sleeve 120 includes a plurality of protrusions 172 formed thereon. These are symmetrically disposed about the sleeve axis 158 and are configured to interface with the saw blade 104, as is further discussed below. Here, the sleeve 120 includes eight protrusions extending therefrom, spaced apart about the sleeve axis 158. It is contemplated that more or fewer protrusions may be present. The protrusions 172 may be integrally formed with sleeve 120 or, for manufacturing convenience, may be separate components fit, such as with an interference fit, into receiving ports 171 (shown in Fig. 3) formed in the distally facing blade contacting surface 160. For clarity, the protrusions 172 are not shown in Fig. 3, but are shown in Fig. 5. In this embodiment, these protrusions 172 are formed of cylindrical pins extending from the substantially planar distally facing blade contacting surface 160. In other examples however, the protrusions 172 have a square, rectangular, triangular or diamond-shaped cross-section. Protrusions of other shapes are also contemplated.

[0023] The protrusions 172 are disposed offset from the mid-line 170 on the distally facing blade contacting surface 160. In the example shown, the protrusions 172 are disposed so that the outermost portion of the protrusions (portion of protrusion closest to the perimeter 164) is located toward the outer edge 168 at least half of the distance between the midline 170 and the outer edge 168. Said another way, the outermost portions of the protrusions 172 are located toward the outer edge 168 at

least three quarters or 75% of the distance from the inner edge 166 to the outer edge 168. In some embodiments, the outermost portions of the protrusions 172 are closer to 80% of the distance between the mid-line 170 and the outer edge 168.

[0024] In the embodiment shown, the inner most portions of the protrusions 172 (portions closest to the inner edge 166) are likewise located toward the outermost edge 136 so that the entire protrusion 172 is disposed outwardly from the midline 170, or more than half of the distance of the inner edge 166 to the outer edge 168.

[0025] Furthermore, in the example of Fig. 5, the outermost portions of the protrusions are disposed toward the outer edge 168 more than 80% of the distance from the sleeve axis 158 to the outer edge 168, and in some embodiments, more than 90% of the distance from the sleeve axis to the outer edge 168.

[0026] The sleeve shank 154 extends from the proximally facing surface 162 (Fig. 3) of the head 152 and includes a transverse through hole 174 in each side sized to receive a pin (not shown) connecting the sleeve 120 and driving shaft 118. When assembled with the driving shaft 118, the hole 174 aligns with the slot 150 in the driving shaft 118 for slidable, pinned attachment.

[0027] Referring now to Fig. 3, as can be seen, the distally facing blade contacting surface 160 of the sleeve 120 and the blade contacting surface 130 of the driving shaft 118 face each other. The pieces may axially move apart to receive the blade 104, and then come together to clamp the blade 104 between the blade contacting surfaces. When assembled, the shaft axis 127 (Fig. 4) of the driving shaft 118 and the sleeve axis 158 (Fig. 5) of the sleeve are co-axially aligned with the longitudinal collet axis 122 (Fig. 3). These form a centerline about which the saw blade 104 can oscillate. The protrusions 172 (not shown for clarity in Fig. 3) extending from the distally facing blade contacting surface 160 fit within the receiving recess 140 formed in the head of the driving shaft 118 to both secure and align the saw blade 104, as discussed below.

[0028] Here, the receiving recess 140 is shown as a single groove formed radially about the shaft axis 127, and extending into the proximally facing blade contacting surface 130. In some embodiments, the collet assembly 116 includes no receiving recess, but the protrusions extend to and abut directly against the substantially planar proximally facing blade contacting surface 130.

[0029] Figs. 6 and 7 show the exemplary micro-saw blade 104 usable with the surgical saw 102 in Fig. 1 and securable with the collet assembly 116 in Figs. 2-5. The micro-saw blade 104 includes a proximal end 180 that facilitates interconnection with the collet assembly 116 and a distal end 182 having a cutting edge including a plurality of cutting teeth 184 formed thereon.

[0030] In this example, the proximal end 180 is defined by a relatively bulbous head 186 that includes a slot 188 extending inwardly along a longitudinal axis 190 from the proximal end of the saw blade 104. The slot 188 is formed

with a funnel-like opening 192 defined by substantially straight edges 194 facing toward the longitudinal axis 190. The straight edges may help guide the saw blade 104 into place on the collet assembly, and form an angle between 70 and 160 degrees, but more particularly, within a range of about 90 to 120 degrees. The slot 188 also includes a slot edge 196 shaped to interface with the blade receiving groove 146 on the driving shaft 118 (Fig. 3). Because the blade receiving groove 146 is cylindrically shaped, the slot edge 196 is formed as a semi-circle, about a center point 198 defined by the bulbous head 186, with substantially parallel sides extending proximally from the slot edge toward the funnel-like opening 192. The slot edge 196 at least in part defines an inner edge of the bulbous head 186. A partially circular outer perimeter 200, which in this embodiment is concentric with the slot edge 196, defines an outer edge of the bulbous head 188. In some embodiments, the outer perimeter 200 has a diameter substantially the same as, or slightly smaller than, the diameter of the driving shaft head 124 and the sleeve head 152. For reference, a concentric midline 202 splits the distance between the outer perimeter 200 and the slot edge 196 in Fig. 7.

[0031] Openings 204 formed in the outer perimeter 200 and extending through the blade 104 permit the saw blade 104 to be secured to the surgical saw collet assembly 116. In the embodiment shown, the openings 204 are symmetrically disposed about the center point 198. Here, at least two openings 204 lie directly on opposing sides of the center point and on transverse sides of the longitudinal axis 190. A centrally disposed opening 206 lies along the longitudinal axis 190. The central opening 206 is spaced the same distance from the center point 198 as the perimeter openings 204. In the example shown the openings 204, 206 are offset from each other by 45 degrees and are sized to match the protrusions 172 on the distally facing surface of the sleeve 120. However, other offset angles are contemplated that match the desired collet assembly.

[0032] The openings 204, 206 are disposed offset from the mid-line 202 defined by the outer perimeter 200 and the slot edge 196 of the bulbous head 186. In the example shown, the openings 204 are formed so that innermost edge portions (edge portions closest to the centerpoint 198) are disposed closer to the outer perimeter 200 than to the slot edge 196. Accordingly, the innermost edge of the opening is spaced from the slot edge 196 more than half of the distance between the outer perimeter 200 and the slot edge 196. In some embodiments, the innermost edge portions of the openings 204 are spaced toward the perimeter edge to be more than about 70% of the distance between the outer perimeter 200 and the slot edge.

[0033] Furthermore, as measured from the centerpoint 198, the innermost edge portions of the openings may be located toward the outer perimeter 200 more than 80% of the distance between the perimeter 200 and the centerpoint 198, and in other embodiments, more than

90% of the distance between the perimeter 200 and the centerpoint 198.

[0034] Each opening 204 is shaped to be slot-like, having a semi-circular inner end 208 and substantially parallel sides 210, albeit for a relatively short distance, extending from the semi-circular end 208 toward the outer perimeter 200. Chamfered or rounded edges 212 smooth the transition from the opening 204 to the outer perimeter 200. This reduces the chance of snagging or perforating surgical gloves on the proximal end 180 of the saw blade 104. This is particularly useful because the outer perimeter 200 may be closely aligned with, or slightly smaller than the outer perimeters of the heads of the driving shaft and sleeve. It is noted that the transition from the outer perimeter 200 to the straight edges 194 of the slot opening 192 are also chamfered or rounded.

[0035] In the example shown, the bulbous head 186 includes five openings 204, 206. However, in other embodiments, more or less openings may be provided. When the funnel-like opening 192 has an angle smaller than that shown, additional openings may be included, while maintaining the 45 degree spacing shown.

[0036] The saw blade 104 includes a shank 214 interposed between the proximal end 180 and the distal end 182. The distal end 182 of the saw blade 104 includes the plurality of teeth 184 formed at angles of 60 degrees, however, other angles, both larger and smaller are contemplated. The cutting teeth angle may be at least partially dependent on the surgical application. In the embodiment shown, tips of the teeth are formed so that together, the teeth define a circular path, indicated by the reference line 216.

[0037] Figs. 8 and 9 respectively show the blade 104 with reference to the driving shaft 118 and the sleeve 104, respectively. Although the blade 104 is shown separately with respect to each of the shaft and sleeve, when the driving shaft 118 and the sleeve 104 are joined together to form the collet assembly 116, it is contemplated that a single blade will be used at a time, although other arrangements are possible. First, with reference to Fig. 8, the bulbous head 186 of the blade 104 fits partially within the blade receiving groove 146. In order to provide a secure fit, the slot 188 (Fig. 7) is formed with a diameter that easily receives the inner portion of the receiving groove 146, but also has a clearance close enough to provide some stabilizing support to the blade 104. The bulbous head 186 of the saw blade 104 is substantially the same size or slightly smaller than the outer perimeter of the head of the driving shaft. It should be noted that when the blade 104 is properly received in the receiving groove 146, the center point 198 of the blade 104 is aligned with the shaft axis 127, such that the outer perimeter 200 of the blade 104 and the outer perimeter 132 of the shaft head 124 are concentric. During assembly, the blade 104 is first introduced into the receiving groove 146 adjacent the blade contacting surface 130 of the shaft head 124 so that the bulbous head 186 lies flush with the blade contacting surface 130, as indicated by the arrow.

The sleeve 120 is then axially slid along the shaft 118 so that the protrusions 172 (not shown in Fig. 8) engage the openings 204, 206 in the blade 104.

[0038] Fig. 9 shows the protrusions 172 of the sleeve 120 interfacing with the openings 204, 206 on the bulbous head 186 of the micro-saw blade 104, without the driving shaft 118. In some embodiments, when assembled with the driving shaft 118, the protrusions 172 extend through the openings 204, 206 and extend at least partially into the receiving recess 140 on the driving shaft 118 (Fig. 3). In other embodiments, the protrusions 172 have a length substantially the same as the thickness of the bulbous blade head 186 such that the protrusions just abut against or lie substantially flush with the proximally facing blade contacting surface 130 of the driving shaft 118 (Fig. 4).

[0039] In the example shown, the saw blade 104 has only five openings and receives five protrusions 172. In other embodiments, the saw blade 104 has more or fewer openings that receive the protrusions. In one example, the blade 104 includes seven openings and receives seven protrusions. Because the protrusions are spaced 45 degrees apart, the blade 104 can be removed and secured onto the sleeve in eight different positions. In some embodiments, for example, the sleeve includes only four protrusions or six protrusions, and the openings on the blade 104 are chosen to correspond with the protrusions.

[0040] It should be noted that when the blade 104 is properly disposed on the sleeve 120, the center point 198 of the blade 104 aligns with the sleeve axis 158, such that the outer perimeter 200 of the blade 104 and the outer perimeter 164 of the head of the sleeve 120 are concentric.

[0041] Because the sleeve protrusions 172 are disposed closer to the outer edge 168 than the inner edge 166, and likewise, because the blade openings 204 are disposed closer to the perimeter 200 than the slot edge 196, the protrusions 172 provide a longer moment arm than conventional systems, thereby providing higher torque with the same forces. This in turn increases the torque at the distal end 182 of the saw blade 104, permitting an equivalent torque while reducing the motor force, or alternatively, using the same motor force to provide increased cutting force. In addition, by increasing the distance of the moment arm from the blade centerpoint to the protrusions, there is less moment placed on the interior portions of the blade when it is oscillating. This may reduce vibration that might otherwise occur, in turn potentially reducing the amount of play and increasing accuracy achievable with the cutting blade 104. By providing openings 204, 206 on the blade 104 relatively far from the centerpoint of the shaft, the moment force at the distal end 182 of the blade 104 may be maximized.

[0042] Fig. 10 shows an alternative embodiment of a micro-saw blade, referenced by the reference numeral 300. Many of the features of the micro-saw blade 300 are similar to those of the micro-saw blade 104 discussed previously. Accordingly, only the differences are ad-

ressed in detail here. Here, the saw blade 300 is formed of a first material such as a single stamped material that provides the distal cutting end 302, and also formed of a second material different than the first material that forms at least a part of the proximal end 304. In this example, in addition to forming the distal end 302, the first material forms a part of a bulbous head section 306. The second material is overmolded about the first material to also form a part of the bulbous head section 306. In some examples the second material at the bulbous head section 306 is formed of a material more compliant than the blade material. In some examples, the overmold is a polymer material molded over a cutting blade portion formed of a surgical steel. Some examples of materials for the overmold include, for example, biocompatible low density polyethylene or polypropylene. Other examples are formed of elastomers, including blends to achieve a desired strength or durability. However, any biocompatible material may be used.

[0043] As shown in Fig. 10, the overmold material is formed to have substantially the same profile as the cutting blade so that the protrusions on the collet assembly will securely attach the cutting blade 300 in the same manner as the cutting blade 104. Furthermore, during use, the overmold material provides some dampening and cushioning to the saw blade 300. This dampening may reduce vibration experienced by the surgeon, providing some relief to hand and arm fatigue, and also decreasing blade wobble, increasing accuracy of the cut. The overmold also provides additional protection to the surgeon's fingers and surgical gloves, as the overmold may provide additional protection from sharp or rigid edges that may be located about the proximal end 304 of the saw blade 300.

[0044] In the embodiment shown, the saw blade 300 may be secured to the sleeve 120 discussed above by five protrusions 172 out of eight since the most proximal portion of the bulbous head 306 forms the tapering opening. However, in an alternative embodiment, shown in Fig. 11, a saw blade referenced herein as 350 includes an overmold 352 forming a part of the bulbous head 354 that extends further around a slot opening 356, thereby at least partially enclosing an inner end 358 of the slot 360 in the saw blade 350. The slot 360 in the center of bulbous head 354 still receives the shank of the driving shaft 118. As shown in Fig. 11, while a blade portion 362 of the saw blade 350 appears to have a size substantially as discussed above, the overmold 352 itself extends about further, partially enclosing the slot 360. This overmold 352 deforms when the saw blade 350 is attached or detached from the collet assembly 116 to permit the shank 126 of the driving shaft 118 to enter the slot 360. In another embodiment, not shown, the overmold 352 completely encloses the slot 360 to hold the blade 350 in place by extending a full 360 degrees around the shank 126 of the driving shaft 118.

[0045] The overmolded portion in Fig. 11, like the overmolded portion in Fig. 10, contains openings 362 that

match the raised protrusions in the collet assembly. With this overmolded plastic arrangement, the blade 350 receives seven or in some embodiments, eight of the protrusions 172. The collet assembly holds the blade 350 in place, yet the pliable and deformable overmold permits easy blade removal. Further, the increased contact provided by the additional material helps further frictionally secure the blade in place and may provide surgeons with more control for precise cuts.

[0046] Fig. 12 shows an additional embodiment of an exemplary saw blade, referenced herein by the numeral 370. Here, the saw blade 370, like the saw blade 300 discussed above, includes a distal cutting end 372, a proximal end 374, and a bulbous head section 376. For reference, Fig. 12 identifies a shank 378 and an outer perimeter 380 of the bulbous head 376. The second material is overmolded about the first material to also form a part of the bulbous head 376. Here, the second material is formed on the blade 370 to cover primarily just the bulbous head section 376. Because of this, the second material does not extend down the shank 378 toward the distal end 372, but has a radius 382 that substantially matches the radius 384 of the outer perimeter 380 of the bulbous head 376. Accordingly, when placed in the collet assembly 116, the second material is substantially contained between the two blade contacting surfaces, with only the shank extending outwardly from the collet assembly 116.

[0047] The overmold in Figs. 10-12 may be formed of a material softer than the sleeve 120 and driving shaft 118 materials. Accordingly, the overmold may reduce friction wear on the sleeve 120 and driving shaft 118 by yielding before the harder materials wear. Because the sleeve 120 and driving shaft 118 of the collet assembly 116 may be more expensive to manufacture than the saw blades, preserving the collet assembly may be beneficial to customers and may prolong the useful life of the associated surgical saw.

[0048] In one embodiment, the overmold is colored to provide information to a surgeon regarding, for example, a blade size, tooth type, or blade thickness. For example, a saw blade having a thickness of 0.254 mm (.010 inch) includes a blue overmold and a blade having a thickness of 3.81 mm (0.15 inch) includes a red overmold. Accordingly, in some instances, a surgeon may select a desired blade from a blade set of a plurality of blades, with each blade having a colored overmold corresponding to a specific thickness, size, or tooth type.

[0049] Fig. 13 shows a side view of an exemplary blade set 400 usable with the collet assembly 116 disclosed herein. Each blade of the blade set 400 includes a proximal end 402 formed of a bulbous head, a shank 404, and distal cutting end 406. In this embodiment, however, the proximal end 402 of each blade of the blade set 400 has the same thickness, but the thicknesses of the shanks 404 and cutting edges 406 varies. Because the proximal end 402 has the same thickness, the head of each of the blades of the set fits within the receiving

groove 146 on the shank 126 of the driving shaft 118 with the same amount of clearance or play for consistency and repeatability. Yet the blade shank 404 and distal cutting edge 406 vary so that a surgeon may select a blade with the desired thickness for the particular surgical application. For example, some blade sets may include blades that vary in thickness between 0.0178 mm (0.007 inch) and 0.686 mm (0.027 inch). The thickness of the proximal end 402 may be a result of an overmold as described above with respect to Figs. 10 and 11, or alternatively, may be laminated or integrally formed of a single monolithic material. In this blade set 400, colored overmolding may identify the thickness of each cutting blade to permit a surgeon to distinguish one blade from another.

[0050] Figs. 13 and 14 show components of an alternative collet assembly, with Fig. 14 showing an alternative sleeve 500 disposed about a shank 502 of a driving shaft, and with Fig. 15 showing a driving shaft head 550 separate from the shank 502. Protrusions 504 on the sleeve 500 and head 550 are spaced toward the respective perimeter edges 506, 552, in the manner discussed above. Accordingly, the description above regarding protrusion placement and placement of the receiving groove is equally applicable to the embodiment in Figs. 13 and 14.

[0051] The sleeve in Fig. 14 includes a distally facing blade contacting surface 508 having both protrusions 504 and recessed receiving openings 510 spaced toward the perimeter edge 506 in the manner discussed above. In this embodiment, the protrusions 504 are rectangular or square rather than the cylindrical pins discussed above. It is contemplated that the driving shaft head 550 and the sleeve 500 would be used to secure a saw blade having corresponding shaped openings. In some embodiments, the protrusions or receiving openings are on the driving shaft, while in other embodiments, the sleeve includes some protrusions and the driving shaft includes other protrusions.

[0052] In Fig. 15, the head 550 is removable from the shank of the driving shaft, but may be attached using a fastener, such as a screw. The head 550 includes a proximally facing blade contacting surface 554 that includes protrusions 504 for engaging corresponding openings in a matching saw blade. In this embodiment, as described above, the protrusions 504 are spaced toward the outer perimeter edge.

[0053] Fig. 16 shows a sagittal saw 600 for driving the saw blade 104. In this embodiment, the collet assembly 602 is arranged to secure the blade 104 in an axial direction relative to a saw handle 604. Accordingly, instead of having proximally and distally facing blade contacting surfaces, the collet assembly includes side-by-side blade contacting surfaces. However, like the oscillating saw 102 disclosed in Figs. 1-6, the sagittal saw 600 includes protrusions disposed adjacent an exterior edge of the collet fixture, and the blade 104 is sized so that the outer perimeter of the head of the saw blade substantially corresponds to the edge of the collet assembly.

[0054] Although only a few exemplary embodiments have been described in detail above, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this disclosure. The scope of the invention is defined in the following claims.

Claims

1. A surgical cutting blade (104) for cutting bone material when the blade is coupled to a hand-held surgical saw having protrusions extending therefrom that interface with the cutting blade, the cutting blade comprising:

a distal end (182) comprising a plurality of cutting teeth (184);

a shank portion (214) adjacent the distal end; a bulbous proximal end (180) adjacent the shank portion, the proximal end being shaped to attach to the surgical saw and including an upper substantially planar surface and a lower substantially planar surface and a side edge extending between the upper and lower planar surfaces; the proximal end including a plurality of openings (204); the openings configured to receive and interface with the protrusions of the surgical saw in a manner that the protrusions cooperatively impart motion to drive the blade;

characterized by the side edge at least in part defining a partially circular outer perimeter (200) extending about a center point (198) at the proximal end and a centrally disposed slot (188) formed in the partially circular outer perimeter and having a partially circular inner edge (196) concentric with the partially circular outer perimeter; the plurality of openings (204) formed closer to the partially circular outer perimeter than to the inner edge of the slot.

2. The surgical cutting blade of claim 1, wherein the proximal end of the blade defines an axis (190) on the center point, the openings being radially spaced about the axis at intervals of 45 degrees.
3. The surgical cutting blade of claim 1, wherein the outer perimeter defines the centerpoint (198) of the proximal end, at least two of the openings being aligned on opposing sides of the centerpoint.
4. The surgical cutting blade of claim 1, the blade defining a longitudinally extending axis, and including a central opening (206) disposed along the axis.
5. The surgical cutting blade of claim 1, wherein the slot includes a tapering opening.

6. The surgical cutting blade of claim 1, wherein the openings comprise indentations in the circular outer perimeter.

7. The surgical cutting blade of claim 6, including one of chamfered and rounded corners (212) that transition the indentations to the perimeter edge.

8. The surgical cutting blade of claim 6, wherein the indentations are openings having a rounded inner end (208) and straight substantially parallel side edges (210) extending toward the perimeter edge.

9. The surgical cutting blade of claim 1, wherein the blade is formed of a first material, the blade further comprising an overmold (352) of a second material having a hardness less than that of the first material.

10. The surgical cutting blade of claim 9, wherein the overmold matches the shape of the proximal end of the blade and has a slot (356) formed therein for extending about a shaft of the surgical saw.

11. The surgical cutting blade of claim 19, wherein the overmold is disposed only over the proximal end of the cutting blade.

12. The surgical cutting blade of claim 1, wherein the slot is formed with a funnel-like opening (192) defined by substantially straight edges (194).

13. The surgical cutting blade of claim 12, wherein the openings include an opening portion closest to the inner edge, the opening portion being disposed spaced from the inner edge at least 75% of the distance between the inner edge and the perimeter edge.

14. A cutting blade set (400) for cutting bone material when the blade is coupled to a hand-held surgical saw having protrusions extending therefrom that selectively interface with each blade of the cutting blade set, the cutting blade set comprising:
a plurality of cutting blades as claimed in any preceding claim, and the proximal end (402) of each cutting blade of the plurality of cutting blades having substantially the same thickness and the distal end (404, 406) of each blade having a different thickness.

Patentansprüche

1. Chirurgische Schneidklinge (104) zum Schneiden von Knochenmaterial, wenn die Klinge mit einer handgehaltenen chirurgischen Säge gekoppelt ist, die sich davon erstreckende Vorsprünge aufweist, die sich mit der Schneidklinge verbinden, wobei die Schneidklinge umfasst:

- ein distales Ende (182), umfassend mehrere Schneidzähne (184);
einen Schaftabschnitt (214) angrenzend an das distale Ende;
ein bauchiges proximales Ende (180) angrenzend an den Schaftabschnitt, wobei das proximale Ende geformt ist, um an der chirurgischen Säge befestigt zu werden und eine obere, im Wesentlichen ebene Fläche und eine untere, im Wesentlichen ebene Fläche und eine Seitenkante einschließt, die sich zwischen der oberen und unteren ebenen Fläche erstreckt;
wobei das proximale Ende mehrere Öffnungen (204) einschließt;
wobei die Öffnungen konfiguriert sind, um die Vorsprünge der chirurgischen Säge aufzunehmen und mit ihnen verbunden zu sein, in einer Weise, dass die Vorsprünge eine Bewegung zusammenwirkend übermitteln, um die Klinge anzutreiben;
gekennzeichnet durch die Seitenkante, die mindestens teilweise einen teilweise kreisförmigen Außenumfang (200) definiert, der sich um einen Mittelpunkt (198) herum an dem proximalen Ende erstreckt, und einen zentral angeordneten Schlitz (188), der in dem teilweise kreisförmigen Außenumfang ausgebildet ist und eine teilweise kreisförmige Innenkante (196) konzentrisch zu dem teilweise kreisförmigen Außenumfang aufweist;
wobei die mehreren Öffnungen (204) näher an dem teilweise kreisförmigen Außenumfang als an der Innenkante des Schlitzes ausgebildet ist.
2. Chirurgische Schneidklinge nach Anspruch 1, wobei das proximale Ende der Klinge eine Achse (190) an dem Mittelpunkt definiert, wobei die Öffnungen in Abständen von 45 Grad radial um die Achse beabstandet sind.
 3. Chirurgische Schneidklinge nach Anspruch 1, wobei der Außenumfang den Mittelpunkt (198) des proximalen Endes definiert, wobei mindestens zwei der Öffnungen auf gegenüberliegenden Seiten des Mittelpunkts ausgerichtet sind.
 4. Chirurgische Schneidklinge nach Anspruch 1, wobei die Klinge eine sich in Längsrichtung erstreckende Achse definiert und eine entlang der Achse angeordnete zentrale Öffnung (206) einschließt.
 5. Chirurgische Schneidklinge nach Anspruch 1, wobei der Schlitz eine sich verjüngende Öffnung einschließt.
 6. Chirurgische Schneidklinge nach Anspruch 1, wobei die Öffnungen Einkerbungen in dem kreisförmigen Außenumfang umfassen.
 7. Chirurgische Schneidklinge nach Anspruch 6, einschließlich einer von abgeschrägten und abgerundeten Ecken (212), die die Einkerbungen in die Umfangskante überführen.
 8. Chirurgische Schneidklinge nach Anspruch 6, wobei die Einkerbungen Öffnungen sind, die ein abgerundetes inneres Ende (208) und gerade, im Wesentlichen parallele Seitenkanten (210) aufweist, die sich in Richtung der Umfangskante erstrecken.
 9. Chirurgische Schneidklinge nach Anspruch 1, wobei die Klinge aus einem ersten Material ausgebildet ist, wobei die Klinge ferner eine Umspritzung (352) aus einem zweiten Material umfasst, die eine Härte aufweist, die geringer als die des ersten Materials ist.
 10. Chirurgische Schneidklinge nach Anspruch 9, wobei die Umspritzung der Form des proximalen Endes der Klinge entspricht und einen darin ausgebildeten Schlitz (356) zum Erstrecken um einen Schaft der chirurgischen Säge herum aufweist.
 11. Chirurgische Schneidklinge nach Anspruch 19, wobei die Umspritzung nur über dem proximalen Ende der Schneidklinge angeordnet ist.
 12. Chirurgische Schneidklinge nach Anspruch 1, wobei der Schlitz mit einer trichterartigen Öffnung (192) ausgebildet ist, die durch im Wesentlichen gerade Kanten (194) definiert ist.
 13. Chirurgische Schneidklinge nach Anspruch 12, wobei die Öffnungen einen Öffnungsabschnitt einschließen, der der Innenkante am nächsten liegt, wobei der Öffnungsabschnitt in einem Abstand von mindestens 75 % des Abstands zwischen der Innenkante und der Umfangskante von der Innenkante angeordnet ist.
 14. Schneidklingsatz (400) zum Schneiden von Knochenmaterial, wenn die Klinge mit einer handgehaltenen chirurgischen Säge gekoppelt ist, die Vorsprünge aufweist, die sich davon erstrecken, die mit jeder Klinge des Schneidklingsatzes selektiv verbunden ist, wobei der Schneidklingsatz umfasst: mehrere Schneidklingen nach einem der vorhergehenden Ansprüche, und wobei das proximale Ende (402) jeder Schneidklinge der mehreren Schneidklingen im Wesentlichen die gleiche Dicke und das distale Ende (404, 406) von jeder Klinge eine unterschiedliche Dicke aufweist.
- 55 **Revendications**
1. Lame de coupe chirurgicale (104) destinée à couper le matériau osseux lorsque la lame est accouplée à

une scie chirurgicale portative présentant des protubérances qui s'étendent à partir de celle-ci, lesquelles protubérances s'interfacent avec la lame de coupe, la lame de coupe comprenant :

une extrémité distale (182) comprenant une pluralité de dents coupantes (184) ;
une partie de tige (214) adjacente à l'extrémité distale ;

une extrémité proximale bulbeuse (180) adjacente à la partie tige, l'extrémité proximale étant formée pour se fixer à la scie chirurgicale, et comportant une surface supérieure sensiblement plane et une surface inférieure sensiblement plane et un bord latéral s'étendant entre les surfaces planes supérieure et inférieure ;

l'extrémité proximale comportant une pluralité d'ouvertures (204) ;


les ouvertures étant conçues pour recevoir et interagir avec les protubérances de la scie chirurgicale de telle sorte que les protubérances assurent en coopération un mouvement pour entraîner la lame ;

caractérisée par le bord latéral définissant au moins en partie un périmètre extérieur partiellement circulaire (200) s'étendant autour d'un point central (198) à l'extrémité proximale, et une fente disposée centralement (188) formée dans le périmètre extérieur partiellement circulaire et présentant un bord intérieur partiellement circulaire (196) concentrique avec le périmètre extérieur partiellement circulaire ;
la pluralité d'ouvertures (204) étant formée plus près du périmètre extérieur partiellement circulaire que du bord intérieur de la fente.

2. Lame de coupe chirurgicale selon la revendication 1, dans laquelle l'extrémité proximale de la lame définit un axe (190) sur le point central, les ouvertures étant espacées radialement autour de l'axe à des intervalles de 45 degrés. 40
3. Lame de coupe chirurgicale selon la revendication 1, dans laquelle le périmètre extérieur définit le point central (198) de l'extrémité proximale, au moins deux des ouvertures étant alignées sur les côtés opposés du point central. 45
4. Lame de coupe chirurgicale selon la revendication 1, la lame définissant un axe s'étendant longitudinalement, et comportant une ouverture centrale (206) disposée le long de l'axe. 50
5. Lame de coupe chirurgicale selon la revendication 1, dans laquelle la fente comporte une ouverture effilée. 55
6. Lame de coupe chirurgicale selon la revendication

1, dans laquelle les ouvertures comprennent des indentations dans le périmètre extérieur circulaire.

- 5 7. Lame de coupe chirurgicale selon la revendication 6, comportant des coins (212) chanfreinés ou arrondis qui assurent la transition entre les indentations et le bord périmétrique.
- 10 8. Lame de coupe chirurgicale selon la revendication 6, dans laquelle les indentations sont des ouvertures ayant une extrémité intérieure arrondie (208) et des bords latéraux droits sensiblement parallèles (210) s'étendant vers le bord périmétrique.
- 15 9. Lame de coupe chirurgicale selon la revendication 1, dans laquelle la lame est formée d'un premier matériau, la lame comprenant en outre un surmoulage (352) d'un second matériau dont la dureté est inférieure à celle du premier matériau. 20
- 25 10. Lame de coupe chirurgicale selon la revendication 9, dans laquelle le surmoulage épouse la forme de l'extrémité proximale de la lame, et présente une fente (356) formée à l'intérieur du surmoulage, pour s'étendre autour d'un arbre de la scie chirurgicale. 30
- 35 11. Lame de coupe chirurgicale selon la revendication 19, dans laquelle le surmoulage est disposé uniquement sur l'extrémité proximale de la lame de coupe.
- 40 12. Lame de coupe chirurgicale selon la revendication 1, dans laquelle la fente est constituée d'une ouverture en forme d'entonnoir (192) définie par des bords sensiblement droits (194).
- 45 13. Lame de coupe chirurgicale selon la revendication 12, dans laquelle les ouvertures comportent une partie d'ouverture la plus proche du bord intérieur, la partie d'ouverture étant disposée de façon espacée du bord intérieur, d'au moins 75 % de la distance entre le bord intérieur et le bord périmétrique.
- 50 14. Ensemble de lames de coupe (400) destinées à couper le matériau osseux lorsque la lame est accouplée à une scie chirurgicale portative présentant des protubérances qui s'étendent à partir de celle-ci, lesquelles protubérances s'interfacent sélectivement avec chaque lame de l'ensemble de lames de coupe, l'ensemble de lames de coupe comprenant :
une pluralité de lames de coupe selon l'une quelconque des revendications précédentes, et l'extrémité proximale (402) de chaque lame de coupe de la pluralité de lames de coupe ayant sensiblement la même épaisseur, et l'extrémité distale (404, 406) de chaque lame ayant une épaisseur différente. 55

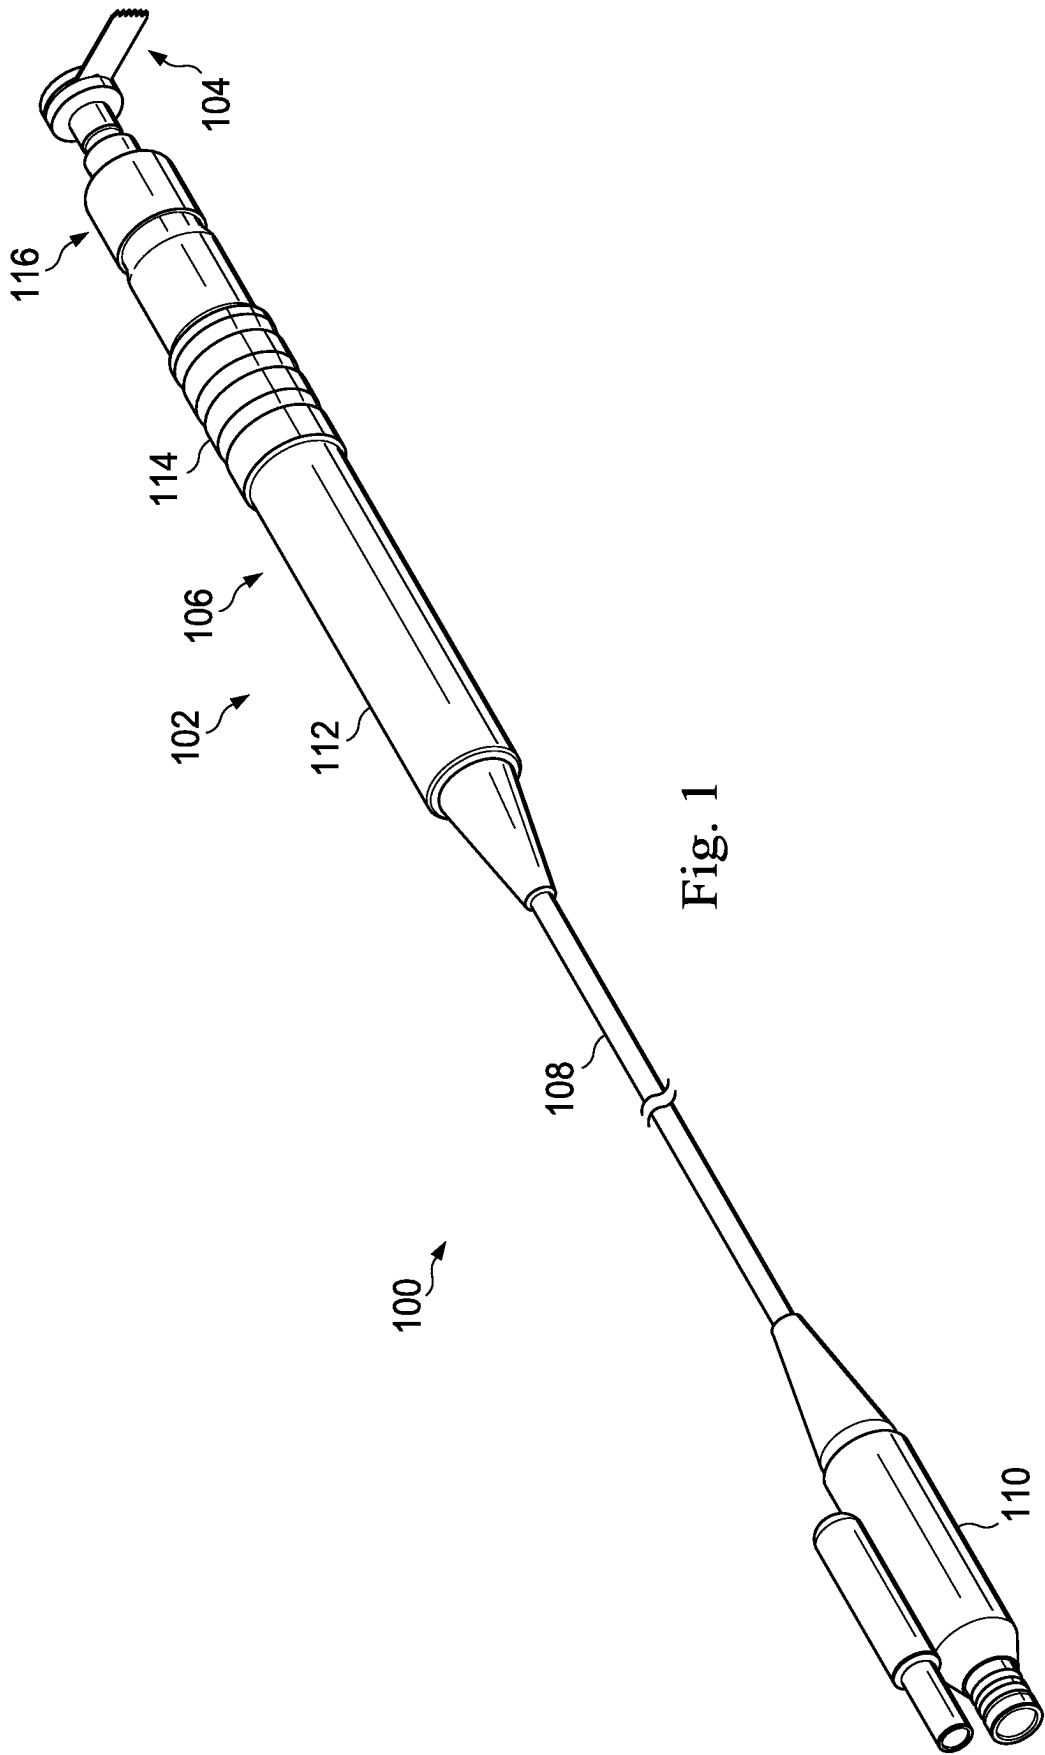

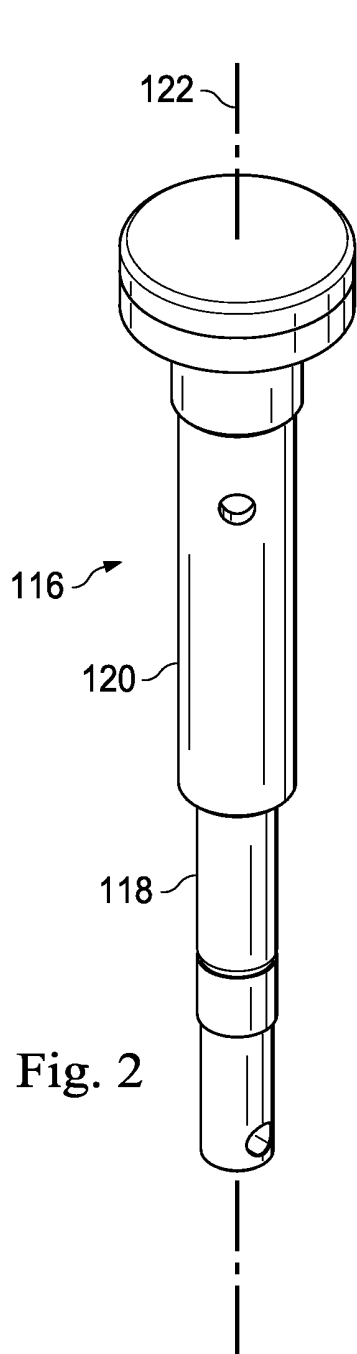


Fig. 2

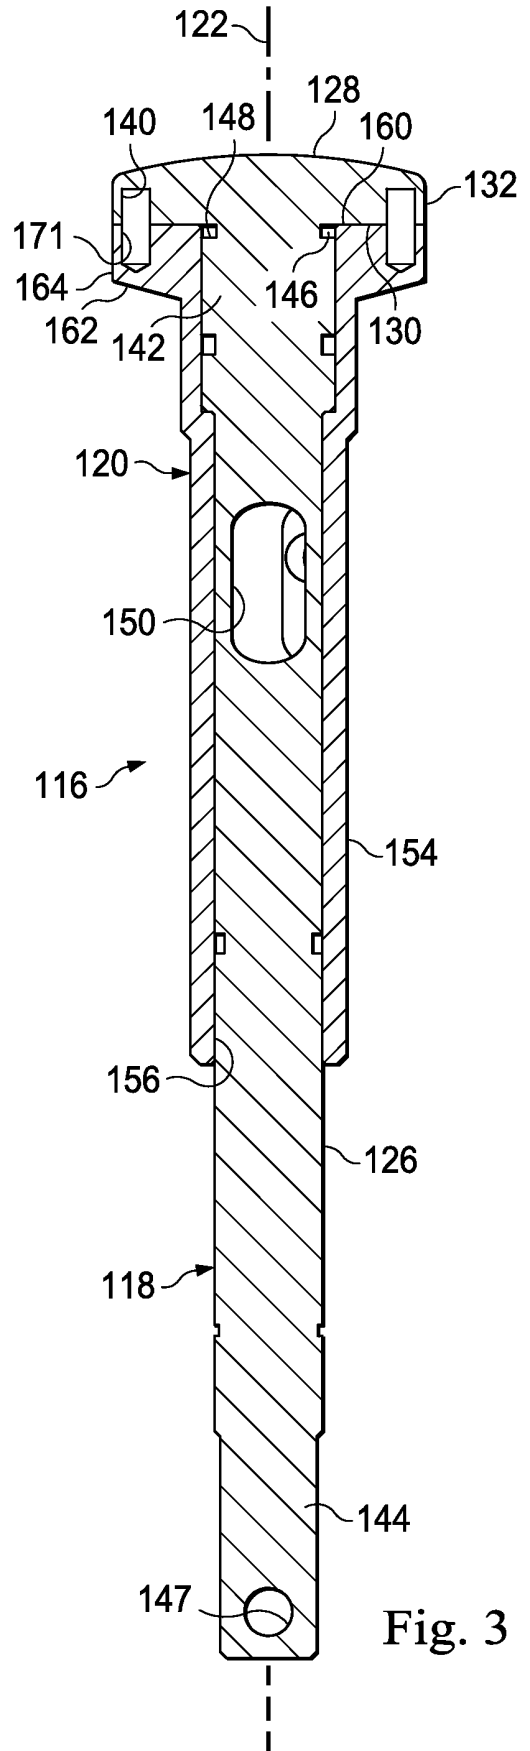
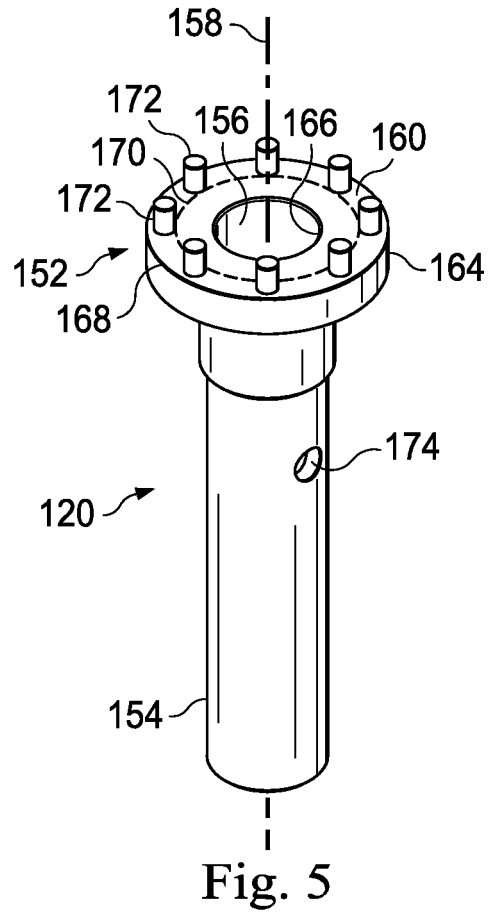
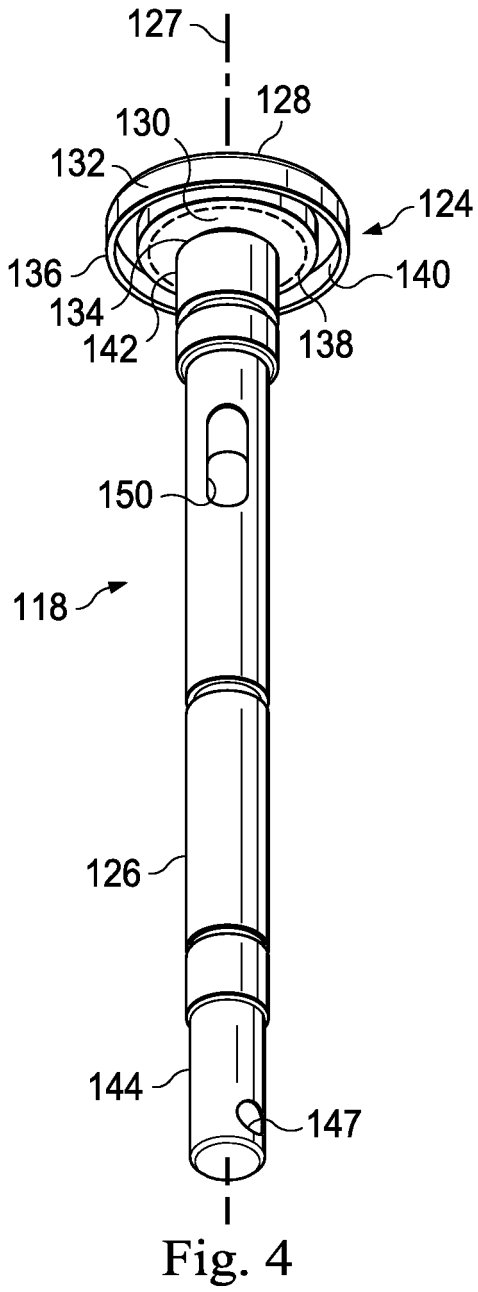
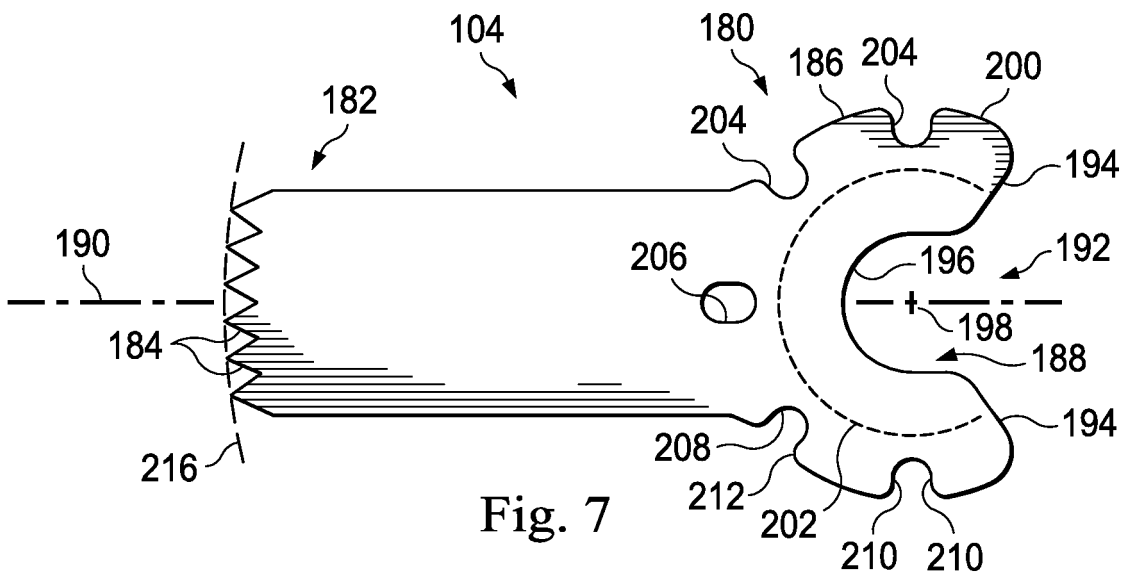
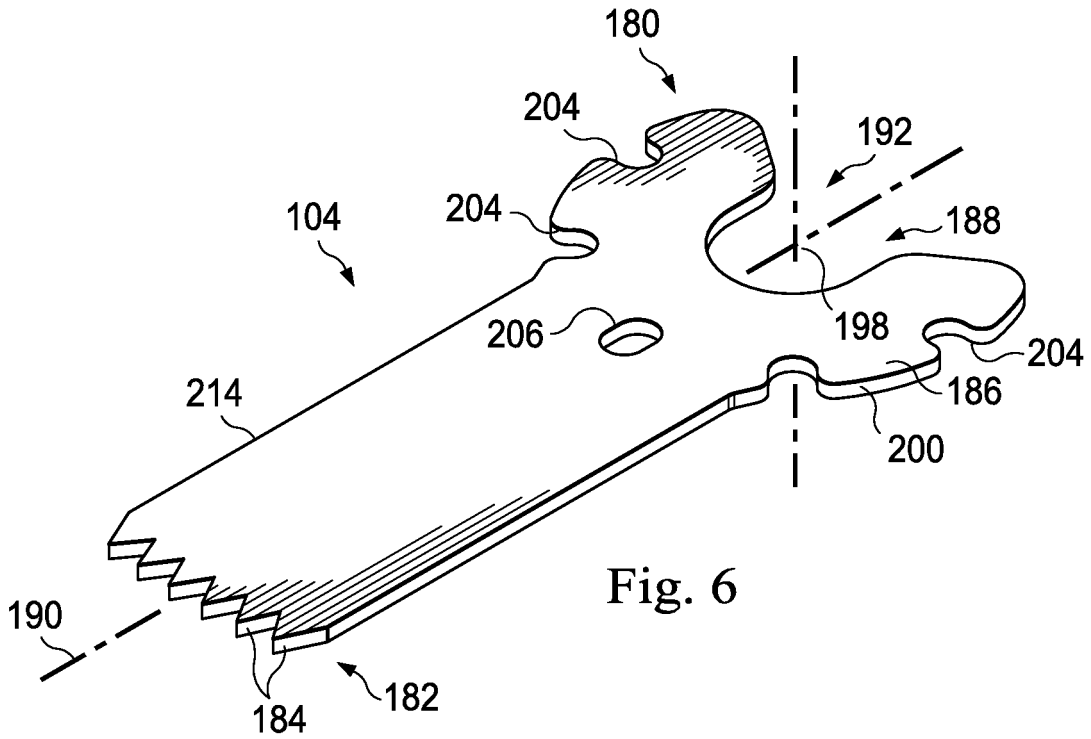
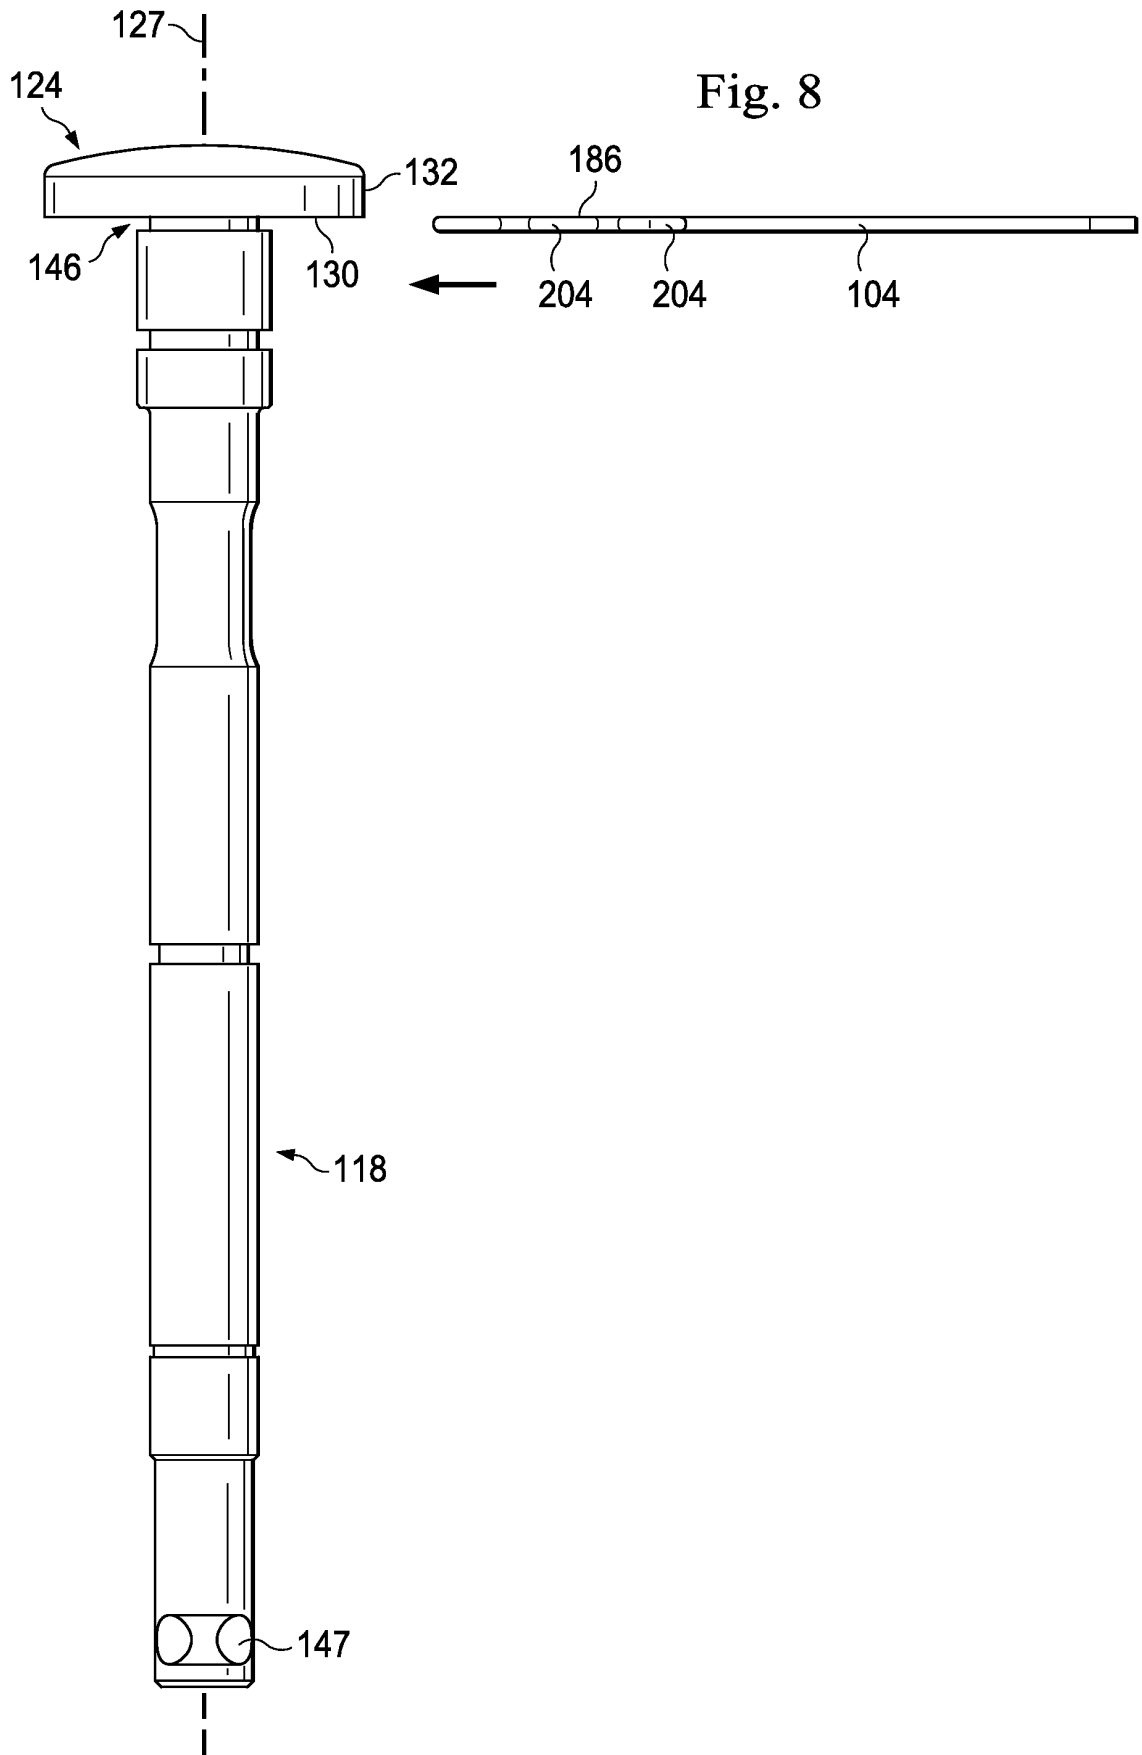


Fig. 3







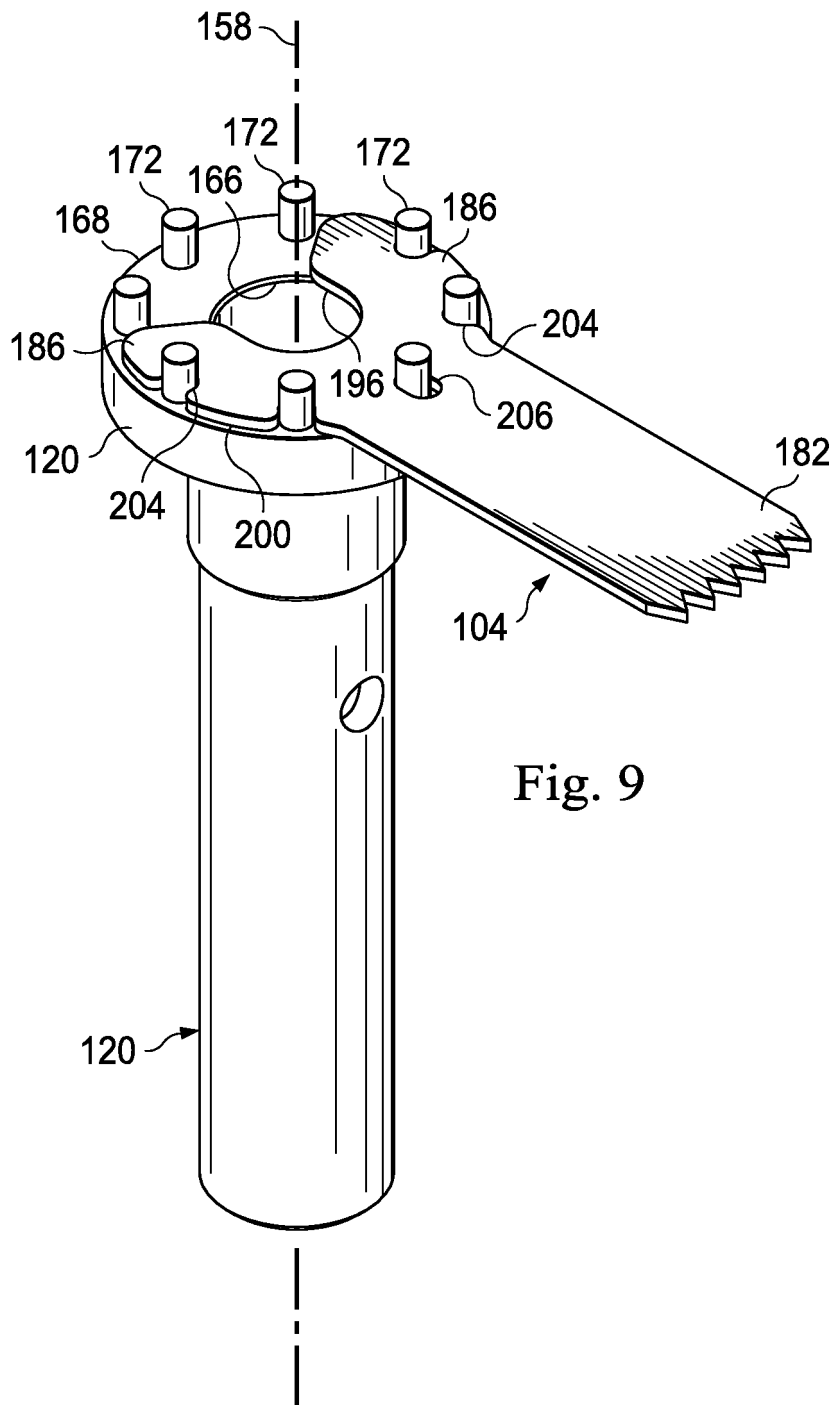
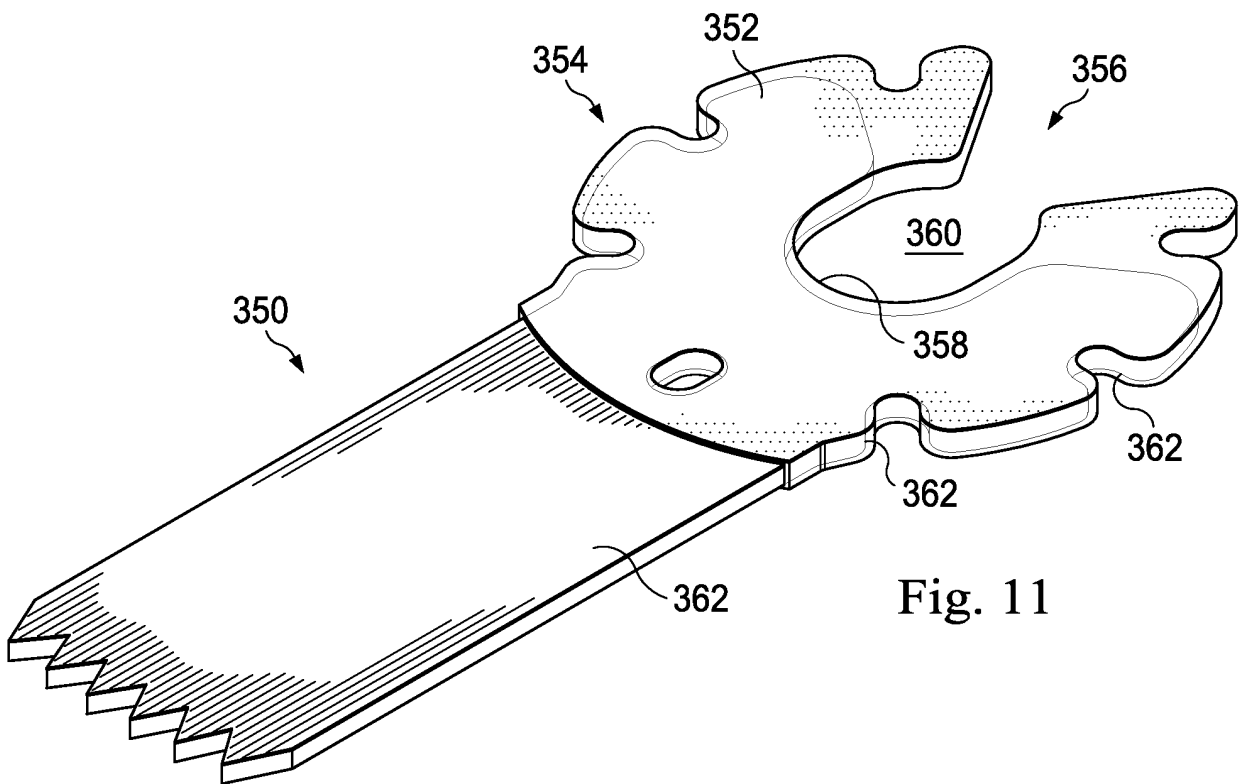
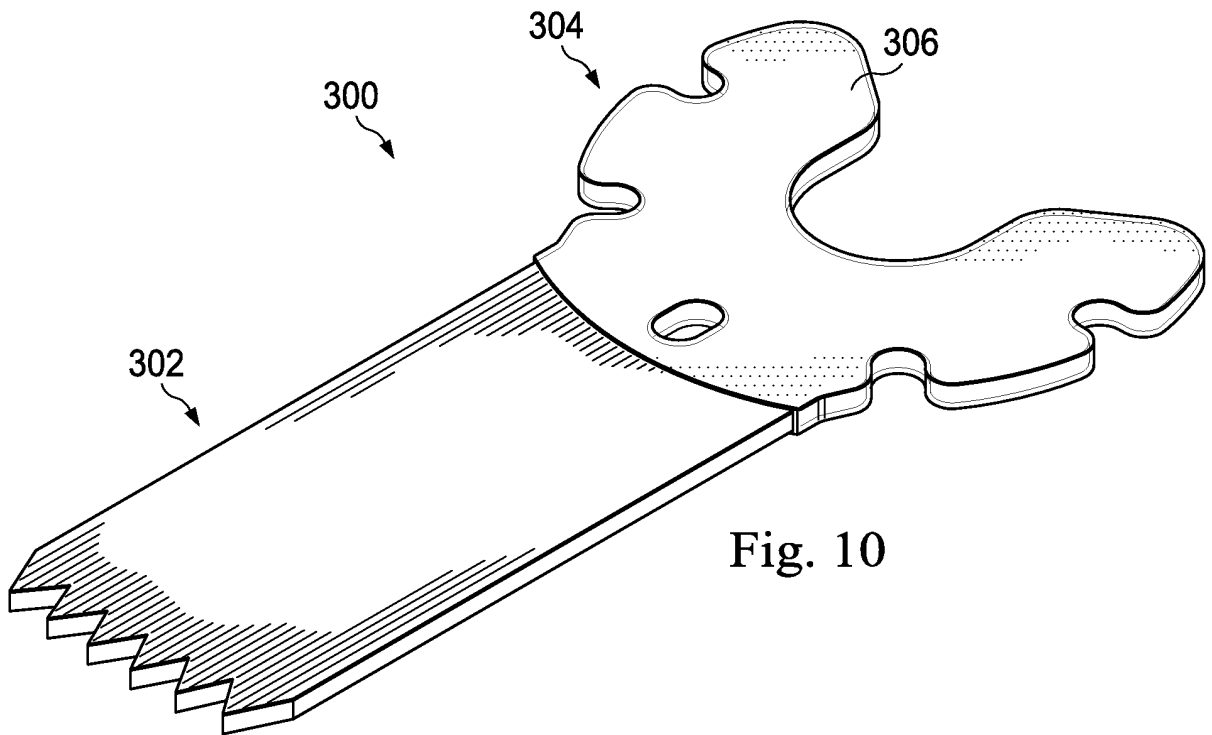


Fig. 9



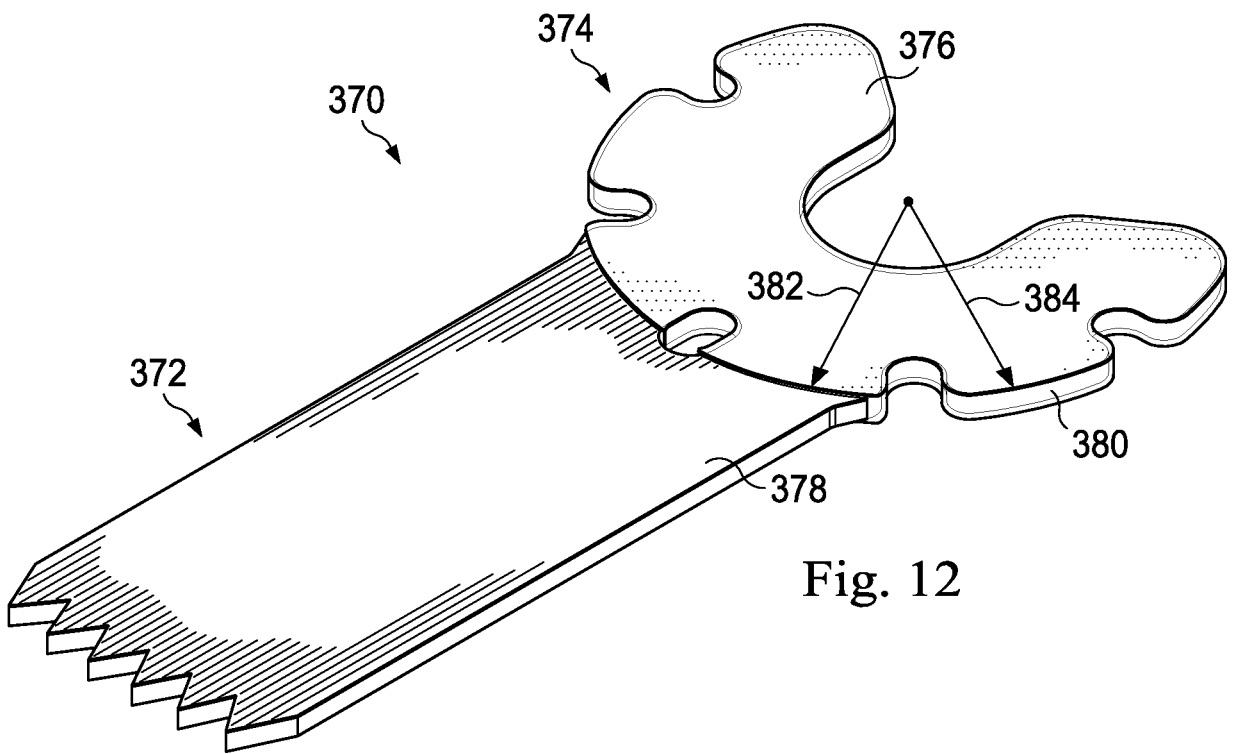
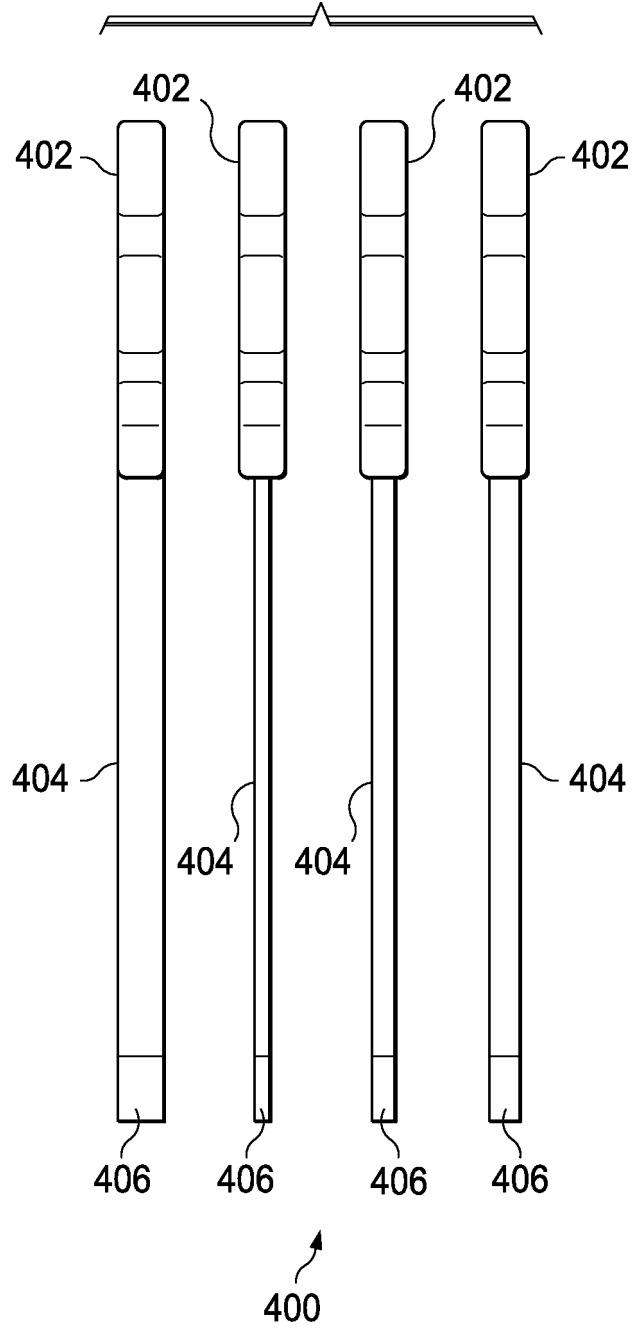


Fig. 12

Fig. 13



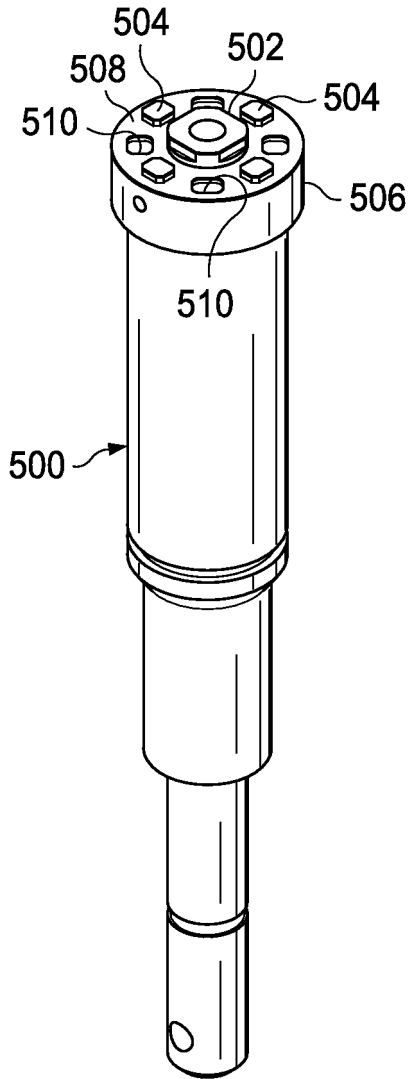


Fig. 14

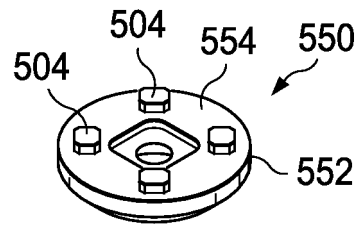


Fig. 15

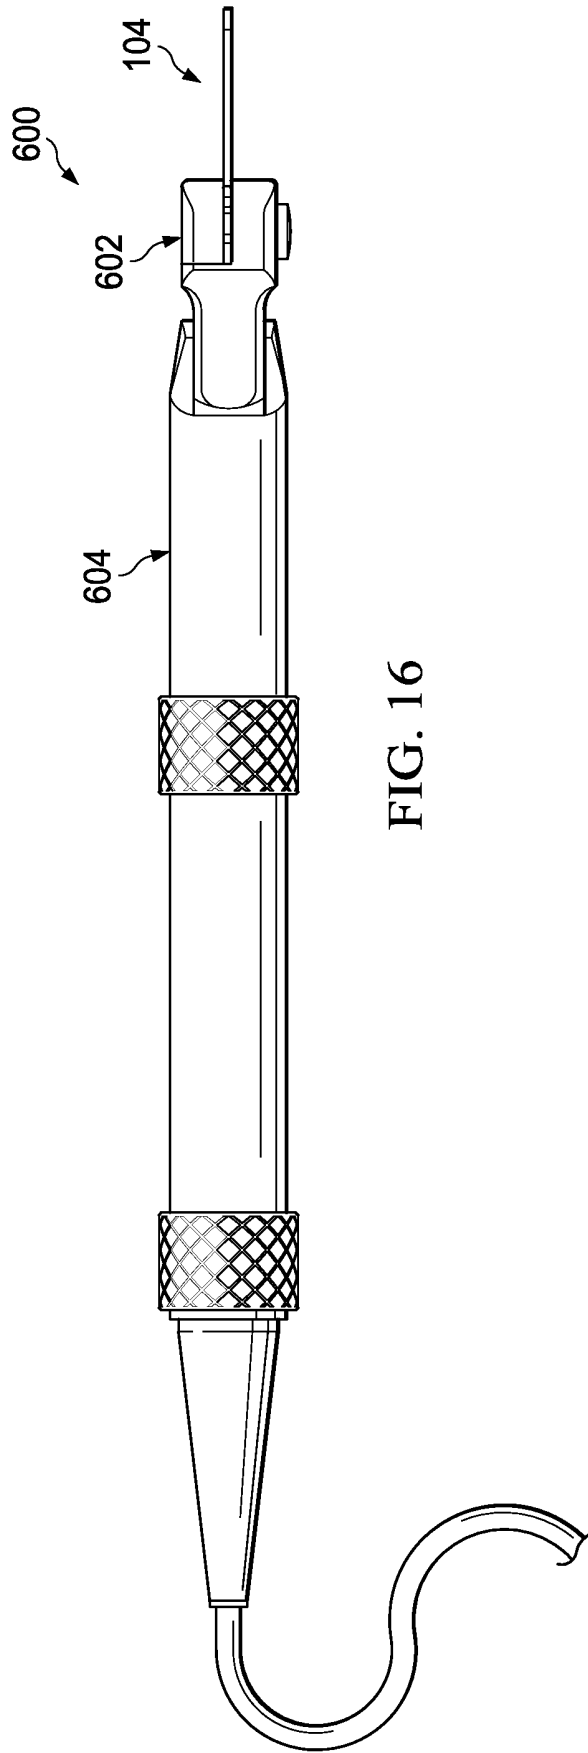


FIG. 16

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2003199880 A [0004]
- US 2004243136 A [0004]
- WO 2007041027 A [0004]