



(11) **EP 2 331 392 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
12.12.2012 Bulletin 2012/50

(51) Int Cl.:
B63B 19/00 ^(2006.01) **B63B 19/14** ^(2006.01)
B63B 19/24 ^(2006.01) **B63B 43/32** ^(2006.01)

(21) Application number: **09788326.8**

(86) International application number:
PCT/NL2009/050561

(22) Date of filing: **18.09.2009**

(87) International publication number:
WO 2010/033026 (25.03.2010 Gazette 2010/12)

(54) **LOCKING ELEMENT AND LOCKING SYSTEM FOR A SHIP'S DOOR, SHIP'S WINDOW OR SHIP'S HATCH**

VERRIEGELUNGSELEMENT UND VERRIEGELUNGSSYSTEM FÜR EINE SCHIFFSTÜR, EIN SCHIFFFENSTER ODER EINE SCHIFFSLUKE

ELEMENT ET SYSTEME DE VERROUILLAGE POUR PORTE, FENETRE OU ECOUILLE DE NAVIRE

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK SM TR**
Designated Extension States:
RS

(72) Inventor: **DE ROVER, Jan**
NL-9606 RJ Kropswolde (NL)

(74) Representative: **Jansen, Cornelis Marinus
VEREENIGDE
Johan de Wittlaan 7
2517 JR Den Haag (NL)**

(30) Priority: **19.09.2008 NL 2001996**

(43) Date of publication of application:
15.06.2011 Bulletin 2011/24

(56) References cited:
EP-A- 0 911 469 US-A- 6 123 370
US-A1- 2007 022 662 US-B1- 6 446 393

(73) Proprietor: **Newthex Ned. B.v.**
9611 TH Sappemeer (NL)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 331 392 B1

Description

[0001] The invention relates to a locking element for, in a fastening condition of the element fastened to a ship's door, ship's window or ship's hatch, locking the door, the window or the hatch with respect to a boundary, such as a frame, with respect to which the door, the window or the hatch is hingedly suspended. More particularly, the invention relates to a locking element for a weather-tight and/or water-tight ship's door, weather-tight and/or water-tight ship's window, or weather-tight and/or water-tight ship's hatch. The invention further relates to a locking system for a weather-tight and/or water-tight ship's door, weather-tight and/or water-tight ship's window, or weather-tight and/or water-tight ship's hatch. Closer state of the art document US 2007/0022662 describes a ship's door with locking element and system comprising extension pins and pin sleeves in the sides of the door.

[0002] It is noted that in this text, for brevity, often the terms "ship's door" or "door" are used. In these cases, however, it is to be understood that these terms are also intended to mean a ship's window or a ship's hatch. It is further noted that in this text the terms "(ship's) door", "(ship's) window" or "(ship's) hatch" are understood to mean doors, windows or hatches of various kinds of vessels and other maritime objects, among which, for instance, offshore structures.

[0003] Known elements of this kind that are used in known systems of this kind are (door) clamps, also called (door) clips, which are fastened near the edge of a door, on the side of the door facing away from the direction in which the door turns open. Such a known clamp comprises an assembly of a lever extending in a particular direction and a locking plate extending in another direction, the lever and the locking plate being immovable relative to each other. This assembly of lever and locking plate is pivotable about a pivot whose position with respect to the door is fixed. By rotating the lever about the pivot, the locking plate can be pivoted from an unlocking position into a locking position, and vice versa. In the locking position, the locking plate clamps against a portion of a boundary with respect to which the door is hingedly suspended.

[0004] It is also known to use several of such known door clamps in a single locking system for a door, in which system the respective levers of the separate door clamps are mutually connected by means of a rod assembly, such that a user can operate all door clamps of the door simultaneously by means of a single operating handle which is connected with the rod assembly.

[0005] A drawback of the known door clamps and the locking systems based thereon is that the system is not very compact. For instance, the clamps require a relatively large pivoting range of their levers and locking plates, which pivoting range projects both on the face of the door and on the boundary of the door. The rod assemblies which are in connection with the levers of the clamps are not very compact either, and moreover are

complex. Further, the levers are subject to operating forces applied thereto, which forces are not always directed equally favorably, which is not beneficial to the life span of the pivoting mechanism of the clamps. Replacement of parts, such as the clamps, of these known locking systems during maintenance is not always equally simple, *inter alia* because of hinging joints between clamp levers and rod assemblies. Furthermore, it is not uncommon for users to sustain (serious) injury from the locking plates of the clamps pivoting forcefully into the locking position.

[0006] It is an object of the invention to provide at least an alternative locking solution for (weather-tight and/or water-tight) ship's doors, which solution offers improvements in respect of aspects such as compactness and/or simplicity and/or maintenance and/or safety.

[0007] To this end, according to the invention, a locking element according to claim 1 is provided. Specific embodiments of the invention are laid down in the dependent claims.

[0008] According to the invention, therefore, there is provided a locking element for, in a fastening condition of the element fastened to a ship's door, ship's window or ship's hatch, locking the door, the window or the hatch with respect to a boundary with respect to which the door, the window or the hatch is hingedly suspended, which locking element comprises a body and a locking bolt, which body comprises at least one bolt passage for therein receiving the bolt, such that the bolt is therein movable back and forth in its axial bolt direction between at least one locking position and at least one unlocking position, which bolt is provided with rod guide means for therein receiving a rod, such that the rod is therein movable back and forth in its axial rod direction, the axial rod direction being at right angles to or otherwise crossing with respect to the axial bolt direction, and wherein the body and the bolt are configured such that the rod, if it is received in the rod guide means in said manner and when it is moved with at least a movement component in the axial bolt direction, causes the bolt to move in the axial bolt direction for changing between the at least one locking position and the at least one unlocking position of the bolt.

[0009] The body and the bolt can each be made of diverse materials, such as, for instance, a metal or metal alloy, for instance stainless steel.

[0010] Such a locking element offers compactness, not only because the body and the bolt are compact, but also because of the relatively small (back-and-forth) sliding range of the locking bolt in the axial bolt direction. Here, not only the sliding range of the bolt projected on the door surface, but also the sliding range of the bolt projected on the door boundary is compact. Furthermore, operating the movement of the bolt is simple because this is simply done by the rod moving with a movement component in the axial bolt direction. As the rod is slidable with respect to the rod guide means, no complex fastenings are present between the bolt and the rod. Furthermore, the bolt being movable back and forth offers a lower risk of injury than a pivoting locking plate of a clamp. In the lock-

ing element, the bolt and the rod only perform relative sliding movements, so that, in principle, the locking element does not require lubrication and in that sense is hence free of maintenance. The absence of relatively fragile rotary mechanisms renders the locking element robust and extremely durable.

[0011] Preferably, the locking element furthermore comprises at least one bolt bearing element which in operation is at least partly received in at least a part of the at least one bolt passage for bearing-supporting the back-and-forth movement of the bolt in the at least one bolt passage. When the body and the bolt are for instance made of metal, the bolt bearing element may for instance be a plastic casing for the bolt, fixed in the bolt passage, in which casing the bolt can move back and forth.

[0012] Preferably, the locking element furthermore comprises a rod bearing element which in operation is at least partly received in at least a part of the rod guide means for bearing-supporting the back-and-forth movement of the rod in the rod guide means. When the rod guide means and the rod are for instance made of metal, the rod bearing element can for instance be a plastic casing for the rod, placed in the rod guide means, in which casing the rod can move back and forth. In connection with the occurring transfer forces between rod and bolt, it is advantageous when the rod bearing element is manufactured from, for instance, a fiber-reinforced plastic.

[0013] It is noted that if the bolt bearing element and/or the rod bearing element are manufactured from plastic, and were to be lost in case of fire, such loss does not affect the primary working of the locking element. This is to say that when these elements are lost, a locking position or unlocking position of the bolt, once assumed, is maintained and it remains possible to change between these positions.

[0014] Various kinds of rod guide means can be used with the bolt. For instance, this may be local protrusions of the bolt. In an advantageous embodiment, the rod guide means are formed by a recess in the bolt. Such a recess is simple to manufacture and contributes to the compactness of the locking element.

[0015] Preferably, the bolt at its one end comprises a bevel extending in the axial bolt direction for therewith, in the fastening condition in the at least one locking position, clampingly engaging with respect to the boundary with respect to which the door, the window or the hatch is hingedly suspended. Such a bevel promotes an advantageous clamping action of the bolt with respect to this boundary. Also, to the boundary there may be fastened, for instance, special counter elements for the bolt end, which counter elements also have a bevel, which is tailored to the bevel of the bolt. Such counter elements are in principle exchangeable with other such counter elements or may for instance be adjustable as to shape or orientation, so that for instance the angle of bevel, height of bevel and the like, of the counter-element can be varied.

[0016] In an advantageous embodiment, the body of

the locking element comprises a first part and a second part, wherein the first part is configured to be directly fastened to the door, the window or the hatch, and wherein the second part is configured to be fastened detachably, as for instance through screwing, to the first part, such that after detachment of the second part, at least the bolt is removable with respect to the first part. Such an embodiment offers for instance the advantages that the locking element can be simply mounted and that once a locking element has been mounted, parts thereof can be simply mounted and demounted. In such an embodiment, the first part is preferably configured to be fastened undetachably, as for instance through welding, to the door, the window or the hatch. This promotes ease of assembly and disassembly still further, since the first part upon first assembly in principle never needs to be removed from the door again.

[0017] The invention is further embodied in a locking system comprising at least one locking element according to the invention, at least one said rod, and manually movable or motor-movable operating means for operatively moving the at least one rod with at least said movement component in the axial bolt direction. From the above, it appears that in operation the freedom of movement of the at least one rod with respect to the door is limited by the rod guide means. Preferably, a locking system according to the invention comprises additional restriction means for, in operation, additionally limiting the freedom of movement of the at least one rod with respect to the door, the window or the hatch. With the aid of these additional restriction means, the operating means can be prevented from possibly moving the at least one rod in an undesired direction and regulation is enabled of the operating means moving the at least one rod in a desired direction.

[0018] Preferably, the additional restriction means comprise at least one hinging element, which hinging element in operation is hingedly connected at a first point of the hinging element to the door, the window or the hatch and in operation is further hingedly connected at another, second point of the hinging element to the at least one rod. Such a hinging element limits the freedom of movement of the rod, such that the point of the rod that is connected to the second point of the hinging element can only move along a circular arc path whose center of rotation is formed by the first point where the hinging element is hingedly connected to the door. Such a circular arc path is particularly suitable for regulating movements of the rod with movement components in the axial rod direction and in the axial bolt direction.

[0019] Preferably, the operating means comprise a manually operable handle which in operation is hingedly connected at a point of the handle to the door, the window or the hatch and which in operation is further hingedly connected at another point of the handle to the at least one rod. Such a hinging element limits the freedom of movement of the rod, such that the point of the rod that is connected to the other point of the handle can only

move along a circular arc path whose center of rotation is formed by the one point where the handle is hingedly connected to the door. Such a circular arc path is particularly suitable for regulating movements of the rod with movement components in the axial rod direction and in the axial bolt direction.

[0020] In an advantageous embodiment, the locking system comprises at least two such locking elements, wherein, for at least one of the at least one rod, this one rod in operation is received in the above-mentioned manner in separate rod guide means of associated separate ones of the at least two locking elements. Thus, a single rod can operate several separate locking elements simultaneously.

[0021] In an advantageous embodiment, the locking system comprises at least two such locking elements and at least two such rods, wherein, for at least one couple of the at least two rods, the two separate rods of this couple in operation are received in the above-mentioned manner in separate rod guide means of associated separate ones of the at least two locking elements, and wherein in operation the two separate rods are mutually coupled by a hinging element as mentioned above, which hinging element in operation is hingedly connected at the second point of the hinging element to one of the two separate rods and which hinging element in operation is hingedly connected at a third point, other than the first point and the second point, of the hinging element to the other of the two separate rods. Thus, two rods can be mutually coupled by such a hinging element, the hinging element thereby limiting the freedom of movement of each of the two rods along a separate circular arc path whose center of rotation is formed by the first point where the hinging element is hingedly connected to the door. Such circular arc paths are particularly suitable for regulating coupled movements of each of the two rods with movement components in the respective axial rod and bolt directions associated with the rods.

[0022] The invention is further embodied in a ship's door, ship's window or ship's hatch as mentioned, and comprising a locking element as mentioned and/or a locking system as mentioned.

[0023] Furthermore, the invention is embodied in an assembly comprising a ship's door, ship's window or ship's hatch as mentioned and the boundary mentioned with respect to which the door, the window or the hatch is hingedly suspended.

[0024] In the following, the invention is further elucidated with reference to the schematic figures in the appended drawing.

Fig. 1 shows in perspective an example of an embodiment of a locking element according to the invention in a disassembled condition.

Fig. 2 shows a part of the locking element shown in Fig. 1 in median longitudinal section.

Fig. 3 shows, in front view, an example of a weather-tight and/or water-tight ship's door provided with a

locking system comprising several locking elements as shown in Figs. 1 and 2.

[0025] In the Figures, a locking element 1 according to the invention is shown. In Figs. 1 and 2, the element 1 is shown in detail, while Fig. 3 shows several such elements 1 in a fastening condition fastened to a ship's door 2 for locking the door 2 with respect to a boundary 3 with respect to which the door is hingedly suspended. In Fig. 3, the elements 1 are fastened near a number of edges of the door 2 on the side of the door 2 facing away from the direction in which the door swings open. With broken lines, door hinges 40 are shown in transparent view.

[0026] The locking element 1 comprises a body 4 and a locking bolt 7. The body 4 comprises at least one bolt passage 8 for therein receiving the bolt 7, such that the bolt 7 is therein movable back and forth in its axial bolt direction between at least one locking position (shown in Fig. 3) and at least one unlocking position. In the example shown, the body 4 comprises two such bolt passages 8, each having a cylindrical shape, which are spaced apart and are in line with each other, while the body 4 between these two bolt passages 8 comprises a recess. The bolt 7 is provided with rod guide means 9 for therein receiving a rod 10, such that the rod is therein movable back and forth in its axial rod direction, the axial rod direction being at right angles to the axial bolt direction. In the example shown, the rod guide means 9 are formed by a recess 9 in the bolt 7. The body 4 and the bolt 7 are configured such that the rod 10, if received in the recess 9 in the manner mentioned and when moved with at least a movement component in the axial bolt direction, causes the bolt 7 to move in the axial bolt direction for changing between the at least one locking position and the at least one unlocking position of the bolt 7.

[0027] The locking element 1 further comprises two bolt bearing elements 11, of which one is operatively received in one bolt passage 8 and of which the other is operatively received in the other bolt passage 8 for bearing-supporting the above-mentioned back-and-forth movement of the bolt 7 in the two bolt passages.

[0028] The locking element 1 further comprises a rod bearing element 12 which is operatively received in the recess 9 of the bolt 7 for bearing-supporting the back-and-forth movement of the rod 10 in the recess 9. The rod bearing element 12 is shown in Fig. 1 and may for instance be manufactured from a plastic, which may or may not be fiber-reinforced. In the example, the rod bearing element 12 is a plastic casing for the rod 10, placed in the recess 9 of the bolt 7, in which casing the rod can move back and forth. This casing is formed by the four mutually adjoining rectangular walls 46 shown, which define an encased slide-through space 45 for the rod 10. The casing has two upstanding walls 47 which each have a projection 44. In assembled condition of the element 1, the rod bearing element 12 is placed in the earlier-mentioned recess of the body 4 which is between the two

bolt passages 8, with the projections 44 resting on the ribs 43 shown of the body 44. In that assembled condition the casing wall 46 shown at the top in Fig. 1 is placed in the recess 9 of the bolt 7 when this bolt 7 is placed in the passages 8. Thus, the rod bearing element 12 is confined between, on one side, the ribs 43 of the body 4 and, on the other side, the bolt 7.

[0029] In Fig. 2 it is shown that the bolt 7 at its one end comprises a bevel 14 extending in the axial bolt direction for therewith, in the fastening condition in the at least one locking position, clampingly engaging with respect to the boundary 3 with respect to which the door 2 is hingedly suspended.

[0030] In the example, the body 4 comprises a first part 5 and a second part 6, the first part 5 being configured to be directly fastened to the door 2, and the second part 6 being configured to be fastened detachably, as for instance by means of the screws 41 shown, to the first part 5, such that after detachment of the second part 6 at least the bolt 7 is removable with respect to the first part 5. The first part 5 may be configured to be fastened undetachably, as for instance by means of welding, to the door 2.

[0031] In Figs. 1 and 2, furthermore, a detachable guard 42 is shown, which in the example can be snapped onto the second part 6 of the body 4.

[0032] In Fig. 3 a locking system is shown which comprises multiple locking elements 1, three rods 10, 110, 210, and manually movable operating means 15 for operatively moving the rods with at least the movement component in the axial bolt direction. The rod 10 is received in two separate rod guide means of associated separate locking elements 1. The rods 110 and 210 are each received in rod guide means of a single locking element 1.

[0033] The three rods shown are mutually coupled by additional restriction means 16, 17 for, in operation, additionally restricting the freedom of movement of the rods 10, 110, 210 with respect to the door 2. In the example, these additional restriction means are formed by hinging elements 16, 17. Each of these elements 16 and 17, respectively, in operation is hingedly connected at a first point 18, and 28, respectively, of the hinging element to the door 2 and in operation is further hingedly connected at another, second point 19 and 29, respectively, of the hinging element to one of the rods.

[0034] A difference between the depicted hinging elements 16 on one side and the depicted hinging elements 17 on the other is that the hinging element 16 in operation is further hingedly connected at a third point 20, other than the first point 18 and other than the second point 19, of the hinging element 16 to another rod 110, 210.

[0035] In the example, the operating means 15 comprise a manually operable handle 15 which in operation is hingedly connected at a point 38 of the handle to the door 2 and which in operation is further hingedly connected at another point 39 of the handle 15 to the rod 10. The rod 10 is coupled via the hinging elements 16, 17 to

the rods 110 and 210. In the situation shown, the bolts 7 of the locking elements 1 shown are each in locking position. By pivoting the handle 15 about the pivot point 38 in the direction of the arrow 50 shown, the mutually coupled rods 10, 110 and 210 are each moved over circular arc paths, such that all bolts 7 of the locking elements 1 shown pass into the unlocking position, which transition is indicated with the arrows 51 shown.

[0036] It is noted that the above-mentioned examples of embodiments do not limit the invention and that within the scope of the appended claims various alternatives are possible. Thus, the locking bolt and the rod can have various cross-sectional shapes. For instance, the perimeter of such a cross section can have a curved shape, such as a circular, elliptical shape or the like, but also a piecewise straight shape, such as for instance a rectangular shape or the like. Also, that perimeter can have a shape combining such curved and piecewise straight shapes. Furthermore, the operating means of locking systems of multiple doors may be centrally controlled. Other variants or modifications, however, are also possible. These and similar alternatives are understood to be within the framework of the invention as defined in the appended claims.

Claims

1. A locking element for, in a fastening condition of the element (1) fastened to a ship's door (2), ship's window or ship's hatch, locking the door, the window or the hatch with respect to a boundary (3) with respect to which the door, the window or the hatch is hingedly suspended, which locking element (1) comprises a body (4) and a locking bolt (7), which body comprises at least one bolt passage (8) for therein receiving the bolt, such that the bolt is therein movable back and forth in its axial bolt direction between at least one locking position and at least one unlocking position, which bolt is provided with rod guide means (9) for therein receiving a rod (10), such that the rod is therein movable back and forth in its axial rod direction, the axial rod direction being at right angles to or otherwise crossing with respect to the axial bolt direction, and wherein the body and the bolt are configured such that the rod, if it is received in the rod guide means in said manner and when it is moved with at least a movement component in the axial bolt direction, causes the bolt to move in the axial bolt direction for changing between said at least one locking position and said at least one unlocking position of the bolt.
2. A locking element according to claim 1, further comprising at least one bolt bearing element (11) which in operation is at least partly received in at least a part of the at least one bolt passage (8) for bearing-supporting said back-and-forth movement of the bolt

(7) in the at least one bolt passage.

3. A locking element according to claim 1 or 2, further comprising a rod bearing element (12) which in operation is at least partly received in at least a part of the rod guide means (9) for bearing-supporting said back-and-forth movement of the rod (10) in the rod guide means. 5
4. A locking element according to any one of the preceding claims, wherein the rod guide means (9) are formed by a recess (9) in the bolt (7). 10
5. A locking element according to any one of the preceding claims, wherein the bolt (7) at its one end comprises a bevel (14) extending in the axial bolt direction for therewith, in the fastening condition in the at least one locking position, clampingly engaging with respect to the boundary (3) with respect to which the door (2), the window or the hatch is hinged-ly suspended. 15
6. A locking element according to any one of the preceding claims, wherein the body (4) comprises a first part (5) and a second part (6), wherein the first part is configured to be directly fastened to the door (2), the window or the hatch, and wherein the second part is configured to be fastened detachably, as for instance through screwing, to the first part, such that after detachment of the second part, at least the bolt (7) is removable with respect to the first part. 20
7. A locking element according to claim 6, wherein the first part (5) is configured to be fastened undetachably, as for instance through welding, to the door (2), the window or the hatch. 25
8. A locking system comprising at least one locking element (1) according to any one of the preceding claims, at least one said rod (10, 110, 210), and manually movable or motor-movable operating means (15) for operatively moving the at least one rod with at least said movement component in the axial bolt direction. 30
9. A locking system according to claim 8, further comprising additional restriction means (16, 17) for, in operation, additionally limiting the freedom of movement of the at least one rod (10, 110, 210) with respect to the door (2), the window or the hatch. 35
10. A locking system according to claim 9, wherein the additional restriction means comprise at least one hinging element (16; 17), which hinging element in operation is hingedly connected at a first point (18; 28) of the hinging element to the door (2), the window or the hatch, and in operation is further hingedly connected at another, second point (19; 29) of the hinging 40

ing element to the at least one rod (10; 110; 210).

11. A locking system according to any one of claims 8 to 10, wherein the operating means (15) comprise a manually operable handle (15) which in operation is hingedly connected at a point (38) of the handle to the door (2), the window or the hatch, and which in operation is further hingedly connected at another point (39) of the handle to the at least one rod (10). 45
12. A locking system according to any one of claims 8 to 11, comprising at least two such locking elements (1), wherein, for at least one of the at least one rod, this one rod (10) in operation is received in said manner in separate rod guide means (9) of associated separate ones of the at least two locking elements (1). 50
13. A locking system according to any one of claims 8 to 12, comprising at least two such locking elements (1) and comprising at least two such rods (10, 110, 210), wherein, for at least one couple of the at least two rods, the two separate rods of this couple in operation are received in said manner in separate rod guide means (9) of associated separate ones of the at least two locking elements, and wherein in operation the two separate rods are mutually coupled by a hinging element (16) as mentioned in claim 10, which hinging element in operation is hingedly connected at the second point (19) of the hinging element to one (10) of the two separate rods and which hinging element in operation is hingedly connected at a third point (20), other than said first point (18) and said second point (19), of the hinging element (16) to the other (110, 210) of the two separate rods. 55
14. A ship's door, ship's window or ship's hatch as mentioned in any one of the preceding claims and comprising a locking element (1) according to any one of claims 1 to 7 and/or a locking system according to any one of claims 8 to 13.
15. An assembly comprising a ship's door (2), ship's window or ship's hatch according to claim 14, as well as said boundary (3) with respect to which the door, the window or the hatch is hingedly suspended.

Patentansprüche

1. Verriegelungselement, um in einem verschließenden Zustand des an einer Schiffstür (2), einem Schiffsfenster oder einer Schiffs Luke befestigten Elements (1) die Tür, das Fenster oder die Luke in Bezug auf eine Begrenzung (3), in Bezug auf welche die Tür, das Fenster oder die Luke drehbar aufgehängt ist, zu verriegeln, wobei das Verriegelungselement (1) einen Körper (4) und einen Verriegelungs- 60

- lungsbolzen (7) umfasst, wobei der Körper mindestens einen Bolzendurchgang (8) zur Aufnahme des Bolzens umfasst, sodass der Bolzen in seiner axialen Bolzenrichtung darin zwischen mindestens einer Verriegelungsposition und mindestens einer Entriegelungsposition vor und zurück beweglich ist, welcher Bolzen mit Stabführungsmitteln (9) versehen ist, um darin einen Stab (10) aufzunehmen, sodass der Stab darin in seiner axialen Stabrichtung, die rechtwinklig zu oder anderweitig kreuzend in Bezug auf die axiale Bolzenrichtung ist, vor und zurück beweglich ist, und wobei der Körper und der Bolzen so konfiguriert sind, dass der Stab, wenn er in den Stabführungsmitteln in dieser Weise aufgenommen ist und wenn er mit mindestens einer Bewegungskomponente in der axialen Bolzenrichtung bewegt wird, bewirkt, dass sich der Bolzen in der axialen Bolzenrichtung bewegt, um zwischen der mindestens einen Verriegelungsposition und der mindestens einen Entriegelungsposition des Bolzens zu wechseln.
2. Verriegelungselement nach Anspruch 1, ferner umfassend mindestens ein Bolzenlagerelement (11), das bei Bedienung mindestens teilweise in mindestens einen Teil des mindestens einen Bolzendurchgangs (8) aufgenommen wird, um die Vor- und Zurückbewegung des Bolzens (7) in dem mindestens einen Bolzendurchgang stützend zu lagern.
 3. Verriegelungselement nach Anspruch 1 oder 2, ferner umfassend ein Stablagerelement (12), das bei Bedienung mindestens teilweise in mindestens einen Teil der Stabführungsmittel (9) aufgenommen wird, um die Vor- und Zurückbewegung des Stabs (10) in den Stabführungsmitteln stützend zu lagern.
 4. Verriegelungselement nach einem der vorhergehenden Ansprüche, wobei die Stabführungsmittel (9) durch eine Vertiefung (9) in dem Bolzen (7) gebildet werden.
 5. Verriegelungselement nach einem der vorhergehenden Ansprüche, wobei der Bolzen (7) an seinem einen Ende einen in axialer Bolzenrichtung verlaufenden Kegel (14) umfasst, um damit im verschließenden Zustand in der mindestens einen Verriegelungsposition klemmend in Bezug auf die Begrenzung (3), in Bezug auf welche die Tür (2), das Fenster oder die Luke drehbar aufgehängt ist, einzugreifen.
 6. Verriegelungselement nach einem der vorhergehenden Ansprüche, wobei der Körper (4) ein erstes Teil (5) und ein zweites Teil (6) umfasst, wobei das erste Teil konfiguriert ist, um direkt an der Tür (2), dem Fenster oder der Luke befestigt zu werden, und wobei das zweite Teil konfiguriert ist, um lösbar, wie beispielsweise durch Verschrauben, an dem ersten Teil befestigt zu werden, so dass nach dem Lösen des zweiten Teils mindestens der Bolzen (7) in Bezug auf das erste Teil entfernbar ist.
 7. Verriegelungselement nach Anspruch 6, wobei das erste Teil (5) konfiguriert ist, um unlösbar, wie beispielsweise durch Verschweißen, an der Tür (2), dem Fenster oder der Luke befestigt zu werden.
 8. Verriegelungssystem, umfassend mindestens ein Verriegelungselement (1) nach einem der vorhergehenden Ansprüche, mindestens einen Stab (10, 110, 210) und manuell oder motorisch bewegliche Bedienungsmittel (15), um operativ den mindestens einen Stab mit mindestens der Bewegungskomponente in der axialen Bolzenrichtung zu bewegen.
 9. Verriegelungssystem nach Anspruch 8, ferner umfassend zusätzliche Einschränkungsmittel (16, 17), um bei Bedienung die Bewegungsfreiheit des mindestens einen Stabs (10, 110, 210) in Bezug auf die Tür (2), das Fenster oder die Luke zusätzlich zu begrenzen.
 10. Verriegelungssystem nach Anspruch 9, wobei die zusätzlichen Einschränkungsmittel mindestens ein Scharnierelement (16; 17) umfassen, das bei Bedienung drehbar an einem ersten Punkt (18; 28) des Scharnierelements mit der Tür (2), dem Fenster oder der Luke verbunden ist, und das bei Betrieb ferner an einem anderen, zweiten Punkt (19; 29) des Scharnierelements mit dem mindestens einen Stab (10; 110; 210) verbunden ist.
 11. Verriegelungssystem nach einem der Ansprüche 8 bis 10, wobei die Bedienungsmittel (15) einen manuell bedienbaren Griff (15) umfassen, der bei Bedienung drehbar an einem Punkt (38) des Griffs mit der Tür (2), dem Fenster oder der Luke verbunden ist, und der bei Bedienung ferner drehbar an einem anderen Punkt (39) des Griffs mit dem mindestens einen Stab (10) verbunden ist.
 12. Verriegelungssystem nach einem der Ansprüche 8 bis 11, umfassend mindestens zwei solche Verriegelungselemente (1), wobei für mindestens einen des mindestens einen Stabs dieser eine Stab (10) bei Bedienung in separaten Stabführungsmitteln (9) von zugehörigen separaten der mindestens zwei Verriegelungselemente (1) in dieser Weise aufgenommen ist.
 13. Verriegelungssystem nach einem der Ansprüche 8 bis 12, umfassend mindestens zwei solche Verriegelungselemente (1) und umfassend mindestens zwei solche Stäbe (1, 110, 210), wobei für mindestens ein Paar der mindestens zwei Stäbe die zwei separaten Stäbe dieses Paares bei Bedienung in separaten Stabführungsmitteln (9) von separaten der

mindestens zwei Verriegelungselementen aufgenommen sind, und wobei bei Bedienung die zwei separaten Stäbe durch ein wie in Anspruch 10 genanntes Scharnierelement (16) aneinander gekoppelt sind, welches Scharnierelement bei Bedienung drehbar an dem zweiten Punkt (19) des Scharnierelements mit einem (10) der zwei separaten Stäbe verbunden ist, und welches Scharnierelement bei Bedienung drehbar an einem dritten Punkt (20), der nicht der erste Punkt (18) und nicht der zweite Punkt (19) des Scharnierelements (16) ist, mit dem anderen (110, 210) der zwei separaten Stäbe verbunden ist.

14. Schiffstür, Schiffsfenster oder Schiffs Luke wie in einem der vorhergehenden Ansprüche erwähnt und umfassend ein Verriegelungselement (1) nach einem der Ansprüche 1 bis 7 und/oder ein Verriegelungssystem nach einem der Ansprüche 8 bis 13.
15. Eine Anordnung, umfassend eine Schiffstür (2), ein Schiffsfenster oder eine Schiffs Luke nach Anspruch 14 sowie die Begrenzung (3), in Bezug auf welche die Tür, das Fenster oder die Luke drehbar aufgehängt ist.

Revendications

1. Élément de verrouillage pour, dans une condition de fixation de l'élément (1) fixé à une porte (2) de navire, une fenêtre de navire ou une écoutille de navire, verrouiller la porte, la fenêtre ou l'écoutille par rapport à une limite (3) par rapport à laquelle la porte, la fenêtre ou l'écoutille est suspendue par charnière, lequel élément de verrouillage (1) comprend un corps (4) et un boulon de verrouillage (7), lequel corps comprend au moins un passage de boulon (8) pour recevoir à l'intérieur de ce dernier le boulon, de sorte que le boulon est mobile à l'intérieur de ce dernier selon un mouvement de va-et-vient dans sa direction axiale entre au moins une position de verrouillage et au moins une position de déverrouillage, lequel boulon est prévu avec des moyens de guidage de tige (9) pour recevoir à l'intérieur de ces derniers une tige (10), de sorte que la tige est mobile à l'intérieur de ces derniers selon un mouvement de va-et-vient dans sa direction axiale, la direction axiale de la tige étant en angle droit ou bien traversante par rapport à la direction axiale du boulon, et dans lequel le corps et le boulon sont configurés de sorte que la tige, si elle est reçue dans les moyens de guidage de tige de cette manière et lorsqu'elle est déplacée avec au moins une composante de mouvement dans la direction axiale du boulon, amène le boulon à se déplacer dans sa direction axiale pour passer de ladite au moins une position de verrouillage à ladite au moins une position de déverrouillage

du boulon.

2. Élément de verrouillage selon la revendication 1, comprenant en outre au moins un élément de support de boulon (11) qui, en fonctionnement, est au moins partiellement reçu dans au moins une partie du au moins un passage de boulon (8) pour supporter ledit mouvement de va-et-vient du boulon (7) dans le au moins un passage de boulon.
3. Élément de verrouillage selon la revendication 1 ou 2, comprenant en outre un élément de support de tige (12) qui, en fonctionnement, est au moins partiellement reçu dans au moins une partie des moyens de guidage de tige (9) pour supporter ledit mouvement de va-et-vient de la tige (10) dans les moyens de guidage de tige.
4. Élément de verrouillage selon l'une quelconque des revendications précédentes, dans lequel les moyens de guidage de tige (9) sont formés par un évidement (9) dans le boulon (7).
5. Élément de verrouillage selon l'une quelconque des revendications précédentes, dans lequel le boulon (7) au niveau de son extrémité comprend un biseau (14) s'étendant dans la direction axiale du boulon, dans la condition de fixation dans la au moins une position de verrouillage, pour se mettre en prise par serrage par rapport à la limite (3) par rapport à laquelle la porte (2), la fenêtre et l'écoutille sont suspendues par charnière.
6. Élément de verrouillage selon l'une quelconque des revendications précédentes, dans lequel le corps (4) comprend une première partie (5) et une seconde partie (6), dans lequel la première partie est configurée pour être fixée directement à la porte (2), la fenêtre ou l'écoutille, et dans lequel la seconde partie est configurée pour être fixée de manière détachable, comme par exemple par vissage, à la première partie, de sorte qu'après le détachement de la seconde partie, au moins le boulon (7) peut être retiré par rapport à la première partie.
7. Élément de verrouillage selon la revendication 6, dans lequel la première partie (5) est configurée pour être fixée de manière non détachable, comme par exemple par soudage, à la porte (2), la fenêtre ou l'écoutille.
8. Système de verrouillage comprenant au moins un élément de verrouillage (1) selon l'une quelconque des revendications précédentes, comprenant au moins ladite une tige (10, 110, 210) et des moyens de fonctionnement manuellement mobiles ou motorisés (15) pour déplacer de manière opérationnelle la au moins une tige avec au moins ladite compo-

sante de mouvement dans la direction axiale du boulon.

9. Système de verrouillage selon la revendication 8, comprenant en outre des moyens de restriction supplémentaires (16, 17) pour, en fonctionnement, limiter de manière supplémentaire la liberté de mouvement de la au moins une tige (10, 110, 210) par rapport à la porte (2), la fenêtre ou l'écouille.

10. Système de verrouillage selon la revendication 9, dans lequel les moyens de restriction supplémentaires comprennent au moins un élément d'articulation (16 ; 17), lequel élément d'articulation, en fonctionnement, est raccordé par charnière, au niveau d'un premier point (18 ; 28) de l'élément d'articulation, à la porte (2), la fenêtre ou l'écouille, et en fonctionnement, est en outre raccordé par charnière, au niveau d'un autre deuxième point (19 ; 29) de l'élément d'articulation, à la au moins une tige (10 ; 110 ; 210).

11. Système de verrouillage selon l'une quelconque des revendications 8 à 10, dans lequel les moyens de commande (15) comprennent une poignée manuellement actionnable (15) qui, en fonctionnement, est raccordée par charnière, au niveau d'un point (38) de la poignée, à la porte (2), la fenêtre ou l'écouille, et qui, en fonctionnement, est en outre raccordée par charnière, au niveau d'un autre point (39) de la poignée, à la au moins une tige (10).

12. Système de verrouillage selon l'une quelconque des revendications 8 à 11, comprenant au moins deux de ces éléments de verrouillage (1), dans lequel, pour au moins l'une de la au moins une tige, cette une tige (10), en fonctionnement, est reçue de cette manière dans des moyens de guidage de tige (9) séparés des tiges séparées associées des au moins deux éléments de verrouillage (1).

13. Système de verrouillage selon l'une quelconque des revendications 8 à 12, comprenant au moins deux de ces éléments de verrouillage (1) et comprenant au moins deux de ces tiges (10, 110, 210), dans lequel, pour au moins une paire des au moins deux tiges, les deux tiges séparées de cette paire en fonctionnement, sont reçues de cette manière dans des moyens de guidage de tige (9) séparés des tiges séparées associées des au moins deux éléments de verrouillage, et dans lequel, en fonctionnement, les deux tiges séparées sont mutuellement couplées par un élément d'articulation (16) comme mentionné dans la revendication 10, lequel élément d'articulation, en fonctionnement, est raccordé par charnière, au niveau du deuxième point (19) de l'élément d'articulation, à l'une (10) des deux tiges séparées et lequel élément d'articulation, en fonctionnement, est raccordé par charnière, au niveau d'un troisième

point (20), différent dudit premier point (18) et dudit deuxième point (19) de l'élément d'articulation (16), à l'autre (110, 210) des deux tiges séparées.

14. Porte de navire, fenêtre de navire ou écouille de navire selon l'une quelconque des revendications précédentes, et comprenant un élément de verrouillage (1) selon l'une quelconque des revendications 1 à 7 et/ou un élément de verrouillage selon l'une quelconque des revendications 8 à 13.

15. Ensemble comprenant une porte (2) de navire, une fenêtre de navire ou une écouille de navire selon la revendication 14, ainsi que ladite limite (3) par rapport à laquelle la porte, la fenêtre ou l'écouille est suspendue par charnière.

Fig. 1

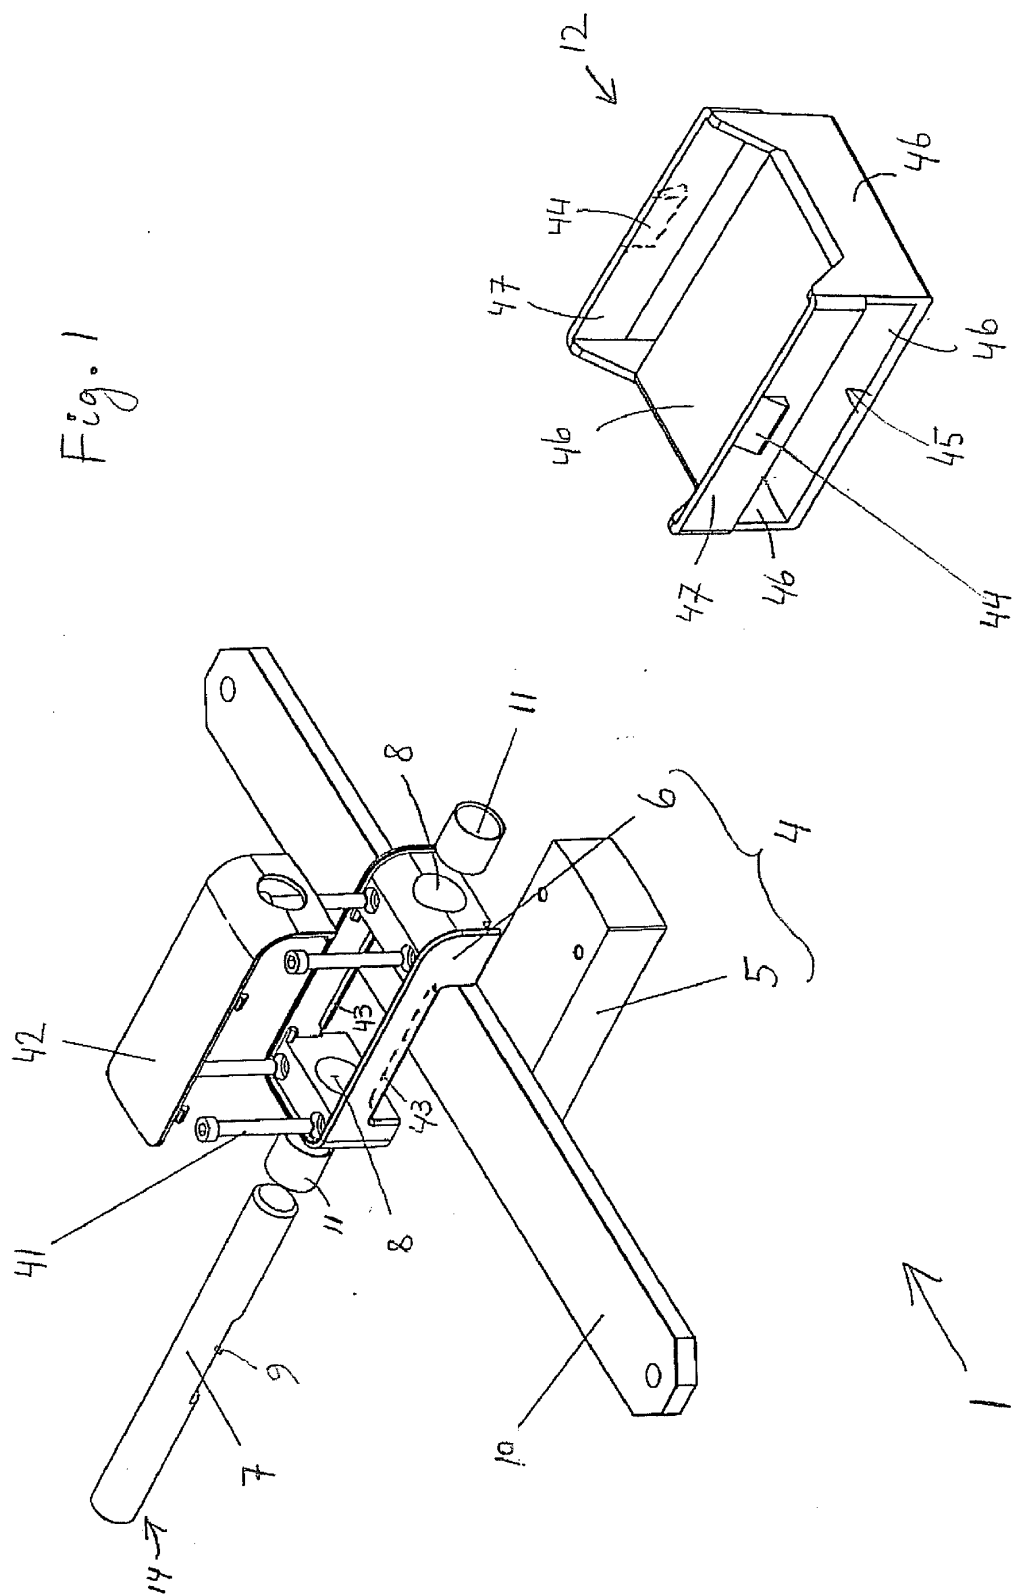


Fig. 2


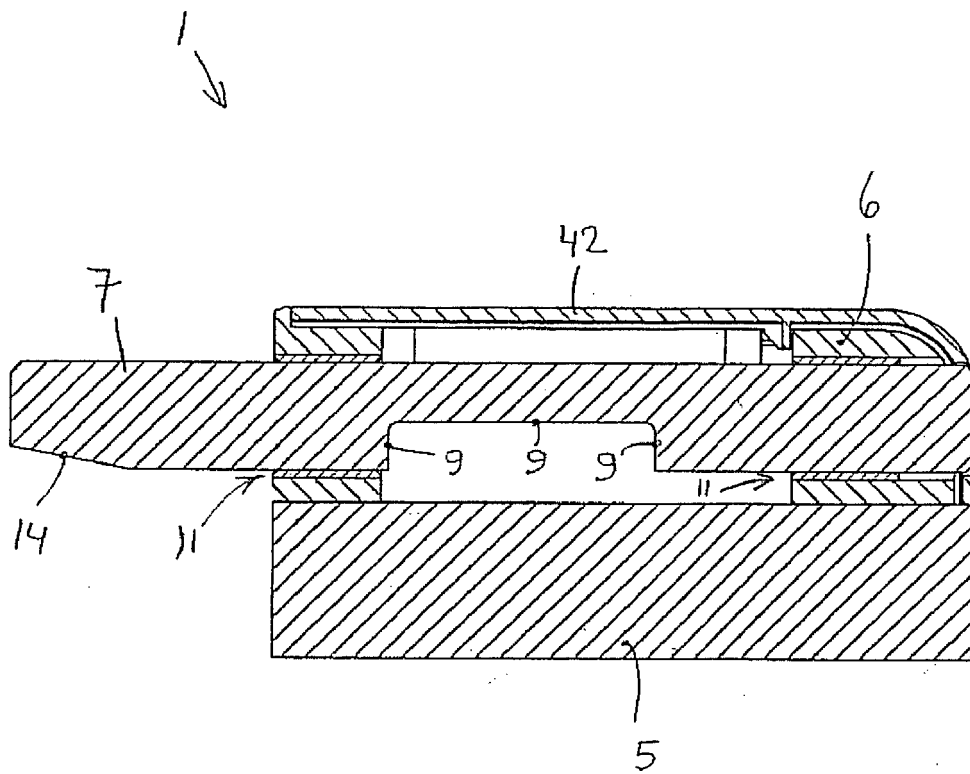


Fig. 3

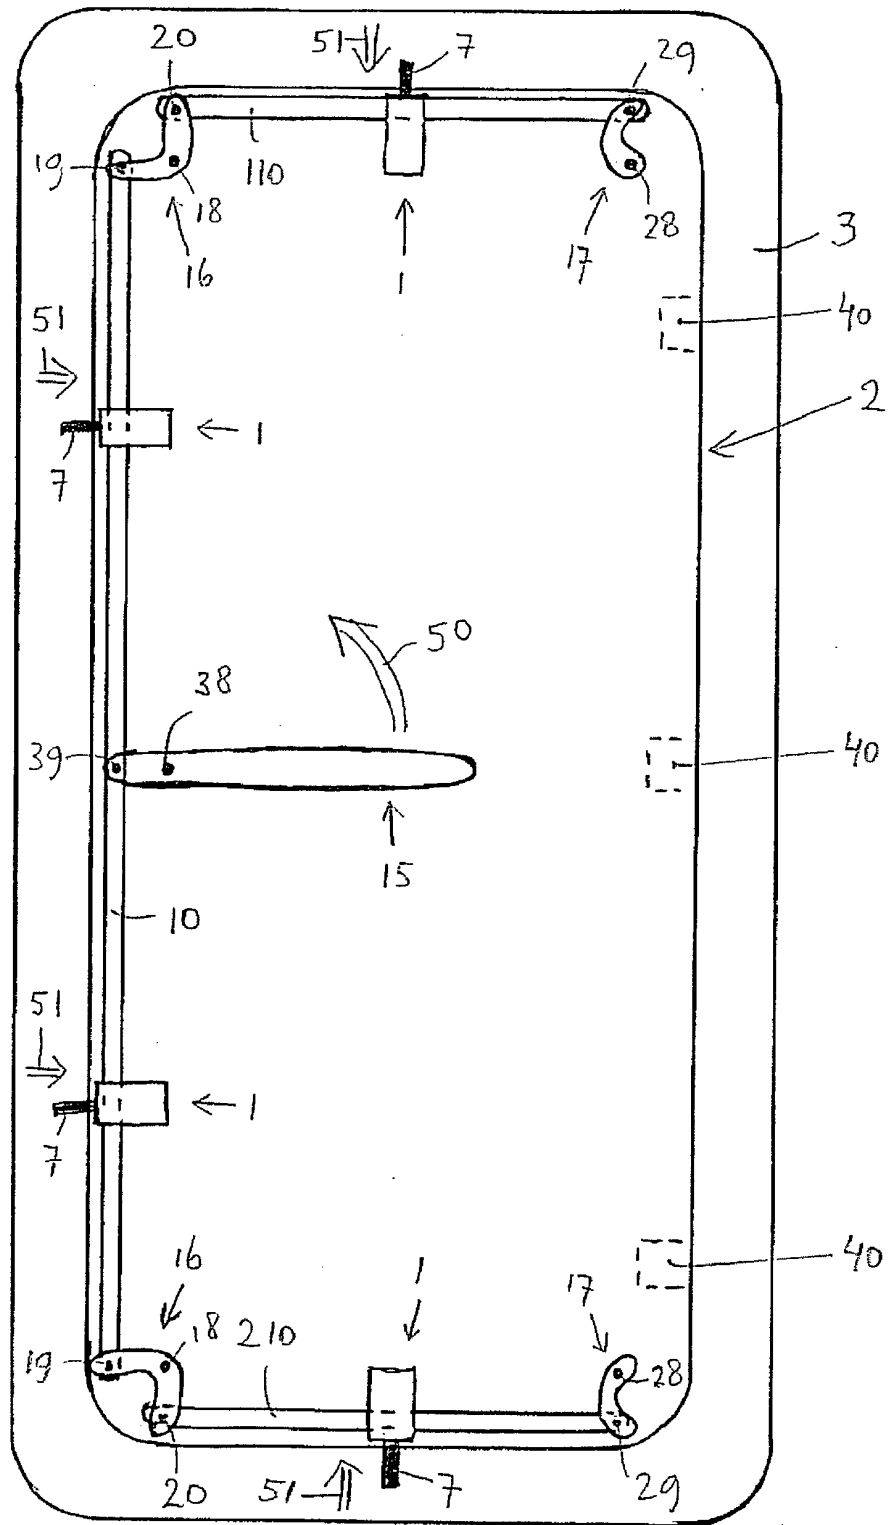

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20070022662 A [0001]