



(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
22.06.2011 Bulletin 2011/25

(51) Int Cl.:
F28F 9/02 (2006.01) F25B 39/02 (2006.01)

(21) Application number: **09820598.2**

(86) International application number:
PCT/JP2009/067780

(22) Date of filing: **14.10.2009**

(87) International publication number:
WO 2010/044420 (22.04.2010 Gazette 2010/16)

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK SM TR
Designated Extension States:
AL BA RS

- ITO, Jun
Kiyosu-shi
Aichi 452-8561 (JP)
- HIMENO, Takamitsu
Nagoya-shi
Aichi 453-8515 (JP)
- TAMAKI, Hitoshi
Nagoya-shi
Aichi 453-8515 (JP)

(30) Priority: **16.10.2008 JP 2008267478**


(71) Applicant: **Mitsubishi Heavy Industries, Ltd.**
Tokyo 108-8215 (JP)

(72) Inventors:
• JOBOJI, Yasunobu
Kiyosu-shi
Aichi 452-8561 (JP)

(74) Representative: **Henkel, Feiler & Hänzel**
Patentanwälte
Maximiliansplatz 21
80333 München (DE)

(54) **REFRIGERANT EVAPORATOR AND AIR-CONDITIONING DEVICE UTILIZING THE SAME**

(57) A refrigerant evaporator (1), in which one of a plurality of blocks is a U-turn block portion (15), includes a plurality of refrigerant-distribution holes (4M, 5M), which communicate between first tank portions (6, 8) and second tank portions (7, 9), provided in the U-turn block portion (15) and in partition walls (4C, 5C) therein that partition the first tank portions (6, 8) and the second tank portions (7, 9) of top and bottom tanks (4, 5). For the refrigerant-distribution holes (4M, 5M), assuming the distance between the plurality of holes as b, the hole length in the hole-row direction as a, and the thickness of the partition wall as t, a/b is set to $a/b \leq -0.0697 \times t^2 + 0.3274 \times t + 0.4594$, where $t = 1$ to 2 mm.

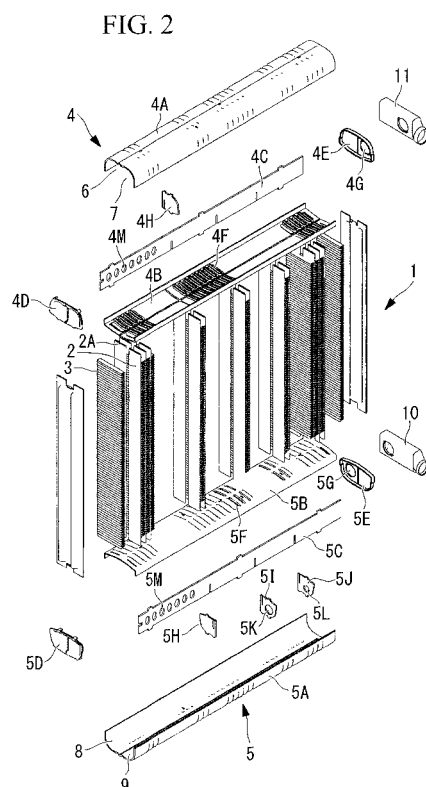

Description

{Technical Field}

[0001] The present invention relates to a refrigerant evaporator provided in a refrigeration cycle, and in particular, to an aluminum-alloy refrigerant evaporator suitable for applying to a vehicle air conditioner and an air conditioner employing the same.

{Background Art}

[0002] As a refrigerant evaporator employed in a refrigeration cycle of a vehicle air conditioner, there is a known all-aluminum-alloy refrigerant evaporator, which is configured including numerous refrigerant tubes that have refrigerant channels for flowing refrigerant in a vertical direction, that are numerous arranged in parallel in a direction orthogonal to a flow direction of the air flowing outside of the refrigerant channel, and that are also arranged in a plurality of rows, front-to-back, parallel to the flow direction of the air; and a pair of top and bottom tanks that are arranged in a direction orthogonal to the flow direction of the air, that are connected to the numerous refrigerant tubes at both top and bottom ends thereof, and whose interior is partitioned by a partition wall into a first tank portion and a second tank portion in a row direction, corresponding to the plurality of rows of the refrigerant tubes, thereby performing distribution and collection of the refrigerant, wherein the refrigerant that has flowed in from a refrigerant inlet sequentially flows through the refrigerant tubes in a plurality of blocks divided by partition plates provided at a plurality of locations in the tanks so as to perform heat exchange with the air to cool the air.

[0003] Patent Literature 1 discloses a refrigerant evaporator having the above-described configuration, in which one of the plurality of blocks is a U-turn block portion wherein the refrigerant flows into the first tank portion of the top tank from a direction parallel to the partition wall, flows to the second tank portion from this first tank portion via a side refrigerant channel, and further flows while being distributed to the plurality of refrigerant tubes from the first tank portion and the second tank portion, respectively. In addition, in the disclosure in Patent Literature 2, a plurality of communication holes are bored in the partition wall to allow the refrigerant collected in the second tank portion of the top tank upon flowing through the plurality of refrigerant tubes to directly flow into the first tank portion separated by the partition wall.

{Citation List}

{Patent Literature}

[0004]

{Patent Literature 1} The Publication of Japanese

Patent No. 3637314.

{Patent Literature 2} The Publication of Japanese Patent No. 3391339.

5 {Summary of Invention}

{Technical Problem}

[0005] However, with the refrigerant evaporator disclosed in Patent Literature 1 described above, in the U-turn block portion of the top tank located at the top, liquid refrigerant is prone to flow into the refrigerant tubes on the front side with respect to an inflow direction of the refrigerant due to inertia, and thus, in some cases, the liquid refrigerant that has flowed into the second tank portion from the first tank portion cannot adequately reach the back-most end thereof. Consequently, there is a problem in that the liquid refrigerant is unevenly distributed to the plurality of refrigerant tubes connected to the second tank portion, creating portions where effective heat exchange does not occur with the air flowing outside of the refrigerant tubes, which thereby deteriorates the heat-exchange performance.

[0006] On the other hand, in the refrigerant evaporator disclosed in Patent Literature 2 described above, although the plurality of communication holes are bored in the partition wall partitioning the first tank portion and the second tank portion, these are for allowing the refrigerant collected in the second tank portion of the top tank to flow directly to the first tank portion separated by the partition wall, and there is no suggestion that, in the U-turn block portion of the top tank, the liquid refrigerant that has flowed into the first tank portion of the top tank from a direction parallel to the partition wall is evenly distributed over the entire region in the length direction of both the first tank portion and the second tank portion constituting the U-turn block portion.

[0007] Furthermore, when boring the plurality of communication holes in the partition wall that partitions between the tanks, stress exerted inside the tanks due to refrigerant pressure acts on wall surfaces between the plurality of communication holes, and this affects the pressure-withstanding strength of the tanks. Therefore, in order to ensure the pressure-withstanding strength of the tanks, it is necessary to form communication holes in the partition walls with restrictive conditions, such as the inability to increase the plate thickness, ensuring a function for evenly distributing refrigerant, ensuring adequate opening area, etc., while preventing an increase in pressure loss of the refrigerant.

[0008] The present invention has been conceived in light of the above-described circumstances, and an object thereof is to provide a refrigerant evaporator that is capable of enhancing heat-exchange performance by achieving an even distribution of liquid refrigerant to a plurality of refrigerant tubes connected to a first tank portion and a second tank portion of a U-turn block portion and also capable of ensuring adequate pressure-with-

standing strength of the tank portions, as well as an air conditioner employing the same.

{Solution to Problem}

[0009] To solve the above-described problems, a refrigerant evaporator of the present invention and an air conditioner employing the same adopt the following solutions.

That is, a refrigerant evaporator according to a first aspect of the present invention is a refrigerant evaporator made of aluminum alloy including numerous refrigerant tubes that have refrigerant channels for flowing refrigerant in a vertical direction, that are numerous arranged in parallel in a direction orthogonal to a flow direction of an external fluid that flows outside of the refrigerant channels, and that are arranged in a plurality of rows, front-to-back, parallel to the flow direction of the external fluid; and a pair of top and bottom tanks that are arranged in the direction orthogonal to the flow direction of the external fluid and connected at top and bottom ends of the numerous refrigerant tubes, the interior of which is partitioned in a row direction corresponding to the plurality of rows of the refrigerant tubes into a first tank portion and a second tank portion by a partition wall, and that distribute or collect the refrigerant, the tanks being provided with a refrigerant inlet and a refrigerant outlet, and the refrigerant that has flowed in from the refrigerant inlet sequentially flowing through the refrigerant tubes of a plurality of blocks divided by partition plates provided in a plurality of locations in the tanks, after which the refrigerant flows out from the refrigerant outlet, wherein one of the plurality of blocks is a U-turn block portion in which the refrigerant flows into the first tank portion or the second tank portion of the top tank from a direction parallel to the partition wall and, from there, flows into the other tank portion, thereby being distributed to the plurality of refrigerant tubes from the first tank portion and the second tank portion, respectively, on the partition walls that partition the first tank portions and the second tank portions of the top and bottom tanks in the U-turn block portion, a plurality of refrigerant-distribution holes, which communicate between the first tank portions and the second tank portions, are provided parallel to the length direction of the partition walls, and for the refrigerant-distribution holes, assuming the distance between the plurality of holes as b , the hole length in the hole-row direction as a , and the thickness of the partition wall as t , a/b is set to $a/b \leq -0.0697 \times t^2 + 0.3274 \times t + 0.4594$, where $t = 1$ to 2 mm.

[0010] With the first aspect of the present invention, because, in the U-turn block portion, liquid refrigerant in gas-liquid two-phase refrigerant that has flowed into the first tank portion or the second tank portion from a direction parallel to the partition wall can be flowed into both of the first tank portion and the second tank portion of the U-turn block portion substantially evenly over the entire region thereof in the refrigerant inflow direction, while

being sequentially distributed into the other tank portion by the plurality of refrigerant-distribution holes provided in the direction parallel to the length direction of the partition walls, it becomes possible to substantially evenly distribute the liquid refrigerant to the plurality of refrigerant tubes connected to the first tank portion and the second tank portion.

Therefore, the liquid refrigerant, which mainly contributes to the cooling of the external fluid, is more evenly distributed, thereby making it possible to enhance the heat-exchange performance of the refrigerant evaporator. In addition, assuming the distance between the plurality of holes of the refrigerant-distribution holes as b , hole length in the hole-row direction as a , and thickness of the partition wall as t , a/b is set to $a/b \leq -0.0697 \times t^2 + 0.3274 \times t + 0.4594$, where $t = 1$ to 2 mm; thus, it is possible to set the inter-hole distance of the plurality of refrigerant-distribution holes provided in the partition walls to a size at which at least a pressure-withstanding pressure of 2.55 MPa or greater can be satisfied. Therefore, it becomes possible to readily increase the pressure-withstanding strength of the tank portions against the internal pressure by optimizing various sizes of the refrigerant-distribution holes in the partition walls, which have restricted configurations.

[0011] Furthermore, in the above-described refrigerant evaporator, it is desirable that a/b of the refrigerant-distribution hole be set to $a/b \leq -0.0744 \times t^2 + 0.3577 \times t + 0.3786$, where $t = 1$ to 2 mm.

According to this configuration, because a/b of the refrigerant-distribution holes is set to $a/b \leq -0.0744 \times t^2 + 0.3577 \times t + 0.3786$, where $t = 1$ to 2 , the inter-hole distance between the plurality of refrigerant-distribution holes can be set to a size that makes it possible to satisfy at least 3.3 MPa or greater break-down pressure. Therefore, it is possible to readily further increase the pressure-withstanding strength of the tank portions against the internal pressure by optimizing various sizes of the refrigerant-distribution holes.

[0012] Furthermore, in the above-described refrigerant evaporator, it is desirable that a/b of the refrigerant-distribution holes be set to $a/b \leq -0.0763 \times t^2 + 0.3810 \times t + 0.2847$, where $t = 1$ to 2 mm.

[0013] According to this configuration, because a/b of the refrigerant-distribution holes is set to $a/b \leq -0.0763 \times t^2 + 0.3810 \times t + 0.2847$, where $t = 1$ to 2 , the inter-hole distance between the plurality of refrigerant-distribution holes can be set to a size that makes it possible to satisfy at least 4.5 MPa or greater break-down pressure, even if the variability thereof is taken into consideration. Therefore, it is possible to readily and assuredly ensure the pressure-withstanding strength of the tank portions against the internal pressure by optimizing various sizes of the group of refrigerant-distribution holes.

[0014] In addition, in any one of the refrigerant evaporators mentioned above, it is desirable that the refrigerant-distribution holes be elongated holes made longer in a direction orthogonal to the hole-row direction of the

refrigerant-distribution holes.

[0015] According to this configuration, because the refrigerant-distribution holes are elongated holes made longer in the direction orthogonal to the hole-row direction of the refrigerant-distribution holes, it is possible to set the opening area of the refrigerant-distribution holes to a size allowing passage of the refrigerant without increasing the pressure loss thereof, while ensuring the pressure-withstanding strength of the tank portions by making a/b of the plurality of refrigerant-distribution holes small. Therefore, the pressure-withstanding strength of the tank portions can be increased while eliminating the influence on the heat-exchange performance by suppressing an increase in pressure loss of the refrigerant due to the refrigerant-distribution holes.

[0016] Furthermore, a refrigerant evaporator according to a second aspect of the present invention is a refrigerant evaporator made of aluminum alloy including numerous refrigerant tubes that have refrigerant channels for flowing refrigerant in a vertical direction, that are numerous arranged in parallel in a direction orthogonal to a flow direction of an external fluid that flows outside of the refrigerant channels, and that are arranged in a plurality of rows, front-to-back, parallel to the flow direction of the external fluid; and a pair of top and bottom tanks that are arranged in the direction orthogonal to the flow direction of the external fluid and connected at top and bottom ends of the numerous refrigerant tubes, the interior of which is partitioned in a row direction corresponding to the plurality of rows of the refrigerant tubes into a first tank portion and a second tank portion by a partition wall, and that distribute or collect the refrigerant, the tanks being provided with a refrigerant inlet and a refrigerant outlet, and the refrigerant that has flowed in from the refrigerant inlet sequentially flowing through the refrigerant tubes of a plurality of blocks divided by partition plates provided in a plurality of locations in the tanks, after which the refrigerant flows out from the refrigerant outlet, wherein one of the plurality of blocks is a U-turn block portion in which the refrigerant flows into the first tank portion or the second tank portion of the top tank from a direction parallel to the partition wall and, from there, flows into the other tank portion, thereby being distributed to the plurality of refrigerant tubes from the first tank portion and the second tank portion, respectively, on the partition walls that partition the first tank portions and the second tank portions of the top and bottom tanks in the U-turn block portion, a plurality of refrigerant-distribution holes, which communicate between the first tank portion and the second tank portion, are provided parallel to the length direction of the partition wall, and the refrigerant-distribution holes are elongated holes made longer in a direction orthogonal to the hole-row direction of the refrigerant-distribution holes.

[0017] With the second aspect of the present invention, because, in the U-turn block portion, liquid refrigerant in gas-liquid two-phase refrigerant that has flowed into the first tank portion or the second tank portion from a direc-

tion parallel to the partition wall can be flowed into both of the first tank portion and the second tank portion of the U-turn block portion substantially evenly over the entire region thereof in the refrigerant inflow direction, while being sequentially distributed into the other tank portion by the plurality of refrigerant-distribution holes provided in the direction parallel to the length direction of the partition walls, it becomes possible to substantially evenly distribute the liquid refrigerant to the plurality of refrigerant tubes connected to the first tank portion and the second tank portion.

Therefore, the liquid refrigerant, which mainly contributes to the cooling of the external fluid, is more evenly distributed, thereby making it possible to enhance the heat-exchange performance of the refrigerant evaporator. Furthermore, because the refrigerant-distribution holes are elongated holes made longer in the direction orthogonal to the hole-row direction of the refrigerant-distribution holes, it is possible to set the inter-hole distance of the plurality of refrigerant distribution holes to a size that satisfies adequate pressure-withstanding pressure or break-down pressure, while setting the opening area of the plurality of refrigerant-distribution holes to a size allowing passage of the refrigerant without increasing the pressure loss thereof. Therefore, it is possible to readily increase the pressure-withstanding strength of the tank portions against the internal pressure by optimizing the hole shape of the refrigerant-distribution holes while suppressing the increase in pressure loss of the refrigerant in the partition walls, which have restricted configurations.

[0018] Furthermore, in any one of the refrigerant evaporators mentioned above, it is desirable that the elongated holes be elliptical holes or elongated circular holes.

[0019] According to this configuration, because the elongated holes are elliptical holes or elongated circular holes, it is possible to set the inter-hole distance of the refrigerant distribution holes to a size that satisfies adequate pressure-withstanding pressure or break-down pressure, while setting the opening area of the plurality of refrigerant-distribution holes to a size allowing passage of the refrigerant without increasing the pressure loss thereof. Therefore, it is possible to readily increase the pressure-withstanding strength of the tank portions against the internal pressure by optimizing the hole shape of the refrigerant-distribution holes, while eliminating the influence on the heat-exchange performance by suppressing an increase in pressure loss of the refrigerant due to the refrigerant-distribution holes.

[0020] Furthermore, in an air conditioner according to a third aspect of the present invention, any one of the above-described refrigerant evaporators is employed as a refrigerant evaporator provided in a refrigeration cycle.

[0021] According to the third aspect of the present invention, the refrigerant evaporator provided in the refrigeration cycle is one of the above-described refrigerant evaporators, the performance of the air conditioner can be enhanced by performance enhancement of the refriger-

erant evaporator, and, simultaneously, the reliability of the air conditioner can be enhanced by increasing the pressure-withstanding strength of the refrigerant evaporator.

[0022] According to the refrigerant evaporators of the present invention, because liquid refrigerant in gas-liquid two-phase refrigerant that has flowed in from a direction parallel to the partition wall can be flowed into both of the first tank portion and the second tank portion of the U-turn block portion formed in the top tank, nearly evenly distributed over the entire region thereof in the refrigerant inflow direction, the liquid refrigerant is more evenly distributed to the plurality of refrigerant tubes connected to the first tank portion and the second tank portion, thereby making it possible to enhance the heat-exchange performance of the evaporator. In addition, because it is possible to set the inter-hole distance of the plurality of refrigerant-distribution holes provided in the partition walls to a size at which at least a pressure-withstanding pressure of 2.55 MPa or greater can be satisfied, it becomes possible to readily ensure the pressure-withstanding strength of the tank portions against the internal pressure by optimizing various sizes of the refrigerant-distribution holes in the partition walls, which have restricted configurations.

[0023] In addition, according to the refrigerant evaporators of the present invention, by configuring the refrigerant-distribution holes provided in the partition walls as elongated holes made longer in the direction orthogonal to the hole-row direction of the refrigerant-distribution holes, it is possible to set the inter-hole distance of the plurality of refrigerant distribution holes to a size that satisfies adequate pressure-withstanding pressure or break-down pressure, while setting the opening area of the plurality of refrigerant-distribution holes to a size allowing passage of the refrigerant without increasing the pressure loss thereof; therefore, it is possible to readily increase the pressure-withstanding strength of the tank portions against the internal pressure by optimizing the hole shape of the refrigerant-distribution holes while suppressing the increase in pressure loss of the refrigerant in the partition walls, which have restricted configurations.

[0024] Furthermore, according to the air conditioner of the present invention, the performance of the air conditioner can be enhanced by enhancing the performance of the refrigerant evaporator, and, simultaneously, the reliability of the air conditioner can be enhanced by increasing the pressure-withstanding strength of the refrigerant evaporator.

{Brief Description of Drawings}

[0025]

{Fig. 1} Fig. 1 is a perspective view of a refrigerant evaporator according to a first embodiment of the present invention.

{Fig. 2} Fig. 2 is an exploded perspective view of the refrigerant evaporator shown in Fig. 1.

{Fig. 3A} Fig. 3A is a front view of the refrigerant evaporator shown in Fig. 1.

{Fig. 3B} Fig. 3B is a right side view of the refrigerant evaporator shown in Fig. 1.

{Fig. 4} Fig. 4 is a side view of a partition wall to be provided in a top tank and a bottom tank of the refrigerant evaporator shown in Fig. 1.

{Fig. 5} Fig. 5 is a plan view showing the refrigerant distribution in a U-turn block portion in the refrigerant evaporator shown in Fig. 1.

{Fig. 6} Fig. 6 is a plan view showing the refrigerant distribution in a U-turn block portion in a refrigerant evaporator according to a second embodiment of the present invention.

{Fig. 7} Fig. 7 is an analytical graph showing the relationship between the break-down pressure P of tank partition portions and a ratio a/b of hole length a in the hole-row direction of a plurality of refrigerant-distribution holes to distance b between the plurality of holes provided in a partition wall of the refrigerant evaporator according to the present invention.

{Fig. 8} Fig. 8 is a graph in which the graph shown in Fig. 7 is converted so as to express thickness t of the partition wall on the horizontal axis and the ratio a/b on the vertical axis.

{Description of Embodiments}

[0026] Embodiments according to the present invention will be described below, with reference to the drawings.

{First Embodiment}

[0027] A first embodiment of the present invention will be described below, using Figs. 1 to 5 and Figs. 7 and 8. Fig. 1 shows a perspective view of a refrigerant evaporator 1 according to the first embodiment of the present invention, Fig. 2 shows an exploded perspective view thereof, and Figs. 3A and 3B show a front view and a right side view thereof. In addition, Fig. 4 shows a side view of a partition wall to be provided inside tanks.

[0028] The refrigerant evaporator 1 is provided with numerous refrigerant tubes 2 having a plurality of refrigerant channels 2A parallel to the length direction. These refrigerant tubes 2 can be formed of aluminum-alloy flat tubes that are manufactured, for example, by extrusion molding or pultrusion molding, or that are manufactured by molding a plate material into an elliptical tube-shape into which inner fins are inserted to be installed therein.

[0029] The refrigerant tubes 2 are numerous arranged in parallel in a stack in a direction orthogonal to the flow direction of an external fluid (air) A flowing outside thereof. In addition, the refrigerant tubes 2 are arranged in a plurality of rows (two rows) front-to-back relative to the flow direction of the air A. For example, heat-

conducting fins 3, which are formed by applying corrugation molding to aluminum-alloy thin plates to impart a wave shape thereto, are interposed between the numerous refrigerant tubes 2 that are numerous arranged in parallel in a stack in the direction orthogonal to the flow direction of the air A, and are bonded to external surfaces of the refrigerant tubes 2 by brazing using a known method.

[0030] At a top end and a bottom end of the numerous refrigerant tubes 2, a top tank 4 and a bottom tank 5, each having a substantially elongated-circular cross section, are bonded thereto by brazing. These top tank 4 and bottom tank 5 are formed of top members 4A and 5A and bottom members 4B and 5B that are split into two vertically; partition walls 4C and 5C which partition the inside of the top tank 4 and the bottom tank 5 into a first tank portion 5 and a second tank portion 7 and a first tank portion 8 and a second tank portion 9, respectively, in the row direction corresponding to the plurality of rows of the refrigerant tubes 2; and cap members 4D and 4E and 5D and 5E which close off the two ends of the top tank 4 and the bottom tank 5, respectively. The top members 4A and 5A, the bottom members 4B and 5B, the partition walls 4C and 5C, and the cap members 4D, 5D, 4E, and 5E are formed of press molded pieces of aluminum alloy and are integrally bonded by brazing using a known method.

[0031] In the bottom members 4B and 5B that constitute the top tank 4 and the bottom tank 5, numerous tube insertion holes 4F and 5F are provided corresponding to the rows of the refrigerant tubes 2 in order for the ends of the numerous refrigerant tubes 2 to be inserted thereinto for bonding by brazing. The cap member 5E of the bottom tank 5 is provided with a refrigerant inlet 5G, which communicates with the first tank portion 8, and a refrigerant-inlet header 10 is bonded thereto by brazing so as to communicate with the refrigerant inlet 5G of the cap member 5E. In addition, the cap member 4E of the top tank 4 is provided with a refrigerant outlet 4G, which communicates with the second tank portion 7, and a refrigerant-outlet header 11 is bonded thereto by brazing so as to communicate with the refrigerant outlet 4G of the cap member 4E. The refrigerant-inlet header 10 and the refrigerant-outlet header 11 are connected to a refrigerant-inlet pipe 12 and a refrigerant-outlet pipe 13, respectively.

[0032] Partition plates 4H and 5H that respectively partition the second tank portion 7 of the top tank 4 and the first tank portion 8 of the bottom tank 5 into two regions on the right and left in a direction parallel to the direction orthogonal to the flow direction of the air A (length direction of the tanks) are provided in the top tank 4 and the bottom tank 5. In this embodiment, the partition plates 4H and 5H are provided at positions where the ratio of the number of the refrigerant tubes 2 in the left region and the right region of the two regions separated into left and right in the figure is about 1:2. In addition, in the second tank portion 9 of the bottom tank 5, two throttle

plates 5I and 5J having throttle holes 5K and 5L that gradually narrow toward the end with the cap member 5E are provided at two appropriate locations in the length direction of the tank in the right region in the figure, separated by a predetermined gap therebetween.

[0033] Furthermore, in the left region in the figure partitioned by the partition plates 4H and 5H, the partition walls 4C and 5C of the top tank 4 and the bottom tank 5 have a plurality of refrigerant-distribution holes 4M and 5M, which communicate between the first tank portion 6 and the second tank portion 7 of the top tank 4 and between the first tank portion 8 and the second tank portion 9 of the bottom tank 5, respectively, provided in the length direction of the partition walls 4C and 5C. The refrigerant-distribution holes 4M and 5M have a function of causing the liquid refrigerant in a gas-liquid two-phase refrigerant flowing into the first tank portion 6 of the top tank 4 parallel to the length direction of the partition wall 4C from the right region to the left region in the figure to flow in while distributing the refrigerant nearly evenly in the length direction of the left region of the second tank portion 7 in the figure.

[0034] In addition, by providing the partition plate 5H in the first tank portion 8 of the bottom tank 5 that is connected to the refrigerant-inlet header 10 and by providing the partition plate 4H in the second tank portion 7 of the top tank 4 that is connected to the refrigerant-outlet header 11, a refrigerant flow pathway in the refrigerant evaporator 1 is divided into three blocks, that is, a first block 14, a second block (U-turn block) 15, and a third block 16, to be described below. The first block 14 is a block that causes the refrigerant that flows into the first tank portion 8 of the bottom tank 5 from the refrigerant-inlet header 10 to flow to the first tank portion 6 of the top tank 4 via the plurality of refrigerant tubes 2 connected in the right region with respect to the partition plate 5H.

[0035] In addition, the second block (U-turn block) 15, which is also referred to as a U-turn block, is a block that causes the refrigerant that flows into the first tank portion 6 of the top tank 4 to flow along the partition wall 4C toward the left region in the figure, from where it is distributed nearly evenly to the left region with respect to the partition plate 4H of the second tank portion 7 parallel to the length direction thereof via the plurality of refrigerant-distribution holes 4M, and then causes the refrigerant to flow down through the plurality of refrigerant tubes 2 from both the first tank portion 6 and the second tank portion 7 to the first tank portion 8 and the second tank portion 9 of the bottom tank 5. The refrigerant that has flowed down to the first tank portion 8 and the second tank portion 9 of the bottom tank 5 is collected in the second tank portion 9 via the refrigerant-distribution holes 5M.

[0036] Furthermore, the third block 16 is a block that causes the refrigerant collected in the second tank portion 9 to flow toward the right region along the partition wall 5C, and then causes it to flow to the second tank portion 7 of the top tank 4 via the plurality of refrigerant

tubes 2. The refrigerant that has flowed to the second tank portion 7 of the top tank 4 in this third block 16 flows out to the refrigerant-outlet pipe 13 via the outlet header 11.

[0037] As shown in Fig. 4, the plurality of refrigerant-distribution holes 4M and 5M provided in the above-described partition walls 4C and 5C are constituted of elongated holes 4m and 5m, which are elliptical holes or elongated circular holes, etc. made longer in a direction orthogonal to the hole-row direction, so that it is possible to ensure an adequate opening area to prevent an increase in pressure loss of the flowing refrigerant, and so that it is also possible to ensure adequate pressure-withstanding strength by alleviating stress concentration due to internal pressure. In addition, assuming the distance between the plurality of elongated holes (pitch of the holes) as b, the hole length in the hole-row direction as a, and the thickness of the partition walls 4C and 5C as t, the elongated holes 4m and 5m are configured as follows in order to enhance the pressure-withstanding strength of the top tank 4 and the bottom tank 5.

[0038] Fig. 7 shows analysis results based on experiments and FEM regarding the relationship between the break-down pressure P [MPa] of the tank partition portions (vertical axis) and the ratio a/b (horizontal axis) when the thickness t of the partition walls 4C and 5C are set at 1 mm, 1.3 mm, and 2 mm, and Fig. 8 shows a graph in which the thickness t of the partition walls 4C and 5C is set as the horizontal axis and a/b as the vertical axis, and the graph shown in Fig. 7 is converted to a polynomial expression that expresses ranges of a/b within which it is possible to ensure required break-down pressure P of the tank partition portions ($P = 2.55$, $P = 3.3$, and $P = 4.5$), taking the thickness t of the partition walls into consideration.

[0039] These analysis results indicate that, in order to satisfy at least 2.55 MPa ($P = 2.55$) or greater pressure-withstanding pressure, setting the above-described a/b to a polynomial expression of $P = 2.55$, that is, $a/b \leq -0.0697 \times t^2 + 0.3274 \times t + 0.4594$, where $t = 1$ to 2 mm, satisfies the pressure-withstanding pressure of 2.55 MPa or greater, and thus, it is possible to ensure the required pressure-withstanding strength. Note that, the partition walls 4Ca and 5C are clad materials, whose core material is A3003-H14 and whose surface material is A4343, and the plate thickness t is normally set between 1 and 2 mm because too low a thickness causes deficient strength and too high a thickness increases the tank size in the thickness direction or decreases the channel area in the tank.

[0040] In addition, for the elongated holes 4m and 5m, it is desirable to set the above-described a/b to $a/b \leq -0.0744 \times t^2 + 0.3577 \times t + 0.3786$, where $t = 1$ to 2 mm, to satisfy at least 3.3 MPa or greater break-down pressure, and, furthermore, it is more desirable to set it to $a/b \leq -0.0763 \times t^2 + 0.3810 \times t + 0.2847$, where $t = 1$ to 2 mm, so that a break-down pressure of 4.5 MPa or greater can be satisfied even if variability in inter-hole distance

of the plurality of elongated holes 4m and 5m, etc. is taken into consideration.

[0041] According to this embodiment described above, the following operational advantages are afforded.

5 The gas-liquid two-phase refrigerant that has flowed into the first tank 8 of the bottom tank 5 from the refrigerant-inlet pipe 12 via the refrigerant-inlet header 10 undergoes heat exchange with the air A via the heat-conducting fins 3 while flowing in the plurality of refrigerant tubes 2 in the first block 14 toward the first tank portion 6 of the top tank 4, and thus part of the refrigerant evaporates. The refrigerant collected in the first tank portion 6 of the top tank 4 flows through the first tank portion 6 to the left region thereof to enter the second block (U-turn block) 15. While flowing through the first tank portion 6, the gas-liquid two-phase refrigerant that has flowed into the second block (U-turn block) 15 is evenly distributed to the second tank portion 7 by the refrigerant-distribution holes 4M constituted of the elongated holes 4m provided in the partition wall 4C.

[0042] The refrigerant evenly distributed to the first tank portion 6 and the second tank portion 7 of the top tank 4 in the second block (U-turn block) 15 further evaporates upon undergoing heat exchange with the air A via the heat-conducting fins 3 while flowing down the plurality of refrigerant tubes 2 in the second block (U-turn block) 15 toward the first tank portion 8 and the second tank portion 9 of the bottom tank 5. The refrigerant that has flowed down to the first tank portion 8 and the second tank portion 9 of the bottom tank 5 is collected in the second tank portion 9 by the refrigerant-distribution holes 5M (the elongated holes 5m) provided in the partition wall 5C and flows through the second tank portion 9 to the right region thereof to enter the third block 16. This refrigerant rises through the plurality of refrigerant tubes 2 in the third block 16 toward the second tank portion 7 of the top tank 4, during which heat exchange with the air A occurs, thereby being entirely gasified and collected in the second tank portion 7. The air A cooled by the heat exchange with the refrigerant is supplied to the vehicle interior to be used for air conditioning, whereas the gasified refrigerant is sucked into a compressor from the outlet header 11 via the refrigerant-outlet pipe 13, thereby being circulated in the refrigeration cycle.

[0043] As described above, in the second block (U-turn block) 15 where the refrigerant makes a U-turn in the top tank, as shown in Fig. 5, the gas-liquid two-phase refrigerant that has flowed into the first tank portion 6 of the top tank 4 along the partition wall 4C is sequentially distributed to the second tank portion 7 from the front side by the plurality of refrigerant-distribution holes 4M constituted of the elongated holes 4m made longer in the longitudinal direction and provided in the length direction of the partition wall 4C; therefore, it is possible to make the liquid refrigerant flow into the second tank portion 7 nearly evenly over the entire region in the length direction thereof. Accordingly, it is possible to nearly evenly distribute the liquid refrigerant to the plurality of refrigerant

tubes 2 connected to the first tank portion 6 and the second tank portion 7 in the second block.

[0044] Therefore, according to the above-described refrigerant evaporator 1, the distribution of the liquid refrigerant is enhanced, in particular, between the first tank portion 6 and the second tank portion 7 of the U-turn block 15, thereby making it possible for the liquid refrigerant that contributes to cooling of the air A, which is the external fluid, to be more evenly distributed to the plurality of refrigerant tubes 2; therefore, it is possible to enhance the heat-exchange performance of the refrigerant evaporator by making the heat-conducting area function effectively.

[0045] On the other hand, it is necessary to increase the pressure-withstanding strength of the top tank 4 and the bottom tank 5 against the refrigerant to be used. In particular, in the top tank 4 and the bottom tank 5, where the refrigerant-distribution holes 4M and 5M are provided in the partition walls 4C and 5C, stress due to the internal pressure concentrates on hole-row portions of the refrigerant-distribution holes 4M and 5M. Accordingly, the refrigerant-distribution holes 4M and 5M are constituted of the elongated holes 4m and 5m, which are elliptical holes or elongated circular holes, etc. made longer in a direction orthogonal to the hole-row direction, so that it is possible to ensure an adequate opening area to prevent an increase in pressure loss of the flowing refrigerant and to ensure adequate pressure-withstanding strength by alleviating stress concentration due to the internal pressure.

[0046] Accordingly, it is possible to set the opening area of the refrigerant-distribution holes 4M and 5M (elongated holes 4m and 5m) to a size allowing passage of the refrigerant without increasing the pressure loss thereof and to set the inter-hole distance of the plurality of refrigerant-distribution holes 4M and 5M (elongated holes 4m and 5m) at a size that makes it possible to satisfy adequate pressure-withstanding pressure or break-down pressure. Therefore, it becomes possible to readily increase the pressure-withstanding strength of the top tank 4 and the bottom tank 5 by optimizing the hole shape of the refrigerant-distribution holes 4M and 5M, while suppressing an increase in pressure loss of the refrigerant in the partition walls 4C and 5C, which have restricted configurations.

[0047] In addition, regarding the plurality of refrigerant-distribution holes 4M and 5M (elongated holes 4m and 5m), because a/b is set to $a/b \leq -0.0697 \times t^2 + 0.3274 \times t + 0.4594$, where $t = 1$ to 2 mm, assuming the distance between the plurality of elongated holes as b , the hole length in the hole-row direction as a , and the thickness of the partition walls as t , it is possible to set the inter-hole distance of the plurality of refrigerant-distribution holes 4M and 5M (elongated holes 4m and 5m) provided in the partition walls 4C and 5C to a size at which at least a pressure-withstanding pressure of 2.55 MPa or greater can be satisfied.

[0048] Fig. 7 shows analysis results regarding the re-

lationship between the break-down pressure P [MPa] of the tank partition portions (vertical-axis) and the above-described a/b (horizontal axis) when the thickness t of the partition walls 4C and 5C is set at 1 mm, 1.3 mm, and 2 mm, and Fig. 8 shows a graph in which the thickness t of the partition walls 4C and 5C is set as the horizontal axis and a/b as the vertical axis, and the graph shown in Fig. 7 is converted to a polynomial expression that expresses ranges of a/b within which it is possible to ensure the required break-down pressure P of the tank partition portions, taking the thickness t of the partition walls into consideration. From these results, it is clear that, in order to satisfy at least 2.55 MPa or greater pressure-withstanding pressure, setting a/b to $a/b \leq -0.0697 \times t^2 + 0.3274 \times t + 0.4594$, where $t = 1$ to 2 mm, satisfies this pressure-withstanding pressure, and thus, it is possible to ensure the required pressure-withstanding strength.

[0049] Similarly, by setting the above-described a/b to $a/b \leq -0.0744 \times t^2 + 0.3577 \times t + 0.3786$, where $t = 1$ to 2 mm, at least 3.3 MPa or greater break-down pressure can be satisfied, and, furthermore, by setting it to $a/b \leq -0.0763 \times t^2 + 0.3810 \times t + 0.2847$, where $t = 1$ to 2 mm, 4.5 MPa or greater break-down pressure can be satisfied even if variability in the inter-hole distance of the plurality of elongated holes 4m and 5m, etc. is taken into consideration. Thus, it is clear that the required pressure-withstanding strengths can be adequately ensured.

[0050] Therefore, according to this embodiment, with the partition walls 4C and 5C which have restrictive conditions, such as the inability to increase the plate thickness because the tank size would be increased, the inability to decrease the number of holes to ensure the function thereof for evenly distributing refrigerant, the need for the opening area to be made large to suppress pressure loss of the refrigerant passing therethrough, etc., it is possible to readily ensure the pressure-withstanding strength of the tank portions against the internal pressure by optimizing various sizes of the refrigerant-distribution holes 4M and 5M (the elongated holes 4m and 5m).

[0051] Note that, as shown in Figs. 3A and 3B, in the above-described embodiment, numerous ribs 4N and 5N may be integrally molded on surfaces of the top members 4A and 5A of the headers 4 and 5. In addition, individual component parts of the refrigerant evaporator 1 shown in Fig. 2 are not separately joined by brazing, but, as is known, after all component parts are pre-assembled, they can be placed in an oven to be heated and be manufactured into an integrated piece by brazing in the oven.

[0052] Furthermore, the above-described aluminum-alloy refrigerant evaporator 1 is particularly suitable for a refrigerant evaporator that forms a refrigeration cycle of a vehicle air conditioner where it is necessary to achieve low weight and compactness, and, by applying the refrigerant evaporator 1 thereto, the performance of the air conditioner can be enhanced, and, simultaneously, the reliability of the air conditioner can be enhanced by increasing the pressure-withstanding strength of the

refrigerant evaporator 1.

{Second Embodiment}

[0053] Next, a second embodiment of the present invention will be described using Fig. 6.

This embodiment differs from the first embodiment described above in the manner of providing the refrigerant-distribution holes 4M and 5M (elongated holes 4m and 5m) to be provided in the partition walls 4C and 5C. Because other components are the same as those of the first embodiment, descriptions thereof will be omitted.

In this embodiment, assuming the entire length of the top tank 4 constituting the second block (U turn block) 15 in the refrigerant inflow direction (the distance between the left end of the top tank 4 and the partition plate 4H) as L2, as shown in Fig. 6, the plurality of refrigerant-distribution holes 4M and 5M (elongated holes 4m and 5m) provided in the partition walls 4C and 5C in the second block (U-turn block) 15 are configured to be provided in a plurality in a back-side region within the length L1, excluding a portion of the region on the front side in the refrigerant inflow direction.

[0054] The above-described back-side-region length L1 is the length from the back-most ends of the first tank portion 6 and the second tank portion 7 to the position of the refrigerant-distribution holes 4M on the front-most side; it is effective to set this length L1 of the back-side region within a range of $0.7 < L1/L2 < 0.9$, relative to the entire length L2, and it is most preferable that L1/L2 be about 0.8. By employing such a configuration, in comparison with the case of the first embodiment, the refrigerant distribution can be further improved, thereby making it possible to further enhance the heat-exchange performance of the refrigerant evaporator 1. Note that when L1/L2 becomes less than 0.7, the distribution of liquid refrigerant in a region close to the partition plate 4H in the second tank portion 7 becomes slightly deficient, whereas when L1/L2 exceeds 0.9, conversely, the distribution of liquid refrigerant in a region on the back-most side thereof becomes slightly deficient; and, from this, it is most preferable that L1/L2 be about 0.8.

[0055] Note that, the present invention is not limited to the invention according to the above-described embodiments, and appropriate modifications are permissible within a range that does not depart from the spirit thereof. For example, although all of the plurality of refrigerant-distribution holes 4M and 5M (elongated holes 4m and 5m) provided in the length direction of the partition walls 4C and 5C are made in equal sizes in the embodiments described above, the sizes of the refrigerant-distribution holes 4M and 5M (elongated holes 4m and 5m) may be gradually increased from the front side toward the back side in the refrigerant inflow direction. Accordingly, the liquid refrigerant, more of which is readily distributed to the refrigerant-distribution holes 4M (elongated holes 4m) on the front side due to inertia, is sequentially shifted to the larger refrigerant-distribution holes 4M (elongated

holes 4m) on the back side, by which the distribution in the refrigerant inflow direction is improved for the liquid refrigerant flowing from the first tank portion 6 to the second tank portion 7, thereby making it possible to distribute the liquid refrigerant nearly evenly over the entire region in the refrigerant inflow direction in the first tank portion 6 and the second tank portion 7; therefore, it is possible to further enhance the heat-exchange performance of the refrigerant evaporator 1 by achieving an even distribution of the liquid refrigerant to the plurality of refrigerant tubes 2.

[0056] In addition, in the above-described embodiments, the U-turn block 15 in which the refrigerant flows from the first tank portion 6 to the second tank portion 7 has been described as an example; however, a configuration such as one in which the refrigerant flows in reverse from the second tank portion to the first tank portion 6 is of course also possible. Furthermore, although an example of dividing the refrigerant flow pathway into three blocks has been described, the number of blocks is not limited to three blocks. In addition, the inlet and outlet of the refrigerant for the refrigerant evaporator 1 may be provided anywhere at the top, bottom, left, and right.

{Reference Signs List}

[0057]

- 1: refrigerant evaporator
- 2: refrigerant tube
- 2A: refrigerant channel
- 4: top tank
- 5: bottom tank
- 4C, 5C: partition wall
- 4G: refrigerant outlet
- 4H, 5H: partition plate
- 4M, 5M: refrigerant-distribution hole
- 4m, 5m: elongated hole
- 5G: refrigerant inlet
- 6, 8: first tank portion
- 7, 9: second tank portion
- 14: first block
- 15: second block (U-turn block)
- 16: third block
- a: hole length of refrigerant-distribution hole (elongated hole) in hole-row direction
- b: distance between plurality of refrigerant-distribution holes (elongated holes)

Claims

1. A refrigerant evaporator made of aluminum alloy comprising:

numerous refrigerant tubes that have refrigerant channels for flowing refrigerant in a vertical di-

rection, that are numerous arranged in parallel in a direction orthogonal to a flow direction of an external fluid that flows outside of the refrigerant channels, and that are arranged in a plurality of rows, front-to-back, parallel to the flow direction of the external fluid; and

a pair of top and bottom tanks that are arranged in the direction orthogonal to the flow direction of the external fluid and connected at top and bottom ends of the numerous refrigerant tubes, the interior of which is partitioned in a row direction corresponding to the plurality of rows of the refrigerant tubes into a first tank portion and a second tank portion by a partition wall, and that distribute or collect the refrigerant, the tanks being provided with a refrigerant inlet and a refrigerant outlet, and the refrigerant that has flowed in from the refrigerant inlet sequentially flowing through the refrigerant tubes of a plurality of blocks divided by partition plates provided in a plurality of locations in the tanks, after which the refrigerant flows out from the refrigerant outlet, wherein

one of the plurality of blocks is a U-turn block portion in which the refrigerant flows into the first tank portion or the second tank portion of the top tank from a direction parallel to the partition wall and, from there, flows into the other tank portion, thereby being distributed to the plurality of refrigerant tubes from the first tank portion and the second tank portion, respectively, on the partition walls that partition the first tank portions and the second tank portions of the top and bottom tanks in the U-turn block portion, a plurality of refrigerant-distribution holes, which communicate between the first tank portions and the second tank portions, are provided parallel to the length direction of the partition walls, and

for the refrigerant-distribution holes, assuming the distance between the plurality of holes as b , the hole length in the hole-row direction as a , and the thickness of the partition wall as t , a/b is set to $a/b \leq -0.0697 \times t^2 + 0.3274 \times t + 0.4594$, where $t = 1$ to 2 mm.

2. A refrigerant evaporator according to Claim 1, wherein a/b of the refrigerant-distribution hole is set to $a/b \leq -0.0744 \times t^2 + 0.3577 \times t + 0.3786$, where $t = 1$ to 2 mm.
3. A refrigerant evaporator according to Claim 1, wherein a/b of the refrigerant-distribution hole is set to $a/b \leq -0.0763 \times t^2 + 0.3810 \times t + 0.2847$, where $t = 1$ to 2 mm.
4. A refrigerant evaporator according to any one of Claims 1 to 3, wherein the refrigerant-distribution

holes are elongated holes made longer in a direction orthogonal to the hole-row direction of the refrigerant-distribution holes.

5. A refrigerant evaporator made of aluminum alloy comprising:

numerous refrigerant tubes that have refrigerant channels for flowing refrigerant in a vertical direction, that are numerous arranged in parallel in a direction orthogonal to a flow direction of an external fluid that flows outside of the refrigerant channels, and that are arranged in a plurality of rows front-to-back parallel to the flow direction of the external fluid; and

a pair of top and bottom tanks that are arranged in the direction orthogonal to the flow direction of the external fluid and connected at top and bottom ends of the numerous refrigerant tubes, the interior of which is partitioned in a row direction corresponding to the plurality of rows of the refrigerant tubes into a first tank portion and a second tank portion by a partition wall, and that distribute or collect the refrigerant, the tanks being provided with a refrigerant inlet and a refrigerant outlet, and the refrigerant that has flowed in from the refrigerant inlet sequentially flowing through the refrigerant tubes of a plurality of blocks divided by partition plates provided in a plurality of locations in the tanks, after which the refrigerant flows out from the refrigerant outlet, wherein

one of the plurality of blocks is a U-turn block portion in which the refrigerant flows into the first tank portion or the second tank portion of the top tank from a direction parallel to the partition wall and, from there, flows into the other tank portion, thereby being distributed to the plurality of refrigerant tubes from the first tank portion and the second tank portion, respectively, on the partition walls that partition the first tank portions and the second tank portions of the top and bottom tanks in the U-turn block portion, a plurality of refrigerant-distribution holes, which communicate between the first tank portion and the second tank portion, are provided parallel to the length direction of the partition wall, and the refrigerant-distribution holes are elongated holes made longer in a direction orthogonal to the hole-row direction of the refrigerant-distribution holes.

6. A refrigerant evaporator according to Claim 4 or 5, wherein the elongated holes are elliptical holes or elongated circular holes.
7. An air conditioner in which a refrigerant evaporator according to any of Claims 1 to 6 is employed as a

refrigerant evaporator provided in a refrigeration cycle.

5

10

15

20

25

30

35

40

45

50

55

FIG. 1

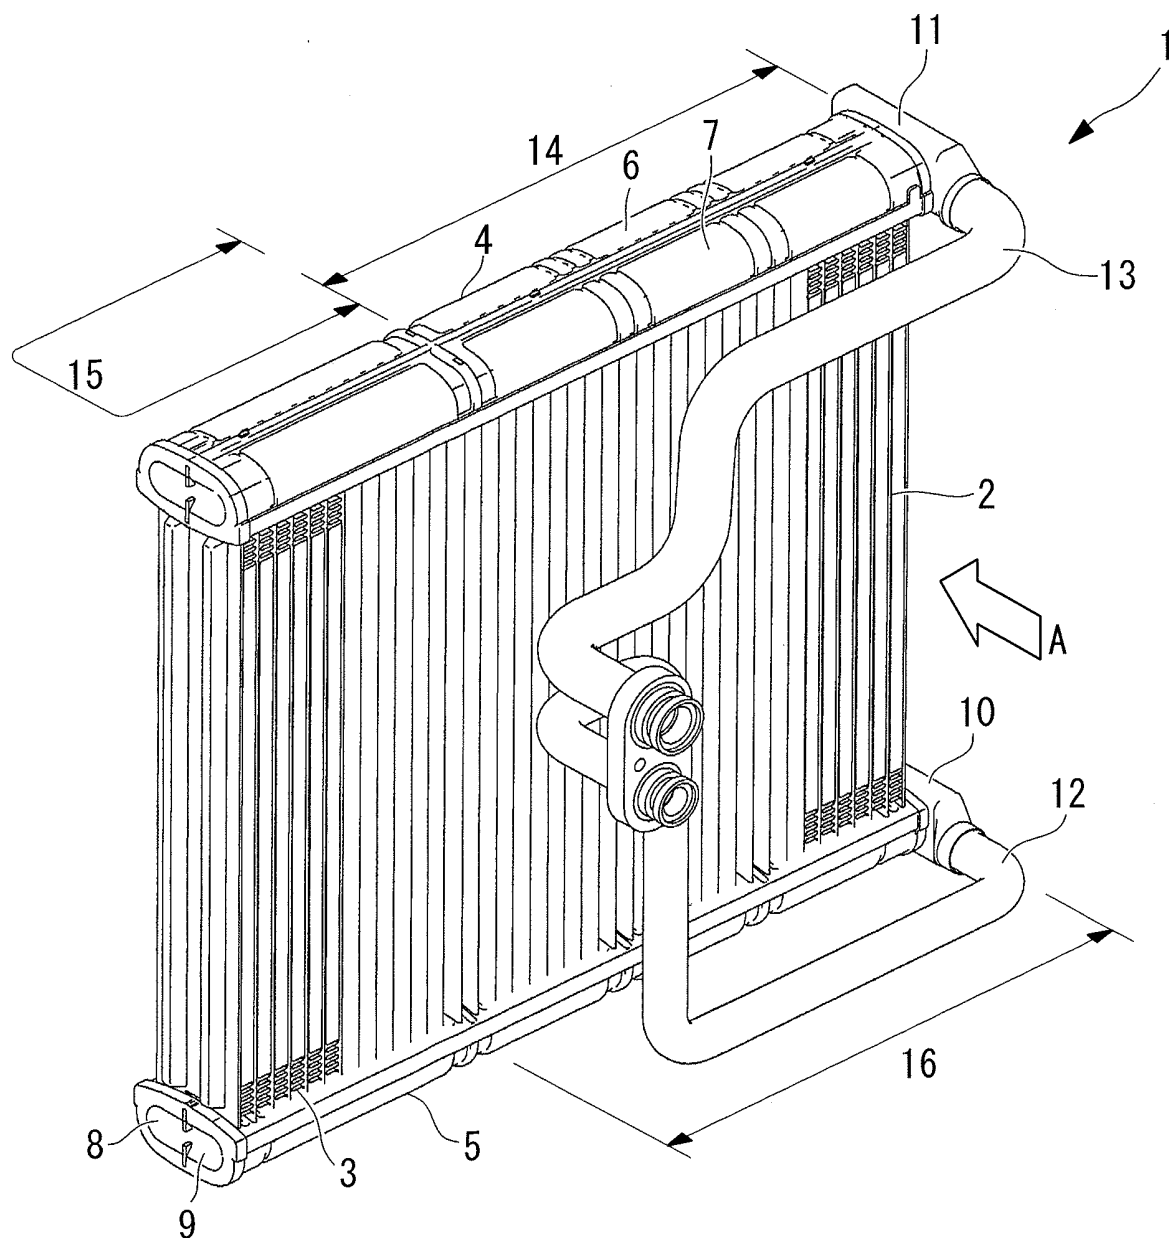


FIG. 2

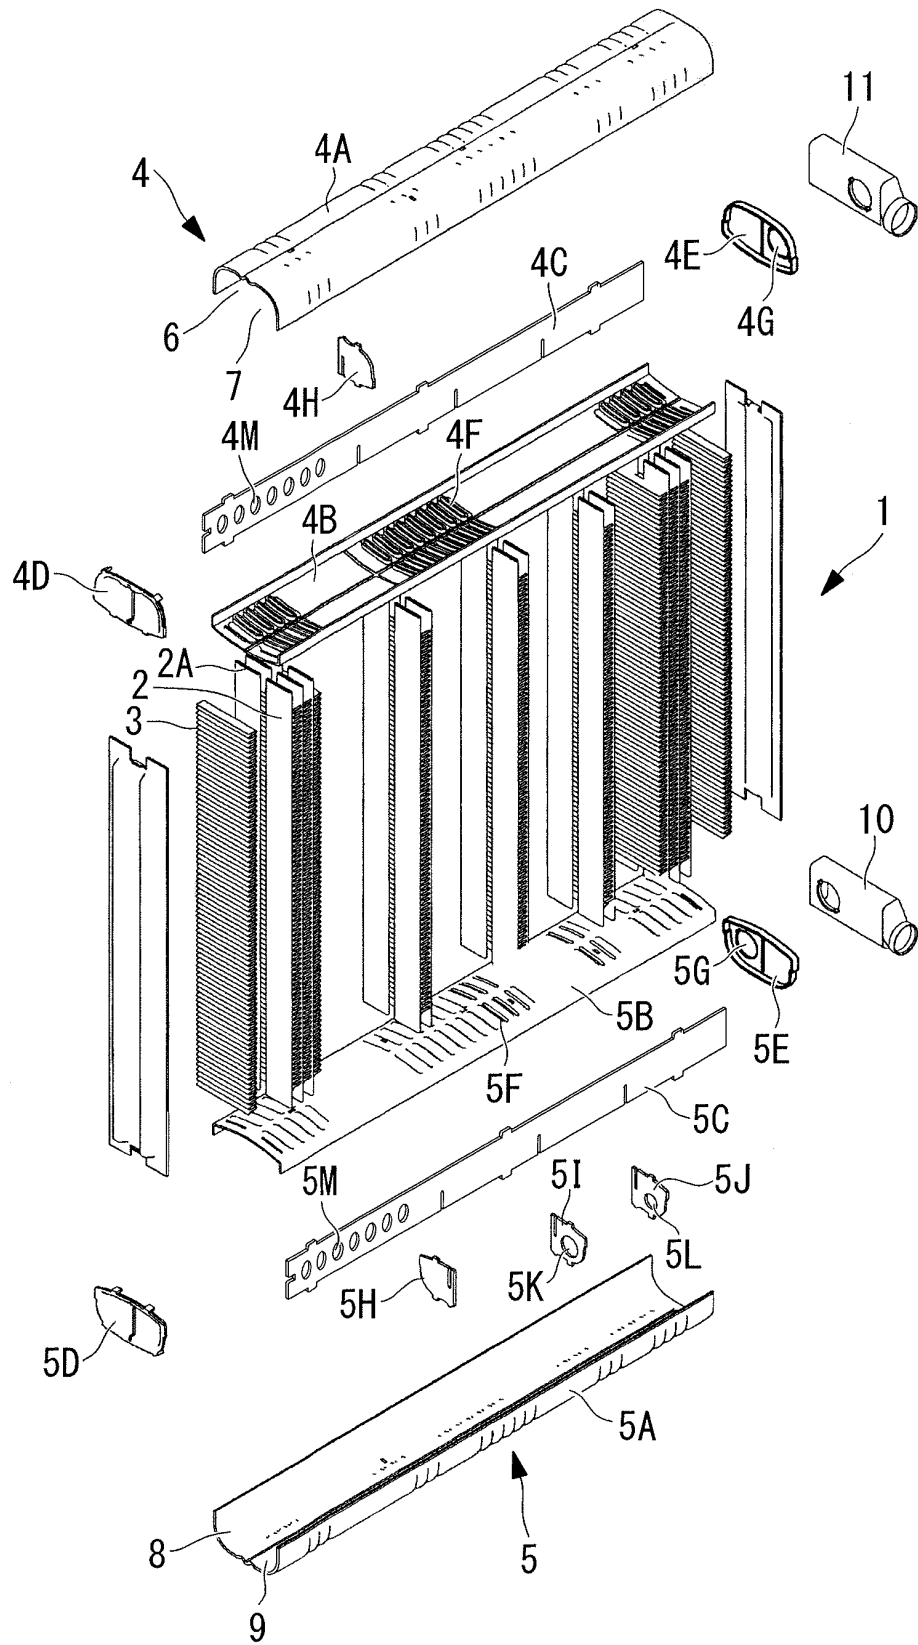


FIG. 3A

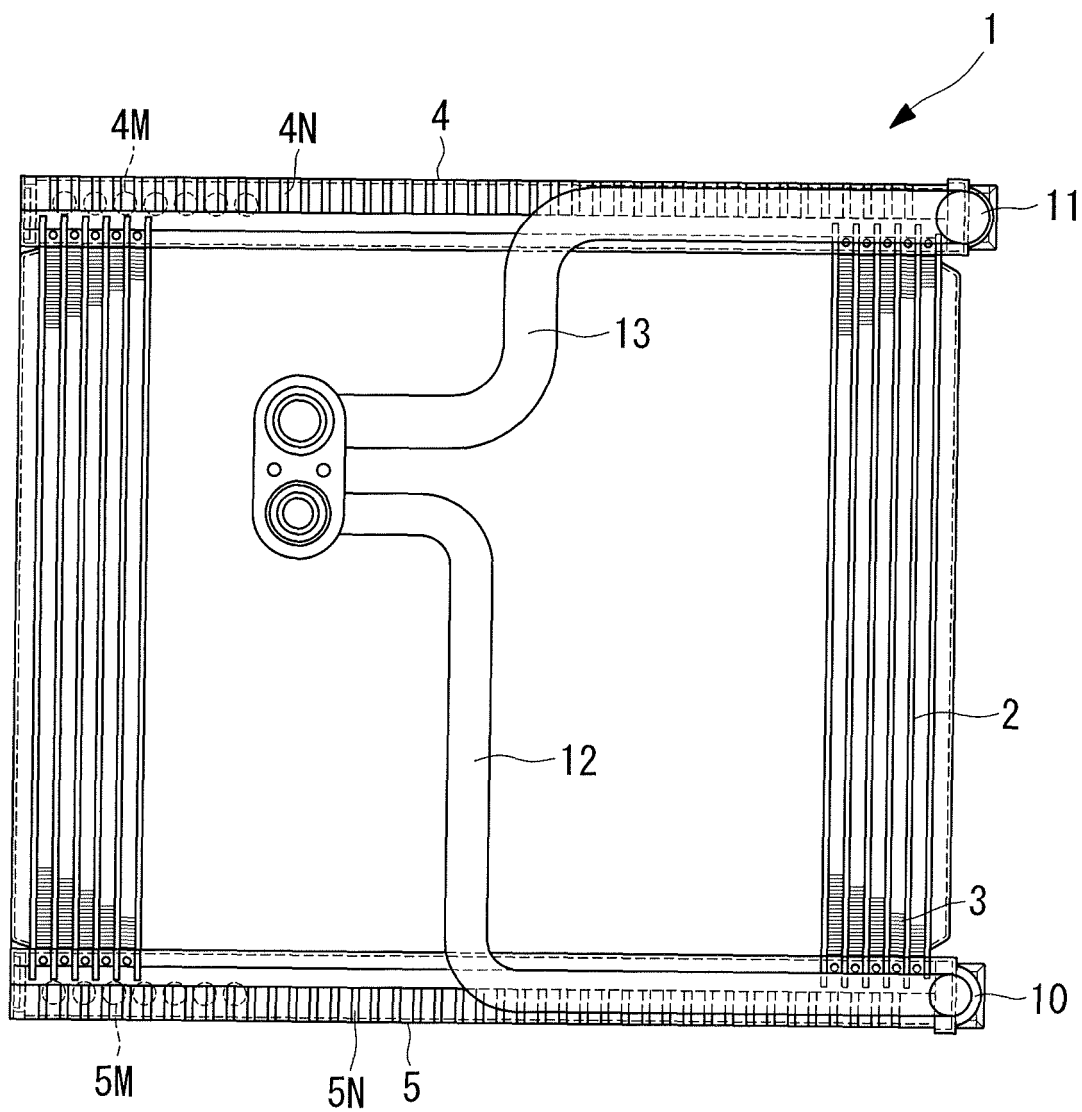


FIG. 3B

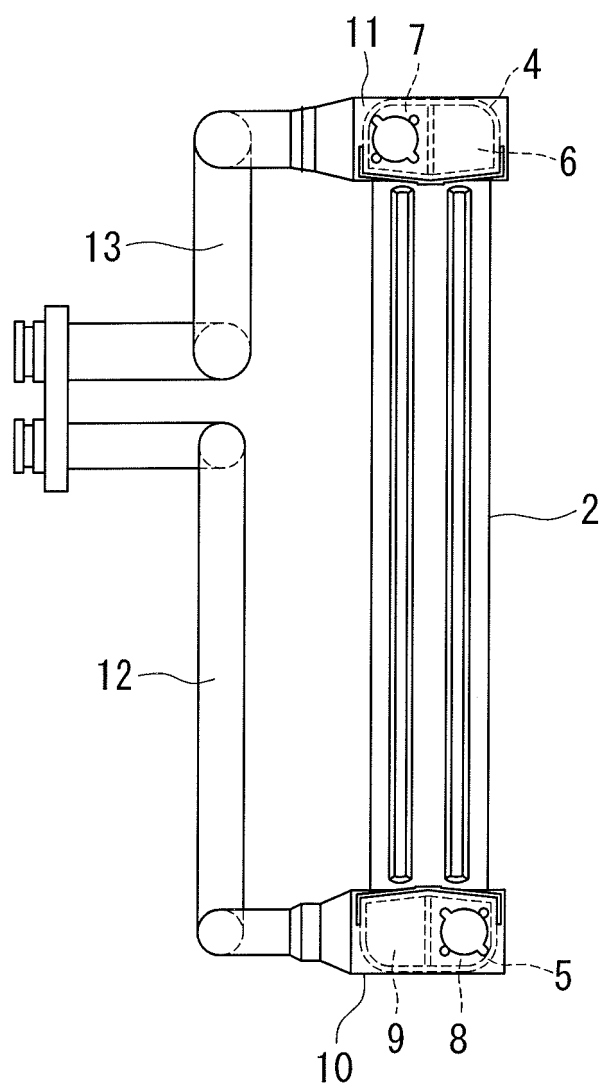


FIG. 4

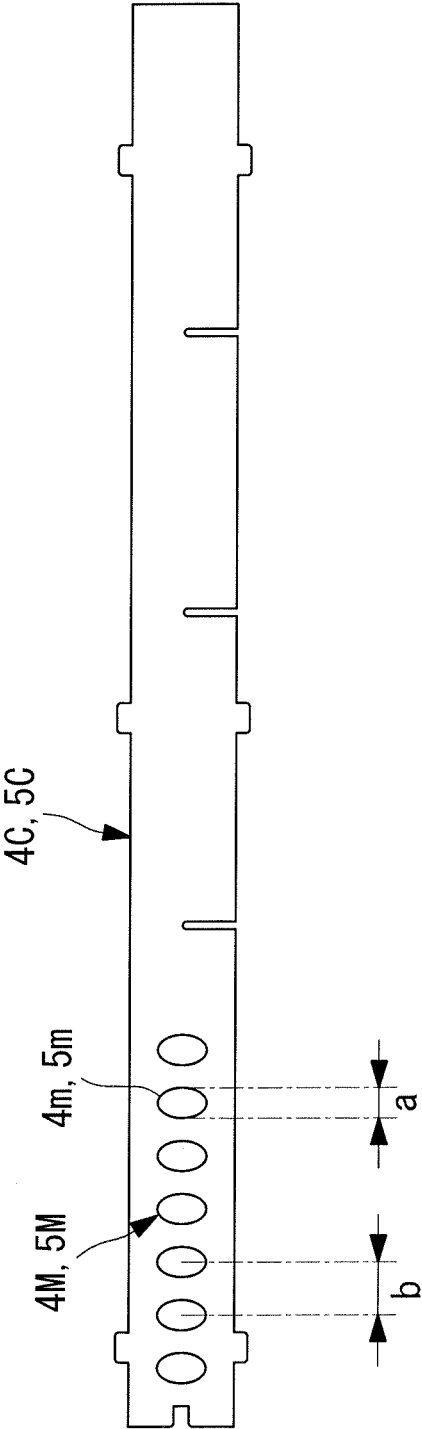


FIG. 5

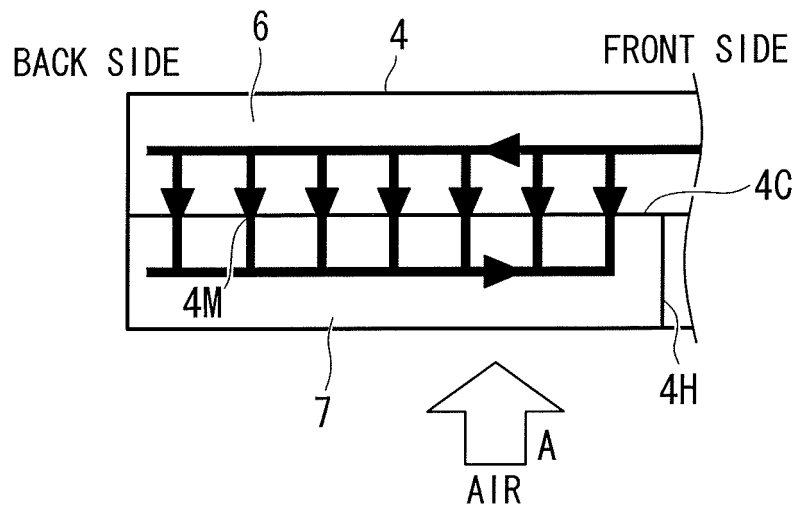


FIG. 6

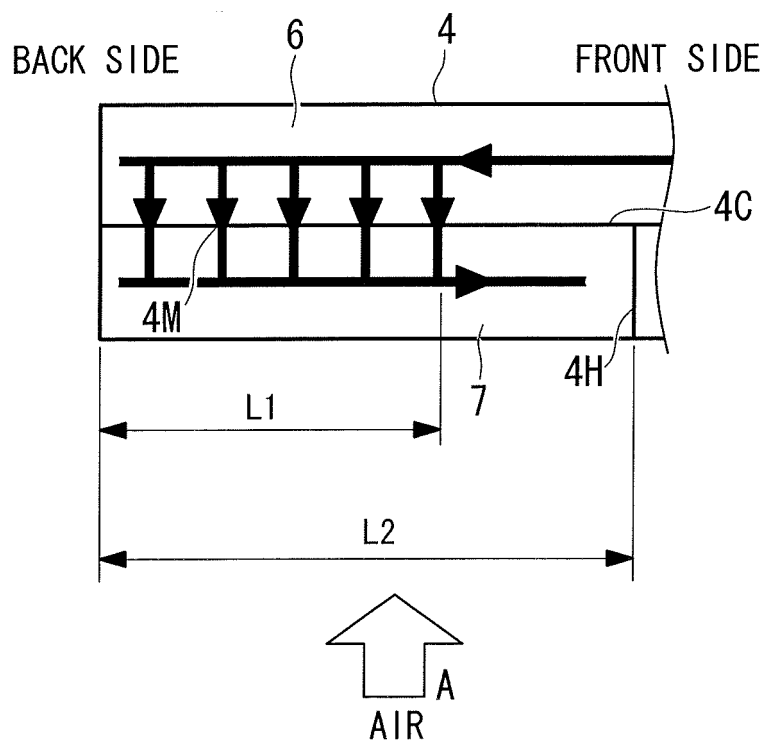


FIG. 7


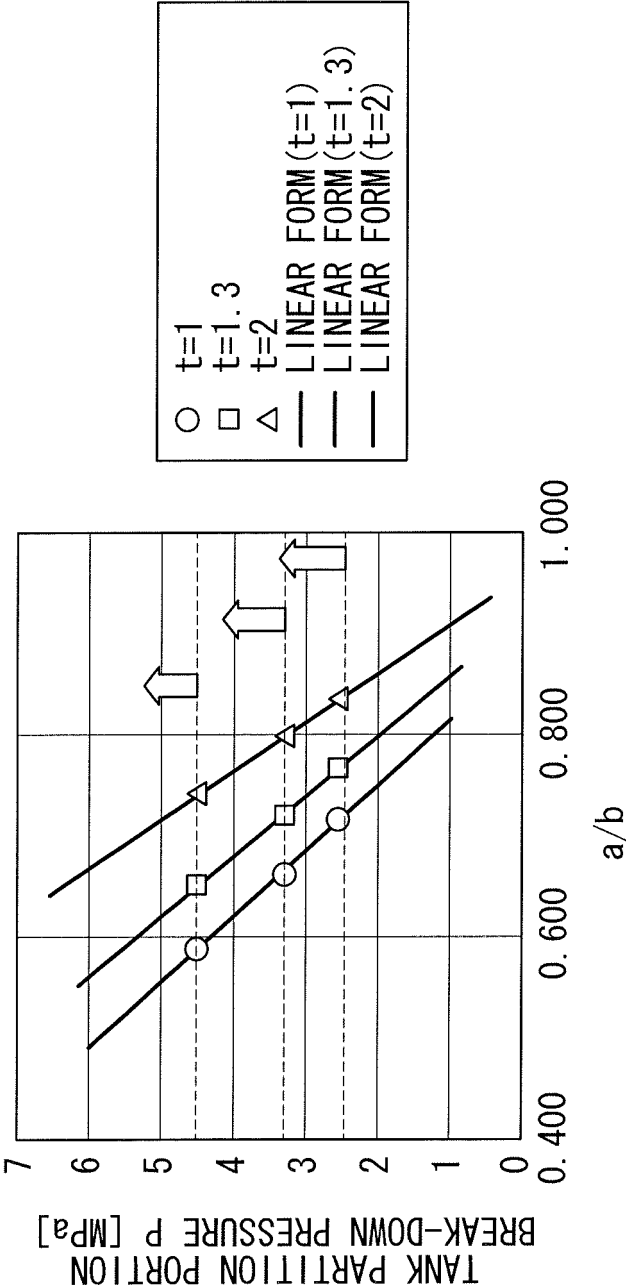


FIG. 8

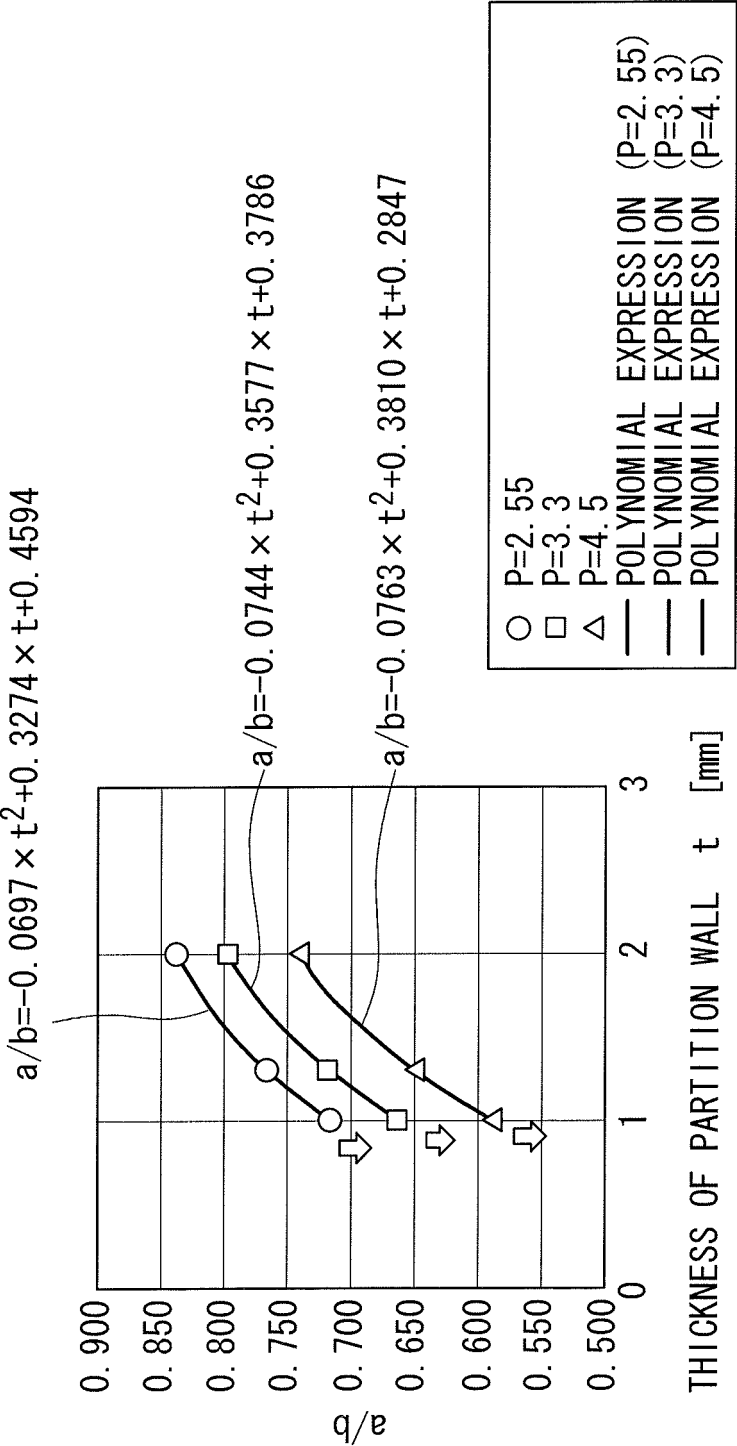

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2009/067780

A. CLASSIFICATION OF SUBJECT MATTER

F28F9/02 (2006.01) i, F25B39/02 (2006.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F28F9/02, F25B39/02

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho	1922-1996	Jitsuyo Shinan Toroku Koho	1996-2009
Kokai Jitsuyo Shinan Koho	1971-2009	Toroku Jitsuyo Shinan Koho	1994-2009

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 6-26780 A (Nippondenso Co., Ltd.), 04 February 1994 (04.02.1994), paragraphs [0009] to [0025], [0030]; fig. 1, 2 (Family: none)	1-7
Y	JP 2001-74388 A (Denso Corp.), 23 March 2001 (23.03.2001), paragraphs [0016], [0028]; fig. 1 & US 6449979 B1 & EP 1065453 A2 & DE 60010377 D & DE 60010377 T & BR 2961 A & KR 10-2001-0015060 A & CN 1292484 A	1-7
A	JP 2004-144395 A (Denso Corp.), 20 May 2004 (20.05.2004), paragraphs [0010] to [0020]; fig. 1 to 4 (Family: none)	1-7

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search
24 December, 2009 (24.12.09)Date of mailing of the international search report
12 January, 2010 (12.01.10)Name and mailing address of the ISA/
Japanese Patent Office

Authorized officer

Facsimile No.

Telephone No.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 3637314 B [0004]
- JP 3391339 B [0004]