



(12) **CORRECTED EUROPEAN PATENT APPLICATION**

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 71

(51) Int Cl.:
B60G 3/06 (2006.01) **B60G 11/08** (2006.01)
B60G 13/00 (2006.01)

(48) Corrigendum issued on:
15.02.2012 Bulletin 2012/07

(43) Date of publication:
29.06.2011 Bulletin 2011/26

(21) Application number: **09425523.9**

(22) Date of filing: **22.12.2009**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK SM TR
Designated Extension States:
AL BA RS

(72) Inventor: **Piasco Federico**
10060 Candiolo (IT)

(74) Representative: **Borsano, Corrado et al**
Notarbartolo & Gervasi S.p.A.
Corso di Porta Vittoria, 9
20122 Milano (IT)

(71) Applicant: **IVECO S.p.A.**
10156 Torino (IT)

(54) **Suspension unit for a front axle of an industrial or commercial vehicle with damper struts and a transverse leaf spring**

(57) Suspension unit (G) for a transport vehicle (V) of the unitized body type or of the unitized frame type, comprising, coupled to each wheel hub (MR) of at least the front wheels of said vehicle (V), shock absorbing means (1) fixed to said body (S) and to a frame (T) of said vehicle (V); a supporting and coupling element (5)

of said shock-absorbing means to said wheel hub (MR), said element (5) being suitable for oscillating together with the wheel hub (MR) itself, and transversally extending with respect to the longitudinal axis (X) of the vehicle (V); and stabilizer means (7) fixed to said shock absorbing means (1).

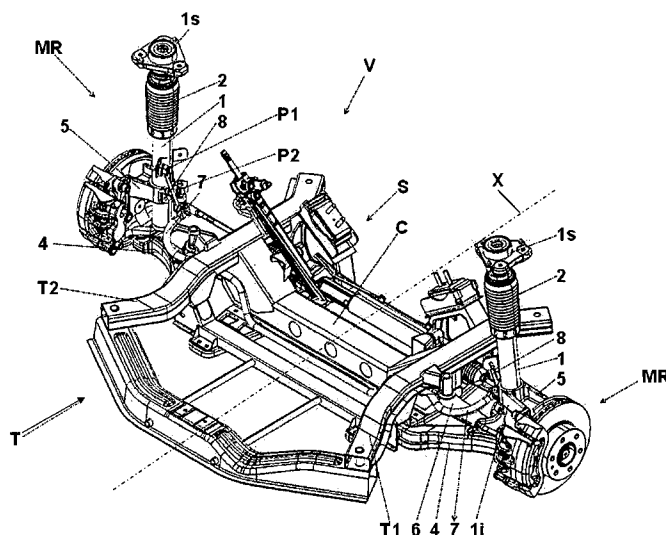


FIG. 4