



(11) **EP 2 342 170 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

(15) Correction information:  
**Corrected version no 1 (W1 B1)**  
**Corrections, see**  
**Description Paragraph(s) 16, 19, 26, 38**

(51) Int Cl.:  
**C07C 2/86** <sup>(2006.01)</sup> **C07C 15/085** <sup>(2006.01)</sup>  
**C07C 37/08** <sup>(2006.01)</sup> **C07C 39/04** <sup>(2006.01)</sup>

(48) Corrigendum issued on:  
**11.09.2019 Bulletin 2019/37**

(86) International application number:  
**PCT/US2009/057941**

(45) Date of publication and mention  
of the grant of the patent:  
**08.11.2017 Bulletin 2017/45**

(87) International publication number:  
**WO 2010/042314 (15.04.2010 Gazette 2010/15)**

(21) Application number: **09792870.9**

(22) Date of filing: **23.09.2009**

---

(54) **PROCESS FOR PRODUCING CUMENE**  
**VERFAHREN ZUR HERSTELLUNG VON CUMEN**  
**PROCÉDÉ DE PRODUCTION DE CUMÈNE**

---

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR**  
**HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL**  
**PT RO SE SI SK SM TR**

(30) Priority: **06.10.2008 US 103076 P**

(43) Date of publication of application:  
**13.07.2011 Bulletin 2011/28**

(73) Proprietor: **Badger Licensing, LLC**  
**Cambridge, MA 02142 (US)**

(72) Inventors:  
• **HWANG, Shyh-Yuan, Henry**  
**Needham,**  
**MA 02494 (US)**  
• **JOHNSON, Dana, E.**  
**Hopkington,**  
**MA 01748 (US)**

- **PETERS, Joseph, C.**  
**Quincy,**  
**MA 02169 (US)**
- **CHI, Chung-Ming**  
**Needham,**  
**MA 02494 (US)**
- **FALLON, Kevin, J.**  
**Boston,**  
**MA 02118 (US)**
- **DEMERS, Francis, A.**  
**Holderness,**  
**NH 03245 (US)**

(74) Representative: **Andrews, Timothy Stephen**  
**Marks & Clerk LLP**  
**62-68 Hills Road**  
**Cambridge**  
**Cambridgeshire CB2 1LA (GB)**

(56) References cited:  
**EP-A1- 2 123 622 WO-A1-2008/102664**  
**JP-A- H1 135 497**

---

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

---

**EP 2 342 170 B9**

## Description

### FIELD

[0001] This invention relates to a process for producing cumene and particularly, but not exclusively, to an integrated process for producing cumene and for converting the cumene to phenol.

### BACKGROUND

[0002] Cumene is an important intermediate in the chemical and polymer industries, with global cumene production in 2006 being about twelve million metric tons and with global demand of cumene being expected to grow by more than 4% per year during 2006-2011.

[0003] The majority of all cumene manufactured in the world today is used for the production of phenol. The demand for phenol for the manufacture of Bisphenol-A and subsequently polycarbonates is accelerating, owing to the broadening applications of polycarbonates in the electronic, healthcare, and automobile industries.

[0004] Cumene is typically produced commercially by reacting benzene and propylene in complete liquid phase or mixed gas-liquid phase conditions in the presence of acid catalysts. Benzene feed in stoichiometric excess relative to the propylene feed is typically fed to the reactor to control or minimize the oligomerization of the propylene which subsequently causes coking and deactivation of the catalyst. Older processes based on solid phosphoric acid typically employ a benzene to propylene feed ratio of about 8:1 molar. The high benzene to propylene feed ratio employed in these processes is also needed to limit the production of polyisopropylbenzenes, mainly diisopropylbenzenes and triisopropylbenzenes, as the polyisopropylbenzenes produced over solid phosphoric acid (SPA) catalysts cannot be converted to cumene effectively and have to be used as gasoline blending stock and regarded as a process yield loss. The high benzene to propylene feed ratio also results in large amounts of unconverted benzene in the reactor effluent that needs to be recovered by distillation and recycled back to the reactor. Both of these factors make SPA processes uneconomical.

[0005] Several processes based on aluminum chloride catalysts, developed in the 1980s, have been able to reduce the feed benzene to propylene ratio to about 3:1 molar, thus reducing the capital and operating costs related to the recovery and recycle of excess benzene, and thus improved the process economics somewhat. Although more polyisopropylbenzenes are produced in the alkylation section of the aluminum chloride processes due to the lower benzene to propylene ratios, the polyisopropylbenzenes produced in these processes can be effectively transalkylated with benzene to produce additional cumene, and the overall process yield is improved significantly over those based on SPA catalysts. However, the introduction of aluminum chloride as catalyst into

the cumene plant brings with it a host of environmental, plant maintenance, and plant and personnel safety issues due to the highly corrosive nature of the catalyst. As a result, only a few cumene plants based on the aluminum chloride processes have been built.

[0006] The introduction of zeolite catalysts based cumene technologies in the 1990s has revolutionized the cumene manufacturing industry. Zeolite catalysts are non-corrosive and environmentally benign. The use of zeolite catalysts thus eliminates the environmental, maintenance, and safety concerns related to the aluminum chloride catalysts. The zeolite based processes are able to produce cumene at higher product purity and process yield than those based on solid phosphoric acid. Most zeolite based technologies are able to effect alkylation at mild conditions and with feed benzene to propylene ratios between 6:1 and 3:1 molar, somewhat lower than those employed in processes based on solid phosphoric acid, while limiting propylene oligomerization and catalyst coking to achieve a catalyst cycle length of one to two years. More advanced zeolite based technology, such as the Mobil/Badger cumene technology licensed by Badger Licensing, are able to operate at extremely low benzene to propylene ratio of 2:1 molar or lower while achieving catalyst cycle lengths of five years or more. Although more polyisopropylbenzenes are produced at low benzene to propylene ratios, they can be very efficiently transalkylated with benzene to produce additional cumene, and their effect on overall process performance is negligible. Moreover, the significant reduction in the amount of unconverted benzene that has to be recovered by distillation and recycled to the reactor results in significant reductions in both capital investment and operating costs of the cumene plant.

[0007] The rapid growth of cumene, phenol and Bisphenol-A production, however, has caused some concerns related to the imbalance of the acetone byproduct produced from the phenol plant. Acetone and phenol are produced at an approximately 1:1 molar ratio from cumene, but are used at an approximately 1:2 molar ratio in the downstream Bisphenol-A production process. The excess acetone that is not used in the production of Bisphenol-A has caused some concern from phenol producers in that it may create a supply-demand imbalance and disrupt the economics of the phenol production business.

[0008] In addition, conventional phenol production is based on the use of propylene feedstock and the need to locate phenol plants near a source of propylene has become an important issue with producers. In today's olefins market, there is also a supply-demand imbalance in the supply of propylene produced from conventional sources such as ethylene plants due to the availability of feedstock that generally favor the production of propylene. This imbalance has forced phenol producers to build their plants closer to feedstock supplies rather than to product outlets.

[0009] Numerous research efforts have been directed

at solving the acetone imbalance and propylene issues described above by recycling the excess acetone produced in the phenol plant to produce cumene. For example, US Patent No. 2,410,553 teaches an alkylation process in which benzene is reacted with acetone to form cumene in the presence of hydrogen and a zinc chloride catalyst. In addition, US Patent 2,412,230 teaches the production of cumene from benzene and isopropanol in the presence of a pyrophosphate of a metal selected from Group IB in the periodic table.

**[0010]** US Patent No. 5,015,786 teaches a process for preparing phenol, comprising the steps of: (a) alkylating benzene with isopropanol using a zeolite catalyst under liquid phase conditions to synthesize cumene, (b) oxidizing the cumene from step (a) with molecular oxygen into cumene hydroperoxide, (c) subjecting cumene hydroperoxide to acid cleavage to synthesize phenol and acetone, and (d) hydrogenating the acetone from step (c) with hydrogen gas under liquid phase conditions into isopropanol which is recycled to step (a).

**[0011]** US Patent No. 5,017,729 discloses a process for preparing phenol, comprising the steps of: (a) reacting benzene with propylene in the presence of an aluminum chloride complex to synthesize cumene, (b) oxidizing the cumene of step (a) with molecular oxygen to cumene hydroperoxide, (c) acid cleaving cumene hydroperoxide into phenol and acetone with an acidic compound, (d) hydrogenating the acetone of step (c) with hydrogen gas into isopropanol in the presence of a hydrogenation catalyst, (e) dehydrating the isopropanol of step (d) into propylene in the presence of an acidic compound, and (f) recycling the propylene of step (e) in a liquid state to step (a).

**[0012]** US Patent No. 5,160,497 discloses a process for producing phenol, comprising the following successive steps: (1) benzene is reacted in an alkylation step with a feedstock comprising propylene and isopropanol in the presence of dealuminized Y zeolite with an  $\text{SiO}_2/\text{Al}_2\text{O}_3$  molar ratio ranging from 8 to 70 to obtain a product which is fractionated to recover three fractions containing unconverted benzene, cumene, and polyisopropylbenzenes, respectively, (2) at least part of said polyisopropylbenzenes fraction is reacted with benzene in a transalkylation step by contacting a dealuminized Y zeolite with an  $\text{SiO}_2/\text{Al}_2\text{O}_3$  molar ratio ranging from 8 to 70 and cumene is collected, (3) the cumene obtained from steps (1) and (2) is oxidized with air to obtain cumene hydroperoxide which is cleaved with an acid to obtain a mixture of phenol and acetone, which mixture is then fractionated in order to separately collect phenol and acetone, and (4) the acetone obtained at the end of step (3) is at least partly hydrogenated into isopropanol that is then at least partly recycled directly to step (1).

**[0013]** US Patent No. 6,841,704 discloses a method for the preparation of cumene comprising reacting isopropanol or a mixture of isopropanol and propylene with benzene in presence of a beta zeolite catalyst having a  $\text{SiO}_2/\text{Al}_2\text{O}_3$  molar ratio greater than 10:1, wherein the

acidity of the catalyst is modified by surface addition of water, and wherein the isopropanol used is obtained by hydrogenation of acetone in at least two process stages.

**[0014]** EP 1,069,099 discloses a process in which benzene is alkylated with isopropanol or a mixture of isopropanol and propylene, under pressure and temperature conditions corresponding to complete gas phase of the mixture presence in the reaction section and in the presence of a catalyst comprising beta zeolite and an inorganic ligand.

**[0015]** US Patent No. 6,512,153 discloses a process in which benzene is reacted with isopropanol, alone or mixed with propylene, in the presence of a zeolite catalyst and under mixed gas-liquid phase, or complete liquid phase, at such temperature and pressure that the concentration of water in the reaction liquid phase is not higher than 8,000 ppm. The patent shows that the beta catalyst tested had adequate stability when the moisture level in the reaction liquid was maintained below 8,000 ppm. However, the catalyst deactivated significantly when the moisture content in reaction liquid exceeded 8,000 ppm.

**[0016]** Since the alkylation of isopropanol with benzene produces one mole of water for every mole of isopropanol consumed during the reaction, the restriction of 8,000 ppm water in the reaction liquid described in US Patent No. 6,512,153 poses a significant limit to the design of the reaction system. Such a 8,000 ppm restriction will require a very efficient removal of water within the reaction system and would require large process equipment, such as pumps, heat exchangers and decanter, and high energy consumption, resulting in high capital and operating costs and rendering such process uneconomical. JP-H1135497 discloses a process for making cumene from isopropanol in the presence of a zeolite and water. The preferred zeolite is mordenite. The highest exemplified water level in the reaction mixture is 5,000 ppm.

**[0017]** The 8,000 ppm limitation described in US Patent No. 6,512,153 also significantly limits the integration of phenol and cumene production, since it requires that the isopropanol feed to the alkylation reactor is substantially dry. In contrast, the crude acetone produced in a conventional phenol plant (in which cumene is oxidized with molecular oxygen to cumene hydroperoxide and then cleaved to acetone and phenol) typically contains 5-10 wt% of water. Hence this large amount of water will need to be removed, either before or after the acetone is converted to isopropanol, before the isopropanol can be fed to the isopropanol alkylation reactor. This is particularly crucial for optimizing an alkylation process in which low benzene to (propylene+isopropanol) ratio is desired, because in such a case, isopropanol will constitute a major fraction of the feedstock to the alkylation reactor and the 5-10% moisture that comes with isopropanol will make the moisture content in the reactor high, even before additional moisture is produced in the alkylation reaction. Since water is difficult to remove

from acetone and isopropanol, reducing the water level in acetone and isopropanol involves significant capital investment and utility consumption. If the 8,000 ppm limit on water content in the alkylation reaction liquid can be expanded substantially or removed, significant savings in capital and utility costs can be realized

**[0018]** In accordance with the present invention, it has now been found that when an MCM-22 family molecular sieve is employed as the alkylation catalyst, benzene can be alkylated with isopropanol or a mixture of isopropanol and propylene in the presence of high levels of water in the feedstock without significant adverse affect on catalyst stability.

## SUMMARY

**[0019]** In one aspect, the invention resides in a process for producing cumene comprising contacting a feed stream comprising benzene and a further feed stream comprising isopropanol or a mixture of isopropanol and propylene in the presence of an alkylation catalyst comprising at least a molecular sieve of the MCM-22 family in an alkylation zone under alkylation conditions of at least partial liquid phase and with a water concentration in the liquid phase from between 8,500 ppm to 40,000 ppm to react at least part of said isopropanol and benzene to produce an effluent stream containing cumene.

**[0020]** In one embodiment, the concentration of water in the liquid phase ranges between 10,000 and 20,000 ppm.

**[0021]** Conveniently, said alkylation conditions comprise a temperature of about 20°C to about 350°C, a pressure of about 100 kPa to about 20,000 kPa, and a molar ratio of benzene to C<sub>3</sub> alkylating agent (isopropanol plus any propylene) fed to said alkylation zone of about 0.1:1 to about 100:1.

**[0022]** In one embodiment, the molar ratio of benzene to C<sub>3</sub> alkylating agent (isopropanol plus any propylene) fed to said alkylation zone ranges from 0.3:1 to 10:1, such as from 0.5:1 to 5:1, for example from 1:1 to 3:1.

**[0023]** In one embodiment, the temperature ranges from 100 to 300°C, such as from 150 to 280°C.

**[0024]** Conveniently, said further feed stream comprises isopropanol or a mixture of isopropanol and propylene wherein the isopropanol to propylene molar ratio ranges from 99.9:0.1 and 0.1:99.9.

**[0025]** Conveniently, the process further comprises recycling at least part of said effluent stream to said alkylation zone. In one embodiment, the process further comprises cooling the effluent stream, separating said effluent stream into a water-rich aqueous stream and an aromatic stream composed mainly of cumene and unreacted benzene; and recycling at least part of said aromatic stream to the alkylation zone.

**[0026]** In a further aspect, the invention resides in an integrated process for producing cumene and phenol, the process comprising:

- (a) alkylating benzene with a C<sub>3</sub> alkylating agent in an alkylation zone in the presence of an alkylation catalyst comprising at least a molecular sieve of the MCM-22 family to produce an alkylation effluent stream containing cumene, the reaction being carried out under complete or partial liquid phase of from between 8,500 to 40,000 ppm to react at least part of said isopropanol and benzene to produce an effluent stream containing cumene;
- (b) oxidizing at least part of the cumene in step (a) to form cumene hydroperoxide;
- (c) cleaving at least part of the cumene hydroperoxide in step (b) to form a cleavage effluent stream containing phenol and acetone;
- (d) separating at least part of the acetone from the cleavage effluent stream in step (c);
- (e) hydrogenating at least part of the acetone from step (d) to form isopropanol; and
- (f) recycling at least part of the isopropanol in step (e) to said alkylating step (a).

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0027]** Figures 1 to 16 are graphs plotting aromatics selectivity and cumene selectivity against cumene productivity per gram of catalyst for the processes of Examples 1 to 16 respectively.

## DETAILED DESCRIPTION OF THE EMBODIMENTS

**[0028]** Described herein is a process for producing cumene by the alkylation of benzene with isopropanol or a mixture of isopropanol and propylene in the presence of an alkylation catalyst in an alkylation zone. Typically the molar ratio of benzene to the C<sub>3</sub> alkylating agent (isopropanol plus propylene) is maintained within the range of about 0.1:1 to about 100:1, typically from 0.3:1 to 10:1, such as from 0.5:1 to 5:1, for example from 1:1 to 3:1. Where the C<sub>3</sub> alkylating agent comprises a mixture of isopropanol and propylene, the isopropanol to propylene molar ratio in the mixture generally ranges from 99.9:0.1 to 0.1:99.9, such as from 90:10 to 10:90.

**[0029]** The alkylation reaction is conducted at a temperature of about 20°C to about 350°C, for example about 100°C to about 300°C, about 150°C to 280°C and as a pressure of about 100 kPa to about 20,000 kPa, for example about 500 kPa to about 10,000 kPa, so that at least part of the reaction mixture is maintained in the liquid phase during the process.

**[0030]** The catalyst employed in the alkylation zone comprises at least one molecular sieve of the MCM-22 family. As used herein, the term "molecular sieve of the MCM-22 family" (or "material of the MCM-22 family" or "MCM-22 family material" or "MCM-22 family zeolite") includes one or more of:

- molecular sieves made from a common first degree crystalline building block unit cell, which unit cell has

the MWW framework topology. (A unit cell is a spatial arrangement of atoms which if tiled in three-dimensional space describes the crystal structure. Such crystal structures are discussed in the "Atlas of Zeolite Framework Types", Fifth edition, 2001, the entire content of which is incorporated as reference);

- molecular sieves made from a common second degree building block, being a 2-dimensional tiling of such MWW framework topology unit cells, forming a monolayer of one unit cell thickness, preferably one c-unit cell thickness;
- molecular sieves made from common second degree building blocks, being layers of one or more than one unit cell thickness, wherein the layer of more than one unit cell thickness is made from stacking, packing, or binding at least two monolayers of one unit cell thickness. The stacking of such second degree building blocks can be in a regular fashion, an irregular fashion, a random fashion, or any combination thereof; and
- molecular sieves made by any regular or random 2-dimensional or 3-dimensional combination of unit cells having the MWW framework topology.

**[0031]** Molecular sieves of the MCM-22 family include those molecular sieves having an X-ray diffraction pattern including d-spacing maxima at  $12.4 \pm 0.25$ ,  $6.9 \pm 0.15$ ,  $3.57 \pm 0.07$  and  $3.42 \pm 0.07$  Angstrom. The X-ray diffraction data used to characterize the material are obtained by standard techniques using the K-alpha doublet of copper as incident radiation and a diffractometer equipped with a scintillation counter and associated computer as the collection system.

**[0032]** Materials of the MCM-22 family include MCM-22 (described in U.S. Patent No. 4,954,325), PSH-3 (described in U.S. Patent No. 4,439,409), SSZ-25 (described in U.S. Patent No. 4,826,667), ERB-1 (described in European Patent No. 0293032), ITQ-1 (described in U.S. Patent No. 6,077,498), ITQ-2 (described in International Patent Publication No. WO97/17290), MCM-36 (described in U.S. Patent No. 5,250,277), MCM-49 (described in U.S. Patent No. 5,236,575), MCM-56 (described in U.S. Patent No. 5,362,697), UZM-8 (described in U.S. Patent No. 6,756,030), and mixtures thereof.

**[0033]** In addition to the MCM-22 family material, the alkylation catalyst may comprise at least one medium pore molecular sieve having a Constraint Index of 2-12 (as defined in U.S. Patent No. 4,016,218). Suitable medium pore molecular sieves include ZSM-5, ZSM-11, ZSM-12, ZSM-22, ZSM-23, ZSM-35, and ZSM-48. ZSM-5 is described in detail in U.S. Patent Nos. 3,702,886 and Re. 29,948. ZSM-11 is described in detail in U.S. Patent No. 3,709,979. ZSM-12 is described in U.S. Patent No. 3,832,449. ZSM-22 is described in U.S. Patent No. 4,556,477. ZSM-23 is described in U.S. Patent No. 4,076,842. ZSM-35 is described in U.S. Patent No. 4,016,245. ZSM-48 is more particularly described in U.S. Patent No. 4,234,231.

**[0034]** Alternatively, the alkylation catalyst may comprise one or more large pore molecular sieves having a Constraint Index less than 2 in addition to the MCM-22 family material. Suitable large pore molecular sieves include zeolite beta, zeolite Y, Ultrastable Y (USY), Dealuminized Y (Deal Y), mordenite, ZSM-3, ZSM-4, ZSM-18, and ZSM-20. Zeolite ZSM-14 is described in U.S. Patent No. 3,923,636. Zeolite ZSM-20 is described in U.S. Patent No. 3,972,983. Zeolite Beta is described in U.S. Patent Nos. 3,308,069, and Re. No. 28,341. Low sodium Ultrastable Y molecular sieve (USY) is described in U.S. Patent Nos. 3,293,192 and 3,449,070. Dealuminized Y zeolite (Deal Y) may be prepared by the method found in U.S. Patent No. 3,442,795. Zeolite UHP-Y is described in U.S. Patent No. 4,401,556. Mordenite is a naturally occurring material but is also available in synthetic forms, such as TEA-mordenite (i.e., synthetic mordenite prepared from a reaction mixture comprising a tetraethylammonium directing agent). TEA-mordenite is disclosed in U.S. Patent Nos. 3,766,093 and 3,894,104.

**[0035]** The above molecular sieves may be used as the alkylation catalyst without any binder or matrix, i.e., in so-called self-bound form. Alternatively, the molecular sieve may be composited with another material which is resistant to the temperatures and other conditions employed in the alkylation reaction. Such materials include active and inactive materials and synthetic or naturally occurring zeolites as well as inorganic materials such as clays and/or oxides such as alumina, silica, silica-alumina, zirconia, titania, magnesia or mixtures of these and other oxides. The latter may be either naturally occurring or in the form of gelatinous precipitates or gels including mixtures of silica and metal oxides. Clays may also be included with the oxide type binders to modify the mechanical properties of the catalyst or to assist in its manufacture. Use of a material in conjunction with the molecular sieve, i.e., combined therewith or present during its synthesis, which itself is catalytically active may change the conversion and/or selectivity of the catalyst. Inactive materials suitably serve as diluents to control the amount of conversion so that products may be obtained economically and orderly without employing other means for controlling the rate of reaction. These materials may be incorporated into naturally occurring clays, e.g., bentonite and kaolin, to improve the crush strength of the catalyst under commercial operating conditions and function as binders or matrices for the catalyst. The relative proportions of molecular sieve and inorganic oxide matrix vary widely, with the sieve content ranging from about 1 to about 90 percent by weight and more usually, particularly, when the composite is prepared in the form of beads, in the range of about 2 to about 80 weight percent of the composite.

**[0036]** The alkylation reaction may be carried out batchwise or on a continuous basis. Moreover, the reaction may be carried out in a fixed or moving bed. Fixed bed operation is, however, preferred, typically with the alkylation reaction zone comprising one or a plurality of

series-connected beds of alkylation catalysts.

**[0037]** The alkylation reaction is generally operated so as to achieve substantially complete conversion of the C<sub>3</sub> alkylating agent (isopropanol plus any propylene) and hence the effluent from the alkylation zone is composed mainly of cumene, coproduced and cofed water, unreacted benzene, and other reaction products. Part of the effluent is typically recycled to the alkylation zone in order to control the reaction temperature. It is, however, important to avoid excessive build-up of water in the alkylation reactor and hence the alkylation effluent is at least partially dewatered before the effluent is recycled. The effluent stream can be cooled, separated into a water-rich aqueous stream and a water-depleted aromatic stream comprising cumene, unreacted benzene, and other reaction products. Part of the aromatic stream is then recycled to the alkylation reaction zone.

**[0038]** By using a catalyst comprising at least one molecular sieve of the MCM-22 family, it is found that the present alkylation process is unusually tolerant to the presence of water in the liquid phase of the alkylation reaction zone. Thus, whereas it is normal to dry alkylation feeds so that the total water content in the liquid phase reaction medium is very low (typically well below 50 ppm), it is found that the present process can operate with water levels of between 8,500 to 40,000 ppm. In one embodiment, the concentration of water in the liquid phase ranges between 10,000 and 20,000 ppm. Water levels within these ranges can generally be achieved by suitable control of the water content of the C<sub>3</sub> alkylating agent (with or without partial drying), the amount of alkylation effluent recycle, and/or the water content of alkylation effluent recycle.

**[0039]** In one embodiment, the present process for converting isopropanol to cumene forms part of an integrated process for producing phenol. In such an integrated process, the cumene produced in the present process is oxidized to form cumene hydroperoxide and the cumene hydroperoxide is cleaved to form a cleavage effluent stream containing phenol and acetone. The acetone is then separated from the cleavage effluent stream, hydrogenated to isopropanol and recycled back to the present process. Details of the cumene oxidation and cleavage steps can be found in, for example, U.S. Patent No. 5,017,729, which is incorporated herein by reference. Details of the acetone hydrogenation to isopropanol can be found in, for example, U.S. Patent No. 5,081,321, also incorporated herein by reference.

#### Comparative Example 1

**[0040]** An alkylation test of benzene with isopropanol and propylene was carried out in a fixed bed reactor, made from a ¾ inch (19 cm) diameter Schedule 40 Stainless Steel 316 pipe with a total length of 34 inches (864 cm). A storage tank was used for the benzene/isopropanol mixture and another tank was used for propylene. A positive displacement pump was used for feeding the

benzene/isopropanol mixture into the reactor and another positive displacement pump was used for feeding propylene into the reactor. The flow rates of the benzene/isopropanol mixture and propylene were set by pump settings and monitored by electronic weight scales. The reactor operating conditions were controlled and monitored by an automatic control system. A portion of the reactor effluent was circulated back to the reactor inlet by a centrifugal pump to control

the temperature rise across the catalyst bed. The feedstock and reactor effluent were analyzed by two Hewlett Packard 5890 Series II Gas Chromatographs, one equipped with a Chrompack CP-Wax 52CB column having an inside diameter of 0.25 mm, film thickness of 0.5 μm, and length of 60 meters, and the other one equipped with an Agilent HP-PONA column having an inside diameter of 0.20 mm, film thickness of 0.5 μm, and length of 50 meters.

**[0041]** 60 grams of an MCM-22 catalyst was loaded into the fixed bed reactor. Before the benzene/isopropanol mixture was introduced into the reactor, the feed to the reactor consisted of pure benzene and propylene and the catalyst performance was stable. The propylene feed weight hourly space velocity (WHSV) was 0.5 hr<sup>-1</sup>, the feed benzene to propylene ratio was 1.2:1 molar, and the reactor inlet temperature was 128°C. The reactor circulation was adjusted to control the temperature rise across the catalyst bed below 20°C. As shown in Figure 1, after the pure benzene feed was replaced with a mixture consisting of 1 wt% isopropanol and 99 wt% benzene and the reactor inlet temperature adjusted to 147°C, the Cumene/(Isopropanol+Propylene) selectivity went down slightly and stabilized at a lower level than before, due to a slight increase in the production of polyisopropylbenzenes. The Aromatics/(Isopropanol+Propylene) selectivity remained essentially unchanged throughout the test, as shown in Figure 1. No gradual or rapid aging as shown in the examples of US PAT No. 6,512,153 was observed. The propylene conversion was 100% and the isopropanol conversion was 99%. The moisture level in the reactor was about 20 ppm with the benzene feed and about 2,100 ppm with the benzene/isopropanol mixture. The corresponding isopropanol WHSV was 0.01 and the isopropanol to propylene molar ratio in the reactor feed was 2:98.

#### Example 2

**[0042]** 30 grams of an MCM-49 catalyst was loaded into the fixed bed reactor described above. The reactor effluent was cooled to near ambient temperature and then the free water was removed in a decanter. A portion of the reactor effluent, after the free water was removed in the decanter, was circulated back to the reactor inlet by the centrifugal pump described in Example 1 to control the moisture content in the reactor.

**[0043]** A feed comprised of 88.6 wt% benzene and 11.4 wt% isopropanol, equivalent to benzene to isopro-

panol molar ratio of 6:1, was fed to the reactor at 134 grams per hour, giving an isopropanol WHSV of  $0.5 \text{ hr}^{-1}$ . The reactor circulation was adjusted to give a moisture content of 10,300 ppm in the reactor. The inlet temperature was  $210^{\circ}\text{C}$ , the reactor pressure was maintained at 470 psig (3342 kPa), and the reaction took place in complete liquid phase. The isopropanol conversion was 100% throughout the run. The Cumene/Isopropanol selectivity observed in this example was much higher than the Cumene/(Isopropanol+Propylene) selectivity observed in Example 1, due to reduced polyisopropylbenzenes production at higher benzene to (Isopropanol+Propylene) ratio in this example than in the previous example. As shown in Figure 2, the catalyst performance was stable throughout the run and no gradual or rapid aging as shown in the Examples of US Patent No. 6,512,153 was observed.

### Example 3

[0044] The same reactor setup and catalyst loading described in Example 2 were used in this example. A feed comprised of 79.6 wt% benzene and 20.4 wt% isopropanol, equivalent to a benzene to isopropanol molar ratio of 3:1, was fed to the reactor at 75 grams per hour, giving an isopropanol WHSV of  $0.5 \text{ hr}^{-1}$ . The reactor circulation was adjusted to give a moisture content of 10,400 ppm in the reactor. The inlet temperature was  $210^{\circ}\text{C}$ , the reactor pressure was maintained at 470 psig (3342 kPa), and the reaction took place in complete liquid phase. The isopropanol conversion was 100% throughout the run. The Cumene/Isopropanol selectivity observed in this example was lower than that observed in Example 2, due to increased polyisopropylbenzenes production at lower benzene to isopropanol ratio in this example. As shown in Figure 3, the catalyst performance was stable after the initial adjustment was made and no gradual or rapid aging as shown in the Examples of US Patent No. 6,512,153 was observed.

### Example 4

[0045] The same reactor setup and catalyst loading described in Example 2 were used in this example. A feed comprised of 72.2 wt% benzene and 27.8 wt% isopropanol, equivalent to a benzene to isopropanol molar ratio of 2:1, was fed to the reactor at 55 grams per hour, giving an isopropanol WHSV of  $0.5 \text{ hr}^{-1}$ . The reactor circulation was adjusted to give a moisture content of 10,400 ppm in the reactor. The inlet temperature was  $230^{\circ}\text{C}$ , the reactor pressure was maintained at 470 psig (3342 kPa), and the reaction took place in complete liquid phase. The isopropanol conversion was 100% throughout the run. The Cumene/Isopropanol selectivity observed in this example was lower than that observed in example 3, due to increased polyisopropylbenzenes production at lower benzene to isopropanol ratio in this example. As shown in Figure 4, the catalyst performance

was stable throughout the run and no gradual or rapid aging as shown in the Examples of US Patent No. 6,512,153 was observed.

### Example 5

[0046] The same reactor setup and catalyst loading described in Example 2 were used in this example. A feed comprised of 72.2 wt% benzene and 27.8 wt% isopropanol, equivalent to a benzene to isopropanol molar ratio of 2:1, was fed to the reactor at 55 grams per hour, giving an isopropanol WHSV of  $0.5 \text{ hr}^{-1}$ . The reactor circulation was adjusted to give a moisture content of 14,950 ppm in the reactor. The inlet temperature was  $230^{\circ}\text{C}$ , the reactor pressure was maintained at 470 psig (3342 kPa), and the reaction took place in complete liquid phase. The isopropanol conversion was 100% throughout the run. The Cumene/Isopropanol selectivity observed in this example was slightly higher than that observed in example 4, due to slightly lower polyisopropylbenzenes production at the higher moisture content in this example. As shown in Figure 5, the catalyst performance was stable throughout the run and no gradual or rapid aging as shown in the Examples of US Patent No. 6,512,153 was observed.

### Example 6

[0047] The same reactor setup and catalyst loading described in Example 2 were used in this example. A feed comprised of 72.2 wt% benzene and 27.8 wt% isopropanol, equivalent to a benzene to isopropanol molar ratio of 2:1, was fed to the reactor at 56 grams per hour, giving an isopropanol WHSV of  $0.5 \text{ hr}^{-1}$ . The reactor circulation was adjusted to give a moisture content of 20,000 ppm in the reactor. The inlet temperature was  $230^{\circ}\text{C}$ , the reactor pressure was maintained at 540 psig (3824 kPa), and the reaction took place in complete liquid phase. The isopropanol conversion was 100% throughout the run. The Cumene/Isopropanol selectivity observed in this example was similar to that observed in example 5. As shown in Figure 6, the catalyst performance was stable throughout the run and no gradual or rapid aging as shown in the Examples of US Patent No. 6,512,153 was observed.

### Example 7

[0048] The same reactor setup and catalyst loading described in Example 2 were used in this example. A feed comprised of 72.2 wt% benzene and 27.8 wt% isopropanol, equivalent to a benzene to isopropanol molar ratio of 2:1, was fed to the reactor at 56 grams per hour, giving an isopropanol WHSV of  $0.5 \text{ hr}^{-1}$ . The reactor circulation was adjusted to give a moisture content of 23,700 ppm in the reactor. The inlet temperature was  $230^{\circ}\text{C}$ , the reactor pressure was maintained at 470 psig (3342 kPa), and the reaction took place in mixed gas-

liquid phase. The moisture content in the liquid phase was calculated to be 18,600 ppm. The isopropanol conversion was 100% throughout the run. The Cumene/Iso-propanol selectivity observed in this example was slightly higher than that observed in example 6. As shown in Figure 7, the catalyst performance was stable throughout the run and no aging as shown in the Examples of US Patent No. 6,512,153 was observed.

### Example 8

[0049] The same reactor setup and catalyst loading described in Example 2 were used in this example. A feed comprised of 72.2 wt% benzene and 27.8 wt% isopropanol, equivalent to benzene to isopropanol molar ratio of 2:1, was fed to the reactor at 54 grams per hour, giving an isopropanol WHSV of 0.5 hr<sup>-1</sup>. In addition, propylene was fed to the reactor at 6 grams per hour, giving a propylene WHSV of 0.2 hr<sup>-1</sup>. The overall Benzene to (Isopropanol+Propylene) molar ratio was 1.3:1 and the isopropanol to propylene molar ratio in the reactor feed was 64:36. The reactor circulation was adjusted to give a moisture content of 8,600 ppm in the reactor. The inlet temperature was 230°C, the reactor pressure was maintained at 470 psig (3342 kPa), and the reaction took place in complete liquid phase. The propylene and isopropanol conversions were both 100% throughout the run. As shown in Figure 8, the catalyst performance was stable after the initial change in Cumene/(Isopropanol+Propylene) selectivity due the reduction of benzene to (Isopropanol+Propylene) ratio at the beginning of the run. No gradual or rapid aging as shown in the Examples of US Patent No. 6,512,153 was observed.

### Example 9

[0050] The same reactor setup and catalyst loading described in Example 2 were used in this example. A feed comprised of 72.2 wt% benzene and 27.8 wt% isopropanol, equivalent to benzene to isopropanol molar ratio of 2:1, was fed to the reactor at 56 grams per hour, giving an isopropanol WHSV of 0.5 hr<sup>-1</sup>. In addition, propylene was fed to the reactor at 6 grams per hour, giving a propylene WHSV of 0.2 hr<sup>-1</sup>. The overall Benzene to (Isopropanol+Propylene) molar ratio was 1.3:1 and the isopropanol to propylene molar ratio in the reactor feed was 64:36. The reactor circulation was adjusted to give a moisture content of 19,300 ppm in the reactor. The inlet temperature was 230°C, the reactor pressure was maintained at 470 psig (3342 kPa), and the reaction took place in mixed gas-liquid phase. The moisture content in the liquid phase was calculated to be 15,800 ppm. The propylene and isopropanol conversions were both 100% throughout the run. As shown in Figure 9, the catalyst performance was stable after the initial change in Cumene/(Isopropanol+Propylene) selectivity. No gradual or rapid aging as shown in the Examples of US Patent No. 6,512,153 was observed.

### Example 10

[0051] The same reactor setup and catalyst loading described in Example 2 were used in this example. A feed comprised of 87.1 wt% benzene and 12.9 wt% isopropanol, equivalent to benzene to isopropanol molar ratio of 5.2:1, was fed to the reactor at 95 grams per hour, giving an isopropanol WHSV of 0.4 hr<sup>-1</sup>. In addition, propylene was fed to the reactor at 9 grams per hour, giving a propylene WHSV of 0.3 hr<sup>-1</sup>. The overall Benzene to (Isopropanol+Propylene) molar ratio was 2.5:1 and the isopropanol to propylene molar ratio in the reactor feed was 49:51. The reactor circulation was adjusted to give a moisture content of 8,500 ppm in the reactor. The inlet temperature was 230°C, the reactor pressure was maintained at 470 psig, and the reaction took place in complete liquid phase. The propylene and isopropanol conversions were both 100% throughout the run. As shown in Figure 10, the catalyst performance was stable after the initial change in Cumene/(Isopropanol+Propylene) selectivity due the increase of benzene to (Isopropanol+Propylene) ratio at the beginning of the run. No gradual or rapid aging as shown in the Examples of US Patent No. 6,512,153 was observed.

### Comparative Example 11

[0052] The same reactor setup and catalyst loading described in Example 2 were used in this example. A feed comprised of 72.2 wt% benzene and 27.8 wt% isopropanol, equivalent to a benzene to isopropanol molar ratio of 2:1, was fed to the reactor at 56 grams per hour, giving an isopropanol WHSV of 0.5 hr<sup>-1</sup>. The reactor circulation was adjusted to give a moisture content of 5,300 ppm in the reactor. The inlet temperature was 230°C, the reactor pressure was maintained at 470 psig (3342 kPa), and the reaction took place in complete liquid phase. The isopropanol conversion was 100% throughout the run. As shown in Figure 11, the catalyst performance was stable throughout the run.

### Example 12

[0053] The same reactor setup described in Example 2 was used in this example. Thirty grams of MCM-22 catalyst was loaded into the fixed bed reactor. A feed comprised of 79.2 wt% benzene and 20.8 wt% isopropanol, equivalent to

### Example 13

[0054] The same reactor setup and catalyst loading described in Example 12 were used in this example. A feed comprised of 79.2 wt% benzene and 20.8 wt% isopropanol, equivalent to a benzene to isopropanol molar ratio of 2.9:1, was fed to the reactor at 73 grams per hour, giving an isopropanol WHSV of 0.5 hr<sup>-1</sup>. The reactor circulation was adjusted to give a moisture content of



15,800 ppm in the reactor. The inlet temperature was 250°C, the reactor pressure was maintained at 550 psig (3893 kPa), and the reaction took place in mixed gas-liquid phase. The moisture content in the liquid phase was calculated to be 13,400 ppm. The isopropanol conversion was 100% throughout the run. The Cumene/Iso-propanol selectivity observed in this example was essentially the same as that observed in example 12. As shown in Figure 13, the catalyst performance was stable throughout the run and no aging as shown in the Examples of US Patent No. 6,512,153.

#### Example 14

[0055] The same reactor setup and catalyst loading described in Example 13 were used in this example. A feed comprised of 72.2 wt% benzene and 27.8 wt% isopropanol, equivalent to a benzene to isopropanol molar ratio of 2.0:1, was fed to the reactor at 57 grams per hour, giving an isopropanol WHSV of 0.5 hr<sup>-1</sup>. The reactor circulation was adjusted to give a moisture content of 15,600 ppm in the reactor. The inlet temperature was 250°C, the reactor pressure was maintained at 550 psig (3893 kPa), and the reaction took place in mixed gas-liquid phase. The moisture content in the liquid phase was calculated to be 14,900 ppm. The isopropanol conversion was 100% throughout the run. As shown in Figure 14, the catalyst performance was stable throughout the run and no aging as shown in the Examples of US Patent No. 6,512,153.

#### Comparative Example 15

[0056] The same reactor setup and catalyst loading described in Example 14 were used in this example. A feed comprised of 72.2 wt% benzene and 27.8 wt% isopropanol, equivalent to a benzene to isopropanol molar ratio of 2.0:1, was fed to the reactor at 56 grams per hour, giving an isopropanol WHSV of 0.5 hr<sup>-1</sup>. The reactor circulation was adjusted to give a moisture content of 5,200 ppm in the reactor. The inlet temperature was 210°C, the reactor pressure was maintained at 550 psig (3893 kPa), and the reaction took place in complete liquid phase. The isopropanol conversion was 100% throughout the run. As shown in Figure 15, the catalyst performance was stable throughout the run.

#### Comparative Example 16

[0057] The same reactor setup and catalyst loading described in Example 15 were used in this example. A feed comprised of 72.2 wt% benzene and 27.8 wt% isopropanol, equivalent to a benzene to isopropanol molar ratio of 2.0:1, was fed to the reactor at 58 grams per hour, giving an isopropanol WHSV of 0.5 hr<sup>-1</sup>. The reactor circulation was adjusted to give a moisture content of 5,100 ppm in the reactor. The inlet temperature was 230°C, the reactor pressure was maintained at 550 psig (3893 kPa),

and the reaction took place in complete liquid phase. The isopropanol conversion was 100% throughout the run. As shown in Figure 16, the catalyst performance was stable throughout the run.

#### Claims

1. A process for producing cumene comprising contacting a feed stream comprising benzene and a further feed stream comprising isopropanol or a mixture of isopropanol and propylene in the presence of an alkylation catalyst comprising at least a molecular sieve of the MCM-22 family in an alkylation zone under alkylation conditions of at least partial liquid phase and with a water concentration in the liquid phase between 8,500 to 40,000 ppm to react at least part of said isopropanol and benzene to produce an effluent stream containing cumene.
2. The process of claim 1 wherein said molecular sieve of the MCM-22 family has an X-ray diffraction pattern including d-spacing maxima at  $12.4 \pm 0.25$ ,  $6.9 \pm 0.15$ ,  $3.57 \pm 0.07$  and  $3.42 \pm 0.07$  Angstroms.
3. The process of claim 1 or claim 2 wherein said molecular sieve of the MCM-22 family is selected from MCM-22, PSH-3, SSZ-25, ERB-1, ITQ-1, ITQ-2, MCM-36, MCM-49, MCM-56, UZM-8, and mixtures thereof.
4. The process of any preceding claim wherein said alkylation catalyst further comprises at least one zeolite catalyst selected from the group comprising ZSM-3, ZSM-4, ZSM-5, ZSM-11, ZSM-12, ZSM-14, ZSM-18, ZSM-20, ZSM-22, ZSM-23, ZSM-35, ZSM-48, zeolite beta, zeolite Y, Ultrastable Y (USY), Dealuminized Y (Deal Y), mordenite, PSH-3, SSZ-25, ERB-1, ITQ-1, ITQ-2, MCM-36, MCM-49, MCM-56, and UZM-8.
5. The process of any preceding claim wherein the concentration of water in the liquid phase ranges between 8,500 and 20,000 ppm.
6. The process of any preceding claim wherein said alkylation conditions further comprise a temperature of 20°C to 350°C, a pressure of 100 kPa to 20,000 kPa, and a molar ratio of benzene to C<sub>3</sub> alkylating agent (isopropanol plus any propylene) fed to said alkylation zone 0.1:1 to 100:1.
7. The process of claim 6 wherein the molar ratio of benzene to C<sub>3</sub> alkylating agent (isopropanol plus any propylene) fed to said alkylation zone ranges between 0.3:1 to 10:1, preferably between 0.5:1 to 5:1, more preferably between 1:1 to 3:1.

8. The process of claim 6 wherein the temperature ranges between 100 to 300°C, preferably between 150 to 280°C.
9. The process of any preceding claim wherein said further feed stream comprises a mixture of isopropanol and propylene and the isopropanol to propylene molar ratio in the mixture ranges from 99.9:0.1 and 0.1:99.9.
10. The process of any preceding claim and further comprising recycling at least part of said effluent stream to said alkylation zone.
11. The process of any preceding claim and further comprising:
  - (i) cooling the said effluent stream;
  - (ii) separating said cooled effluent stream into a water-rich aqueous stream and an aromatic stream composed mainly of cumene and unreacted benzene; and
  - (iii) recycling at least part of said aromatic stream to the alkylation zone.
12. An integrated process for producing phenol, the process comprising:
  - (a) contacting a feed stream comprising benzene and a further feed stream comprising isopropanol or a mixture of isopropanol and propylene in the presence of an alkylation catalyst comprising at least a molecular sieve of the MCM-22 family in an alkylation zone under alkylation conditions of at least partial liquid phase and with a water concentration in the liquid phase of between 8,500 to 40,000 ppm to react at least part of said isopropanol and benzene to produce an effluent stream containing cumene;
  - (b) oxidizing at least part of the cumene produced in (a) to form cumene hydroperoxide;
  - (c) cleaving at least part of the cumene hydroperoxide from (b) to form a cleavage effluent stream containing phenol and acetone;
  - (d) separating at least part of the acetone from the cleavage effluent stream;
  - (e) hydrogenating at least part of the acetone separated in (d) to produce isopropanol; and
  - (f) recycling at least part of the isopropanol produced in (e) to said contacting (a).
13. The process of claim 12 wherein said molecular sieve of the MCM-22 family has an X-ray diffraction pattern including d-spacing maxima at  $12.4 \pm 0.25$ ,  $6.9 \pm 0.15$ ,  $3.57 \pm 0.07$  and  $3.42 \pm 0.07$  Angstroms.
14. The process of claim 12 or claim 13 wherein said

molecular sieve of the MCM-22 family is selected from MCM-22, PSH-3, SSZ-25, ERB-1, ITQ-1, ITQ-2, MCM-36, MCM-49, MCM-56, UZM-8, and mixtures thereof.

## Patentansprüche

1. Verfahren zur Herstellung von Cumol, umfassend das Kontaktieren eines Zuführstroms umfassend Benzol und eines weiteren Zuführstroms umfassend Isopropanol oder eine Mischung von Isopropanol und Propylen, in Gegenwart eines Alkylierungskatalysators umfassend mindestens ein Molekularsieb der MCM-22-Familie in einer Alkylierungszone unter Alkylierungsbedingungen mindestens einer teilweise flüssigen Phase und mit einer Wasserkonzentration in der flüssigen Phase zwischen 8.500 und 40.000 ppm, um mindestens einen Teil des Isopropanols und Benzols umzusetzen, um einen Cumol enthaltenden Abflussstrom herzustellen.
2. Verfahren nach Anspruch 1, wobei das Molekularsieb der MCM-22-Familie ein Röntgenstrahlenbeugungsmuster aufweist, das Abstand d-Maxima bei  $12,4 \pm 0,25$ ,  $6,9 \pm 0,15$ ,  $3,57 \pm 0,07$  und  $3,42 \pm 0,07$  Ångström umfasst.
3. Verfahren nach Anspruch 1 oder Anspruch 2, wobei das Molekularsieb der MCM-22-Familie unter MCM-22, PSH-3, SSZ-25, ERB-1, ITQ-1, ITQ-2, MCM-36, MCM-49, MCM-56, UZM-8 und Mischungen davon ausgewählt ist.
4. Verfahren nach einem der vorhergehenden Ansprüche, wobei der Alkylierungskatalysator ferner mindestens einen Zeolithkatalysator umfasst ausgewählt aus der Gruppe umfassend ZSM-3, ZSM-4, ZSM-5, ZSM-11, ZSM-12, ZSM-14, ZSM-18, ZSM-20, ZSM-22, ZSM-23, ZSM-35, ZSM-48, Zeolith beta, Zeolith Y, ultrastabilem Y (USY), entaluminisiertem Y (Deal Y), Mordenit, PSH-3, SSZ-25, ERB-1, ITQ-1, ITQ-2, MCM-36, MCM-49, MCM-56 und UZM-8.
5. Verfahren nach einem der vorhergehenden Ansprüche, wobei die Konzentration von Wasser in der flüssigen Phase im Bereich zwischen 8.500 und 20.000 ppm liegt.
6. Verfahren nach einem der vorhergehenden Ansprüche, wobei die Alkylierungsbedingungen ferner eine Temperatur von 20 °C bis 350 °C, einen Druck von 100 kPa bis 20.000 kPa umfassen und ein Molverhältnis von Benzol zu C<sub>3</sub>-Alkylierungsmittel (Isopropanol + irgendein Propylen), das zur Alkylierungszone geführt wird, 0,1:1 bis 100:1 beträgt.

7. Verfahren nach Anspruch 6, wobei das Molverhältnis von Benzol zu C<sub>3</sub>-Alkylierungsmittel (Isopropanol + irgendein Propylen), das zur Alkylierungszone geführt wird, im Bereich von 0,3:1 bis 10:1, bevorzugt 0,5:1 bis 5:1, noch bevorzugter 1:1 bis 3:1, liegt. 5
8. Verfahren nach Anspruch 6, wobei die Temperatur im Bereich zwischen 100 °C und 300 °C, bevorzugt zwischen 150 und 280 °C, liegt. 10
9. Verfahren nach einem der vorhergehenden Ansprüche, wobei der weitere Zuführstrom eine Mischung von Isopropanol und Propylen umfasst und das Molverhältnis von Isopropylen zu Propylen in der Mischung im Bereich von 99,9:0,1 bis 0,1:99,9 liegt. 15
10. Verfahren nach einem der vorhergehenden Ansprüche und ferner das Rückführen mindestens eines Teils des Ausflusses zur Alkylierungszone umfassend. 20
11. Verfahren nach einem der vorhergehenden Ansprüche und ferner Folgendes umfassend:
- (i) das Kühlen des Ausflusses;
  - (ii) das Trennen des gekühlten Ausflusses in einen wasserreichen wässrigen Strom und einen aromatischen Strom, der hauptsächlich aus Cumol und unreaktiertem Benzol besteht; und
  - (iii) das Rückführen mindestens eines Teils des aromatischen Stroms zur Alkylierungszone. 25 30
12. Integriertes Verfahren zur Herstellung von Phenol, wobei das Verfahren Folgendes umfasst: 35
- (a) das Kontaktieren eines Zuführstroms umfassend Benzol und eines weiteren Zuführstroms umfassend Isopropanol oder eine Mischung von Isopropanol und Propylen, in Gegenwart eines Alkylierungskatalysators umfassend mindestens ein Molekularsieb der MCM-22-Familie in einer Alkylierungszone unter Alkylierungsbedingungen mindestens einer teilweise flüssigen Phase und mit einer Wasserkonzentration in der flüssigen Phase zwischen 8.500 und 40.000 ppm, um mindestens einen Teil des Isopropanols und Benzols umzusetzen, um einen Cumol enthaltenden Abflusstrom herzustellen; 40
  - (b) das Oxidieren mindestens eines Teils des in (a) hergestellten Cumols, um Cumolhydroperoxid zu bilden; 45
  - (c) das Spalten mindestens eines Teils des Cumolhydroperoxids von (b), um einen Spaltungsabflusstrom zu bilden, der Phenol und Aceton enthält; 50
  - (d) das Trennen mindestens eines Teils des Acetons von dem Spaltungsabflusstrom; 55
  - (e) das Hydrieren mindestens eines Teils des in
- (d) abgetrennten Acetons, um Isopropanol herzustellen; und
- (f) das Rückführen mindestens eines Teils des in (e) hergestellten Isopropanols zu dem Kontaktieren (a).
13. Verfahren nach Anspruch 12, wobei das Molekularsieb der MCM-22-Familie ein Röntgenstrahlenbeugungsmuster aufweist, das Abstand d-Maxima bei  $12,4 \pm 0,25$ ,  $6,9 \pm 0,15$ ,  $3,57 \pm 0,07$  und  $3,42 \pm 0,07$  Ångström aufweist.
14. Verfahren nach Anspruch 12 oder Anspruch 13, wobei das Molekularsieb der MCM-22-Familie unter MCM-22, PSH-3, SSZ-25, ERB-1, ITQ-1, ITQ-2, MCM-36, MCM-49, MCM-56, UZM-8 und Mischungen davon ausgewählt ist.

## Revendications

1. Procédé de production de cumène comprenant la mise en contact d'un écoulement d'alimentation comprenant du benzène et d'un écoulement d'alimentation supplémentaire comprenant de l'isopropanol ou un mélange d'isopropanol et de propylène en la présence d'un catalyseur d'alkylation comprenant au moins un tamis moléculaire de la famille de MCM-22 dans une zone d'alkylation sous des conditions d'alkylation d'une phase au moins partiellement liquide et avec une concentration de l'eau dans la phase liquide comprise entre 8 500 à 40 000 ppm pour faire réagir au moins une partie desdits isopropanol et benzène pour produire un écoulement effluent contenant du cumène.
2. Procédé selon la revendication 1, ledit tamis moléculaire de la famille de MCM-22 ayant un profil de diffraction des rayons X comprenant des maxima d'espacement d à  $12,4 \pm 0,25$ ,  $6,9 \pm 0,15$ ,  $3,57 \pm 0,07$  et  $3,42 \pm 0,07$  angströms.
3. Procédé selon la revendication 1 ou la revendication 2, ledit tamis moléculaire de la famille de MCM-22 étant sélectionné parmi MCM-22, PSH-3, SSZ-25, ERB-1, ITQ-1, ITQ-2, MCM-36, MCM-49, MCM-56, UZM-8, et leurs mélanges.
4. Procédé selon l'une quelconque des revendications précédentes, ledit catalyseur d'alkylation comprenant en outre un moins un catalyseur zéolite sélectionné dans le groupe comprenant ZSM-3, ZSM-4, ZSM-5, ZSM-11, ZSM-12, ZSM-14, ZSM-18, ZSM-20, ZSM-22, ZSM-23, ZSM-35, ZSM-48, la zéolite bêta, la zéolite Y, la Y ultrastable (USY), la Y désaluminisée Y (Deal Y), la mordenite, PSH-3, SSZ-25, ERB-1, ITQ-1, ITQ-2, MCM-36, MCM-49, MCM-56, et UZM-8.

5. Procédé selon l'une quelconque des revendications précédentes, la concentration de l'eau dans la phase liquide s'étendant entre 8 500 et 20 000 ppm.
6. Procédé selon l'une quelconque des revendications précédentes, lesdites conditions d'alkylation comprenant en outre une température de 20°C à 350°C, une pression de 100 kPa à 20 000 kPa, et un rapport molaire du benzène à l'agent d'alkylation en C<sub>3</sub> (isopropanol plus n'importe quel propylène) alimenté au niveau de ladite zone d'alkylation de 0,1:1 à 100:1.
7. Procédé selon la revendication 6, le rapport molaire du benzène à l'agent d'alkylation en C<sub>3</sub> (isopropanol plus n'importe quel propylène) alimenté au niveau de ladite zone d'alkylation s'étendant entre 0,3:1 à 10:1, préférablement entre 0,5:1 à 5:1, plus préférablement entre 1:1 à 3:1.
8. Procédé selon la revendication 6, la température s'étendant entre 100 à 300°C, préférablement entre 150 à 280°C.
9. Procédé selon l'une quelconque des revendications précédentes, ledit écoulement d'alimentation supplémentaire comprenant un mélange d'isopropanol et de propylène et le rapport molaire de l'isopropanol au propylène dans le mélange s'étendant de 99,9:0,1 et 0,1:99,9.
10. Procédé selon l'une quelconque des revendications précédentes et comprenant en outre le recyclage d'au moins une partie dudit écoulement effluent vers ladite zone d'alkylation.
11. Procédé selon l'une quelconque des revendications précédentes et comprenant en outre:
- (i) le refroidissement dudit écoulement effluent;
  - (ii) la séparation dudit écoulement effluent refroidi dans un écoulement aqueux riche en eau et un écoulement aromatique principalement composé de cumène et de benzène n'ayant pas réagi; et
  - (iii) le recyclage d'au moins une partie dudit écoulement aromatique vers la zone d'alkylation.
12. Procédé intégré de production de phénol, le procédé comprenant:
- (a) la mise en contact d'un écoulement d'alimentation comprenant du benzène et d'un écoulement d'alimentation supplémentaire comprenant de l'isopropanol ou un mélange d'isopropanol et de propylène en la présence d'un catalyseur d'alkylation comprenant au moins un tamis moléculaire de la famille de MCM-22 dans une zone d'alkylation sous des conditions d'alkylation d'une phase au moins partiellement liquide et avec une concentration de l'eau dans la phase liquide comprise entre 8 500 à 40 000 ppm pour faire réagir au moins une partie desdits isopropanol et benzène pour produire un écoulement effluent contenant du cumène;
  - (b) l'oxydation d'au moins une partie du cumène produit dans (a) pour former de l'hydroperoxyde de cumène;
  - (c) le clivage d'au moins une partie de l'hydroperoxyde de cumène de (b) pour former un écoulement effluent de clivage contenant du phénol et de l'acétone;
  - (d) la séparation d'au moins une partie de l'acétone de l'écoulement effluent de clivage;
  - (e) l'hydrogénation d'au moins une partie de l'acétone séparée dans (d) pour produire de l'isopropanol; et
  - (f) le recyclage d'au moins une partie de l'isopropanol produit dans (e) vers ladite mise en contact (a).
13. Procédé selon la revendication 12, ledit tamis moléculaire de la famille de MCM-22 ayant un profil de diffraction des rayons X comprenant des maxima d'espacement d à  $12,4 \pm 0,25$ ,  $6,9 \pm 0,15$ ,  $3,57 \pm 0,07$  et  $3,42 \pm 0,07$  angströms.
14. Procédé selon la revendication 12 ou la revendication 13, ledit tamis moléculaire de la famille de MCM-22 étant sélectionné parmi MCM-22, PSH-3, SSZ-25, ERB-1, ITQ-1, ITQ-2, MCM-36, MCM-49, MCM-56, UZM-8, et leurs mélanges.

Figure 1

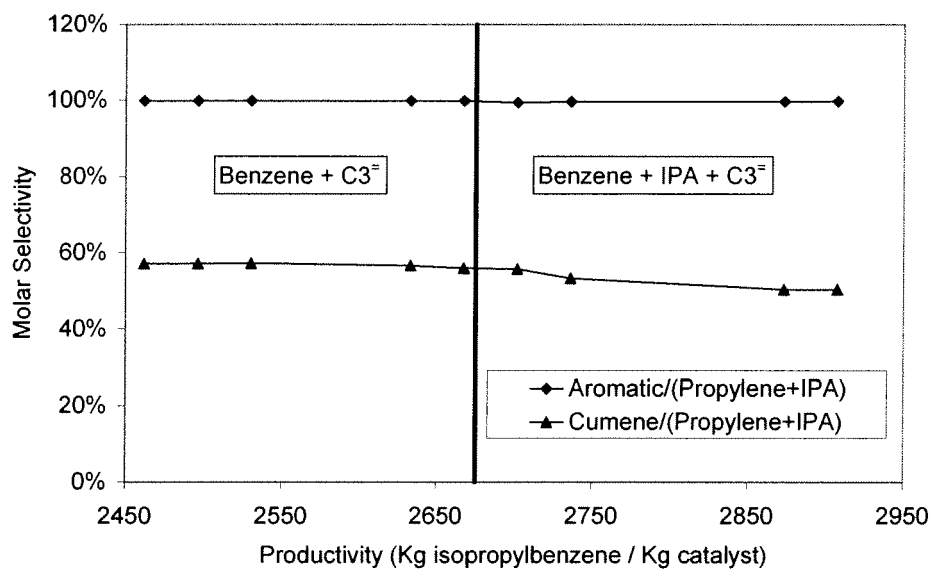


Figure 2

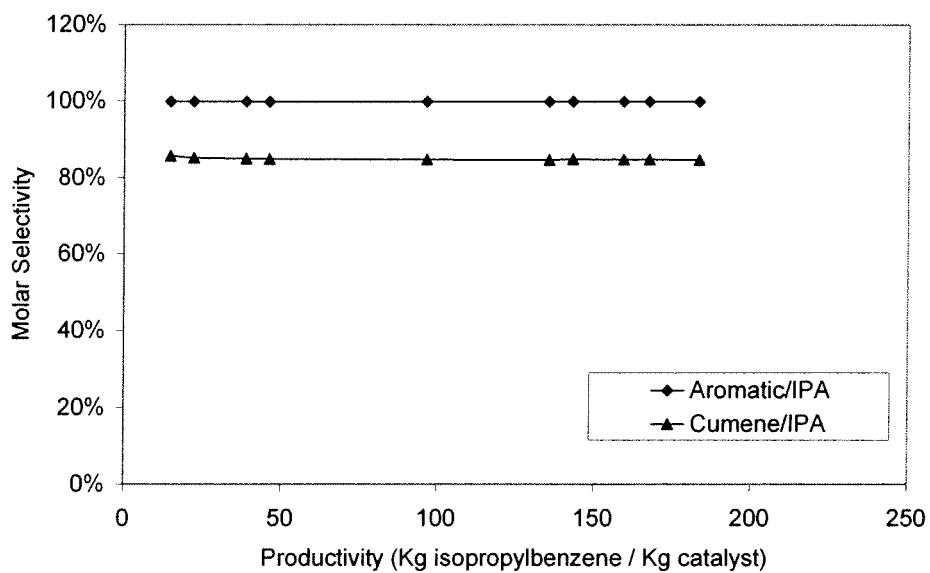


Figure 3

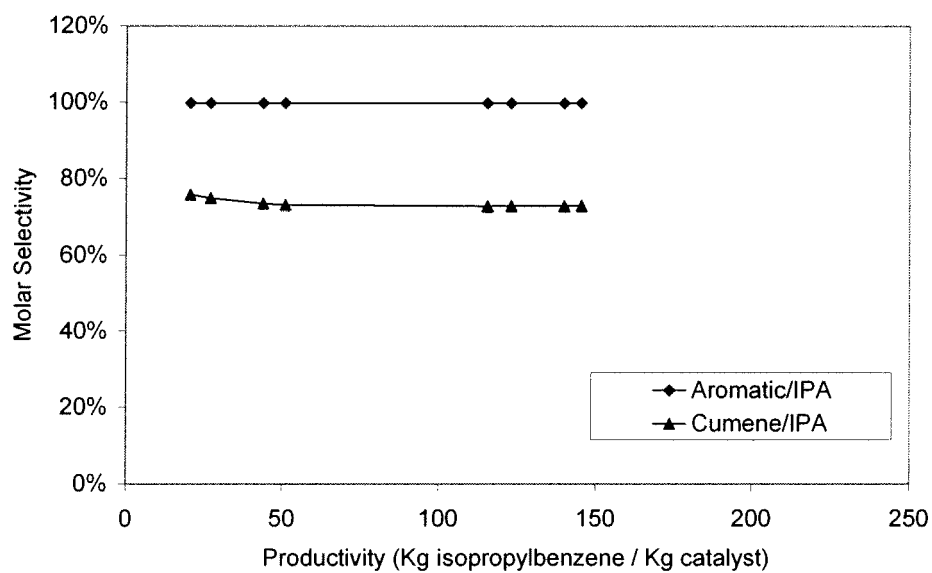


Figure 4

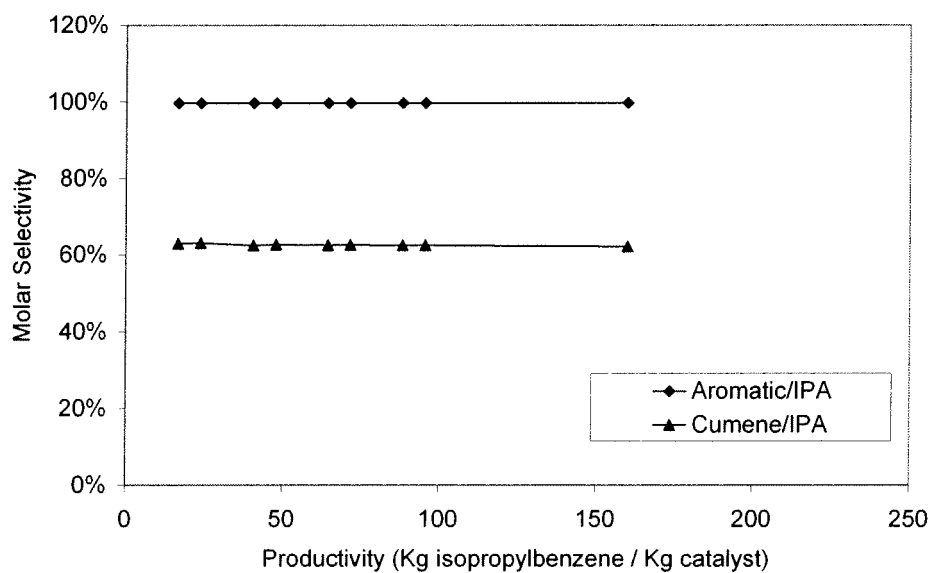


Figure 5

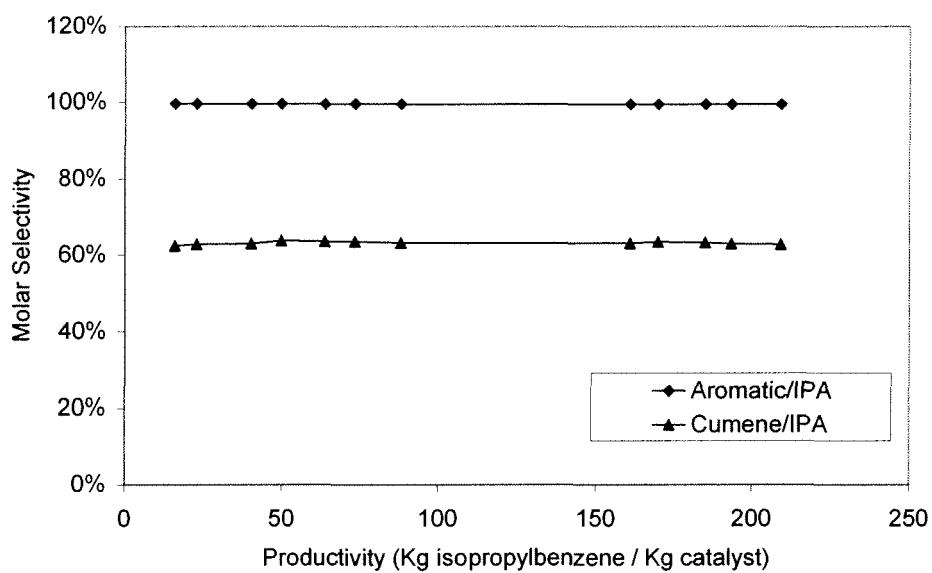


Figure 6

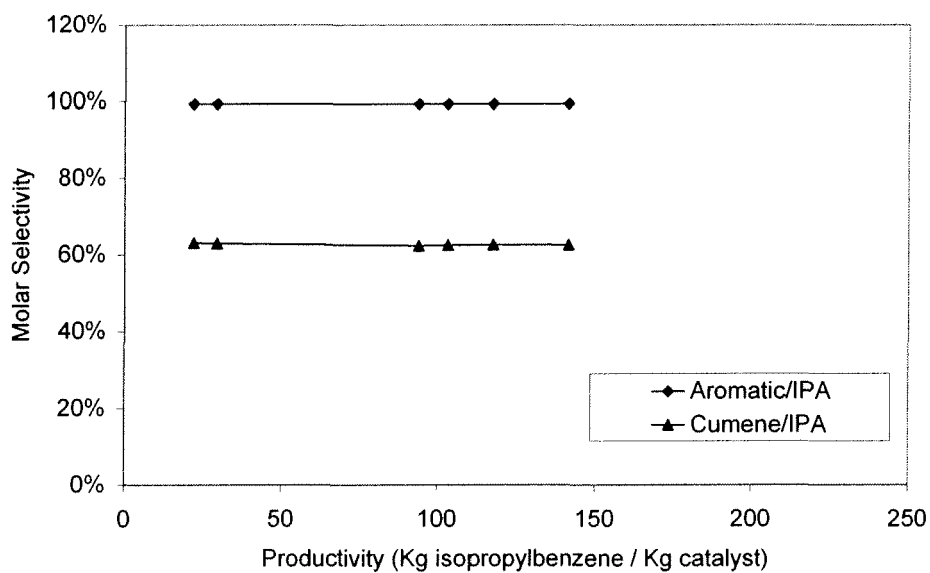


Figure 7

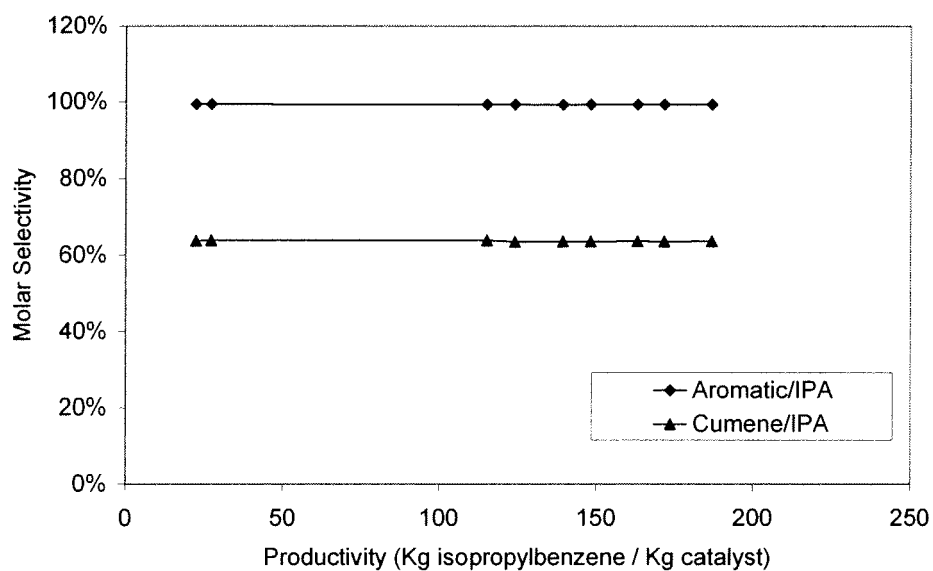


Figure 8

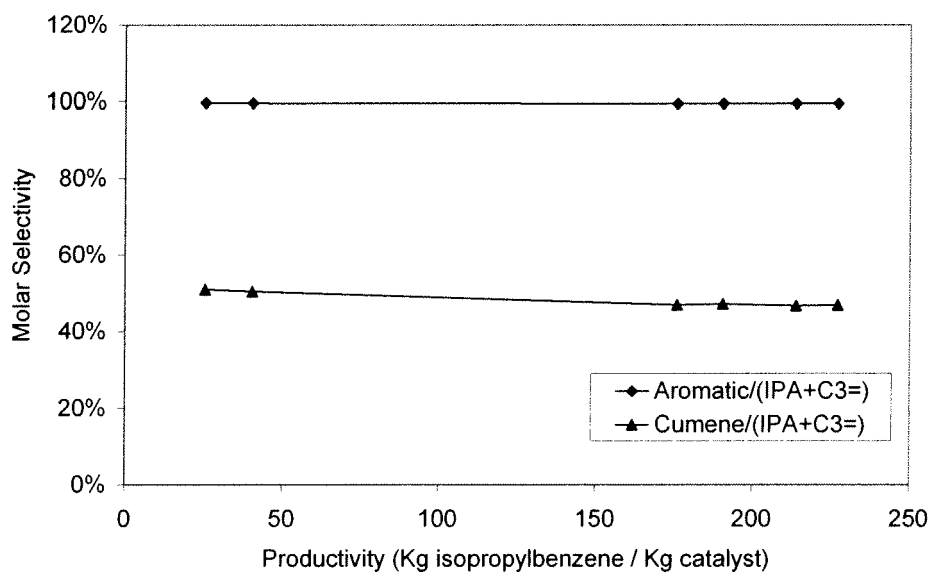




Figure 9

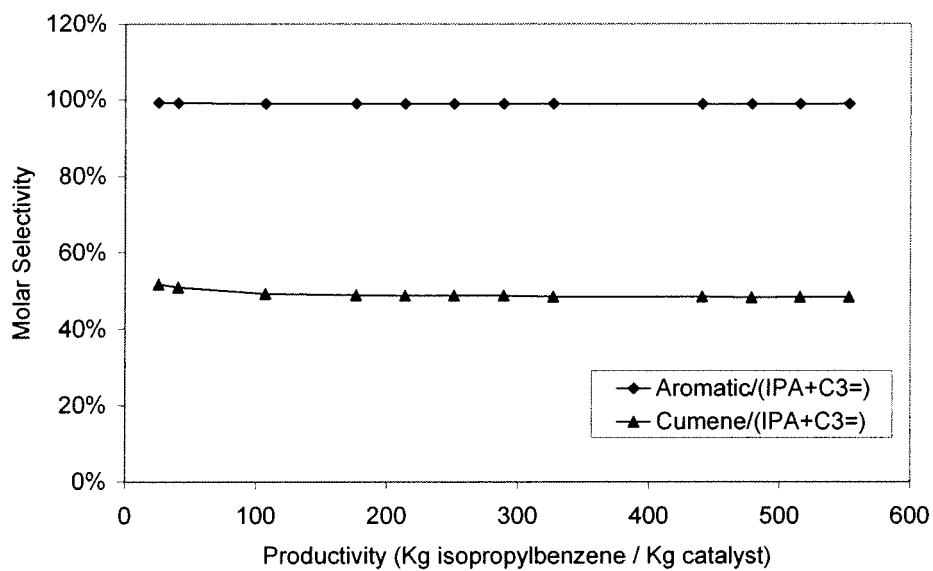


Figure 10

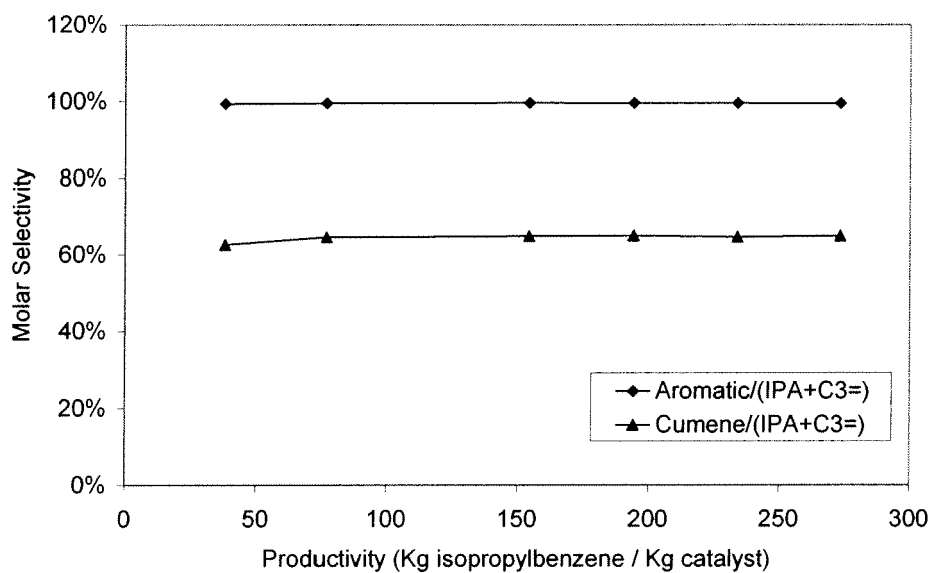


Figure 11

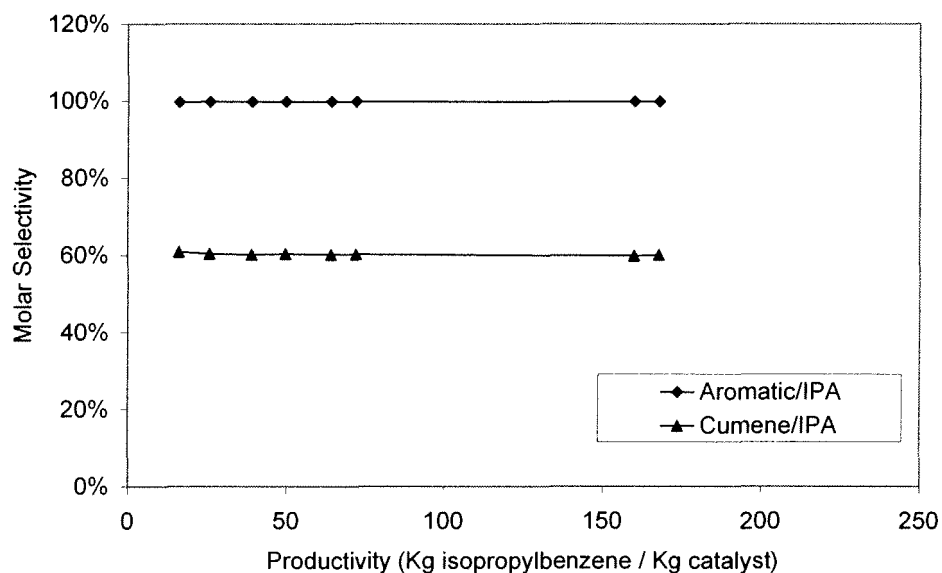


Figure 12

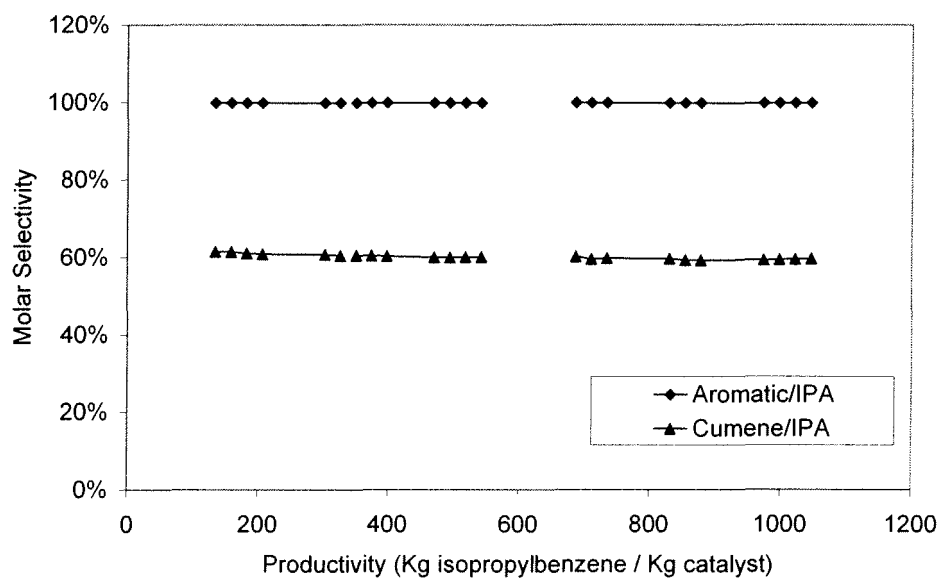


Figure 13

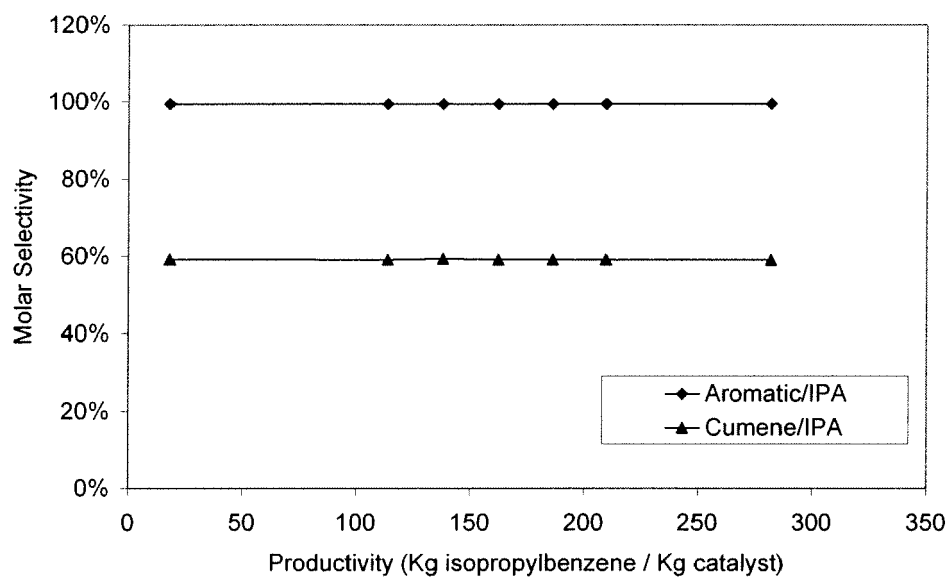


Figure 14

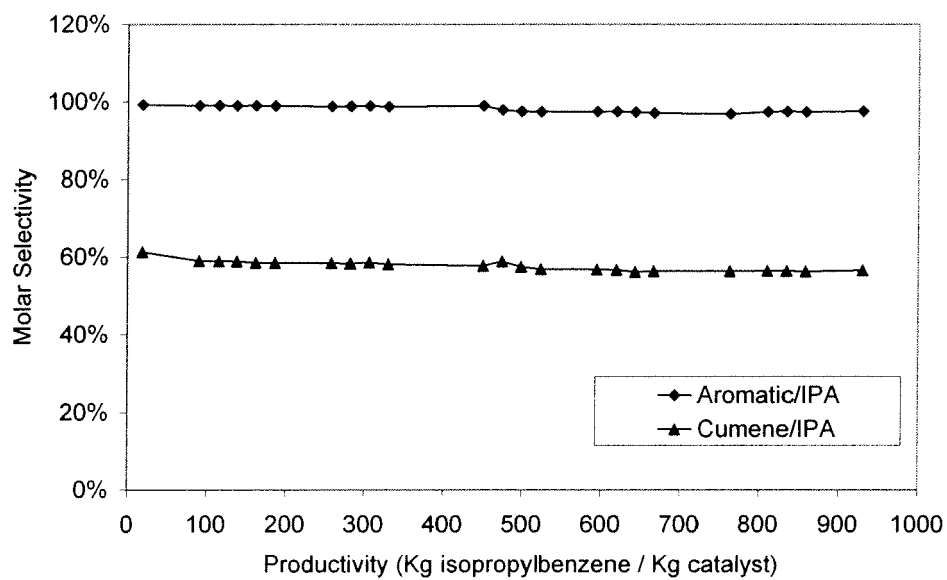


Figure 15


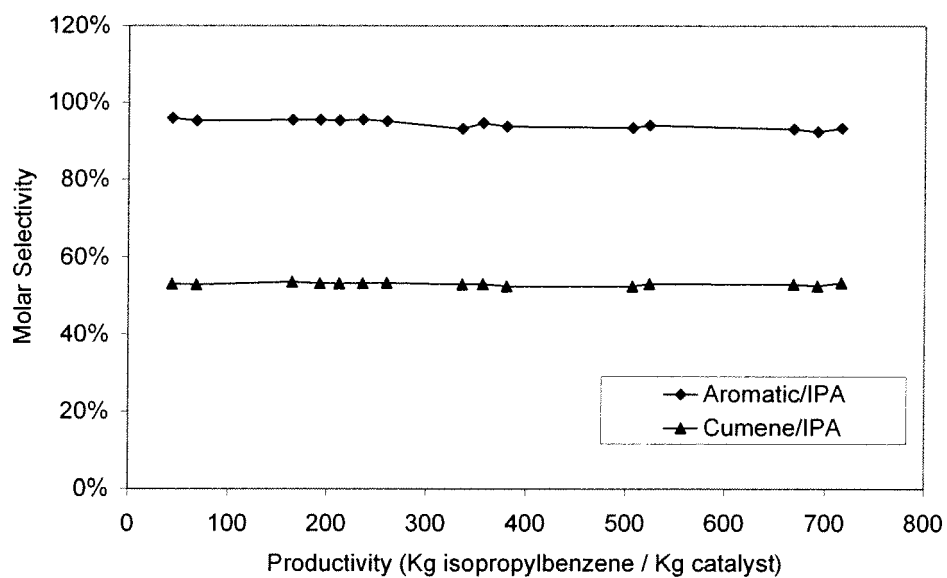


Figure 16

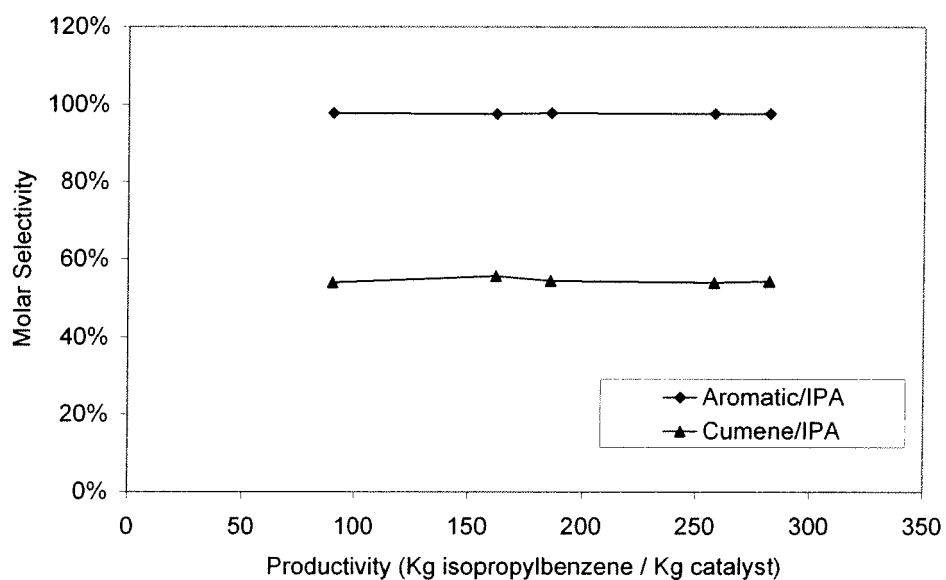

## REFERENCES CITED IN THE DESCRIPTION

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

### Patent documents cited in the description

- US 2410553 A [0009]
- US 2412230 A [0009]
- US 5015786 A [0010]
- US 5017729 A [0011] [0039]
- US 5160497 A [0012]
- US 6841704 B [0013]
- EP 1069099 A [0014]
- US 6512153 B [0015] [0016] [0017] [0041] [0043] [0044] [0045] [0046] [0047] [0048] [0049] [0050] [0051] [0054] [0055]
- JP H1135497 B [0016]
- US 4954325 A [0032]
- US 4439409 A [0032]
- US 4826667 A [0032]
- EP 0293032 A [0032]
- US 6077498 A [0032]
- WO 9717290 A [0032]
- US 5250277 A [0032]
- US 5236575 A [0032]
- US 5362697 A [0032]
- US 6756030 B [0032]
- US 4016218 A [0033]
- US 3702886 A [0033]
- US RE29948 E [0033]
- US 3709979 A [0033]
- US 3832449 A [0033]
- US 4556477 A [0033]
- US 4076842 A [0033]
- US 4016245 A [0033]
- US 4234231 A [0033]
- US 3923636 A [0034]
- US 3972983 A [0034]
- US 3308069 A [0034]
- US 28341 A [0034]
- US 3293192 A [0034]
- US 3449070 A [0034]
- US 3442795 A [0034]
- US 4401556 A [0034]
- US 3766093 A [0034]
- US 3894104 A [0034]
- US 5081321 A [0039]

### Non-patent literature cited in the description

- Atlas of Zeolite Framework Types. 2001 [0030]