

(19)



(11)

EP 2 352 341 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

26.10.2016 Bulletin 2016/43

(51) Int Cl.:

H04W 60/04 (2009.01)

(86) International application number:

PCT/CN2009/074930

(21) Application number: **09825771.0**

(22) Date of filing: **13.11.2009**

(87) International publication number:

WO 2010/054596 (20.05.2010 Gazette 2010/20)

(54) **METHOD, NETWORK SIDE DEVICE AND SYSTEM FOR CONGESTION CONTROL IN LOCATION UPDATING**

VERFAHREN, NETZWERKNEBENGERÄT UND SYSTEM ZUR ÜBERLASTUNGSSTEUERUNG BEI STANDORTAKTUALISIERUNGEN

PROCÉDÉ, DISPOSITIF CÔTÉ RÉSEAU ET SYSTÈME PERMETTANT DE CONTRÔLER L'ENCOMBREMENT DANS UNE MISE À JOUR DE LIEUX

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK SM TR**

(72) Inventor: **ZHAO, Hongxia**

Guangdong 518129 (CN)

(30) Priority: **17.11.2008 CN 200810177330**

(74) Representative: **Pfenning, Meinig & Partner mbB**

Patent- und Rechtsanwälte

Theresienhöhe 11a

80339 München (DE)

(43) Date of publication of application:

03.08.2011 Bulletin 2011/31

(56) References cited:

WO-A1-2007/111009

WO-A1-2007/126352

WO-A1-2008/123580

WO-A1-2008/123811

CN-A- 101 060 711

CN-A- 101 150 859

(73) Proprietor: **Huawei Technologies Co., Ltd.**

Longgang District

Shenzhen, Guangdong 518129 (CN)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**FIELD OF THE INVENTION**

5 **[0001]** The present disclosure relates to the field of communication technology, and in particular, to method, network side device and system for congestion control in location updating.

BACKGROUND OF THE INVENTION

10 **[0002]** Compared with the fixed network, the mobile communication has the advantage of mobility. When a user moves in the cellular mobile network, the continuity of the user service must be guaranteed. In the case that wide geographic areas are covered by different cells, when the user moves across the cells, not only the continuity of the ongoing service must be guaranteed, but also the location of the user terminal needs to be tracked, so that the user can be called in time. With the increasing areas covered by the cells that have dense concentrations of users, the hardness of the location management increases. Especially, if location updating in intercell handover for a number of users occurs in a short time, the location updating traffic may be too heavy, thereby resulting in congestion. After congestion, in one aspect, a lot of location updating traffic occupies air interface resources, so that the call fails due to a lack of the air interface resources; in another aspect, because the congestion easily causes the location update failure, the call may fail during congestion. If the user moves across cells frequently, the signaling overhead increases continuously. In this case, the method for taking advantage of wireless resources effectively and tracking locations of user terminals effectively becomes one of important mobility management technologies.

20 **[0003]** In the prior art, during terminal location updating, numerous terminals send location updating requests to the network side. Because location updating requests are based on the competitive mode, the location updating request that succeeds in competition can be accepted. However, the location updating request that fails to compete is rejected, leading to location update failure.

25 **[0004]** The inventor finds that at least the following problems exist in the prior art.

[0005] When a number of users move at the same time, a lot of location updating requests are generated. The location updating congestion cannot be controlled effectively. Moreover, access channels are preempted excessively during location updating congestion, leading to increasing call loss.

30 **[0006]** Patent application WO2008123811 A1 discloses that in densely populated areas a random period of time or an offset is added in order to avoid signaling congestion. Using the described method and system will reduce the signaling peak load on the signaling channels when many subscribers are changing Location Area at the same time. The method and system as described in D1 are easy to implement and does not require additional hardware resources or configurations on the network side.

35 **[0007]** Patent application WO2008123580 A1 provides for a mobile radio communications device arranged for operation within a mobile radio communications network comprising a plurality of location areas each comprising a plurality of cells, the device including means for identifying an approaching border of an area with a neighbouring area, triggering means for triggering location update signalling from the device and to reflect a change in area responsive to the identification of the said border, and the device further including delaying means for delaying transmission of a location update signalling such that, particularly if a random delay is employed, the cell traffic load can be spread out in time and its required location.

SUMMARY OF THE INVENTION

45 **[0008]** The present disclosure is directed to a method, a network side device, and a system for congestion control in location updating, in which a method for dynamically adjusting a location updating policy in intercell handover is provided, by this method, it can be effectively controlled whether the terminal initiates the location updating immediately or initiates the location updating with delay in intercell handover, so as to effectively smooth the system bandwidth required in the location updating, reduce the system call loss, and increase the terminal location updating efficiency and wireless resource utilization ratio.

50 **[0009]** The following detailed description is not to be taken in a limiting sense, and the scope of the present invention is defined only by the appended claims.

[0010] According to one aspect of the invention, a method for congestion control in location updating is provided. The method includes:

55 receiving, by a terminal, location updating congestion control information; and
implementing, by the terminal, the congestion control in location updating according to the location updating congestion control information;

wherein the implementation, by the terminal, of the congestion control in location updating according to the location updating congestion control information comprises:

obtaining, by the terminal, a second delay time value by using a preset algorithm according to a first delay time value in the location updating congestion control information, wherein the first delay time value is set according to the network circumstances;
 detecting, by the terminal, whether a location registration area of the terminal changes; and
 if a detection result is that the location registration area changes, then counting time by the terminal and sending, by the terminal, a location updating request to a network side device after the counted time reaches the second delay time value;
 wherein the first delay time value is set according to the network circumstances through this following way:

generating the first delay time value according to the number of the terminals requiring the location updating and a location request access bandwidth parameter of the network side device.

[0011] In accordance with yet another aspect of the invention, a network side device, for congestion control in location updating, is provided. The network side device includes:

a setting module, adapted to set location updating congestion control information according to network circumstances, wherein the location updating congestion control information comprises a first delay time value; and
 a sending module, adapted to send the location updating congestion control information set by the setting module to a terminal so as to implement, by the terminal, congestion control in location updating according to the first delay time value in the location updating congestion control information;
 wherein the first delay time value is generated according to the number of the terminals requiring the location updating and a location request access bandwidth parameter of the network side device.

[0012] In accordance with yet another aspect of the invention, a system, for congestion control in location updating, is provided. The system includes a network side device, communicatively connected to a terminal, in accordance with the independent claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] To illustrate the technical solutions according to the embodiments of the present invention more clearly, the accompanying figures for describing the embodiments are introduced briefly in the following. Apparently, the accompanying drawings in the following description are only some embodiments of the present invention; persons of ordinary skill in the art can derive other drawings according to the accompanying drawings without paying any creative efforts.

FIG. 1 is a flow chart of a method for congestion control in location updating according to Embodiment 1 of the present invention;
 FIG. 2 is a flow chart of a method for congestion control in location updating according to Embodiment 2 of the present invention;
 FIG. 3 is a flow chart of a method for congestion control in location updating according to Embodiment 3 of the present invention;
 FIG. 4 is a structural schematic view of a system for congestion control in location updating according to Embodiment 4 of the present invention;
 FIG. 5 is a structural schematic view of a terminal for congestion control in location updating according to Embodiment 4 of the present invention; and
 FIG. 6 is a structural schematic view of a network side device for congestion control in location updating according to Embodiment 4 of the present invention.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0014] The technical solutions according to the aspects of the present invention will be clearly and fully described below with reference to the accompanying drawings. It is obvious that the aspects to be described are only a part rather than all of the aspects of the present invention. All other aspects obtained by persons skilled in the art based on the aspects of the present invention without creative efforts shall fall within the protection scope of the present invention.

[0015] As shown in FIG. 1 Aspect 1 of the present invention provides a method for congestion control in location updating, which includes the following steps.

[0016] In s101, location updating congestion control information is set according to network circumstances.

[0017] In s102, the location updating congestion control information is sent to a terminal, and the terminal implements the congestion control in location updating according to the location updating congestion control information.

[0018] The technical solutions according to the embodiments of the present invention provide a method for dynamically adjusting a location updating policy in intercell handover. By this method, location updating congestion control information is set, and it can be effectively controlled whether the terminal initiates the location updating immediately or initiates the location updating with delay in intercell handover according to the location updating congestion control information, so as to effectively smooth the system bandwidth required in the location updating, reduce the system call loss, and increase the terminal location updating efficiency and wireless resource utilization ratio.

[0019] As shown in FIG. 2, Aspect 2 of the present invention provides a method for congestion control in location updating, which includes the following steps.

[0020] In s201, a network side device sets a first delay time value according to network circumstances. The methods of setting the first delay time value are as follows. For clear explanation, let $T_{Lu_delay_max}$ denote the first delay time, let $T_{Lu_delay_ue}$ denote the second delay time, and let T_p denote a periodical location updating time.

Method 1:

[0021] The network circumstances of the network side device are assessed to generate an empirical value of the first delay time value, and the first delay time value is set according to the empirical value. The empirical value is adapted to give the default value of $T_{Lu_delay_max}$. The empirical value is obtained by experimenting and testing for a long time, gathering statistics of the experiment and test and calculating the results.

Method 2:

[0022] The first delay time value is generated according to the number of the terminals requiring the location updating and a location request access bandwidth parameter of the network side device.

[0023] Let N_0 denote the number of the terminals that already reside in the cell, let N_{Lu} denote the number of the terminals that should complete location updating in intercell handover in instantaneous peak time, and let C denote the bandwidth of the Random Access Channel (RACH) of the cell, which is the number of the acceptable random requests per second. Let C_{Lu} denote the maximum RACH bandwidth that can be used by the network side device for location updating, that is, the number of the allowable concurrently accessed requests per second. Let C_p denote the bandwidth that is used for periodical location updating.

[0024] The public access channel is used for the location update access in intercell handover and call access. To perform location updating, the terminal should first access the public access channel. Here, a certain ratio of public access channel resources can be reserved for call access. Here, let α denote the proportion of the public access channel bandwidth reserved for call access in the total RACH access bandwidth. The value of α may be the default value according to the empirical value or dynamically derived by operation parameters and other known network parameters. An algorithm of obtaining the value of α is as follows.

[0025] Let β denote the call loss expected by the network side device, let γ denote the proportion of the number of the user terminals that initiate call access in a unit time in the total registered user terminals, and let C_{Call} denote the bandwidth reserved for the call access. The value of α can be calculated by the following equation:

$$\alpha = \frac{C_{Call}}{C} = \frac{\gamma(N_{Lu} + N_0)(1 - \beta)}{C} \quad (1)$$

[0026] The bandwidth reserved for the location updating in intercell handover is the bandwidth used for periodical location updating C_p subtracted from the bandwidth reserved for the call access C_{Call} subtracted from the total access bandwidth C . N_0/T_p is the access bandwidth required for the periodical location updating of the terminals that already reside. Moreover, the terminals that newly enter the location registration area cannot initiate the periodical location updating while initiating the location updating in intercell handover. Therefore, the maximum delay time for the location updating in intercell handover of the terminal can be calculated by the following equation:

$$T_{Lu_delay_max} = \frac{N_{Lu}}{C_{Lu}} = \frac{N_{Lu}}{(1 - \alpha)C - N_0/T_p} \quad (2)$$

[0027] A $T_{Lu_delay_max}$ calculation method as follows can be derived by substituting Equation (1) in Equation (2):

$$T_{Lu_delay_max} = \frac{N_{Lu}}{C - \gamma(N_{Lu} + N_0)(1 - \beta) - N_0/T_p} \quad (3)$$

[0028] The location updating in intercell handover is instantaneous burst traffic. If a lot of instantaneous mobile users enter the cell in the boundary of the location registration area, the amount of the burst location update access in intercell handover is far more than the number of the call random access requests. Therefore, to reduce the complexity of the system process, let $C_{Lu} \approx C$. The Equation (2) and Equation (3) can be simplified as follows:

$$T_{Lu_delay_max} = N_{Lu}/C \quad (4)$$

Method 3:

[0029] The value of $T_{Lu_delay_max}$ is determined by loads of different access channels.

[0030] The network side device directly determines the value of $T_{Lu_delay_max}$ according to the loads of the RACH.

[0031] The network side device calculates the statistical average value $E[\xi]$ of current load factors of the network side device in a period of time. During the network plan, n thresholds of the load factors are configured, for example, $\xi_1, \xi_2, \dots, \xi_n$, where $\xi_1 < \xi_2 < \dots < \xi_n$.

[0032] Moreover, Δt is set to be a step size. The network side device compares the current load factor $E[\xi]$ with the thresholds $\xi_1, \xi_2, \dots, \xi_n$. If the current load factor $E[\xi]$ is greater than the n th threshold, let $T_{Lu_delay_max} = n * \Delta t$. For example, if the load factor $E[\xi]$ is greater than ξ_2 and less than ξ_3 , let $T_{Lu_delay_max} = 2 * \Delta t$.

[0033] For wireless cellular system that is designed to implement the periodical location updating, assume that the duration of timer for the periodical location updating is T_p . In this system, the set value of $T_{Lu_delay_max}$ should satisfy the following condition: $T_{Lu_delay_max} < T_p$. If $T_{Lu_delay_max} \geq T_p$ the set value of $T_{Lu_delay_max}$ has no sense, and the terminal initiates the location updating process once the timer for the periodical location updating expires. If the location registration area changes at this time, the new location registration area of the terminal is sent to the network side device in the periodical location updating process.

[0034] In s202, the network side device sends location updating congestion control information to the terminal, in which the location updating congestion control information includes the first delay time value.

[0035] The network side device sends the location updating congestion control information to the terminal by an active sending method or a passive sending method. The details are as follows.

Method 1:

[0036] Network side device-based centralized control in the cell and distributed processing on terminals are adopted. The base station sends location updating congestion control information to the terminals by using a broadcast message. After receiving the location updating congestion control information, the terminals in the cell process the location updating congestion control information according to the uniform instruction and local information to smooth the location updating traffic in intercell handover. In this method, different policies can be used for different network circumstances of different cells to calculate different first delay time values, and then these first delay time values are sent to terminals by using cell broadcast.

Method 2:

[0037] Distributed location updating control in intercell handover is adopted on each terminal, that is, the system can provide different location updating policies in intercell handover according to requirements and situations of each terminal, for example, the tolerable call loss. In the embodiments of the present invention, location updating congestion control information is obtained when the terminal implements the network registration process or the initial network location updating process.

[0038] In this method, the terminal first sends a delay request to the network. The delay request includes basic information of the terminal, such as an International Mobile Subscriber Identity (IMSI) and a mobile phone number. After receiving the delay request sent by the terminal, the network side device sends a registration response message including the location updating congestion control information to the terminal according to the basic information of the terminal in the delay request.

[0039] In s203, the terminal calculates a second delay time value by using a preset algorithm according to the first delay time value in the location updating congestion control information. The first delay time value is set to determine the maximum delay time required in location updating. The second delay time value is calculated in order that numerous terminals can be evenly distributed in the first delay time according to their own situations. Therefore, the terminals neither implement location updating simultaneously at the end of first delay time nor compete in location update access directly when the their own locations change.

[0040] Many kinds of methods can be adapted to calculate the second delay time value. For clear explanation, let $T_{Lu_delay_ue}$ denote the second delay time value. The detailed calculation methods are as follows.

Method 1:

[0041] The terminal generates a random number r in $[0,1]$ and calculates $T_{Lu_delay_ue}$ based on the random number r .

$$T_{Lu_delay_ue} = r * T_{Lu_delay_max}$$

[0042] Since r is a random number, $T_{Lu_delay_ue}$ calculated by each terminal is evenly distributed on any point between 0 and $T_{Lu_delay_max}$.

Method 2:

[0043] The Access Class (AC) information is saved in the Subscriber Identity Module (SIM) or Universal Subscriber Identity Module (USIM) of the terminal, and the terminal can calculate $T_{Lu_delay_ue}$ by using AC. Different delay time values are assigned according to different ACs to guarantee that the delay time value calculated by the terminal of higher AC priority is less and the delay time value calculated by the terminal of lower AC priority is greater. The delay time values calculated by the terminals of similar AC priorities may be the random values in the same range.

[0044] AC is adapted to prevent specific user equipments (UEs) accessing certain areas in the Public Land Mobile-communication Network (PLMN). AC is defined in the Universal Terrestrial Radio Access Network (UTRAN). Each terminal has any one of the ACs 0-9. The AC of the UE is saved in the SIM/USIM card. Besides, these UEs can also have the special ACs 11-15, which is also saved in SIM/USIM. These users of special priorities are defined as follows:

Class 15 → Support staff in PLMN
 Class 14 → Emergency services
 Class 13 → Public affairs
 Class 12 → Safety services
 Class 11 → PLMN network applications

[0045] The values of $T_{Lu_delay_ue}$ are different due to the different priorities.

[0046] The second delay time value is calculated by the following equation:

$$T_{Lu_delay_ue} = \phi(q, v) * T_{Lu_delay_max} * r$$

where $\phi(q, v)$ is the function of the terminal priority q and terminal movement velocity v , and r is a random number in $[0,1]$.

[0047] In s204, the terminal detects whether its own location registration area changes.

[0048] If the terminal moves from a current service cell to another cell, the terminal can detect its intercell handover from the original service cell to a new cell. If the location of the terminal does not change, the terminal continues to perform the detection. If the location registration area of the terminal changes, the procedure proceeds to the next step.

[0049] In s205, if a detection result is that the location registration area changes, the terminal counts the time and sends a location updating request to the network side device after the counted time reaches the second delay time value.

[0050] In the case that the location registration area of the terminal changes, the terminal should send the location updating request to the network side device. To avoid excessive location updating requests and control the possible congestion, the terminal delays sending the request according to the second delay time value to avoid the request sending peak and sends the location updating request to the network side device after the second delay time.

[0051] After the terminal counts the time, if a call to be initiated is detected during the time counting, $T_{Lu_delay_ue}$ is set to 0 immediately, the time counting is stopped, and then the location updating is initiated at once. After the location

updating succeeds, the call access is initiated to satisfy the terminal call of the access user.

[0052] According to the embodiments of the present invention, the first delay time value is the maximum delay time value of the terminal, while the second delay time value is the specific delay time of each terminal. Therefore, the first delay time value is greater than or equal to the second delay time value.

[0053] The location registration area according to the embodiments of the present invention is a location area, routing area, tracking area, or registration area.

[0054] The technical solutions according to the embodiments of the present invention provide a method for dynamically adjusting a location updating policy in intercell handover. By this method, the first delay time value and the second delay time value are set, so it can be effectively controlled whether the terminal initiates the location updating immediately or initiates the location updating with delay in intercell handover, so as to effectively smooth the system bandwidth required in the location updating, reduce the system call loss, and increase the terminal location updating efficiency and wireless resource utilization ratio.

[0055] Aspect 3 of the present invention provides a method for congestion control in location updating. Aspect 3 is different from Aspect 2. In Aspect 2, the terminal generates the second delay time value according to the first delay time value in the location updating congestion control information sent by the network side device, and then counts the time and delays for a period of time, and then sends the location updating request. In Embodiment 3, the network side device only sends the location updating congestion control information to the terminal, and the terminal generates the second delay time value according to the congestion degree information in the location updating congestion control information and a step size time parameter of the delay.

[0056] As shown in FIG. 3, the method includes the following steps.

[0057] In s301, a network side device sets congestion degree information according to network circumstances.

[0058] The network side device controls network congestion based on the network congestion degree. In this embodiment, the network side device comprehensively examines utilization situations of resources required by all involved location updating in a period of time. If finding network congestion, the network side device sends location updating congestion control information to a terminal, in which the location updating congestion control information includes the congestion degree information, which is adapted to express the current network congestion degree. Let η_i denote a congestion degree class, where $\eta_i \in \{\eta_1, \eta_2, \dots, \eta_N\}$ and $\eta_1 < \eta_2 < \dots < \eta_N$. The terminal generates a different second delay time value according to a different congestion degree class. For example, the network congestion degree is classified into 10 classes between full congestion and non-congestion. If the congestion degree class corresponding to the first class is η_1 , the congestion degree η_1 is 10%.

[0059] In s302, the network side device sends location updating congestion control information to the terminal, and the terminal generates a second delay time value according to the congestion degree information in the location updating congestion control information.

[0060] The terminal presets the step size time parameter of the delay Δt , which is based on average time required for the terminal accessing the network. The time for different terminals accessing the network is different. Therefore, the step size time parameter of the delay may be an average time value.

[0061] The second delay time value is calculated by the following equation:

$$T_{Lu_delay_ue} = \phi(q, v) * (i \Delta t) * r$$

where $\phi(q, v)$ is the function of the terminal priority q and terminal movement velocity v , i corresponds to the congestion degree, and r is a random number in $[0, 1]$.

[0062] For the system where the periodical location updating time T_p , $T_{Lu_delay_max}$ calculated by the terminal should meet the following condition: $T_{Lu_delay_max} \leq T_p$.

[0063] In s303, the terminal detects whether its own location registration area changes.

[0064] If the terminal moves from a current service cell to another cell, the terminal can detect its intercell handover from the original service cell to a new cell. If the terminal location does not change, the terminal continues to perform the detection. If the location registration area of the terminal changes, the procedure proceeds to s304.

[0065] In s304, if a detection result is that the location registration area changes, the terminal counts the time and sends a location updating request to the network side device after the counted time reaches the second delay time value.

[0066] In the case that the location registration area of the terminal changes, the terminal should send the location updating request to the network side device. To avoid excessive location updating requests received by the network side device, the possible resulting congestion needs to be controlled. The terminal delays sending the request according to the second delay time value to avoid the location updating request sending peak and sends the location updating request to the network side device after the second delay time.

[0067] After the terminal counts the time, if a call to be initiated is detected during the time counting, $T_{Lu_delay_ue} = 0$

is set to 0 immediately, the time counting is stopped, and then the location updating is initiated at once. After the location updating succeeds, the call access is initiated to satisfy the terminal call of the access user. Call access can be initiated by the terminal only after the terminal location updating. Therefore, if a terminal in a different area wants to initiate call access, the location updating should be first implemented.

[0068] The location registration area according to the aspects of the present invention is a location area, routing area, tracking area, or registration area.

[0069] The technical solutions according to the embodiments of the present invention provide a method for dynamically adjusting a location updating policy in intercell handover. By this method, location updating congestion control information is set, the congestion degree is set according to network circumstances, and the second delay time value is calculated according to the congestion degree, so it can be effectively controlled whether the terminal initiates the location updating immediately or initiates the location updating with delay in intercell handover, so as to effectively smooth the system bandwidth required in the location updating, reduce the system call loss, and increase the terminal location updating efficiency and wireless resource utilization ratio.

[0070] As shown in FIG. 4, Aspect 4 of the present invention provides a system, for congestion control in location updating, which includes a network side device 410 and a terminal 420.

[0071] The network side device 410 is adapted to set location updating congestion control information according to network circumstances and sends the location updating congestion control information to the terminal 420.

[0072] The terminal 420 is adapted to receive the location updating congestion control information set by the network side device 410 according to the network circumstances, generate a second delay time value according to the location updating congestion control information, and detect whether the location registration area of the terminal 420 changes. If a detection result is that the location registration area changes, the terminal 420 counts the time and sends a location updating request to the network side device 410 after the counted time reaches the second delay time.

[0073] The terminal 420 is adapted to implement the congestion control in location updating. As shown in FIG. 5, the terminal 420 includes a receiving module 421, a calculating module 422, a detecting module 423, and a time counting and requesting module 424.

[0074] The receiving module 421 is adapted to receive the location updating congestion control information sent by the network side device 410. The location updating congestion control information is set by the network side device 410 according to the network circumstances.

[0075] The network side device 410 sends the location updating congestion control information to the terminal 420. In the present invention, the sending method includes an active sending method and a passive sending method. The details are as follows.

Method 1:

[0076] Network side device-based centralized control in the cell and distributed processing on terminals are adopted. The network side device 410 sends location updating congestion control information to the terminal 420 through a base station by using a broadcast message. After receiving the location updating congestion control information, the terminal 420 in the cell processes the location updating congestion control information according to the uniform instruction and local information to smooth the location updating traffic in intercell handover. This method can be based different cells and different network circumstances. Then the location updating congestion control information is sent to terminals by using cell broadcast.

Method 2:

[0077] Distributed location updating control in intercell handover is adopted on each terminal, that is, the system can provide different location updating policies in intercell handover according to requirements and situations of each terminal, for example, the tolerable call loss. In the present invention, location updating congestion control information is obtained when the terminal 420 implements the network registration process or the initial network location updating process.

[0078] By this method, the receiving module 421 of the terminal 420 first sends a delay request to the network side device 410. After receiving the delay request sent by the terminal 420, the network side device 410 sends a response message including location updating congestion control information to the terminal 420 according to the terminal identifier information in the delay request.

[0079] The calculating module 422 is adapted to calculate the second delay time value by using a preset algorithm according to the location updating congestion control information received by the receiving module 421.

[0080] Here, the calculating method includes two methods. In Method 1, a first delay time value is extracted from the location updating congestion control information sent by the network side device 410, and the second delay time value is calculated according to the first delay time value. In Method 2, the second delay time value is calculated according to congestion degree information extracted from the location updating congestion control information. To set the first delay

time value and congestion degree information, refer to the description of network side device 410.

Method 1:

[0081] The second delay time value can be calculated by many modes.

[0082] The terminal 420 can also generate a random number in [0,1] and calculate the second delay time value based on the random number. Since r is a random number, $T_{Lu_delay_ue}$ calculated by each terminal is evenly distributed on any point between 0 and $T_{Lu_delay_max}$.

[0083] The AC information is saved in the SIM/USIM card of the terminal 420, and the terminal 420 can calculate $T_{Lu_delay_ue}$ by using AC. Different delay time values are assigned according to different ACs to guarantee that the delay time value calculated by the terminal of higher AC priority is less and the delay time value calculated by the terminal of lower AC priority is greater. The delay time values calculated by the terminals of similar AC priorities may be the random values in the same range.

[0084] The second delay time value is calculated by the following equation:

$$T_{Lu_delay_ue} = \phi(q, v) * T_{Lu_delay_max} * r$$

where $\phi(q, v)$ is the function of the terminal priority q and terminal movement velocity v , and r is a random number in [0,1].

[0085] The first delay time value is set to determine the maximum delay time required in location updating implemented by the terminal 420. The second delay time value is calculated in order that numerous terminals 420 can be evenly distributed in the first delay time according to their own situations. Therefore, the terminals neither implement location updating simultaneously at the end of first delay time nor compete in location update access directly when the their own locations change.

Method 2:

[0086] The terminal extracts the congestion degree information from the received location updating congestion control information. The calculating module 422 calculates the second delay time value by using the preset time step size parameter algorithm according to the congestion degree information.

[0087] Let η_i denote a congestion degree class, where $\eta_i \in \{\eta_1, \eta_2, \dots, \eta_N\}$ and $\eta_1 < \eta_2 < \dots < \eta_N$. The terminal generates a different second delay time value according to a different congestion degree class. The terminal presets the step size time parameter of the delay Δt , which is based on average time required for the terminal accessing the network.

[0088] The second delay time value is calculated by the following equation:

$$T_{Lu_delay_ue} = \phi(q, v) * (i\Delta t) * r$$

where $\phi(q, v)$ is the function of the terminal priority q and terminal movement velocity v , i corresponds to the congestion degree, and r is a random number in [0,1].

[0089] The detecting module 423 is adapted to detect whether the location registration area changes.

[0090] If the terminal 420 moves from a current service cell to another cell, the terminal 420 can detect its intercell handover from the original service cell to a new cell. If the location registration area of the terminal 420 does not change, the terminal 420 continues to perform the detection. If the location registration area of the terminal 420 changes, the procedure proceeds to the next step.

[0091] The time counting and requesting module 424 is adapted to count time and send a location updating request to the network side device 410 after the counted time reaches the second delay time value calculated by the calculating module 422 if a detection result is that the location registration area changes.

[0092] The terminal 420 further includes a time parameter module 425.

[0093] The time parameter module 425 is adapted to save the step size time parameter preset based on average time for accessing the network. The calculating module 422 obtains the second delay time value by using a preset time parameter algorithm according to the congestion degree information in the location updating congestion control information and the step size time parameter in the time parameter module 425.

[0094] The terminal 420 further includes a delay request module 426.

[0095] The delay request module 426 is adapted to send a delay request to the network side device.

[0096] The receiving module 421 receives the location updating congestion control information sent by the network side device 410 according to the delay request.

[0097] The detecting module 423 is also adapted to detect whether a call is to be initiated by the terminal 420 after time counting.

[0098] If a call to be initiated is detected during the time counting, the time counting and requesting module 424 stops the time counting and sends the location updating request to the network side device 410 immediately.

[0099] If a call to be initiated is not detected during the time counting, the time counting and requesting module 424 sends the location updating request to the network side device 410 after the counted time reaches the second delay time value.

[0100] In the case that the location registration area of the terminal 420 changes, the terminal 420 should send the location updating request to the network side device 410. To avoid excessive location updating requests and control the possible congestion, the terminal 420 delays sending the request according to the second delay time value to avoid the request sending peak and sends the location updating request to the network side device 410 after the counted time reaches the second delay time value.

[0101] According to the embodiments of the present invention, the first delay time value is the maximum delay time value of the terminal, while the second delay time value is the specific delay time of each terminal. Therefore, the first delay time value is greater than or equal to the second delay time value.

[0102] The location registration area where the terminal is located may be a location area, routing area, tracking area, or registration area.

[0103] The network side device 410 is adapted to implement the congestion control in location updating. As shown in FIG. 6, the network side device 410 includes a setting module 411 and a sending module 412.

[0104] The setting module 411 is adapted to set location updating congestion control information according to network circumstances.

[0105] Since the terminal can calculate the second delay time value by different methods, the location updating congestion control information can be set by the following two methods.

[0106] In Method 1 for setting the location updating congestion control information, the network side device sets the first delay time value according to network circumstances.

[0107] The first delay time value can be set by the following methods.

[0108] In Method 1 for setting the first delay time value, the network circumstances of the network side device 410 are assessed to generate an empirical value of the first delay time value, and the first delay time value is set according to the empirical value. The empirical value is adapted to give the default value of the first delay time value. The empirical value is obtained by experimenting and testing for a long time, gathering statistics of the experiment and test and calculating the results.

[0109] In Method 2 for setting the first delay time value, the first delay time value is generated according to the number of the terminals 420 requiring the location updating and a location request access bandwidth parameter of the network side device.

[0110] In Method 3 for setting the first delay time value, the value of $T_{Lu_delay_max}$ is determined by loads of different access channels.

[0111] In Method 2 for setting the location updating congestion control information, the network side device sets the congestion degree according to network congestion degree situations.

[0112] In this aspect, the network side device comprehensively examines utilization situations of resources required by all involved location updating in a period of time. If finding network congestion, the network side device sends location updating congestion control information to the terminal, in which the location updating congestion control information includes the congestion degree information, which is adapted to express the current network congestion degree. Let η_i denote a congestion degree class, where $\eta_i \in \{\eta_1, \eta_2, \dots, \eta_N\}$ and $\eta_1 < \eta_2, \dots < \eta_N$. The terminal generates a different second delay time value according to a different congestion degree class. For example, the network congestion degree is classified into 10 classes between full congestion and non-congestion. If the congestion degree class corresponding to the first class is η_1 , the congestion degree η_1 is 10%.

[0113] The sending module 412 is adapted to send the location updating congestion control information set by the setting module 411 to the terminal 420.

[0114] The network side device 410 sends the location updating congestion control information to the terminal 420. In the present invention, the sending method includes an active sending method and a passive sending method. The details are as follows.

[0115] In Method 1, network side device-based centralized control in the cell and distributed processing on terminals are adopted. The network side device 410 sends location updating congestion control information to the terminal 420 through a base station by using a broadcast message. After receiving the location updating congestion control information, the terminal 420 in the cell process the location updating congestion control information according to the uniform instruction and local information to smooth the location updating traffic in intercell handover. In this method, different policies can be adapted to calculate different location updating congestion control information according to different network circumstances of different cells, and then the location updating congestion control information are sent to

terminals by using cell broadcast.

[0116] In Method 2, distributed location updating control in intercell handover is adopted on each terminal, that is, the system can provide different location updating policies in intercell handover according to requirements and situations of each terminal, for example, the tolerable call loss. In the present invention, location updating congestion control information is obtained when the terminal 420 implements the network registration process or the initial network location updating process.

[0117] By this method, the receiving module 421 of the terminal 420 first sends a delay request to the network side device 410. After receiving the delay request sent by the terminal 420, the network side device 410 sends a response message including location updating congestion control information to the terminal 420 according to the terminal identifier information in the delay request.

[0118] For wireless cellular system that is designed to implement the periodical location updating, assume that the duration of timer for the periodical location updating is T_p . In this system, the set value of $T_{Lu_delay_max}$ should satisfy the following condition: $T_{Lu_delay_max} < T_p$. If $T_{Lu_delay_max} \geq T_p$, the set value of $T_{Lu_delay_max}$ has no sense, and the terminal initiates the location updating process once the timer for the periodical location updating expires. If the location registration area changes at this time, the new location registration area of the terminal is sent to the network side device in the periodical location updating process.

[0119] The location registration area according to the embodiments of the present invention is a location area, routing area, tracking area, or registration area.

[0120] The technical solutions according to the aspects of the present invention provide a method for dynamically adjusting a location updating policy in intercell handover. By this method, location updating congestion control information is set, and the delay time is generated according to the information, so it can be effectively controlled whether the terminal initiates the location updating immediately or initiates the location updating with delay in intercell handover, so as to effectively smooth the system bandwidth required in the location updating, reduce the system call loss, and increase the terminal location updating efficiency.

[0121] Through the descriptions of the aspects, those skilled in the art may understand that the present invention may be implemented by using hardware only or by using software and a necessary universal hardware platform. Based on such understandings, the technical solution of the present invention may be embodied in the form of a software product. The software product may be stored in a nonvolatile storage medium, which can be a Compact Disk Read-Only Memory (CD-ROM), Universal Serial Bus (USB) flash drive, or a removable hard drive. The software product includes a number of instructions that enable a computer apparatus (personal computer, server, or network apparatus) to execute the methods provided in the embodiments of the present invention.

[0122] It should be understood by persons skilled in the art that the accompanying drawings are merely schematic views of a preferred embodiment, and modules or processes in the accompanying drawings are not necessarily required in implementing the present invention.

[0123] The above descriptions are merely preferred aspects of the present invention. It should be noted by persons of ordinary skill in the art that modifications and improvements may be made without departing from the principle of the present invention, which should be construed as falling within the scope of the present invention.

Claims

1. A method for congestion control in location updating, comprising:

receiving, by a terminal, location updating congestion control information; and
implementing (s102), by the terminal, congestion control in location updating according to the location updating congestion control information;
wherein the implementation, by the terminal, of the congestion control in location updating according to the location updating congestion control information comprises:

obtaining (s203), by the terminal, a second delay time value by using a preset algorithm according to a first delay time value in the location updating congestion control information, wherein the first delay time value is set according to the network circumstances;

detecting (s204), by the terminal, whether a location registration area of the terminal changes; and

if a detection result is that the location registration area changes, then counting time by the terminal and sending, by the terminal, a location updating request to a network side device after the counted time reaches the second delay time value (s205);

wherein the first delay time value is set according to the network circumstances through this following way:

generating the first delay time value according to the number of the terminals requiring the location updating and a location request access bandwidth parameter of the network side device.

2. The method according to claim 1, wherein the step of receiving the location updating congestion control information comprises:

receiving, by the terminal, the location updating congestion control information by using cell broadcast; or sending, by the terminal, a delay request and receiving, by the terminal, the location updating congestion control information according to the delay request.

3. The method according to claim 1 and 2, wherein the obtaining the second delay time value by using the preset algorithm according to the first delay time value comprises:

calculating the second delay time value according to an inherent priority of the terminal and the first delay time value; or calculating the second delay time value according to a random number generated by the terminal and the first delay time value.

4. The method according to any one of claims 2 to 3, wherein the counting time by the terminal and sending the location updating request to the network side device after the counted time reaches the second delay time value comprises:

counting the time by the terminal and detecting, by the terminal, whether a call is to be initiated by the terminal; if a call to be initiated is detected during the time counting, stopping, by the terminal, the time counting and sending a location updating request to the network side device; otherwise if a call to be initiated is not detected during the time counting, sending, by the terminal, the location updating request to the network side device after the counted time reaches the second delay time value.

5. The method according to any one of claims 1 to 4, wherein the first delay time value is greater than or equal to the second delay time value.

6. The method according to any one of claims 1 to 5, wherein the location registration area is a location area, routing area, tracking area, or registration area.

7. A network side device, for congestion control in location updating, comprising:

a setting module (411), adapted to set location updating congestion control information according to network circumstances, wherein the location updating congestion control information comprises a first delay time value; and a sending module (412), adapted to send the location updating congestion control information set by the setting module to a terminal so as to implement, by the terminal, congestion control in location updating according to the first delay time value in the location updating congestion control information; wherein the setting module (411) is adapted to generate the first delay time value according to the number of the terminals requiring the location updating and a location request access bandwidth parameter of the network side device.

8. The network side device according to claim 7, wherein:

the sending module is adapted to send the location updating congestion control information to the terminal by using cell broadcast; or the sending module is adapted to send the location updating congestion control information according to a delay request sent by the terminal.

9. A system, for congestion control in location updating, including a network side device according to claim 7 or 8, and a terminal, and the terminal comprises:

a receiving module (421), adapted to receive location updating congestion control information sent by a network side device, wherein the location updating congestion control information comprises a first delay time value and the first delay time value is generated by the network side device according to the number of the terminals

requiring the location updating and a location request access bandwidth parameter of the network side device;
a calculating module (422), adapted to obtain a second delay time value by using a preset algorithm according
to the first delay time value in the location updating congestion control information received by the receiving
module;

a detecting module (423), adapted to detect whether a location registration area of the terminal changes; and
a time counting and requesting module (424), adapted to count time and send a location updating request to
the network side device after the counted time reaches the second delay time value calculated by the calculating
module if a detection result is that the location registration area changes.

10. The system according to claim 9, the terminal further comprising:

a delay request module (426), adapted to send a delay request to the network side device wherein the receiving
module is adapted to receive the location updating congestion control information sent by the network side
device according to the delay request.

11. The system according to claims 9 or 10, wherein the receiving module is adapted to receive the location updating
congestion control information sent by the network side device by using cell broadcast.

12. The system according to any one of claims 9 to 11, wherein the detecting module is further adapted to detect whether
a call is to be initiated by the terminal after the time counting is begun; and
if a call to be initiated is detected during the time counting, the time counting and requesting module is adapted to
stop the time counting and sends the location updating request to the network side device immediately; otherwise
if a call to be initiated is not detected during the time counting, the time counting and requesting module is adapted
to send the location updating request to the network side device after the counted time reaches the second delay
time value.

Patentansprüche

1. Verfahren zur Überlastungssteuerung bei Standortaktualisierungen, umfassend:

Empfangen, durch ein Endgerät, von Überlastungssteuerungsinformationen für die Standortaktualisierung; und
Implementieren (s102), durch das Endgerät, der Überlastungssteuerung bei Standortaktualisierungen gemäß
den Überlastungssteuerungsinformationen für die Standortaktualisierung;
wobei die Implementierung, durch das Endgerät, der Überlastungssteuerung bei Standortaktualisierungen ge-
mäß den Überlastungssteuerungsinformationen für die Standortaktualisierung umfasst:

Beschaffen (s203), durch das Endgerät, eines zweiten Verzögerungszeitwerts mithilfe eines voreingestell-
ten Algorithmus gemäß einem ersten Verzögerungszeitwert in den Überlastungssteuerungsinformationen
für die Standortaktualisierung, wobei der erste Verzögerungszeitwert gemäß den Netzwerkbedingungen
eingestellt wird;

Erkennen (s204), durch das Endgerät, ob sich ein Aufenthaltsbereich des Endgeräts ändert; und
falls ein Erkennungsergebnis lautet, dass sich der Aufenthaltsbereich ändert, Zählen der Zeit durch das
Endgerät und Senden, durch das Endgerät, einer Standortaktualisierungsanforderung an eine netzwerksei-
tige Vorrichtung, nachdem die gezählte Zeit den zweiten Verzögerungszeitwert erreicht hat (s205);
wobei der erste Verzögerungszeitwert gemäß den Netzwerkbedingungen eingestellt wird wie folgt:

Erzeugen des ersten Verzögerungszeitwerts gemäß der Anzahl der Endgeräte, die die Standortaktu-
alisierung anfordern, und einem Standortanforderung-Zugangsbandbreitenparameter der netzwerksei-
tigen Vorrichtung.

2. Verfahren gemäß Anspruch 1, wobei der Schritt des Empfangens der Überlastungssteuerungsinformationen für die
Standortaktualisierung umfasst:

Empfangen, durch das Endgerät, der Überlastungssteuerungsinformationen für die Standortaktualisierung mit-
tels Zellenrundsendefunktion ("Cell Broadcast"); oder
Senden, durch das Endgerät, einer Verzögerungsanforderung
und Empfangen, durch das Endgerät, der Überlastungssteuerungsinformationen für die Standortaktualisierung

gemäß der Verzögerungsanforderung.

3. Verfahren gemäß Anspruch 1 und 2, wobei das Beschaffen des zweiten Verzögerungszeitwerts mithilfe des vor-
eingestellten Algorithmus gemäß dem ersten Verzögerungszeitwert umfasst:

Berechnen des zweiten Verzögerungszeitwerts gemäß einer inhärenten Priorität des Endgeräts und dem ersten
Verzögerungszeitwert; oder
Berechnen des zweiten Verzögerungszeitwerts gemäß einer Zufallszahl, die von dem Endgerät berechnet wird,
und dem ersten Verzögerungszeitwert.

4. Verfahren gemäß einem der Ansprüche 2 bis 3, wobei das Zählen der Zeit durch das Endgerät und das Senden
der Standortaktualisierungsanforderung an die netzwerkseitige Vorrichtung, nachdem die gezählte Zeit den zweiten
Verzögerungszeitwert erreicht hat, umfassen:

Zählen der Zeit durch das Endgerät und Erkennen, durch das Endgerät, ob von dem Endgerät ein Ruf eingeleitet
werden soll;
falls während der Zeitzählung ein einzuleitender Ruf erkannt wird, Anhalten, durch das Endgerät, der Zeitzählung
und Senden einer Standortaktualisierungsanforderung an die netzwerkseitige Vorrichtung; andernfalls
falls während der Zeitzählung kein einzuleitender Ruf erkannt wird, Senden, durch das Endgerät, der Standort-
aktualisierungsanforderung an die netzwerkseitige Vorrichtung, nachdem die gezählte Zeit den zweiten Ver-
zögerungszeitwert erreicht hat.

5. Verfahren gemäß einem der Ansprüche 1 bis 4, wobei der erste Verzögerungszeitwert größer oder gleich dem
zweiten Verzögerungszeitwert ist.

6. Verfahren gemäß einem der Ansprüche 1 bis 5, wobei der Aufenthaltsbereich ein Standortbereich ("Location Area"),
ein Routingbereich ("Routing Area"), ein Verfolgungsbereich ("Tracking Area") oder ein Einbuchungsbereich ("Re-
gistration Area") ist.

7. Netzwerkseitige Vorrichtung zur Überlastungssteuerung bei Standortaktualisierungen, umfassend:

ein Einstellmodul (411), das dafür ausgelegt ist, Überlastungssteuerungsinformationen für die Standortaktua-
lisierung gemäß den Netzwerkbedingungen einzustellen, wobei die Überlastungssteuerungsinformationen für
die Standortaktualisierung einen ersten Verzögerungszeitwert umfassen; und
ein Sendemodul (412), das dafür ausgelegt ist, die Überlastungssteuerungsinformationen für die Standortak-
tualisierung, die vom Einstellmodul eingestellt wurden, an ein Endgerät zu senden, um durch das Endgerät
eine Überlastungssteuerung bei Standortaktualisierungen gemäß dem ersten Verzögerungszeitwert in den
Überlastungssteuerungsinformationen für die Standortaktualisierung der netzwerkseitigen Vorrichtung zu imp-
lementieren;
wobei das Einstellmodul (411) dafür ausgelegt ist, den ersten Verzögerungszeitwert gemäß der Anzahl der
Endgeräte, die die Standortaktualisierung anfordern, und einem Standortanforderung-Zugangsbandbreitenpa-
rameter der netzwerkseitigen Vorrichtung zu erzeugen.

8. Netzwerkseitige Vorrichtung gemäß Anspruch 7, wobei:

das Sendemodul dafür ausgelegt ist, die Überlastungssteuerungsinformationen für die Standortaktualisierung
mittels "Cell Broadcast" an das Endgerät zu senden; oder
das Sendemodul dafür ausgelegt ist, die Überlastungssteuerungsinformationen für die Standortaktualisierung
gemäß einer vom Endgerät gesendeten Verzögerungsanforderung zu senden.

9. System zur Überlastungssteuerung bei Standortaktualisierungen, welches eine netzwerkseitige Vorrichtung gemäß
Anspruch 7 oder 8 und ein Endgerät aufweist, wobei das Endgerät umfasst:

ein Empfangsmodul (421), das dafür ausgelegt ist, die Überlastungssteuerungsinformationen für die Standor-
tactualisierung zu empfangen, die von einer netzwerkseitigen Vorrichtung gesendet wurden, wobei die Über-
lastungssteuerungsinformationen für die Standortaktualisierung einen ersten Verzögerungszeitwert umfassen
und der erste Verzögerungszeitwert von der netzwerkseitigen Vorrichtung gemäß der Anzahl der Endgeräte,
die die Standortaktualisierung anfordern, und einem Standortanforderung-Zugangsbandbreitenparameter der

netzwerkseitigen Vorrichtung erzeugt wird;

ein Berechnungsmodul (422), das dafür ausgelegt ist, einen zweiten Verzögerungszeitwert zu erhalten, indem ein voreingestellter Algorithmus gemäß dem ersten Verzögerungszeitwert in den Überlastungssteuerungs-
 5 informationen für die Standortaktualisierung verwendet wird, der durch das Empfangsmodul empfangen wurde;
 ein Erkennungsmodul (423), das dafür ausgelegt ist, zu erkennen, ob sich ein Aufenthaltsbereich des Endgeräts ändert; und

ein Zeitzählungs- und Anforderungsmodul (424), das dafür ausgelegt ist, Zeit zu zählen und eine Standortaktualisierungsanforderung an die netzwerkseitige Vorrichtung zu senden, nachdem die gezählte Zeit den zweiten
 10 Verzögerungszeitwert erreicht hat, der vom Berechnungsmodul berechnet wird, falls ein Erkennungsergebnis besagt, dass sich der Aufenthaltsbereich ändert.

10. System gemäß Anspruch 9, wobei das Endgerät ferner umfasst:

15 ein Verzögerungsanforderungsmodul (426), das dafür ausgelegt ist, eine Verzögerungsanforderung an die netzwerkseitige Vorrichtung zu senden, wobei das Empfangsmodul dafür ausgelegt ist, die Überlastungssteuerungs-
 informationen für die Standortaktualisierung, die von der netzwerkseitigen Vorrichtung gesendet wurden, gemäß der Verzögerungsanforderung zu empfangen.

11. System gemäß Anspruch 9 oder 10, wobei das Empfangsmodul dafür ausgelegt ist, die Überlastungssteuerungs-
 20 informationen für die Standortaktualisierung zu empfangen, die von der netzwerkseitigen Vorrichtung mittels "Cell Broadcast" gesendet wurden.

12. System gemäß einem der Ansprüche 9 bis 11, wobei das Erkennungsmodul ferner dafür ausgelegt ist, zu erkennen,
 25 ob vom Endgerät ein Ruf eingeleitet werden soll, nachdem die Zeitzählung begonnen hat; und

falls während der Zeitzählung ein einzuleitender Ruf erkannt wird, ist das Zeitzählungs- und Anforderungsmodul
 dafür ausgelegt, die Zeitzählung anzuhalten, und sendet die Standortaktualisierungsanforderung sofort an die netzwerkseitige Vorrichtung; andernfalls

falls während der Zeitzählung kein einzuleitender Ruf erkannt wird, ist das Zeitzählungs- und Anforderungsmodul
 30 dafür ausgelegt, die Standortaktualisierungsanforderung an die netzwerkseitige Vorrichtung zu senden, nachdem die gezählte Zeit den zweiten Verzögerungszeitwert erreicht hat.

Revendications

35 1. Procédé de contrôle de congestion dans une mise à jour d'emplacement, comprenant les étapes suivantes :

recevoir, par un terminal, des informations de contrôle de congestion de mise à jour d'emplacement ; et
 implémenter (s102), par le terminal, un contrôle de congestion dans une mise à jour d'emplacement conformé-
 40 ment aux informations de contrôle de congestion de mise à jour d'emplacement ;

où l'implémentation, par le terminal, du contrôle de congestion dans une mise à jour d'emplacement conformé-
 ment aux informations de contrôle de congestion de mise à jour d'emplacement comprend les étapes suivantes :

obtenir (s203), par le terminal, une seconde valeur de temps de délai en utilisant un algorithme prédéfini
 45 conformément à une première valeur de temps de délai dans les informations de contrôle de congestion
 de mise à jour d'emplacement, où la première valeur de temps de délai est définie conformément aux
 circonstances du réseau ;

détecter (s204), par le terminal, si une zone d'enregistrement d'emplacement du terminal change ; et
 si un résultat de détection est que la zone d'enregistrement d'emplacement change, alors compter le temps
 par le terminal et envoyer, par le terminal, une demande de mise à jour d'emplacement à un dispositif côté
 50 réseau après que le temps compté a atteint la seconde valeur de temps de délai (s205) ;

où la première valeur de temps de délai est définie conformément aux circonstances du réseau de la
 manière suivante :

55 générer la première valeur de temps de délai conformément au nombre de terminaux demandant la
 mise à jour d'emplacement et à un paramètre de bande passante d'accès de demande d'emplacement
 du dispositif côté réseau.

2. Procédé selon la revendication 1, dans lequel l'étape comprenant de recevoir les informations de contrôle de

congestion de mise à jour d'emplacement comprend les étapes suivantes :

recevoir, par le terminal, les informations de contrôle de congestion de mise à jour d'emplacement en utilisant une diffusion cellulaire ; ou
envoyer, par le terminal, une demande de délai
et recevoir, par le terminal, les informations de contrôle de congestion de mise à jour d'emplacement conformément à la demande de délai.

3. Procédé selon les revendications 1 et 2, dans lequel l'obtention de la seconde valeur de temps de délai en utilisant l'algorithme prédéfini conformément à la première valeur de temps de délai comprend les étapes suivantes :

calculer la seconde valeur de temps de délai conformément à une priorité inhérente du terminal et à la première valeur de temps de délai ; ou
calculer la seconde valeur de temps de délai conformément à un nombre aléatoire généré par le terminal et à la première valeur de temps de délai.

4. Procédé selon l'une quelconque des revendications 2 à 3, dans lequel compter le temps par le terminal et envoyer la demande de mise à jour d'emplacement au dispositif côté réseau après que le temps compté a atteint la seconde valeur de temps de délai comprennent les étapes suivantes :

compter le temps par le terminal et détecter, par le terminal, si un appel doit être initié par le terminal ;
si un appel à initier est détecté au cours du comptage de temps, stopper, par le terminal, le comptage de temps et envoyer une demande de mise à jour d'emplacement au dispositif côté réseau ; sinon
si un appel à initier n'est pas détecté au cours du comptage de temps, envoyer, par le terminal, la demande de mise à jour d'emplacement au dispositif côté réseau après que le temps compté a atteint la seconde valeur de temps de délai.

5. Procédé selon l'une quelconque des revendications 1 à 4, dans lequel la première valeur de temps de délai est supérieure ou égale à la seconde valeur de temps de délai.

6. Procédé selon l'une quelconque des revendications 1 à 5, dans lequel la zone d'enregistrement d'emplacement est une zone d'emplacement, une zone de routage, une zone de suivi ou une zone d'enregistrement.

7. Dispositif côté réseau pour le contrôle de congestion dans une mise à jour d'emplacement, comprenant :

un module de définition (411), adapté pour définir des informations de contrôle de congestion de mise à jour d'emplacement conformément aux circonstances du réseau, où les informations de contrôle de congestion de mise à jour d'emplacement comprennent une première valeur de temps de délai ; et
un module d'envoi (412), adapté pour envoyer les informations de contrôle de congestion de mise à jour d'emplacement définies par le module de définition à un terminal de manière à implémenter, par le terminal, un contrôle de congestion dans une mise à jour d'emplacement conformément à la première valeur de temps de délai dans les informations de contrôle de congestion de mise à jour d'emplacement ;
où le module de définition (411) est adapté pour générer la première valeur de temps de délai conformément au nombre de terminaux demandant la mise à jour d'emplacement et à un paramètre de bande passante d'accès de demande d'emplacement du dispositif côté réseau.

8. Dispositif côté réseau selon la revendication 7, dans lequel :

le module d'envoi est adapté pour envoyer les informations de contrôle de congestion de mise à jour d'emplacement au terminal en utilisant une diffusion cellulaire ; ou
le module d'envoi est adapté pour envoyer les informations de contrôle de congestion de mise à jour d'emplacement conformément à une demande de délai envoyée par le terminal.

9. Système pour le contrôle de congestion dans une mise à jour d'emplacement, comprenant un dispositif côté réseau selon les revendications 7 ou 8, et un terminal, et où le terminal comprend :

un module de réception (421), adapté pour recevoir des informations de contrôle de congestion de mise à jour d'emplacement envoyées par un dispositif côté réseau, où les informations de contrôle de congestion de mise

à jour d'emplacement comprennent une première valeur de temps de délai et la première valeur de temps de délai est générée par le dispositif côté réseau conformément au nombre de terminaux demandant la mise à jour de l'emplacement et à un paramètre de largeur de bande d'accès de demande d'emplacement du dispositif côté réseau ;

un module de calcul (422), adapté pour obtenir une seconde valeur de temps de délai en utilisant un algorithme prédéfini conformément à la première valeur de temps de délai dans les informations de contrôle de congestion de mise à jour d'emplacement reçues par le module de réception ;

un module de détection (423), adapté pour détecter si une zone d'enregistrement d'emplacement du terminal change ; et

un module de comptage de temps et de demande (424), adapté pour compter le temps et envoyer une demande de mise à jour d'emplacement au dispositif côté réseau après que le temps compté a atteint la seconde valeur de temps de délai calculée par le module de calcul si un résultat de détection est que la zone d'enregistrement d'emplacement change.

10. Système selon la revendication 9, le terminal comprenant en outre :

un module de demande de délai (426), adapté pour envoyer une demande de délai au dispositif côté réseau, où le module de réception est adapté pour recevoir les informations de contrôle de congestion de mise à jour d'emplacement envoyées par le dispositif côté réseau conformément à la demande de délai.

11. Système selon les revendications 9 ou 10, dans lequel le module de réception est adapté pour recevoir les informations de contrôle de congestion de mise à jour d'emplacement envoyées par le dispositif côté réseau en utilisant une diffusion cellulaire.

12. Système selon l'une quelconque des revendications 9 à 11, dans lequel le module de détection est en outre adapté pour détecter si un appel doit être initié par le terminal après que le comptage de temps a commencé ; et si un appel à initier est détecté au cours du comptage de temps, le module de comptage de temps et de demande est adapté pour stopper le comptage de temps et envoyer la demande de mise à jour d'emplacement au dispositif côté réseau immédiatement ; sinon si un appel à initier n'est pas détecté au cours du comptage de temps, le module de comptage de temps et de demande est adapté pour envoyer la demande de mise à jour d'emplacement au dispositif côté réseau après que le temps compté a atteint la seconde valeur de temps de délai.

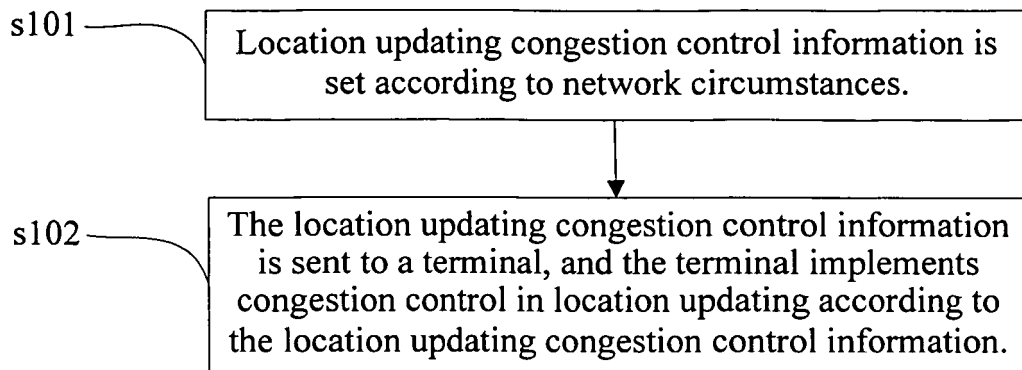


FIG. 1

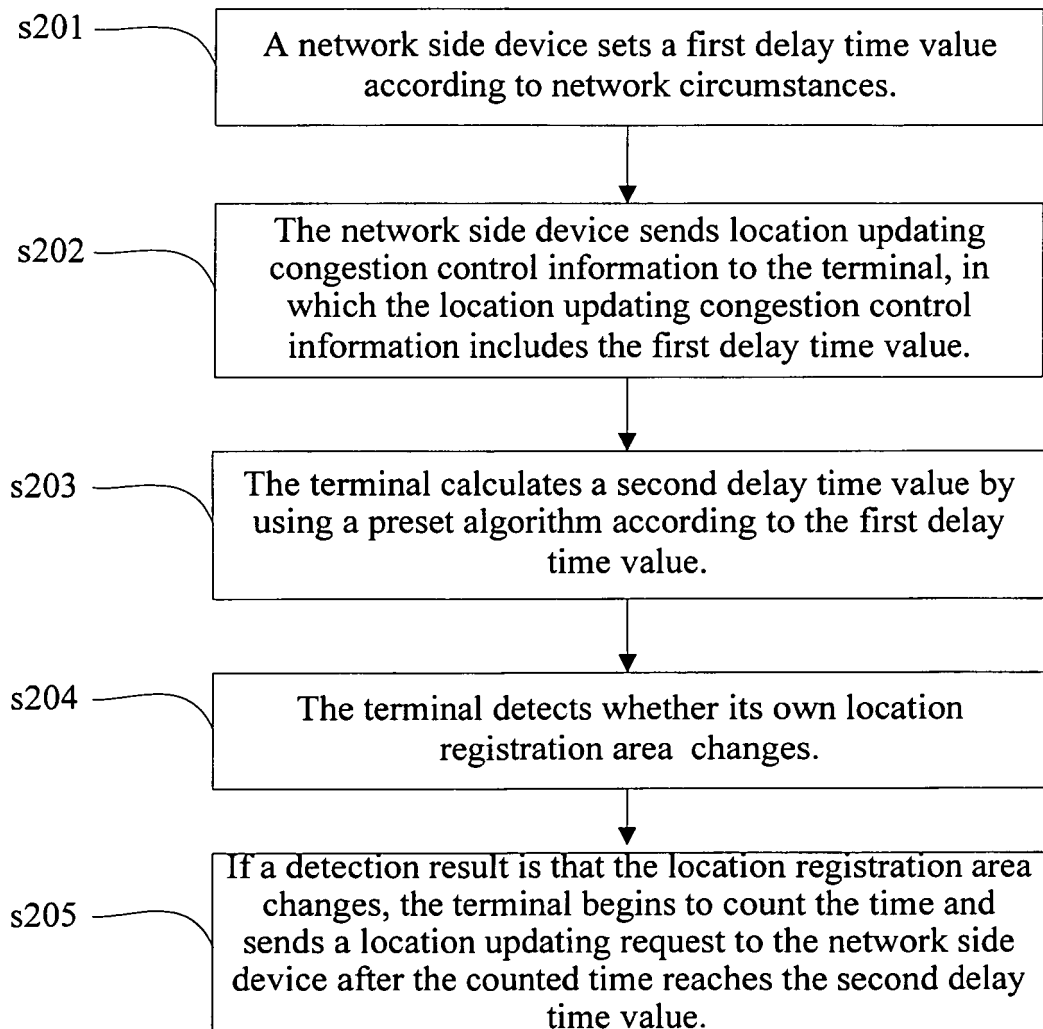


FIG. 2

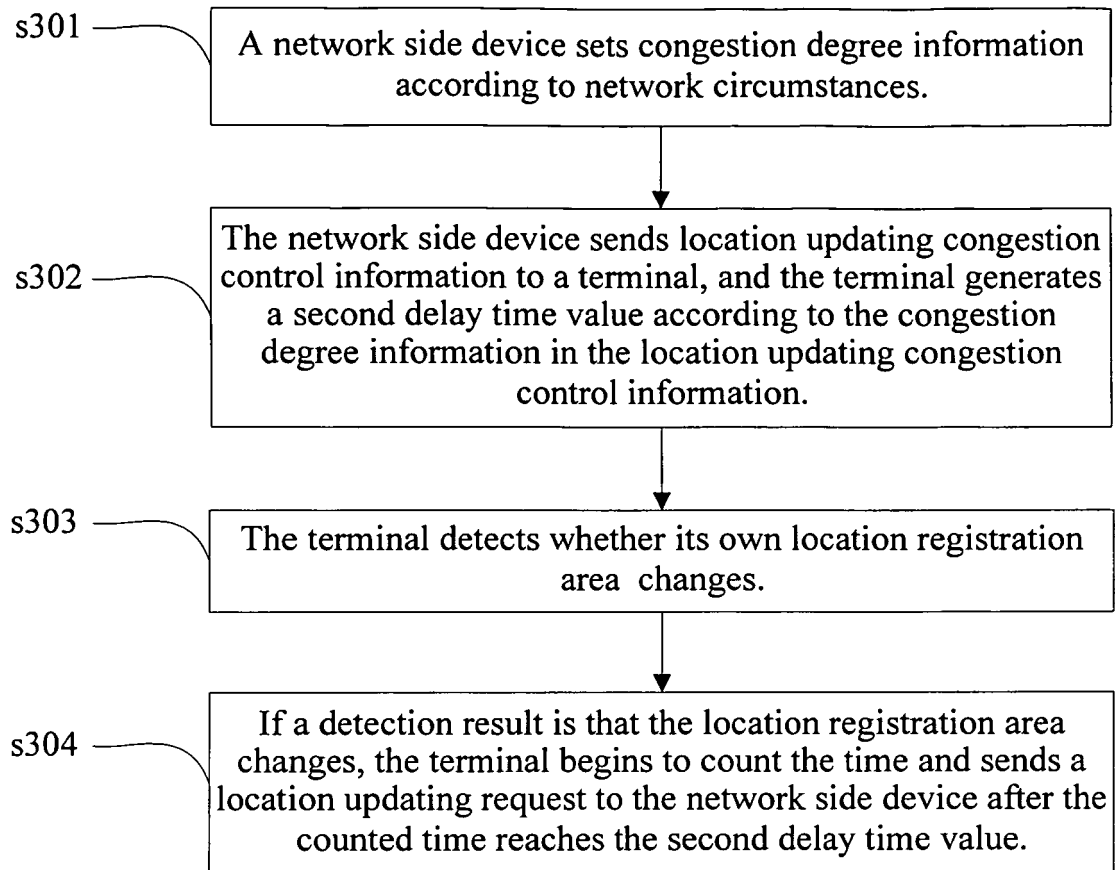


FIG. 3

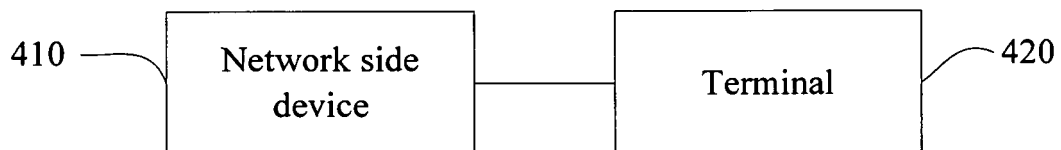


FIG. 4

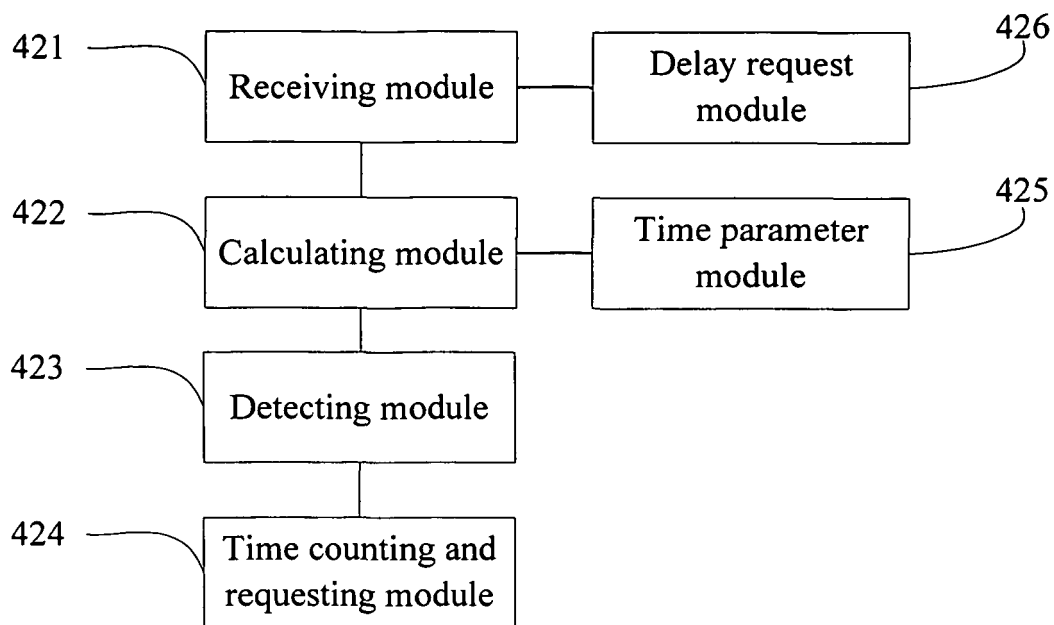


FIG. 5

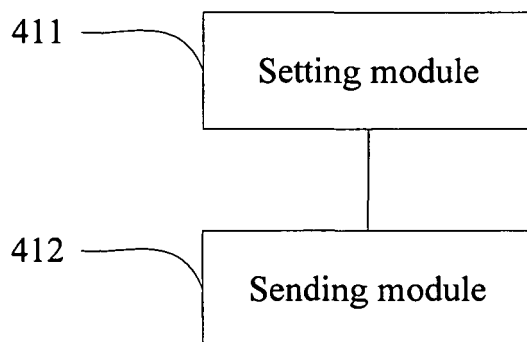


FIG. 6

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2008123811 A1 [0006]
- WO 2008123580 A1 [0007]