



EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
03.09.2014 Bulletin 2014/36

(51) Int Cl.:
C22F 1/04 ^(2006.01) **B21B 3/00** ^(2006.01)
C22C 21/00 ^(2006.01) **C22C 1/03** ^(2006.01)
C22C 1/06 ^(2006.01)

(21) Application number: **10723902.2**

(86) International application number:
PCT/CN2010/072550

(22) Date of filing: **10.05.2010**

(87) International publication number:
WO 2011/022985 (03.03.2011 Gazette 2011/09)

(54) **METHOD FOR CONTROLLING VARIATION OF GRAIN REFINING ABILITY OF AL-TI-C ALLOY
BY CONTROLLING COMPRESSION RATIO**

VERFAHREN ZUR STEUERUNG VON VARIATIONEN EINER AL-TI-C-LEGIERUNGS-
KORNVERFEINERUNGSKAPAZITÄT DURCH STEUERUNG DES
KOMPRESSIONSVERHÄLTNISSES

PROCÉDÉ DE RÉGULATION DE LA VARIATION DE LA CAPACITÉ DE RAFFINAGE DES GRAINS
DE L'ALLIAGE AL-TI-C PAR RÉGULATION DU TAUX COMPRESSION

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO SE SI SK SM TR**

• **YU, Yueming**
Shenzhen
Guangdong 518000 (CN)

(30) Priority: **05.02.2010 CN 201010110060**

(74) Representative: **ProI European Patent Attorneys**
Postfach 2123
90711 Fürth (DE)

(43) Date of publication of application:
17.08.2011 Bulletin 2011/33

(56) References cited:
EP-A2- 1 205 567 WO-A1-88/09392
WO-A1-88/09392 CN-A- 1 290 760
CN-A- 1 290 760 CN-A- 1 912 160
CN-A- 1 912 160 GB-A- 2 299 099
KR-A- 20050 003 827

(73) Proprietor: **Sun Xing Chemical & Metallurgical
Materials**
(Shenzhen) Co. Ltd.
Shenzhen, Guangdong 518000 (CN)

(72) Inventors:
• **CHEN, Xuemin**
Shenzhen
Guangdong 518000 (CN)
• **YE, Qingdong**
Shenzhen
Guangdong 518000 (CN)
• **LI, Jianguo**
Shenzhen
Guangdong 518000 (CN)
• **LIU, Chaowen**
Shenzhen
Guangdong 518000 (CN)

• **FUNG-CHI CHANG, WENG-SING HWANG,
CHUNG-HAM LEE, CHUN-FU WU, JIN-BIN YANG:**
"FORGING CONDITION FOR REMOVING
POROSITIES IN THE HYBRID CASTING AND
FORGING PREOCESS OF 7075 ALUMINUM
ALLOY CASTING", MATERIALS
TRANSACTIONS/JAPAN INSTITUTE OF
METALS, vol. 45, no. 6, 1 July 2004 (2004-07-01),
pages 1886-1890, XP002685788, JAPAN

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

- LI JIAN-GUO, HUANG MIN, MA MO, YE WEI, LIU DONG-YU, SONG DONG-MING, BAI BING-ZHE, FANG HONG-SHENG: "PERFORMANCE COMPARISON OF ALTIC AND ALTIB MASTER ALLOYS IN GRAIN REFINEMENT OF COMMERCIAL AND HIGH PURITY ALUMINUM", TRANSACTIONS OF NONFERROUS METALS SOCIETY OF CHINA, vol. 16, 1 June 2006 (2006-06-01), pages 242-253, XP002685789, China
- LIANG LIPING: 'Research on Fabrication Processes of Al-Ti-C Grain Refiners Based on SHS-meting Technology' MASTER'S DEGREE THESIS OF TAIYUAN INSTITUTE OF TECHNOLOGY May 2006, pages 37 - 43, XP008155186

Description

[0001] The present invention relates to processing techniques, especially relates to a method for controlling variations of Al(aluminum)-Ti(titanium)-C(carbon) alloy crystal grain refinement through controlling a ratio of sectional area of Al-Ti-C alloy before press processing to after press processing (namely compression ratio) during a production of the Al-Ti-C alloy.

GENERAL BACKGROUND

[0002] Currently, Al-Ti-C alloy is much popularly employing in Al material machining as a most efficient preliminary alloy for Al and Al alloy coagulation crystal grain refinement. A refinement ability of the Al-Ti-C alloy crystal grain is a very important factor when judging a quality of Al processing material. Usually, the better the Al-Ti-C alloy crystal grain refinement ability is, the higher yield strength and the better malleability of the Al material are. Therefore, the Al-Ti-C alloy manufacturers and research organizations are forward into developing improvements of the Al-Ti-C alloy crystal grain refinement ability. The US aluminum association has specially ruled an AA value to represent the crystal grain refinement ability, and the lesser the AA value is, the better the refinement ability of the Al-Ti-C alloy is. That is, the lesser AA value that the Al-Ti-C alloy added during Al and Al alloy producing process has, the more refined the crystal grain of the Al and Al alloy are. With a development of the process and refinement technology, the AA value is decreased from 250 at very beginning to 170. Presently, alloy fabrication technology is focused on material components, melting process, and such like. However, a quality control during a press process of the Al-Ti-C alloy has been ignored or indifferent to people. The press process includes mill rolling and cast extrusion machine extruding, and many believe that a ratio of the sectional area before press process to that after press process (defined as compression ratio), a variation of temperatures before and after press process, a line speed at exit, and a quantity of the standers have relations with the refinement ability of the Al-Ti-C alloy crystal grain, and there is no quantitative optimal control method for control the refinement ability of the Al-Ti-C alloy crystal grain through these respects including compression ratio.

[0003] WO 88/09392 discloses a method for the production of master alloys intended for grain refining of aluminium melts wherein it is possible to regulate the properties of the compounds with the aid of several parameters - like reaction temperature, holding times for isothermal treatments, cooling rate to casting temperature, cooling rate during treatment, titanium content, added carbon and nitrogen amounts, - based on theoretical grounds and according to practical experiments.

[0004] What is needed, therefore, is a method for controlling variations of Al-Ti-C alloy crystal grain refinement ability through controlling a compression ratio of sectional area of Al-Ti-C alloy that can overcome the above-described deficiencies.

SUMMARY

[0005] It is an object of the present invention to provide a method for controlling variations of Al-Ti-C alloy crystal grain refinement ability through controlling a compression ratio of sectional area of Al-Ti-C alloy.

[0006] One exemplary embodiment of the present invention is a method for controlling variations of Al-Ti-C alloy crystal grain refinement ability through controlling a compression ratio of sectional area of Al-Ti-C alloy including: A. establishing a relationship between variations of refinement ability of Al-Ti-C alloy crystal grain and parameters of press process of the Al-Ti-C alloy; setting the parameters of press process and controlling the variation of the refinement ability of the Al-Ti-C alloy crystal grain through controlling a value of the compression ratio.

[0007] Other novel features and advantages will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] The components in the drawings are not necessarily drawn to scale, the emphasis instead being placed upon clearly illustrating the principles of at least one embodiment of the present invention. In the drawings, like reference numerals designate corresponding parts throughout various views, and all the views are schematic.

FIG. 1 is a schematic view of continuous casting and tandem rolling manufacturing process employing a method for controlling variations of Al-Ti-C alloy crystal grain refinement ability through controlling a compression ratio of sectional area of Al-Ti-C alloy according to an exemplary embodiment of the present invention.

FIG. 2 is a schematic view of continuous casting and continuous extruding manufacturing process employing the

method for controlling variations of Al-Ti-C alloy crystal grain refinement ability through controlling a compression ratio of sectional area of Al-Ti-C alloy.

FIG. 3 is a schematic, plane structural view of part of a rolling mill used for the method for controlling variations of Al-Ti-C alloy crystal grain refinement ability through controlling a compression ratio of sectional area of Al-Ti-C alloy.

FIG. 4 is a schematic, plane structural view of a cast extrusion machine used for the method for controlling variations of Al-Ti-C alloy crystal grain refinement ability through controlling a compression ratio of sectional area of Al-Ti-C alloy.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0009] Reference will now be made to the drawings to describe preferred and exemplary embodiments in detail.

[0010] It has been proved that during a press process of the Al-Ti-C alloy, a pressure parameter of the press process is directly related with the refinement ability of the Al-Ti-C alloy crystal grain by experiments conducted by inventors of the present application using continuous casting and tandem rolling machines, and continuous casting and continuous extruding machines. The pressure parameter is closely relevant to the refinement ability of the Al-Ti-C alloy crystal grain. The following is a table 1 showing part of the experiments data.

Table 1

S_1 (mm ²)	S_2 (mm ²)	$D = \frac{S_1}{S_2}$	ΔT (°C)	V (m/s)	n	ΔAA	AA_1	AA_2
760	70.8	10.7	3	3	7	7.9	170	162
780	70.8	11.0	3	3	7	8.1	170	162
800	70.8	11.3	3	3	7	8.3	170	162
960	70.8	13.6	3	3	7	9.9	170	160
980	70.8	13.8	3	3	7	10.1	170	160
1000	70.8	14.1	3	3	7	10.4	170	160
1160	70.8	16.4	3	3	7	12.0	170	158
1180	70.8	16.7	3	3	7	12.2	170	158
1200	70.8	16.9	3	3	7	12.4	170	158
760	70.8	10.7	4	6	8	10.3	170	160
780	70.8	11.0	4	6	8	10.6	170	159
800	70.8	11.3	4	6	8	10.9	170	159
960	70.8	13.6	4	6	8	13.0	170	157
980	70.8	13.8	4	6	8	13.3	170	157
1000	70.8	14.1	4	6	8	13.6	170	156
1160	70.8	16.4	4	6	8	15.8	170	154
1180	70.8	16.7	4	6	8	16.0	170	154
1200	70.8	16.9	4	6	8	16.3	170	154
760	70.8	10.7	5	9	10	9.9	170	160
780	70.8	11.0	5	9	10	10.2	170	160
800	70.8	11.3	5	9	10	10.4	170	160
960	70.8	13.6	5	9	10	12.5	170	157
980	70.8	13.8	5	9	10	12.8	170	157
1000	70.8	14.1	5	9	10	13.0	170	157

(continued)

S_1 (mm ²)	S_2 (mm ²)	$D = \frac{S_1}{S_2}$	ΔT (°C)	V (m/s)	n	ΔAA	AA_1	AA_2
1160	70.8	16.4	5	9	10	15.1	170	155
1180	70.8	16.7	5	9	10	15.4	170	155
1200	70.8	16.9	5	9	10	15.7	170	154

[0011] There is an international standard for the Al-Ti-C alloy production that the final product of the Al-Ti-C alloy should have a diameter of 9.5mm, that is a sectional area of 70.8mm². Contents of table 1 is part of experiments data conducted by continuous casting and tandem rolling machines using a method for controlling variations of Al-Ti-C alloy .crystal grain refinement ability through controlling a compression ratio of sectional area of Al-Ti-C alloy according to an exemplary embodiment of the present invention. The continuous casting and tandem rolling machines includes a rolling mill 30 and a cooling module for Al-Ti-C alloy during a cooling press process. The cooling module includes a temperature sensor for detecting a temperature before the press process of the Al-Ti-C alloy and a temperature after the press process of the Al-Ti-C alloy. The press process of the Al-Ti-C alloy is completed through a cooperation of two rollers 31 of the rolling mill 30, and the Al-Ti-C alloy maintains solid state before, after, and during the press process. During the press process, there are two points of temperatures that one point of the temperature is before the pressure being imposed and the other point of the temperature is after the pressure being released. Before the pressure being imposed, an instantaneous temperature of the Al-Ti-C alloy is about the same as an input temperature, and after the pressure being released, an instantaneous temperature of Al-Ti-C alloy is about the same as an output temperature, therefore it is convenient to detect temperatures of the two points.

[0012] Referring to FIG. 1, Al-Ti-C alloy melt is put into a crystallize wheel 20 from a crucible 10 thereby forming an Al-Ti-C alloy bar. Thereafter, the bar-shaped Al-Ti-C alloy is put into the rolling mill 30 to conduct press process. An amount of standers of the rolling mill 30 could be 3, 4, 5, 6, 7, 8, 9 or 10. In the illustrated embodiment as shown in FIG 1, an amount of standers of the rolling mill 30 is 10. Referring to FIG. 3, one stand of the rolling mill 30 is shown in enlarged view. The two rollers 31 of the rolling mill 30 are rolling inward and toward each other. S_1 is denoted for the sectional area before press process, and S_2 is denoted for the sectional area after the press process. There are at least two temperature sensors provided therein, which are configured to detect the temperature of the Al-Ti-C alloy before the press process and the temperature of the Al-Ti-C alloy after the press process. A scope of temperatures of the Al-Ti-C alloy before the press process is between 300°C-450 °C. The temperature of the Al-Ti-C alloy is raised when being processed in the rolling mill 30. The cooling module is configured for spraying cooling fluid 50 onto the rollers 31 of the rolling mill 30. By controlling a flow rate of the cooling fluid 50, a temperature difference ΔT of the Al-Ti-C alloy before the press process and after the press process can be controlled within a proper range. In the illustrated embodiment, the cooling fluid 50 can be water. The Al-Ti-C alloy comes out from the rolling mill 30 and forms an Al-Ti-C alloy rod.

[0013] From the data shown in table 1, the relation between the parameters of the press process and the refinement ability variation ΔAA can be conclude as the formula described below:

$$\Delta AA = K \cdot D \cdot V / (\Delta T \cdot n)$$

[0014] In the formula, $\Delta AA = AA_1 - AA_2$, wherein AA_1 represents a refinement ability value of the Al-Ti-C alloy before the press process, AA_2 represents a refinement ability value of the Al-Ti-C alloy after the press process. K is a constant and can be calculated according the data of table 1 to be 5.13. D represents the compression ratio, and $D = S_1/S_2$, S_1 is denoted for the sectional area before press process, and S_2 is denoted for the sectional area after the press process. ΔT represents a temperature variation of the Al-Ti-C alloy before the press process and after the press process. V represents a line speed of the outlet, and $V = 3\Delta T - 6$, $V \geq 1$ m/s. Currently the line speed V can reach high to 30m/s. N represents the number of the standers of the rolling mill 30.

[0015] The above-mentioned formula $\Delta AA = K \cdot D \cdot V / (\Delta T \cdot n)$ is applicable to both single stander and a plurality of standers, that is, whether the computation is for total standers or for single stander, the formula is applicable. When $n=1$, the computation means for the last one of the standers, and the sectional area of the Al-Ti-C alloy products output from the last stander is 70.8mm².

[0016] In the production of the Al-Ti-c alloy, the press process parameters including temperature variation ΔT , line speed of the outlet V , and the amount of the standers are normally fixed, and through controlling on the compression

EP 2 357 263 B1

ratio of the press process of the Al-Ti-C alloy, the refinement ability variation ΔAA can be controlled precisely. As shown in table 1, when $\Delta T=4^{\circ}\text{C}$, $V=6\text{m/s}$, and $n=8$, by controlling the compression ratio D from 10.7 to 16.9, the refinement ability ΔAA can be raised from 10.3 up to 16.3, and when the AA_1 value maintains at 170, the AA_2 value can be changed from 160 to 154.

Table 2

S_1 (mm ²)	S_2 (mm ²)	$D = \frac{S_1}{S_2}$	ΔT (°C)	V (m/s)	n	ΔAA	AA_1	AA_2
760	70.8	10.7	149	3	1	1.1	170	169
780	70.8	11.0	149	3	1	1.1	170	169
800	70.8	11.3	149	3	1	1.2	170	169
960	70.8	13.6	149	3	1	1.4	170	169
980	70.8	13.8	149	3	1	1.4	170	169
1000	70.8	14.1	149	3	1	1.5	170	169
1160	70.8	16.4	149	3	1	1.7	170	168
1180	70.8	16.7	149	3	1	1.7	170	168
1200	70.8	16.9	149	3	1	1.8	170	168
1360	70.8	19.2	149	3	1	2.0	170	168
1380	70.8	19.5	149	3	1	2.0	170	168
1400	70.8	19.8	149	3	1	2.0	170	168
760	70.8	10.7	150	4	1	1.5	170	169
780	70.8	11.0	150	4	1	1.5	170	168
800	70.8	11.3	150	4	1	1.5	170	168
960	70.8	13.6	150	4	1	1.9	170	168
980	70.8	13.8	150	4	1	1.9	170	168
1000	70.8	14.1	150	4	1	1.9	170	168
1160	70.8	16.4	150	4	1	2.2	170	168
1180	70.8	16.7	150	4	1	2.3	170	168
1200	70.8	16.9	150	4	1	2.3	170	168
1360	70.8	19.2	150	4	1	2.6	170	167
1380	70.8	19.5	150	4	1	2.7	170	167
1400	70.8	19.8	150	4	1	2.7	170	167
760	70.8	10.7	149	5	1	1.8	170	168
780	70.8	11.0	149	5	1	1.9	170	168
800	70.8	11.3	149	5	1	1.9	170	168
960	70.8	13.6	149	5	1	2.3	170	168
980	70.8	13.8	149	5	1	2.4	170	168
1000	70.8	14.1	149	5	1	2.4	170	168
1160	70.8	16.4	149	5	1	2.8	170	167
1180	70.8	16.7	149	5	1	2.9	170	167
1200	70.8	16.9	149	5	1	2.9	170	167

(continued)

S_1 (mm ²)	S_2 (mm ²)	$D = \frac{S_1}{S_2}$	ΔT (°C)	V (m/s)	n	ΔAA	AA_1	AA_2
1360	70.8	19.2	149	5	1	3.3	170	167
1380	70.8	19.5	149	5	1	3.4	170	167
1400	70.8	19.8	149	5	1	3.4	170	167
760	70.8	10.7	151	6	1	2.2	170	168
780	70.8	11.0	151	6	1	2.2	170	168
800	70.8	11.3	151	6	1	2.3	170	168
960	70.8	13.6	151	6	1	2.8	170	167
980	70.8	13.8	151	6	1	2.8	170	167
1000	70.8	14.1	151	6	1	2.9	170	167
1160	70.8	16.4	151	6	1	3.3	170	167
1180	70.8	16.7	151	6	1	3.4	170	167
1200	70.8	16.9	151	6	1	3.5	170	167
1360	70.8	19.2	151	6	1	3.9	170	166
1380	70.8	19.5	151	6	1	4.0	170	166
1400	70.8	19.8	151	6	1	4.0	170	166

[0017] Contents of table 2 is part of experiments data conducted by continuous casting and continuous extruding machines designed by the applicant and using a method for controlling variations of Al-Ti-C alloy crystal grain refinement ability through controlling a compression ratio of sectional area of Al-Ti-C alloy according to an exemplary embodiment of the present invention. The continuous casting and continuous extruding machines includes a casting extrusion machine 40 and a cooling module for Al-Ti-C alloy during a cooling press process. The press process of the Al-Ti-C alloy is completed in a roller of the casting extrusion machine 40. The Al-Ti-C alloy maintains solid state before, after, and during the press process. During the press process, there are two points of temperatures that one point of the temperature is before the pressure being imposed and the other point of the temperature is after the pressure being released. Before the pressure being imposed, an instantaneous temperature of the Al-Ti-C alloy is about the same as an friction heat temperature, and after the pressure being released, an instantaneous temperature of Al-Ti-C alloy is about the same as an temperature outputted from the casting extrusion machine 40, therefore it is convenient to detect temperatures of the two points.

[0018] Referring to FIG. 2, Al-Ti-C alloy melt is put into a crystallize wheel 20 from a crucible 10 thereby forming an Al-Ti-C alloy bar. Thereafter, the bar-shaped Al-Ti-C alloy is put into the casting extrusion machine 40 to conduct press process.

[0019] Referring to FIG. 2, Al-Ti-C alloy melt is put into a crystallize wheel 20 from a crucible 10 thereby forming an Al-Ti-C alloy bar. Thereafter, the bar-shaped Al-Ti-C alloy is put into the casting extrusion machine 40 to conduct press process. An amount of the standers of the casting extrusion machine 40 is as shown in FIG 2. Referring to FIG 4, S_1 is denoted for the sectional area before press process, and S_2 is denoted for the sectional area after the press process. There are at least two temperature sensors provided therein, which are configured to detect the temperature of the Al-Ti-C alloy before the press process and the temperature of the Al-Ti-C alloy after the press process. The temperature of the Al-Ti-C alloy is raised when being processed in the casting extrusion machine 40 and the Al-Ti-C alloy is altered into semifluid. The cooling module spraying cooling fluid into the casting extrusion machine 40. By controlling a flow rate of the cooling fluid, a temperature difference ΔT of the Al-Ti-C alloy before the press process and after the press process can be controlled within a proper range. In the illustrated embodiment, the cooling fluid can be water. The Al-Ti-C alloy comes out from the casting extrusion machine 40 and forms an Al-Ti-C alloy rod.

[0020] From the data shown in table 1, the relation between the parameters of the press process and the refinement ability variation ΔAA can be conclude as the formula described below:

$$\Delta AA = K \cdot D \cdot V / (\Delta T \cdot n)$$

[0021] In the formula, $\Delta AA = AA_1 - AA_2$, wherein AA_1 represents a refinement ability value of the Al-Ti-C alloy before the press process, AA_2 represents a refinement ability value of the Al-Ti-C alloy after the press process. K is a constant and can be calculated according the data of table 1 to be 5.13. D represents the compression ratio, and $D = S_1/S_2$, S_1 is denoted for the sectional area before press process, and S_2 is denoted for the sectional area after the press process. ΔT represents a temperature variation of the Al-Ti-C alloy before the press process and after the press process. V represents a line speed of the outlet. N represents the number of the standers of the casting extrusion machine 40, and $n=1$.

[0022] The above-mentioned formula $\Delta AA = K \cdot D \cdot V / (\Delta T \cdot n)$ is applicable to casting extrusion machine 40 with single stander. When $n=1$, the computation means for the last one of the standers, and the sectional area of the Al-Ti-C alloy products output from the last stander is 70.8mm².

[0023] In the production of the Al-Ti-c alloy, the press process parameters including temperature variation ΔT , line speed of the outlet V, and the amount of the standers are normally fixed, and through controlling on the compression ratio of the press process of the Al-Ti-C alloy, the refinement ability variation ΔAA can be controlled precisely. As shown in table 2, when $\Delta T=150^\circ\text{C}$, $V=4\text{m/s}$, and $n=1$, by controlling the compression ratio D from 10.7 to 19.8, the refinement ability ΔAA can be raised from 1.5 to 2.7, and when the AA_1 value maintains at 170, the AA_2 value can be changed from 169 to 167.

[0024] The method for controlling variations of Al-Ti-C alloy crystal grain refinement ability through controlling a compression ratio of sectional area of Al-Ti-C alloy has overcome the deficiencies of conventional technique for Al-Ti-C alloy process, and proved that variations of the refinement ability can be controlled through controlling a compression ratio of sectional area of Al-Ti-C alloy. By adopting the present invention, with the parameters of press process, the temperature variation before and after the press process, the line speed of outlet, and the amount of the standers being set fixed, the variations of the refinement ability of Al-Ti-C alloy crystal grain can be precisely controlled by controlling the compression ratio. The greater the variation is, the better the refinement ability of Al-Ti-C alloy crystal grain is with a certain AA value before the press process and a lesser AA value after the press process.

[0025] It is to be understood, however, that even though numerous characteristics and advantages of exemplary and preferred embodiments have been set out in the foregoing description, together with details of the structures and functions of the embodiments, the disclosure is illustrative only, and changes may be made in detail, especially in matters of shape, size, and arrangement of parts within the principles of the invention to the full extent indicated by the broad general meaning of the terms in which the appended claims are expressed.

Claims

1. A method for controlling variations of Al-Ti-C alloy crystal grain refinement ability through controlling a compression ratio of sectional area of Al-Ti-C alloy comprising:

A. establishing a relationship between variations of refinement ability of Al-Ti-C alloy crystal grain and parameters of press process of the Al-Ti-C alloy:

$$\Delta AA = K \cdot D \cdot V / (\Delta T \cdot n)$$

wherein $\Delta AA = AA_1 - AA_2$, AA_1 represents a refinement ability value of the Al-Ti-C alloy before the press process, AA_2 representing a refinement ability value of the Al-Ti-C alloy after the press process, K being a constant, wherein $D = S_1/S_2$, S_1 being denoted for the sectional area before press process, and S_2 being denoted for the sectional area after the press process, wherein ΔT represents a temperature variation of the Al-Ti-C alloy before the press process and after the press process, V representing a line speed of an outlet, n representing a number of the standers of process machine;

B. setting the parameters V, ΔT , and n, and controlling the ΔAA value through controlling a value of the compression ratio D.

Patentansprüche

1. Verfahren zum Steuern von Variationen einer Al-Ti-C-Legierungskristall-Kornverfeinerungsfähigkeit durch Steuern eines Kompressionsverhältnisses der Querschnittsfläche der Al-Ti-C-Legierung, das aufweist:

A. Herstellen einer Beziehung zwischen Variationen der Verfeinerungsfähigkeit des Al-Ti-C-Legierungskristallkorns und Parametern des Pressprozesses der Al-Ti-C-Legierung:

$$\Delta AA = K \cdot D \cdot V / (\Delta T \cdot n)$$

wobei $\Delta AA = AA_1 - AA_2$, AA_1 einen Verfeinerungsfähigkeitswert der Al-Ti-C-Legierung vor dem Pressprozess repräsentiert, AA_2 einen Verfeinerungsfähigkeitswert der Al-Ti-C-Legierung nach dem Pressprozess repräsentiert, K eine Konstante ist, wobei $D = S_1/S_2$, S_1 die Querschnittsfläche vor dem Pressprozess bezeichnet, und S_2 die Querschnittsfläche nach dem Pressprozess bezeichnet, wobei ΔT eine Temperaturvariation der Al-Ti-C-Legierung vor dem Pressprozess und nach dem Pressprozess repräsentiert, V eine Maschinengeschwindigkeit am Auslass repräsentiert, n eine Anzahl der Ständer der Verarbeitungsmaschine repräsentiert;

B. Einstellen der Parameter V , ΔT und n , und Steuern des ΔAA -Werts durch Steuern eines Werts des Kompressionsverhältnisses D .

Revendications

1. Procédé de régulation de la variation de la capacité de raffinage des grains cristallins d'un alliage Al-Ti-C par régulation d'un taux de compression de zones de section de l'alliage Al-Ti-C, comprenant :

A. la formulation d'une relation entre des variations de la capacité de raffinage des grains cristallins de l'alliage Al-Ti-C, et des paramètres du processus de compression de l'alliage Al-Ti-C :

$$\Delta AA = K \cdot D \cdot V / (\Delta T \cdot n)$$

où $\Delta AA = AA_1 - AA_2$, AA_1 représentant une valeur de capacité de raffinage de l'alliage Al-Ti-C avant le processus de compression, AA_2 représentant une valeur de capacité de raffinage de l'alliage Al-Ti-C après le processus de compression, K étant une constante, où $D = S_1/S_2$, S_1 désignant la zone de section avant le processus de compression, et S_2 la zone de section après le processus de compression, ΔT représentant une variation de température de l'alliage Al-Ti-C avant le processus de compression et après le processus de compression, V représentant une vitesse linéaire d'une sortie, n représentant un nombre de montants de la machine ;

B. la définition des paramètres V , ΔT et n , et la régulation de la valeur ΔAA par régulation d'une valeur du taux de compression D .

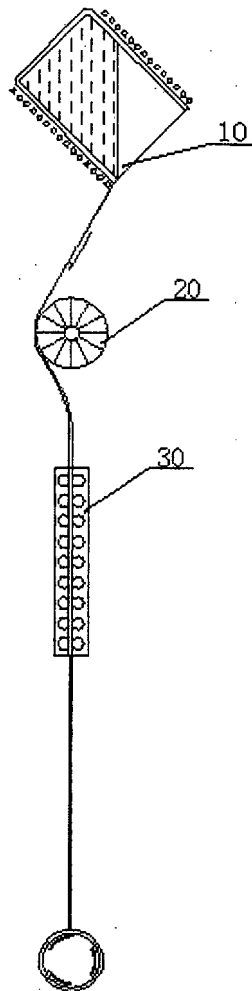


FIG. 1

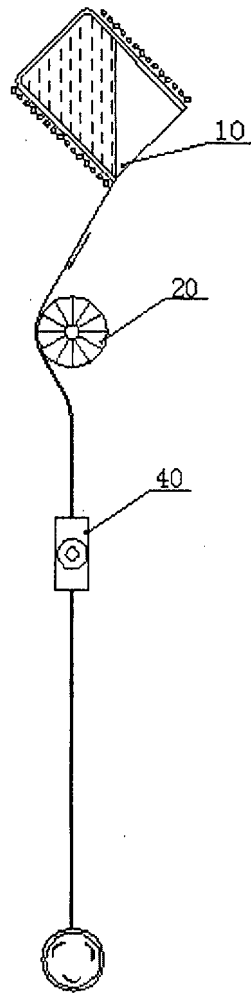


FIG. 2

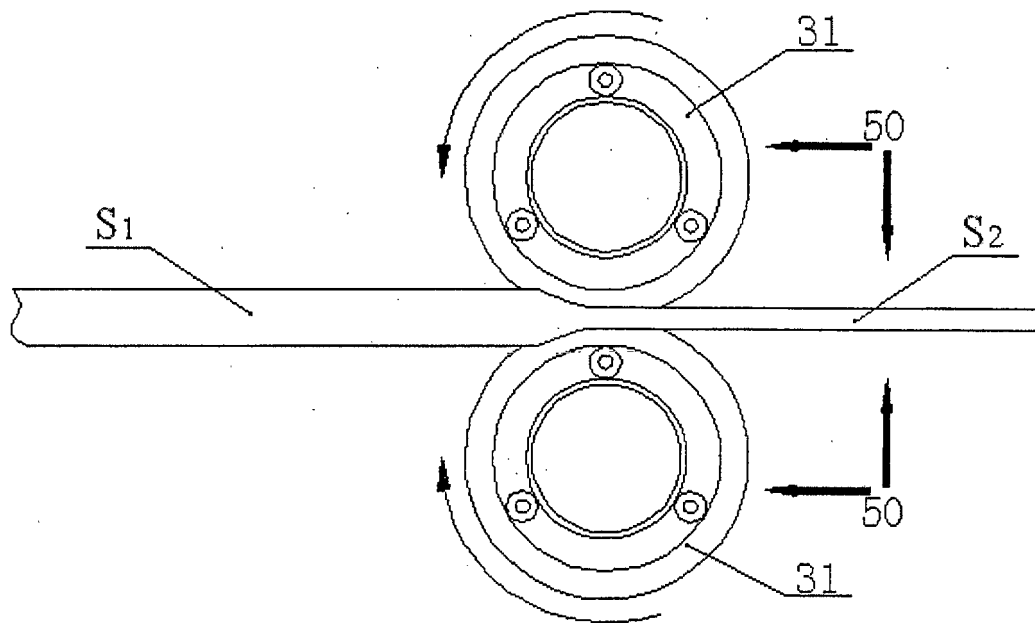


FIG. 3

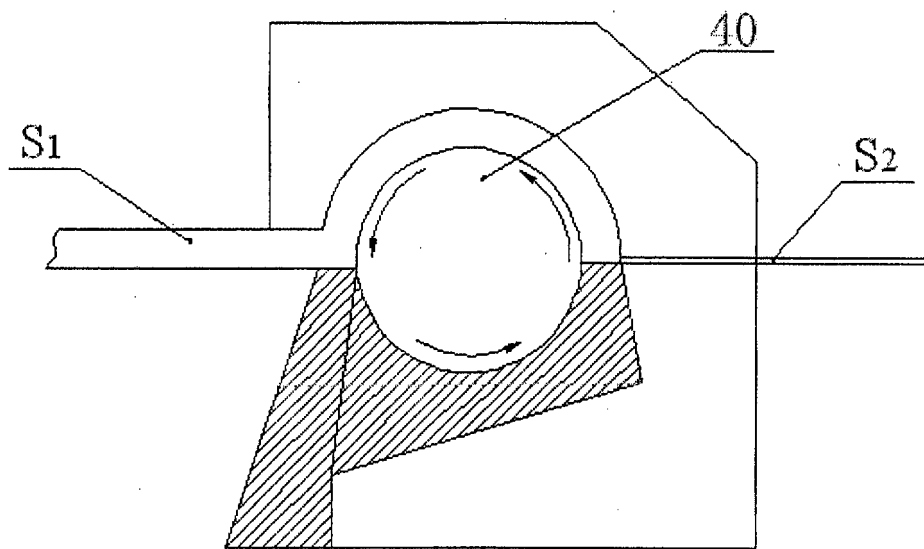


FIG. 4

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 8809392 A [0003]