



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
24.08.2011 Bulletin 2011/34

(51) Int Cl.:
A47L 15/42^(2006.01) A47L 15/22^(2006.01)

(21) Application number: **11003775.1**

(22) Date of filing: **08.08.2007**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE SI SK TR

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
07015582.5 / 2 022 385

(71) Applicant: **Electrolux Home Products Corporation N.V.**
1130 Brussel (BE)

(72) Inventors:
• **Füglein, Stefan**
90427 Nürnberg (DE)

• **Stahlmann, Rolf**
91639 Wolframs-Eschenbach (DE)
• **Elger, Gordon**
35132 Padova (IT)
• **Rousset, Matthieu**
33170 Pordenone (IT)

(74) Representative: **Röder, Richard**
Electrolux Rothenburg GmbH
Factory and Development
90327 Nürnberg (DE)

Remarks:

This application was filed on 09-05-2011 as a divisional application to the application mentioned under INID code 62.

(54) **Dishwasher**

(57) Dishwasher, comprising a first wash circulation system (7) with a wash circulation pump (6) to circulate washing liquid from a sump (5) to at least one spray device (3, 4) arranged in a wash tank (2) and a second circulation system (10) comprising a further pump and a filtration device (11) to filter washing liquid independently from actuation of the circulation pump (6) of the first circulation system (7), wherein the further pump is the drain pump (13) and the second circulation system (10) comprises a sedimentation chamber (17) located downstream of the drain pump (13) and having a filter (12), in particular a micro fine filter (12), in its upper part, wherein the dishwasher (1, 1', 1'') comprises a junction (15) having at least one inlet connected to the outlet side of the drain pump (13) and at least two outlets, wherein a first outlet is connected to the sedimentation chamber (17) and a second outlet is connected to a drain tube (14) for final drainage of washing liquid.

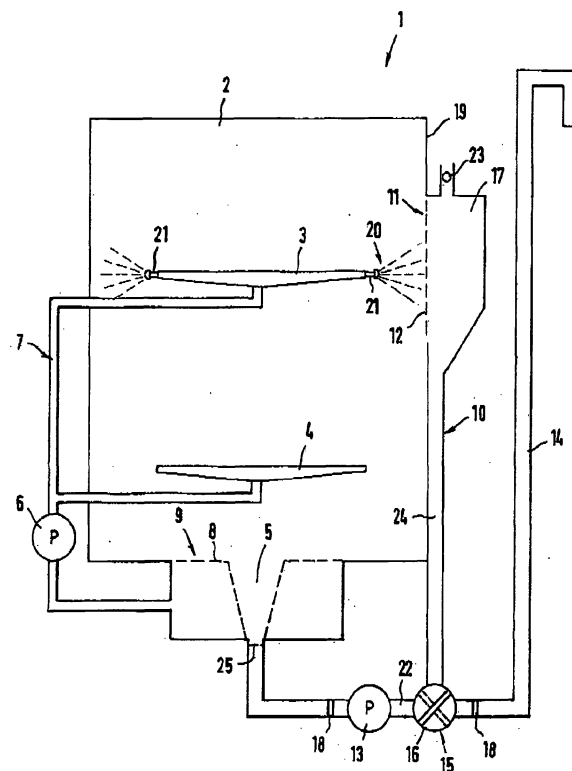


FIG. 1

Description

[0001] The invention concerns a dishwasher, comprising a first wash circulation system with a wash circulation pump to circulate washing liquid from a sump to at least one spray device arranged in a wash tank.

[0002] In known dishwashers, washing liquid is normally drawn from a sump at the bottom of a wash tank, pumped by a circulation pump into spray arms distributing the wash liquid within the wash tank to remove soils from dishes located in dish baskets in the tank.

[0003] To prevent the redistribution of soil onto the dishes, various filter devices are known. These filters separate soil out of the circulating wash liquid. Two basic solutions are known in the art.

[0004] In one solution, a filter screen or filter mesh is deposited on the outlet side of the circulation pump. A fine filter or even a micro fine filter can be used. However, the risk of clogging of the filter exists. Typically, backwash jets are directed against the filter in an attempt to clear the filter and prevent clogging. However, to drive these backwash jets, the circulation pump itself needs to be actuated so that the backwash jets work against a high pressure so that cleaning may be incomplete. Additionally, behind a clogged filter increasing pressure builds up so that soil is pressed into the filter and embedding itself fixedly, so that it cannot be easily removed.

[0005] Another known solution is to arrange a filter in the sump, normally comprising a fine filter surrounding the final drain inlet where only a coarse filter is provided. Backwashing or cleaning filter is very complex and sophisticated in such a case, so that usually no micro-fine filters are used. Water or washing liquid passing the circumferential fine filter is recirculated again by the circulation pump.

[0006] In general, filter clogging can adversely effect the dishwashers cleaning ability, causing poor washability and indirectly increased water and energy consumption.

[0007] An additional drawback of these filtering solutions is that filtering and, if applicable, filter cleaning, all depend on the actuation of the circulation pump. The design of the washing cycles is therefore limited as the filtration process is not independently controllable. Moreover, soil particles are recirculated through the circulation system causing clogging not only of the filter device.

[0008] It is therefore the object of the present invention to provide a dishwasher with an improved filtration system essentially obviating the aforementioned drawbacks of the state of the art.

[0009] According the present invention, such an aim is reached in a dishwasher of the above mentioned type, wherein a second circulation system comprising a further pump and a filtration device is provided to filter washing liquid independently from actuation of the circulation pump of the first circulation system.

[0010] In the dishwasher according to the invention, a second circulation system is provided, which is dedicated

to the process of filtering the washing liquid. The circulation pump of the first circulation system and the further pump driving the second circulation system can be controlled independently. Filtration and filter cleaning no longer effect the washing cycle itself, so that the freedom for cycle design is increased. Phases with 100 % filtration and/or 100 % filter cleaning are now possible.

[0011] Additionally, less soil particles are deposited in the first circulation system, causing clogging or the like.

The separation of the circulation of the washing liquid and the filtering also allows an improved dirt handling. Soil can be pumped out of the dishwasher without actuating the circulation pump of the first circulation system.

[0012] Another advantage of the current invention is that a flat sump design can be achieved, since the filtration device no longer needs to be positioned in the sump itself, as well as backwashing devices. A reduction of the total water volume in the sump is possible.

[0013] The filtration device can comprise a micro fine filter and/or a fine filter. 100 % micro fine filtering is now possible without the risk of adversely effecting the dishwashers cleaning ability.

[0014] Preferably, at least one filter of the filtration device forms part of the wall of the wash tank. This filter can for example be a filter screen or a filter mesh and is preferably a micro fine filter. In this manner, a visible clue to the improved filtering is given to the customer. Additionally, easy replacement of the filter is possible and space is effectively used.

[0015] In such a configuration, a device for backwashing the filter can advantageously be provided in the wash tank. In one variation, the device for backwashing the filter comprises nozzles located at the outwardly facing ends of at least one spray arm. The device for backwashing the filter is preferably driven by the circulation pump of the first circulation system, while the further pump is not active. Cleaning of the filter forming part of the wall of the wash tank can in this manner be effected at the same time the dishes are washed.

[0016] It is to be noted that in the dishwasher according to the invention no high pressure needs to be built up against the filter of the filtration device. If, for example, a micro fine filter forms part of the wall of a wash tank, washing liquid containing soil particles only needs to be pumped up at a pressure which allows the washing liquid to run through the filter being part of the wall of the wash tank. Consequently, minimal pressure is exerted on the micro fine filter itself. Soil particles therefore do not tend to be embedded into the filter and can for example easily be backwashed by a device for backwashing the filter. This contrasts the aforementioned state of the art, wherein the filtration device is part of the first circulation system and is subject to high pressure.

[0017] It is, however, possible that the first circulation system also comprises a filtration device. Typically, this additional filtration device will only comprise coarse filters and/or fine filters, so that micro fine filtering remains the domain of the second circulation system.

[0018] Such an additional filtration device or part of the filtration device of the second circulation system may be located in the sump. For example, the already known fine filter placed in the sump can be used for the first as well as for the second circulation system. In other embodiments, the additional filtration device or the part of the filtration device located in the sump only apply to the first or the second circulation system. Such an additional filtration device, or part of the filtration device, can, if assigned to the second circulation system, act as a prefiltering stage for a micro fine filter, for example forming part of the wall of the wash tank.

[0019] According to the invention, the further pump is the drain pump. This means, the drain pump not only drives the draining of water out of the dishwasher, but also the second circulation system. Advantageously, no additional pump is needed in this configuration. A control unit of the dishwasher may then independently control operation of the drain pump so that either draining or filtration/cleaning of the filter or the filters is effected. To prevent the backflow of water containing soil particles into the sump from the filtration device, a backflow valve can be provided upstream of the drain pump.

[0020] The second circulation system comprises a sedimentation chamber located downstream of the drain pump and having a filter, in particular a micro fine filter, in its upper part. In this configuration, water is pumped into the sedimentation chamber by the drain pump, at a pressure such that the water level just reaches the filter arranged in the upper part of the sedimentation chamber wall. The filter can, like already mentioned, form a part of the wall of the wash tank. The soil particles, which cannot pass the filter, remain in the sedimentation chamber. Once actuation of the drain pump is stopped, due to the backflow valve, washing liquid may remain in the sedimentation chamber and the soil particles slowly begin to sediment, i.e. sink down to the bottom of the sedimentation chamber, where they can be simply drained away.

[0021] Washing liquid should not be drained through the sedimentation chamber, because in this case it would simply flow back into the wash tank through the filter. Therefore, the dishwasher may comprise a junction having at least one inlet connected to the outlet side of the drain pump and at least two outlets, wherein a first outlet is connected to the sedimentation chamber and a second outlet is connected to a drain tube for final drainage of washing liquid. To prevent the draining of washing liquid during filtration, a u-like bend of the drain tube for finally draining washing liquid can be located higher than the highest point of the second circulation system, in particular the sedimentation chamber. In such a configuration, if washing liquid is pumped by the drain pump at a low pressure, the water level can only be raised to reach the filter located in the sedimentation chamber, but no water is drained. If driven at a higher speed, water can be drained. Still, the possibility exists that washing liquid may flow back into the wash tank during draining.

[0022] Thus, preferably a switch is provided at the junction,

wherein the switch is adapted to selectively connect at least the inlet and the first outlet and the inlet and the second outlet. The at least two positions of the switch correspond to "filtration", i.e. use of the second circulation system, and "draining". If the switch is in a first position, connecting the inlet with the first outlet, washing liquid is circulated through the second circulation system, passing the sedimentation chamber and the filter. Please note that when the pump is turned off, soil particles begin to sink down to the bottom of the sedimentation chamber, which can preferably be adjacent to the junction and the switch. To drain water from the dishwasher, the switch is in the second position, connecting the inlet with the second outlet. On actuation of the pump, water is drained from the dishwasher. At this time, water can be reloaded from the sedimentation chamber by turning the pump off and switching the switch back to the first position, so that water and soil particles residing at least in the lower part of the sedimentation chamber flow into the tub section between the backflow valve or the drain pump and the junction. Then again, the switch is actuated into the second position and the soil-laden washing liquid can easily be drained. Depending on how much washing liquid can flow back from the sedimentation chamber, this process can be repeated one or more times. In this manner, at least in multiple steps, the sedimentation chamber can be fully drained. Even heavy dirt can be handled. If the filter of the sedimentation chamber is formed as part of the wall of the wash tank and a device for backwashing the filter is used to clean the filter, the water accumulating in the sedimentation chamber can also be drained in this manner.

[0023] In another variant, an outlet in the upper part of the sedimentation chamber can be connected to the drain tube such that an overflow for a completely filled sedimentation chamber is formed. In this manner, if the filter is clogged or the drain pump is driven at a too high speed, washing liquid can be drained. However, such an overflow can also be used to effect a tangential cleaning of the filter. Thus, preferably, if such an overflow is provided, the drain pump is controllable to effect a tangential cleaning of the filter. This means, the drain pump is driven at a high speed so that the water passes tangentially along the filter in the sedimentation chamber, taking along the soil particles which are drained through the overflow and subsequently through the drain tube.

[0024] Additionally, if such an overflow is provided and, especially when the u-like bend of the drain tube is located higher than the highest point of the overflow, a backflow valve can be provided downstream of the outlet of the sedimentation chamber.

[0025] In a third variant, the junction can comprise a second inlet connected to an outlet in the upper part of the sedimentation chamber such that an overflow for a completely filled sedimentation chamber is formed and the switch can be actuated so that the first inlet is connected to the first outlet and at the same time the second inlet is connected to the first outlet, and so that the first

inlet is connected to the second outlet. The first position of the switch, connecting the first inlet to the first outlet and the second inlet to the second outlet allows for filtration of the washing liquid at a low speed of the drain pump. Even if the filter is clogged in such a situation, overflowing washing liquid can simply be drained through the final drain tube. If the pump is driven at a higher speed, tangential cleaning of the filter can be effected and the washing liquid is directly drained to the drain tube. If the switch is in the second position, connecting the first inlet to the second outlet, washing liquid can be directly be drained.

[0026] In a further development of this third variant, the switch can additionally be actuated so that the first inlet is connected to the first outlet and at the same time the second inlet and the second outlet are closed. This third position is especially preferable if a sensor device adapted to sense a clogging of the filter is used, for example a hydrostatic sensor connected to the upper end of the sedimentation chamber. If during filtration of the washing liquid the filter is clogged, washing liquid filling the overflow is not drained through the drain tube, but confined to the overflow so that a strong increase in pressure can be measured. Adequate measures can be taken in such a case, like notifying the user that the filter is to be cleaned. Cleaning or draining of the filter is again effected in the first position of the switch, when the second inlet is connected to the second outlet.

[0027] A flat sump can be realised, possibly comprising a flat fine filter acting as a pre-filtering stage for the filtration system.

[0028] A sensor device adapted to sense a clogging of the filter can be provided. This sensor device can be hydrostatic sensor, which, in case a sedimentation chamber is provided, can be connected to the upper end of the sedimentation chamber. Advantageously, clogging of the filter can be detected in such a configuration and countermeasures can be taken and/or a warning can be output to a user to exchange or manually clean the filter.

[0029] Please note that the first wash circulation system, filtration devices as such, especially filters located in the sump, are considered well-known by the person skilled in the art and will not be discussed in detail in this description.

[0030] Further advantages and details of the current invention can be learned from the following description of preferred embodiments in connection with the drawings, wherein:

Fig. 1 is a schematic diagram of a dishwasher according to the first variant of the invention,

Fig. 2 is a schematic diagram showing a dishwasher according to the second variant of the invention,

Fig. 3 is a schematic diagram of a dishwasher according to a third variant of the invention,

Fig. 4 is a view showing a switch used in the dishwasher of Fig. 3,

Fig. 5 shows different positions of the switch of Fig. 4,

[0031] Fig. 1 shows a dishwasher 1 according to the first variant of the invention. It comprises a wash tank 2 wherein soiled dishes can be loaded in dish baskets (not shown) to be washed. Two spray arms 3, 4 are provided in the wash tank 2. During operation of the dishwasher 1, washing liquid is drawn from a sump 5 by a circulation pump 6 and recirculated into the wash tank 2 via the spray arms 3, 4. While circulating in this first circulation system 7, the washing liquid passes a flat fine filter 8 located in the sump 5. In this variant, the fine filter 8 is part of a filtration device 9 of the first circulation system 7. However, filtration in the first circulation system 7 depends on the actuation of the circulation pump 6, and no micro fine filtering is available. A coarse filter 25 can be provided in the sump 5 where washing liquid is drained.

[0032] According to the invention, the dishwasher 1 comprises a second circulation system 10 comprising a filtration device 11 with a micro fine filter 12 to filter washing liquid independently from actuation of the circulation pump 6 of the first circulation system 7. The second circulation system 10 is driven by the drain pump 13, by which usually water is drained from the sump 5 to a drain tube 14. To effect draining of washing liquid as well as filtering of washing liquid by the same drain pump 13, the dishwasher 1 comprises a junction 15 with a switch 16. The junction 15 has one inlet connected to the outlet side of the drain pump 13 and two outlets, namely a first outlet connected to a sedimentation chamber 17 and a second outlet connected to the drain tube 14. The switch 16 can be actuated between two positions. In a first position, the inlet is connected to a first outlet, in a second position the inlet is connected to the second outlet. Also provided are backflow valves 18 preventing the flowback of water into the sump 5 or the sedimentation chamber 17. Please note that the narrow, lower portion 24 is also a part of the sedimentation chamber 17.

[0033] The micro fine filter 12 is arranged so that it forms part of the wall 19 of the wash tank 2. Washing liquid passing through the micro fine filter 12 from the sedimentation chamber 17 is directly recirculated into the wash tank 2.

[0034] Additionally, the micro fine filter 12 can easily be cleaned by backwashing using a device 20 for backwashing the filter 12 located in the wash tank 2. The device 20 comprises nozzles 21 arranged circumferentially around the upper spray arm 3 facing outwardly, so that backwash jets ejected from the nozzles 21 hit the micro fine filter 12, thereby cleaning it.

[0035] Of course, additional nozzles aimed at the filter 12 can be provided at the lower spray arm 4 or other spray devices.

[0036] In this configuration, a filtration process or phase is independent from actuation of the circulation

pump 6. The filtration process will now be described in more detail.

[0037] If the washing liquid is to be filtered, the switch 16 is actuated into the first position, connecting the inlet to the first outlet and therewith the sedimentation chamber 17. The drain pump 13 is now actuated at a speed which raises the washing liquid level in the sedimentation chamber to a height in which washing liquid can just pass the filter 12. In this manner, the pressure exerted on the filter 12 is as low as possible, preventing soil particles from being pressed into the filter mesh or screen. This means, soil particles at or in the filter 12 can usually still be removed by actuation of the device 20 for backwashing the filter 12. At the end of the filtration phase the drain pump 13 is stopped and the switch 16 is actuated to the second position, now connecting the inlet to the second outlet and therewith the drain tube 14. Meanwhile, the soil particles in the remaining column of washing liquid filling the sedimentation chamber 17 begin to sink down to the bottom of the sedimentation chamber 17, i.e. the lower portion 24. There, the sedimented particles remain close to the switch 16.

[0038] With the switch 16 in the second position, washing liquid can be drained from the sump 5 to the drain tube 14. Now, the portion 22 between the sump-side backflow valve 18 and the switch 16 can at least partly be emptied. In this condition, the switch 16 is again actuated into the first position so that at least part of the washing liquid column in the sedimentation chamber 17, in particular the lower part containing the soil particles, flows into the portion 22. The switch 16 is then again actuated into the second position, so that the washing liquid reloaded from the sedimentation chamber 17 containing the soil particles can be drained through the drain tube 14. This process of draining the sedimentation chamber 17 can, if required, be repeated one or several times, for example, if it cannot be completely drained in one step. In this case, after the portion 22 has been at least partly emptied, the switch is again actuated into the first position, washing liquid from the sedimentation chamber 17 containing soil particles is drained into the portion 22, the switch is again actuated into the second position, and the washing liquid is drained.

[0039] After or during the actuation of the device 20 for backwashing the filter 12, this process of draining the sedimentation chamber 17 is also effected.

[0040] In this manner, the soil filtered out from the washing liquid can easily be drained without consuming too much washing liquid. Additionally, a smaller sump can be realised as the filtration of the washing liquid takes place in the filtration device 11.

[0041] The micro fine filter 12 as part of the wall 19 of the wash tank 2 can be seen by the user looking into the dishwasher, assuring him of a good cleaning performance wherein soil particles are less often recirculated through the first circulation system 7. Additionally, the micro fine filter 12 can easily be disassembled and cleaned by hand.

[0042] The dishwasher also comprises a hydrostatic sensor 23, located at the upper end of the sedimentation chamber 17. In the rare case of a clogged filter 12, the hydrostatic sensor 23 measures a high pressure and therefore countermeasures and/or warnings to the user can be effected.

[0043] Fig. 2 shows a dishwasher 1' according to the second variant, wherein like parts are designated by like numerals.

[0044] In particular, the first circulation system 7 and the part of a filter device 9 located in the sump 5 are similar in all embodiments, thus, the description is omitted in the following.

[0045] In the variant of fig. 2, the drain pump 13 also acts as a further pump, having a switch 16 at a junction 15 downstream. However, differing from the variant in fig. 1, an outlet 26 is provided in the upper part of the sedimentation chamber 17. This outlet 26 is connected to the final drain tube 14 so that an overflow 27 of a completely filled sedimentation chamber 17 is formed. To prevent washing liquid from flowing back from the drain tube 14 through the overflow 27 into the sedimentation chamber 17, a backflow valve 28 is provided along the overflow 27.

[0046] Apart from acting as an overflow 27 for the sedimentation chamber 17, thus preventing an excess pressure on the filter 12, the overflow 27 may be used in a tangential cleaning step for the filter 12. During tangential cleaning, the switch 16 is in a first position, so that the inlet on the drain pump 13 side and the first outlet leading to the sedimentation chamber are connected. The drain pump 13 is then driven at a high speed, so that washing liquid passes tangentially upwards along the filter 12, which again can be a micro fine filter, taking with it soil particles sticking to the filter or sedimented in the sedimentation chamber 17. The soil-laden washing liquid then passes through the overflow 27 and is discharged through the drain tube 14.

[0047] If tangential cleaning is effected, a device 20 for backwashing the filter 12 is in principle not needed, but may additionally be provided. Please note that soil accumulated in the lower portion 24 of the sedimentation chamber 17 can also be drained using the same process as described with reference to fig. 1, i.e. at least partly emptying the section 22, moving the switch 16 to the first position, moving the switch 16 to the second position and again driving the pump.

[0048] Thus, in this second variant, cleaning of the filter 12 is improved as tangential cleaning becomes possible.

[0049] A third variant of a dishwasher 1" according to the invention is shown in fig. 3. The difference to the variant in fig. 2 is that in this case a second inlet connected to the overflow 27 is provided at the junction 15 and a different switch 16' is used which can be actuated into three positions.

[0050] An embodiment of the switch 16' is shown in fig. 4. The switch 16' comprises a rotatable actuator 29 having an expanded section 30 at one side. This config-

uration allows to dispense with the backflow valve 28.

[0051] The switch 16' can be actuated into three positions shown in fig. 5, each corresponding to a mode of function of the dishwasher 1". In a first position I, the first inlet corresponding to the section 22 is connected to the first outlet corresponding to the sedimentation chamber 17, while the second inlet corresponding to the overflow 27 and the second outlet corresponding to the drain tube 14 are blocked. In this first position, the filter 12 of the filtration device 11 and the sedimentation chamber 17 are used for filtration of the washing liquid in the second circulation system 10. Washing liquid is pumped into the sedimentation chamber 17 by the drain pump 13 at a low speed such that at nearly zero pressure washing liquid may pass through the filter 12 into the wash tank 2, thereby being filtered. Please note that, as the connection between the overflow 27 and the drain tube 14 is blocked, a hydrostatic sensor 23 can again be used in this variant to detect clogging of the filter 12.

[0052] In the second position II a first inlet corresponding to the section 22 is connected to the second outlet corresponding to the drain tube 14. In this position, washing liquid can be directly drained from the dishwasher 1".

[0053] The third position III connects a first inlet corresponding to the section 22 to the first outlet corresponding to the sedimentation chamber 17 and at the same time the second inlet corresponding to the overflow 27 to the second outlet corresponding to the drain tube 14. In this position, a tangential cleaning of the filter 12 as described above with reference to fig. 2 can be effected while the drain pump 13 runs at a high speed. Washing liquid is pumped from the sump 5 through the section 22, then through switch 16' into the sedimentation chamber 17, passing the filter 12. Afterwards, the washing liquid passes the overflow 27, again flows through switch 16' to be drained through a drain tube 14.

Claims

1. Dishwasher, comprising a first wash circulation system (7) with a wash circulation pump (6) to circulate washing liquid from a sump (5) to at least one spray device (3, 4) arranged in a wash tank (2) and a second circulation system (10) comprising a further pump and a filtration device (11) to filter washing liquid independently from actuation of the circulation pump (6) of the first circulation system (7), wherein the further pump is the drain pump (13) and the second circulation system (10) comprises a sedimentation chamber (17) located downstream of the drain pump (13) and having a filter (12), in particular a micro fine filter (12), in its upper part, **characterised in that** the dishwasher (1, 1', 1'') comprises a junction (15) having at least one inlet connected to the outlet side of the drain pump (13) and at least two outlets, wherein a first outlet is connected to the sedimentation chamber (17) and a second outlet is connected

to a drain tube (14) for final drainage of washing liquid.

2. Dishwasher according to claim 1, **characterised in that** a switch (16, 16') is provided at the junction (15), wherein the switch (16, 16') is adapted to selectively connect at least the inlet and the first outlet and the inlet and the second outlet.
3. Dishwasher according to claim 2, **characterised in that** an outlet in the upper part of the sedimentation chamber (17) is connected to the drain tube (14) such that an overflow (27) for a completely filled sedimentation chamber (17) is formed.
4. Dishwasher according to claim 3, **characterised in that** the drain pump (13) is controllable to effect a tangential cleaning of the filter (12).
5. Dishwasher according to claim 3 or 4, **characterised in that** a backflow valve (28) is provided downstream of the outlet of the sedimentation chamber (17).
6. Dishwasher according to claim 2, **characterised in that** the junction (15) comprises a second inlet connected to an outlet in the upper part of the sedimentation chamber (17) such that an overflow (27) for a completely filled sedimentation chamber (17) is formed and the switch (16') can be actuated so that the first inlet is connected to the first outlet and at the same time the second inlet is connected to the first outlet, and so that the first inlet is connected to the second outlet.
7. Dishwasher according to claim 6, **characterised in that** the switch (16') can additionally be actuated so that the first inlet is connected to the first outlet and at the same time the second inlet and the second outlet are closed.
8. Dishwasher according to claim 1, **characterised in that** a backflow valve (18) is provided upstream of the drain pump (13).
9. Dishwasher according to claim 1, **characterised in that** a u-like bend (34) of the drain tube (14) for finally draining washing liquid is located higher than the highest point of the second circulation system (10), in particular the sedimentation chamber (17).
10. Dishwasher according to one of the preceding claims, **characterised in that** the filtration device (11) comprises a micro fine filter (12) and/or a fine filter.
11. Dishwasher according to one of the preceding claims, **characterised in that** at least one filter (12) of the filtration device (11) forms part of the wall (19)

of the wash tank (2).

12. Dishwasher according to claim 11, **characterised in that** a device (20) for backwashing the filter (12) is provided in the wash tank (2), in particular wherein the device (20) for backwashing the filter (12) comprises nozzles (21) located at the outwardly facing ends of at least one spray arm (3, 4). 5
13. Dishwasher according to one of the preceding claims, **characterised in that** the first circulation system (7) also comprises a filtration device (9). 10
14. Dishwasher according to one of the preceding claims, **characterised in that** an additional filtration device (9) or part of the filtration device (11) is located in the sump (5). 15
15. Dishwasher according to one of the preceding claims, **characterised in that** a sensor device adapted to sense a clogging of the filter (13) is provided, in particular wherein the sensor device is a hydrostatic sensor (23), in particular wherein the sensor (23) is connected to the upper end of the sedimentation chamber (17). 20 25

30

35

40

45

50

55

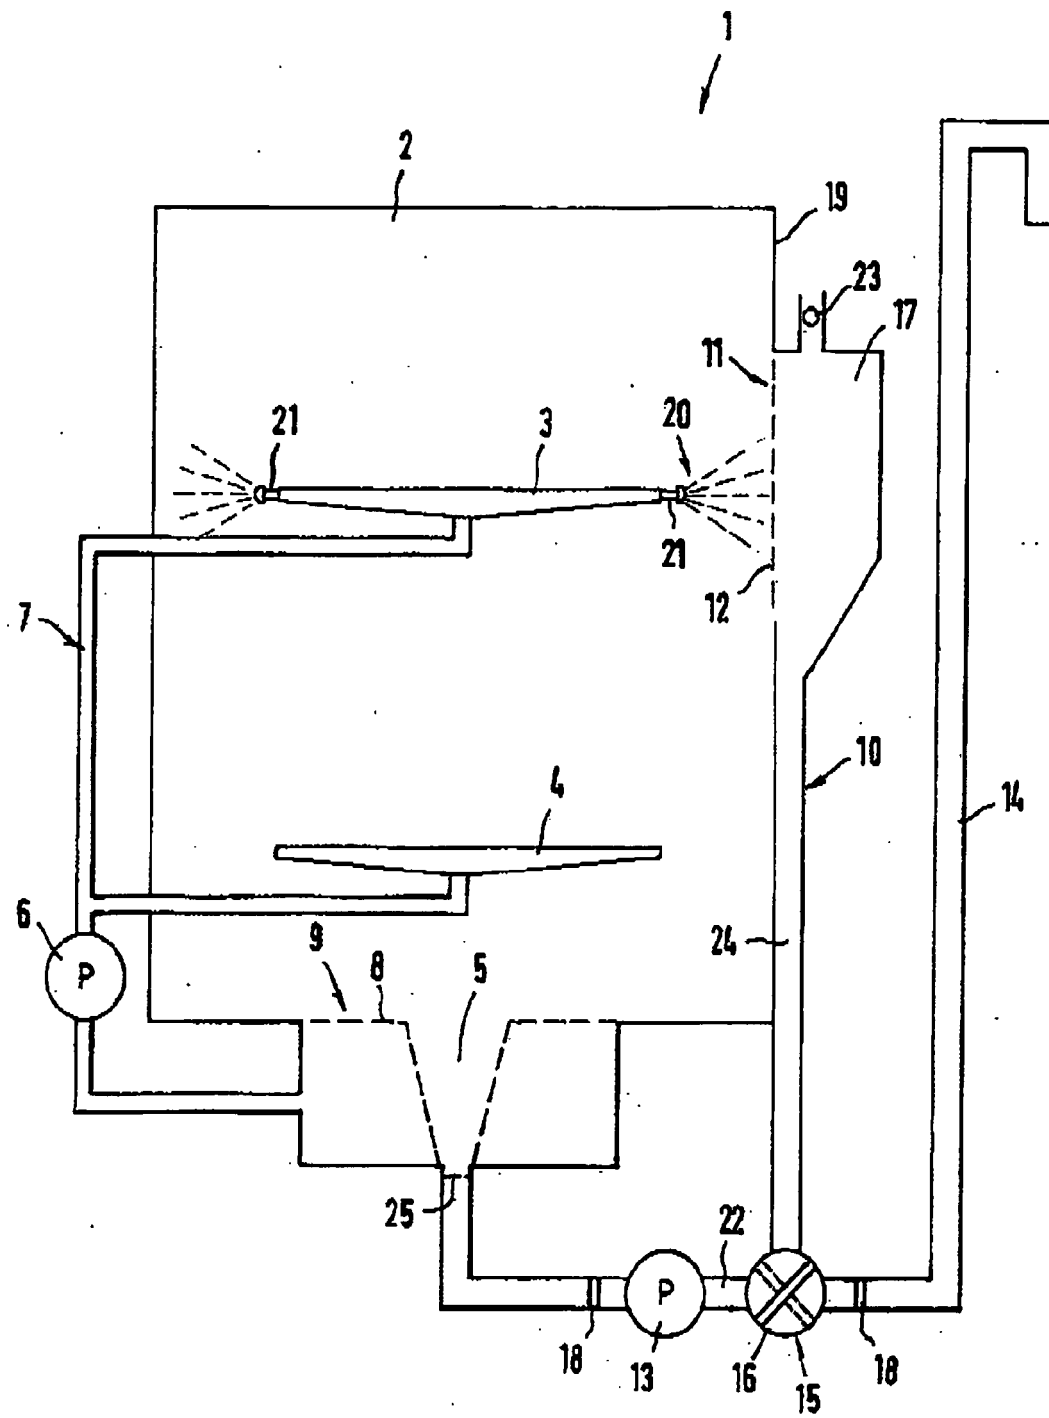


FIG. 1

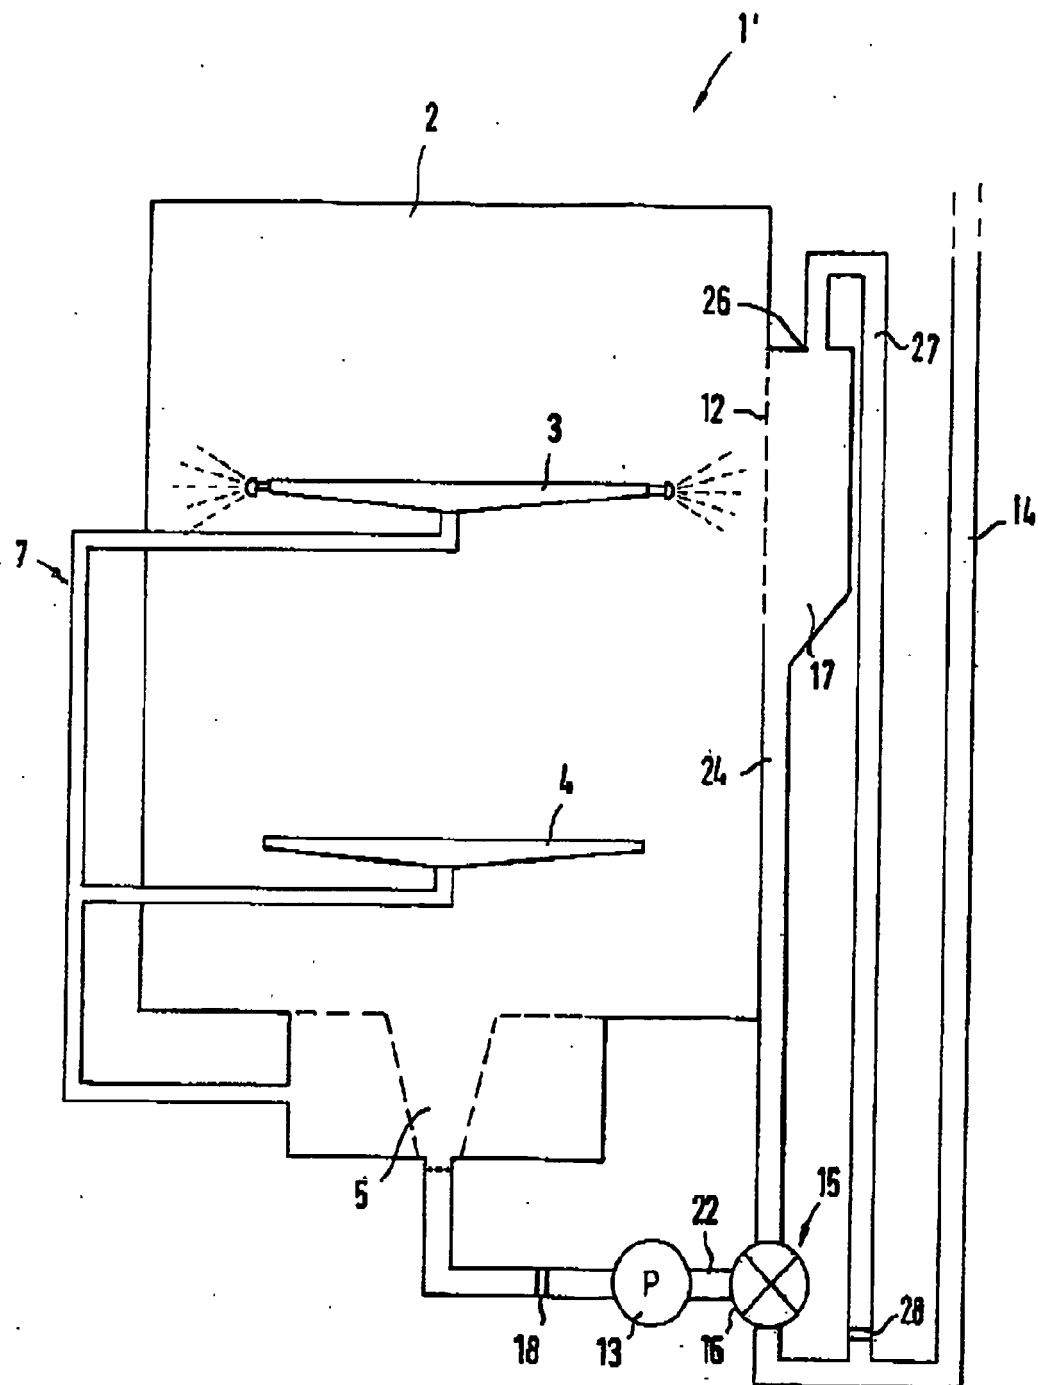


FIG. 2

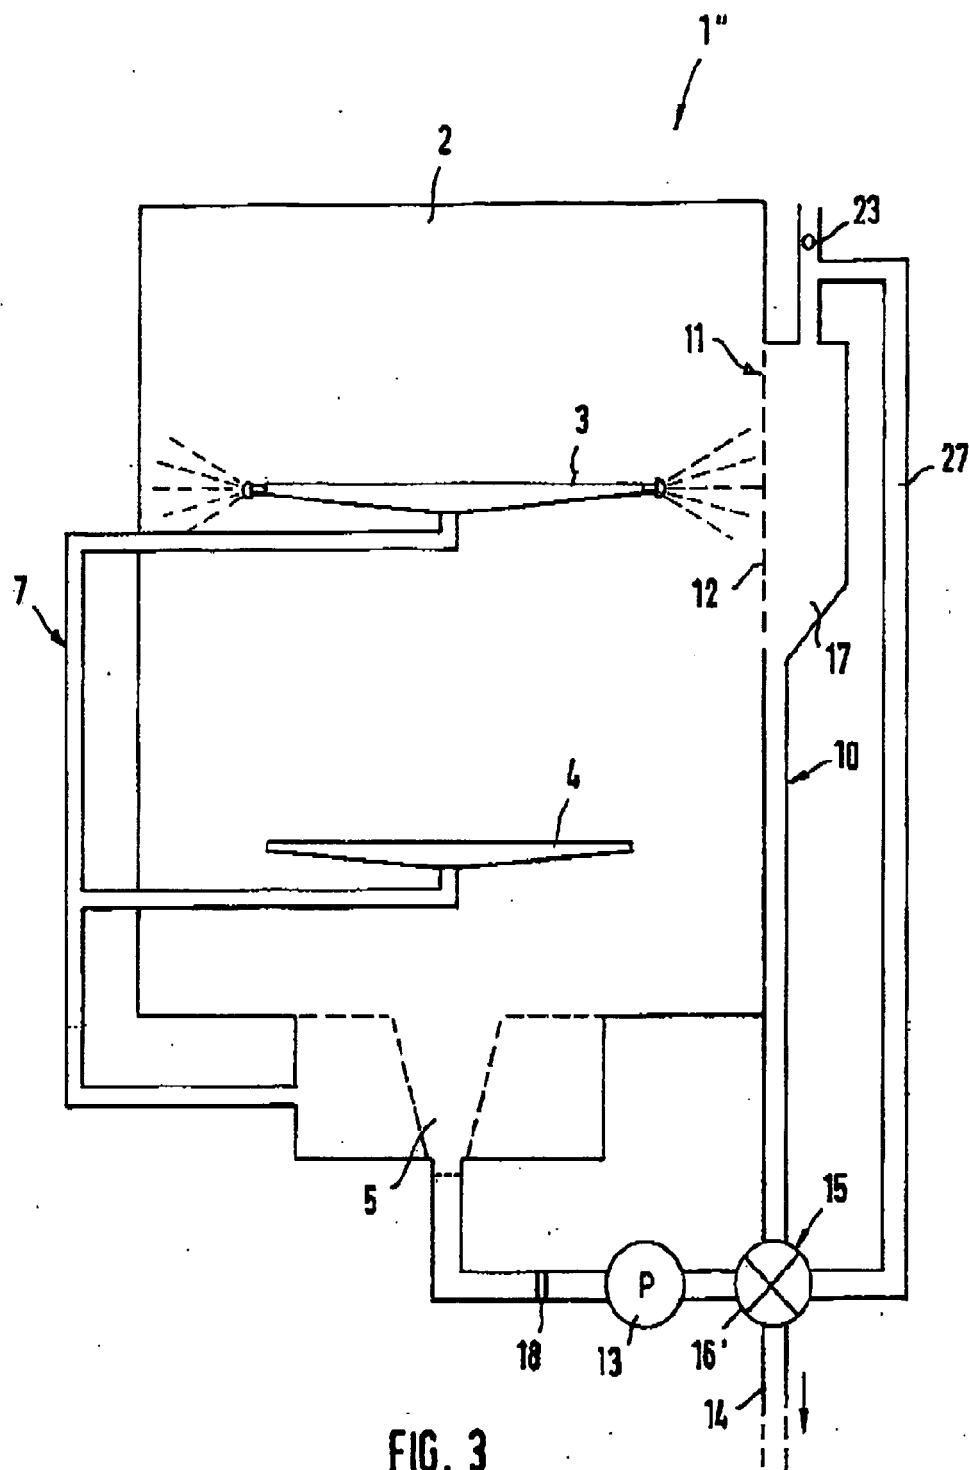


FIG. 3


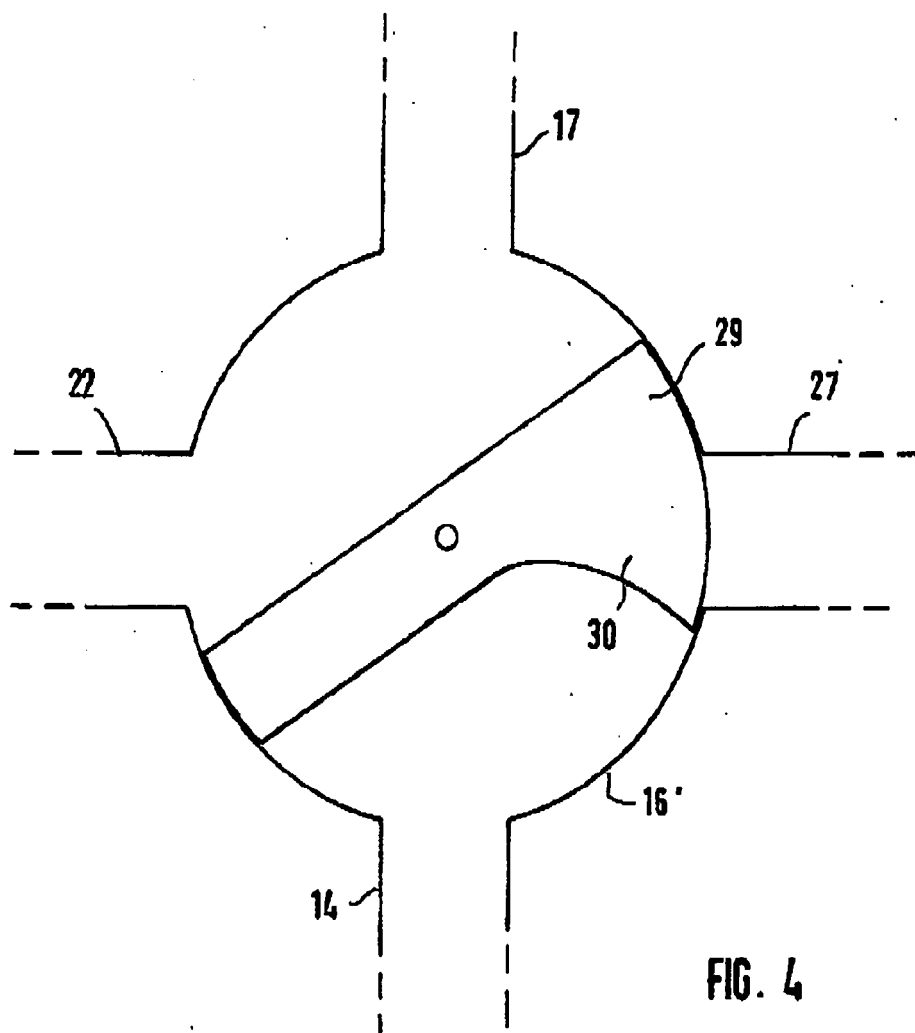


FIG. 5



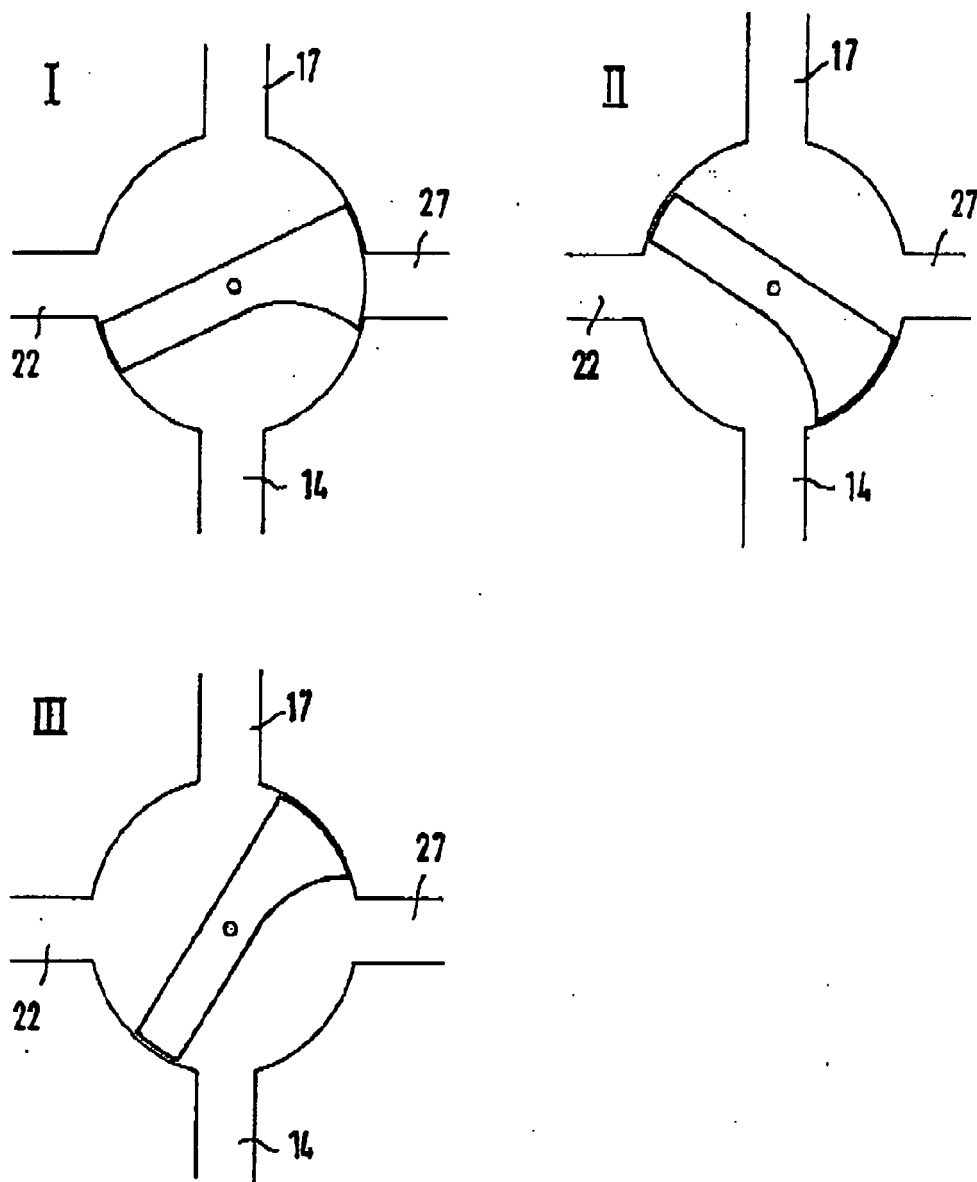

EUROPEAN SEARCH REPORT

Application Number
EP 11 00 3775

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	EP 0 990 413 A (CANDY SPA [IT]) 5 April 2000 (2000-04-05) * columns 3-5; figures * -----	1	INV. A47L15/42 A47L15/22
A	US 5 909 743 A (THIES EDWARD L [US] ET AL) 8 June 1999 (1999-06-08) * column 5; figure 2 * -----	1	
A	US 6 418 943 B1 (MILLER CLAUDE W [US]) 16 July 2002 (2002-07-16) * figure 2 * -----	6	
			TECHNICAL FIELDS SEARCHED (IPC)
			A47L
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 6 July 2011	Examiner Lopez Vega, Javier
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 11 00 3775

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-07-2011

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP 0990413	A	05-04-2000	DE	69820625 D1	29-01-2004
			DE	69820625 T2	11-11-2004

US 5909743	A	08-06-1999	NONE		

US 6418943	B1	16-07-2002	US	6454872 B1	24-09-2002
