



(11) **EP 2 362 746 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**05.09.2018 Bulletin 2018/36**

(21) Application number: **09760248.6**

(22) Date of filing: **29.10.2009**

(51) Int Cl.:  
**A61B 1/267 (2006.01)**

(86) International application number:  
**PCT/GB2009/002578**

(87) International publication number:  
**WO 2010/049694 (06.05.2010 Gazette 2010/18)**

(54) **GUIDING DEVICE FOR USE WITH LARYNGOSCOPE**

FÜHRUNGSVORRICHTUNG ZUR VERWENDUNG MIT EINEM LARYNGOSKOP

DISPOSITIF DE GUIDAGE UTILISÉ AVEC UN LARYNGOSCOPE

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL  
PT RO SE SI SK SM TR**

(30) Priority: **30.10.2008 GB 0819942**

(43) Date of publication of application:  
**07.09.2011 Bulletin 2011/36**

(73) Proprietor: **Indian Ocean Medical Inc.  
Mahé (SC)**

(72) Inventors:  
• **YOUNG, Peter  
Kings Lynn PE32 1AR (GB)**

• **PATEL, Anil  
Surrey SM2 7DP (GB)**

(74) Representative: **Jacob, Reuben Ellis  
Maucher Jenkins  
26 Caxton Street  
London SW1H 0RJ (GB)**

(56) References cited:  
**EP-A1- 1 598 001 EP-A1- 1 640 033  
WO-A2-00/30707 WO-A2-2007/066134  
WO-A2-2009/027669 FR-A1- 2 381 528  
US-A- 3 426 749 US-A- 4 834 077  
US-A- 5 261 392 US-A- 5 349 943  
US-A1- 2003 168 059 US-A1- 2007 287 888**

**EP 2 362 746 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

**[0001]** This invention relates to a guiding device for use with a laryngoscope, more particularly to a guiding device for use with a laryngoscope for assisting in the orotracheal insertion of a tube into a patient.

**[0002]** The expression "orotracheal tube" generally designates an endotracheal tube that is inserted through the mouth. Orotracheal intubation consists in inserting a tube through the mouth, the laryngeal inlet and into the trachea of a patient. This procedure is commonly performed in medical conditions in patients who are unable to protect their airways, are at risk of pulmonary aspiration and those that require assistance with mechanical ventilation. It is also commonly performed to permit safe general anaesthesia to enable mechanical ventilation during surgery.

**[0003]** A laryngoscope assists with intubation by allowing the clinician to visualise the path of the endotracheal tube as it passes through the glottis towards the trachea. Tracheal intubation can be performed by direct laryngoscopy or indirect laryngoscopy.

**[0004]** During direct laryngoscopy, a laryngoscope is used to obtain a direct view of the vocal cords. An orotracheal tube is inserted under direct vision through the vocal cords normally in an unconscious patient. A laryngoscope typically comprises a handle and a blade. There are many types of laryngoscopes designed for direct laryngoscopy. The blade may be curved (e.g. the Macintosh blade), straight (e.g. the Miller blade) or may comprise a moveable hinged blade tip (e.g. McCoy laryngoscope).

**[0005]** The technique of orotracheal intubation begins with the blade inserted into the right corner of the patient's mouth. The blade is shaped such that a flange will push the tongue to the left side of the oropharynx to create space in the oropharynx through which a view of the larynx will be sought. The epiglottis is visualised. The laryngoscope handle is manipulated so that the blade lifts the epiglottis directly with the straight blade or indirectly with the curved blade thereby exposing the laryngeal inlet in normal patients. The endotracheal tube is then advanced past the vocal cords into the trachea.

**[0006]** Most intubations are straightforward using the direct laryngoscopy procedure described above. However some patients are known to be difficult to intubate under direct laryngoscopy, especially if there are anatomical abnormalities or if the larynx lies particularly anteriorly. Other patients are unexpectedly found during direct laryngoscopy to be difficult to intubate this way.

**[0007]** Intubation of these patients may be more successful using indirect laryngoscopy. This can be performed using a videolaryngoscope such as those sold under the trademarks Airtraq and GlideScope. These videolaryngoscopes have a light source and imaging modality embedded in or inserted near to the distal portion of the blade. The blade is shaped such that with manipulation the imaging modality can be positioned adjacent

to the larynx. This enables visualisation of the laryngeal inlet on a viewer or screen. Fibreoptic intubating laryngoscopes are also used for intubation, particularly if direct laryngoscopy is judged to be difficult or dangerous.

**[0008]** When the user attempts to insert an endotracheal tube, the tip can be visualised on the screen as it passes through the larynx. It is common however with videolaryngoscopes for a good laryngoscopic view on the screen to be achieved but for the user to have difficulty directing the endotracheal tube into the laryngeal inlet. Most problematic is the endotracheal tube tip directing too posteriorly. A stiff introducer or bougie can be inserted into the endotracheal tube to try to overcome this difficulty but this adds complexity and risk to the procedure.

**[0009]** Some videolaryngoscopes, for example the Airtraq® and the Pentax-AWS®, have an insertion technique completely different to that used in direct laryngoscopy and have an open sided rigid channel to help guide the tube. A disadvantage of these rigid open sided channels is that the endotracheal tube is not placed with a technique similar to direct laryngoscopy which is familiar to all anesthesiologists. Another disadvantage is that depending upon tube diameter used, the tube tip is not always gripped sufficiently to direct it along the blade in a sufficiently anterior direction. Another disadvantage is that the rigidity of the guiding channel can impede the removal of the laryngoscope over the endotracheal tube when intubation has been achieved and the laryngoscope needs to be removed. US 3,426,749 and US 4,834,077 disclose laryngoscopes comprising disposable sheath for protecting the blades of the laryngoscope. US2003/0168059 discloses a laryngoscope comprising a distal video and a lifter portion. It is an object of this invention to mitigate problems such as those described above. The invention is defined by claim 1 and figures 12 to 16 disclose an embodiment of the invention. According to a first aspect of the invention, there is provided a guiding device for use with a laryngoscope for assisting in the insertion of an endotracheal tube into a patient, the device comprising a guiding means for guiding an endotracheal tube through the patient's upper airways, and attachment means to attach the guiding means to the blade of the laryngoscope. When the guiding means is attached to the blade of the laryngoscope, the outer shape of the guiding means plus blade may resemble any of the shapes commonly used in laryngoscopy, i.e. the guiding means plus blade may be curved, straight or may comprise a moveable hinged blade tip.

The guiding means is preferably releasably coupled to the endotracheal tube.

**[0010]** The invention is intended to improve the ease of intubation through the patient's mouth and into his upper airways.

**[0011]** The guiding device is preferably integrally constructed and may be one-piece blow moulded so that the cost of production is relatively affordable. However, two-part guiding devices may also be used. The two components of a two-part guiding device may be joined together

by welding, gluing or clipping.

**[0012]** The guiding means may be made of a flexible material, such as a flexible thermoplastic material, or of a rigid material. The guiding device, or part of the guiding device, may be flexible due to its shape, design or dimension (e.g. thickness).

**[0013]** The guiding means may be movable relative to the surface of the blade. For example, the guiding means may be attached to the blade or the attachment means by means of one or more hinge elements. An advantage of these features is that they enable the user to adjust the guiding means, making a single guiding device suitable for placing and securing endotracheal tubes of various dimensions to the laryngoscope. In addition, in embodiments in which the guiding means is movable relative to the surface of the blade, the guiding means may be adjusted so that the endotracheal tube or its distal end is deflected towards the surface of the blade to improve visualisation and positioning of the tube in the patient's airways. The guiding device may be designed to enable the guiding means to be adjusted before use and/or during use.

**[0014]** In an alternative embodiment the guiding means is fixed relative to the surface of the blade once the attachment means has secured the guiding means to the laryngoscope. Guiding devices which are fixed relative to the surface of the blade may be easier and cheaper to manufacture, therefore such embodiments may be better suited for use as disposable items.

**[0015]** The guiding means is of dimensions suitable to support and guide the endotracheal tube or to grip the tube. It may be tubular or a portion of a circumference of a tubular channel or a guiding paddle. The guiding means deflects the distal tip of the tube towards the distal end of the blade or guiding means into the laryngeal inlet. In embodiments in which the guiding means comprises a guiding paddle, the guiding paddle provides a surface that the endotracheal tube can glide over towards the laryngeal inlet and into the trachea of a patient. When the guiding device is attached to the laryngoscope, the guiding paddle may extend outwards substantially level to the upper or lower surface of the blade of the laryngoscope.

The guiding means may comprise two guiding paddles, one guiding paddle providing a surface that the endotracheal tube can glide over and the other guiding paddle partially enclosing the endotracheal tube to help prevent displacement of the endotracheal tube during insertion, or one guiding paddle located on one side of the device and the other guiding paddle located on the other side of the device.

**[0016]** In a preferred embodiment, the attachment means comprises a sleeve capable of enclosing, partly or wholly, the blade of the laryngoscope. For example, the sleeve may surround a portion of the length of the blade; or it may comprise a longitudinal slit so that the sleeve may be easily fitted around the blade.

**[0017]** The attachment means may enable reversible

attachment of the guiding device to the laryngoscope. Reversible attachment may be enabled using pins, screws or bolts, alone or in combination.

**[0018]** In another embodiment, the guiding device extends longitudinally from the distal end of the blade of the laryngoscope to form an extended tip to provide an improved laryngoscopic view of the patient's airways. The guiding device further comprises one or more channels in which visualisation means can be removably inserted or secured.

**[0019]** The guiding device may be made, partly or wholly, of a transparent material. The guiding device may be made, partly or wholly, of a disposable material. The disposable material may be plastic or metal.

**[0020]** According to the invention there is provided a laryngoscope comprising a guiding device as described above. The laryngoscope according to the present invention may further comprise indirect means for visualising the laryngeal inlet. The visualisation means comprise a light source and a camera.

#### Brief Description of the Figures

**[0021]** For a fuller understanding of the nature and objects of the present invention, reference should be made to the following drawings in which the same reference numerals are used to indicate the same or similar parts wherein:

Figure 1 shows an isometric view of one embodiment of a laryngoscope with a guiding device according to the invention;

Figure 2 shows a top view of the guiding device;

Figure 3 shows a side view the guiding device of Figure 2;

Figure 4 shows a view of the other side of the guiding device of Figure 2;

Figure 5 shows an isometric view of the guiding device of Figure 2;

Figure 6 shows an alternative isometric view of the guiding device of Figure 2;

Figure 7 shows a top view of the guiding device;

Figure 8 shows a side view of the guiding device of Figure 7;

Figure 9 shows a view of the other side of the guiding device of Figure 7;

Figure 10 shows an isometric view of the guiding device of Figure 7;

Figure 11 shows an alternative isometric view of the guiding device of Figure 7;

Figure 12 shows a top view of an embodiment of the guiding device;

Figure 13 shows a side view of the guiding device of Figure 12;

Figure 14 shows a view of the other side of the guiding device of Figure 12;

Figure 15 shows an isometric view of the guiding device of Figure 12; and

Figure 16 shows an alternative isometric view of the guiding device of Figure 12.

**[0022]** In this application, the terms "distal part" and "proximal part" are used relative to the medical professional, i.e. the "distal part" is used to describe the part of the device that is inserted first into the patient. The terms "anterior" and "posterior" are used relative to the patient to designate his front and his back, respectively.

**[0023]** The laryngoscope (1) of Figure 1 comprises a handle (2) for holding and manoeuvring the laryngoscope and a rigid blade (3) that is pivotally attached to the handle (2). The laryngoscope (1) further comprises means of visualisation including a display screen (4) to visualise the area captured, for example, by a camera (not shown).

**[0024]** A guiding device (5) is shown that comprises a guiding means (6) for guiding an endotracheal tube through the patient's mouth and upper airways and an attachment means embodied as a sleeve (7).

**[0025]** The blade (3) of the laryngoscope (1) is inserted into the sleeve (7). The sleeve (7) should preferably fit the blade (3) so that it is sufficiently secured during use and so that it can be removed after use.

**[0026]** The guiding means (6) deflects the tube towards the surface of the sleeve (7) and deflects the distal tip of the tube towards the distal end of the blade and into the laryngeal inlet.

**[0027]** Preferably, the guiding means (6) has mechanical and geometric properties or external manoeuvrability such that it deflects the distal endotracheal tube tip towards the blade and thereafter along a pathway through the glottic opening. The flexibility or manoeuvrability of the guiding means (6) permits the endotracheal tube to disengage from the blade when intubation has been achieved and the laryngoscope needs removing.

**[0028]** The guiding means (6) may be externally movable relative to the attachment means so that the distal end of the endotracheal tube is pushed along the surface of laryngoscope blade (3). The guiding means (6) may be hinged or be made of a flexible material.

**[0029]** To substantially deflect the distal end of the endotracheal tube along the blade surface there needs to be sufficient force from the guiding means (6). However once tracheal intubation is achieved it is desirable that there is very little force holding the endotracheal tube between the blade (3) and the guiding means (6) because it is desirable to remove the laryngoscope from the patient's upper airway whilst applying minimal forces so as to avoid disrupting the endotracheal tube position or damaging the airway structures.

**[0030]** The guiding means (6) may be hinged, be externally movable or of stiffness sufficient to guide a range of external diameters of endotracheal tubes along the line of the surface of the rigid blade and anteriorly (i.e. at the distal end) into the laryngeal inlet under indirect vision.

**[0031]** The guiding means (6) may be flexible enough such that the endotracheal tube can slip out laterally easily

when the laryngoscope needs to be removed following intubation.

**[0032]** The blade (3) may be straight, e.g. a Miller laryngoscope blade. Alternatively, a curved blade may be used, e.g. a Macintosh blade. Another suitable type of blade is one that comprises a moveable and/or hinged blade tip, e.g. McCoy laryngoscope.

**[0033]** Figure 1 shows a straight blade (3) and a guiding device (5) that extends longitudinally from the distal end of the blade (3) to form an extended tip or tongue (8). This guiding device (5) is particularly suitable for indirect videolaryngoscopy and the tip (8) facilitates a good laryngoscopic view for the user, for example, on a display screen (4).

**[0034]** An important advantage of the guiding device (5), and in particular of the use of an attachment means, is that it may be used in combination with any type of laryngoscope, including those with straight, curved, angled or hinged blades as described above, and can therefore be used as a universal guiding means (6). Furthermore, the guiding means (6) may include a tip (8) that may be straight, curved or angled to modify an existing laryngoscope blade. For example, a guiding means with a straight tip may be used with a Miller laryngoscope to extend the length of the existing blade; a guiding means with a curved tip may be used with a straight blade to transform it into a Macintosh-type blade.

**[0035]** The guiding device (5) may be reusable, disposable, partly reusable or partly disposable. Prior art reusable laryngoscopes must be cleaned and sterilised after use and the process is time consuming and incur costs. Clinicians may use a disposable sheath to cover the blade of a laryngoscope to minimise the need for cleaning and sterilisation. Alternatively, a reusable laryngoscope or a reusable blade may be used but are more costly to produce than a disposable or partly disposable guiding device (5).

**[0036]** The laryngoscope (1) may comprise visualisation means such as a light source, fibreoptics, camera or other technology that enable external indirect visualisation of the laryngeal inlet. Indirect visualisation of the laryngeal inlet through fibreoptics, camera or other means, is particularly useful to assist the user to juxtapose the tip of the blade with the laryngeal inlet.

**[0037]** In a preferred embodiment, the laryngoscope (1) may consist of a disposable sleeve (7) and separate reusable camera and light source components (not shown). The disposable sleeve (7) may comprise a channel for the camera or light source component to be inserted prior to use and removed from after use. For example in the laryngoscope of Figure 1, a camera and a light source are located at the distal end of the blade (3) and are protected from bodily fluids by the disposable sleeve (7).

**[0038]** It may be desirable that the guiding means (6) is partly or wholly transparent so as not to impede the line of view from the camera or similar to the laryngeal inlet. For example, the distal section of the channel where the

camera is positioned may be transparent to permit visualisation. Similarly, where the guiding device (5) comprises a distal extension (8), the extension may be transparent for improved visualisation of the patient's airways. In a preferred embodiment, the whole guiding device (5) may be made out of a transparent material.

**[0039]** In use, the guiding device (5) may be attached to the laryngoscope (1) by inserting the blade (3) into the sleeve (7). The endotracheal tube may be attached to the guiding means (6) that positions the tube along the surface of the blade (3) or along the surface of the sleeve (7). The distal end of the tube may be positioned so that its distal tip aligns with the distal end of the blade (3). The laryngoscope (1) is inserted into the mouth of the patient. The blade (3) will push the tongue of the patient to the side of the oropharynx to create space through which the larynx and the epiglottis can be viewed. The blade is manipulated to lift the epiglottis thereby exposing the laryngeal inlet. The endotracheal tube can then be advanced past the vocal cords into the trachea. The user can visualise the distal end of the blade for example on the display screen (4) and manipulate the laryngoscope accordingly. Once the tube is correctly positioned, it is released from the guiding device (5) without displacing the tube and without damage to the surrounding tissues.

**[0040]** The size and shape of guiding devices (5) according to the present invention can vary. In particular, the size and shape of the guiding devices (5) may vary to suit a patient's anatomy. In the embodiment depicted in Figure 1, the laryngoscope (1) and blade (3) are reusable whilst the guiding device (5) is disposable. This enables the laryngoscope (1) and its blade (3) to be used with a number of patients, whilst a different guiding device (5) is used with each patient. Therefore, the clinician is free to choose the size and shape of guiding device (5) best suited to use with an individual patient.

**[0041]** Figures 2 to 6 depict a guiding device (5) with a guiding means (6) in the form of a single guiding paddle extending outwards substantially level to the lower surface of the laryngoscope blade (3). The embodiment of Figures 2 to 6 includes attachment means in the form of a sleeve (7) that may be reversibly attached to the laryngoscope blade (3).

**[0042]** Figures 7 to 11 depict an alternative embodiment of a guiding device (5) with a guiding means (6) in the form of two guiding paddles, each extending outwards substantially level to the lower surface of the laryngoscope blade (3) but on different sides of the guiding device (5). One of the guiding paddles extends under the upper surface of the guiding device (5) to partially enclose an endotracheal tube located between the two surfaces.

**[0043]** Figures 12 to 16 depict an embodiment of a guiding device (5), in which the extended tip (8) is anteriorly deflected to enable an endotracheal tube inserted using the device (5) to be deflected anteriorly.

## Claims

### 1. A video laryngoscope (1) comprising:

a handle (2),  
an elongate blade (3) pivotally attached to the handle,  
an indirect visualisation means, wherein the indirect visualisation means comprises a camera and a light source for viewing the laryngeal inlet of a patient (4), wherein the camera and the light source are located at a distal end of the elongate blade, and  
wherein the laryngoscope further comprises at least two detachable guiding devices (5), wherein the guiding devices (5) each comprise a sleeve (7) that wholly encloses the elongate blade (3) and a channel for the camera and light source, wherein the camera and light source are inserted into the channel prior to use and removed from the channel after use such that the camera and light source are protected from bodily fluids, wherein, the guiding devices (5) are movable relative to the elongate blade (3), and

wherein at least one of the guiding devices (5) is a guiding device for difficult airway intubations, the difficult airway intubation guiding device (5) comprising:

a guiding paddle (6) for guiding an endotracheal tube through the patient's upper airways, wherein the guiding paddle (6) extends outward substantially level to and in the plane of the upper or lower surface of the guiding device (5) of the laryngoscope (1), and wherein the guiding device (5) extends longitudinally from the distal end of the elongate blade (3) to form an anteriorly deflected extended tip (8).

2. The laryngoscope according to claim 1, wherein the guiding paddle (6) is releasably coupled to the endotracheal tube.

3. The laryngoscope according to claim 2, wherein the guiding paddle (6) is made of a flexible material.

4. The laryngoscope according to any preceding claim, wherein the guiding device (5) is made, partly or wholly, of a transparent material.

5. The laryngoscope according to any preceding claim, wherein the guiding device (5) is made, partly or wholly, of a disposable material.

6. The laryngoscope according to claim 1, wherein the guiding device (5) comprises two guiding paddles (6), one guiding paddle providing a surface that the endotracheal tube can glide over and the other guiding paddle partially enclosing the endotracheal tube

to help prevent displacement of the endotracheal tube during insertion.

7. The laryngoscope according to claim 1, wherein the guiding device (5) comprises two guiding paddles (6), one guiding paddle located on one side of the device and the other guiding paddle located on the other side of the device.
8. The laryngoscope according to claim 1, wherein the visualisation means (4) further comprises a display screen.

#### Patentansprüche

1. Videolaryngoskop (1), das Folgendes umfasst:

einen Griff (2),  
einen langgestreckten Spatel (3), der schwenkbar an dem Griff angebracht ist,  
ein Mittel zur indirekten Visualisierung, wobei das Mittel zur indirekten Visualisierung eine Kamera und eine Lichtquelle zum Betrachten des Kehlkopfingangs eines Patienten (4) umfasst, wobei sich die Kamera und die Lichtquelle an einem distalen Ende des langgestreckten Spatels befinden, und

wobei das Laryngoskop weiter mindestens zwei abnehmbare Führungsvorrichtungen (5) umfasst, wobei die Führungsvorrichtungen (5) jeweils eine Hülse (7), die den langgestreckten Spatel (3) vollständig umschließt, und einen Durchgang für die Kamera und die Lichtquelle umfasst, wobei die Kamera und die Lichtquelle vor dem Gebrauch in den Durchgang eingeführt werden und nach dem Gebrauch aus dem Durchgang entfernt werden, sodass die Kamera und die Lichtquelle vor Körperflüssigkeiten geschützt sind, wobei die Führungsvorrichtungen (5) relativ zu dem langgestreckten Spatel (3) bewegbar sind, und

wobei es sich bei mindestens einer der Führungsvorrichtungen (5) um eine Führungsvorrichtung für schwierige Luftwegsintubationen handelt, wobei die Führungsvorrichtung (5) für schwierige Luftwegsintubationen Folgendes umfasst:

ein Führungsblatt (6) zum Führen eines Endotrachealtubus durch die oberen Luftwege des Patienten, wobei sich das Führungsblatt (6) im Wesentlichen auf einer Höhe mit und in der Ebene der oberen oder der unteren Oberfläche der Führungsvorrichtung (5) des Laryngoskops (1) nach außen erstreckt, und wobei sich die Führungsvorrichtung (5) in Längsrichtung von dem distalen Ende des langgestreckten Spatels (3) erstreckt, um eine nach anterior gebogene ver-

längerte Spitze (8) zu bilden.

2. Laryngoskop nach Anspruch 1, wobei das Führungsblatt (6) abnehmbar an den Endotrachealtubus gekoppelt ist.
3. Laryngoskop nach Anspruch 2, wobei das Führungsblatt (6) aus einem biegsamen Material hergestellt ist.
4. Laryngoskop nach einem der vorangehenden Ansprüche, wobei die Führungsvorrichtung (5) teilweise oder ganz aus einem durchsichtigen Material hergestellt ist.
5. Laryngoskop nach einem der vorangehenden Ansprüche, wobei die Führungsvorrichtung (5) teilweise oder ganz aus einem Wegwerfmaterial hergestellt ist.
6. Laryngoskop nach Anspruch 1, wobei die Führungsvorrichtung (5) zwei Führungsblätter (6) umfasst, wobei ein Führungsblatt eine Oberfläche bereitstellt, über die der Endotrachealtubus gleiten kann, und das andere Führungsblatt den Endotrachealtubus teilweise umschließt, um zur Verhinderung des Verschiebens des Endotrachealtubus während des Einführens beizutragen.
7. Laryngoskop nach Anspruch 1, wobei die Führungsvorrichtung (5) zwei Führungsblätter (6) umfasst, wobei sich ein Führungsblatt auf einer Seite der Vorrichtung befindet und sich das andere Führungsblatt auf der anderen Seite der Vorrichtung befindet.
8. Laryngoskop nach Anspruch 1, wobei das Mittel zur Visualisierung weiter einen Anzeigeschirm umfasst.

#### Revendications

1. Laryngoscope vidéo (1) comprenant :

un manche (2),  
une lame allongée (3) attachée sur pivot au manche,  
un moyen de visualisation indirect, dans lequel le moyen de visualisation indirect comprend une caméra et une source de lumière pour visionner l'entrée du larynx d'un patient (4), dans lequel la caméra et la source de lumière sont situées au niveau d'une extrémité distale de la lame allongée, et  
dans lequel le laryngoscope comprend en outre au moins deux dispositifs de guidage détachables (5), dans lequel les dispositifs de guidage (5) comprennent chacun un manchon (7) qui renferme complètement la lame allongée (3) et

- un canal pour la caméra et la source de lumière, dans lequel la caméra et la source de lumière sont insérées jusque dans le canal avant l'utilisation et retirées du canal après l'utilisation de sorte que la caméra et la source de lumière sont protégées des fluides corporels, dans lequel les dispositifs de guidage (5) sont capables de déplacement par rapport à la lame allongée (3), et dans lequel au moins un des dispositifs de guidage (5) est un dispositif de guidage pour les intubations de voies aériennes difficiles, le dispositif de guidage pour intubations de voies aériennes difficiles (5) comprenant :
- une palette de guidage (6) pour guider une sonde endotrachéale dans les voies aériennes supérieures du patient, dans lequel la palette de guidage (6) s'étend vers l'extérieur substantiellement au même niveau que et dans le plan de la surface supérieure ou inférieure du dispositif de guidage (5) du laryngoscope (1), et dans lequel le dispositif de guidage (5) s'étend de manière longitudinale depuis l'extrémité distale de la lame allongée (3) pour former une pointe étendue déviée de manière antérieure (8).
- 25
2. Laryngoscope selon la revendication 1, dans lequel la palette de guidage (6) est couplée de manière amovible à la sonde endotrachéale.
  3. Laryngoscope selon la revendication 2, dans lequel la palette de guidage (6) est fabriquée dans un matériau souple.
  4. Laryngoscope selon l'une quelconque des revendications précédentes, dans lequel le dispositif de guidage (5) est fabriqué, en partie ou en totalité, dans un matériau transparent.
  5. Laryngoscope selon l'une quelconque des revendications précédentes, dans lequel le dispositif de guidage (5) est fabriqué, en partie ou en totalité, dans un matériau jetable.
  6. Laryngoscope selon la revendication 1, dans lequel le dispositif de guidage (5) comprend deux palettes de guidage (6), une palette de guidage fournissant une surface sur laquelle la sonde endotrachéale peut glisser et l'autre palette de guidage renfermant partiellement la sonde endotrachéale pour aider à prévenir le déplacement de la sonde endotrachéale pendant l'insertion.
  7. Laryngoscope selon la revendication 1, dans lequel le dispositif de guidage (5) comprend deux palettes de guidage (6), une palette de guidage située d'un côté du dispositif et l'autre palette de guidage située de l'autre côté du dispositif.
  8. Laryngoscope selon la revendication 1, dans lequel le moyen de visualisation (4) comprend en outre un écran d'affichage.

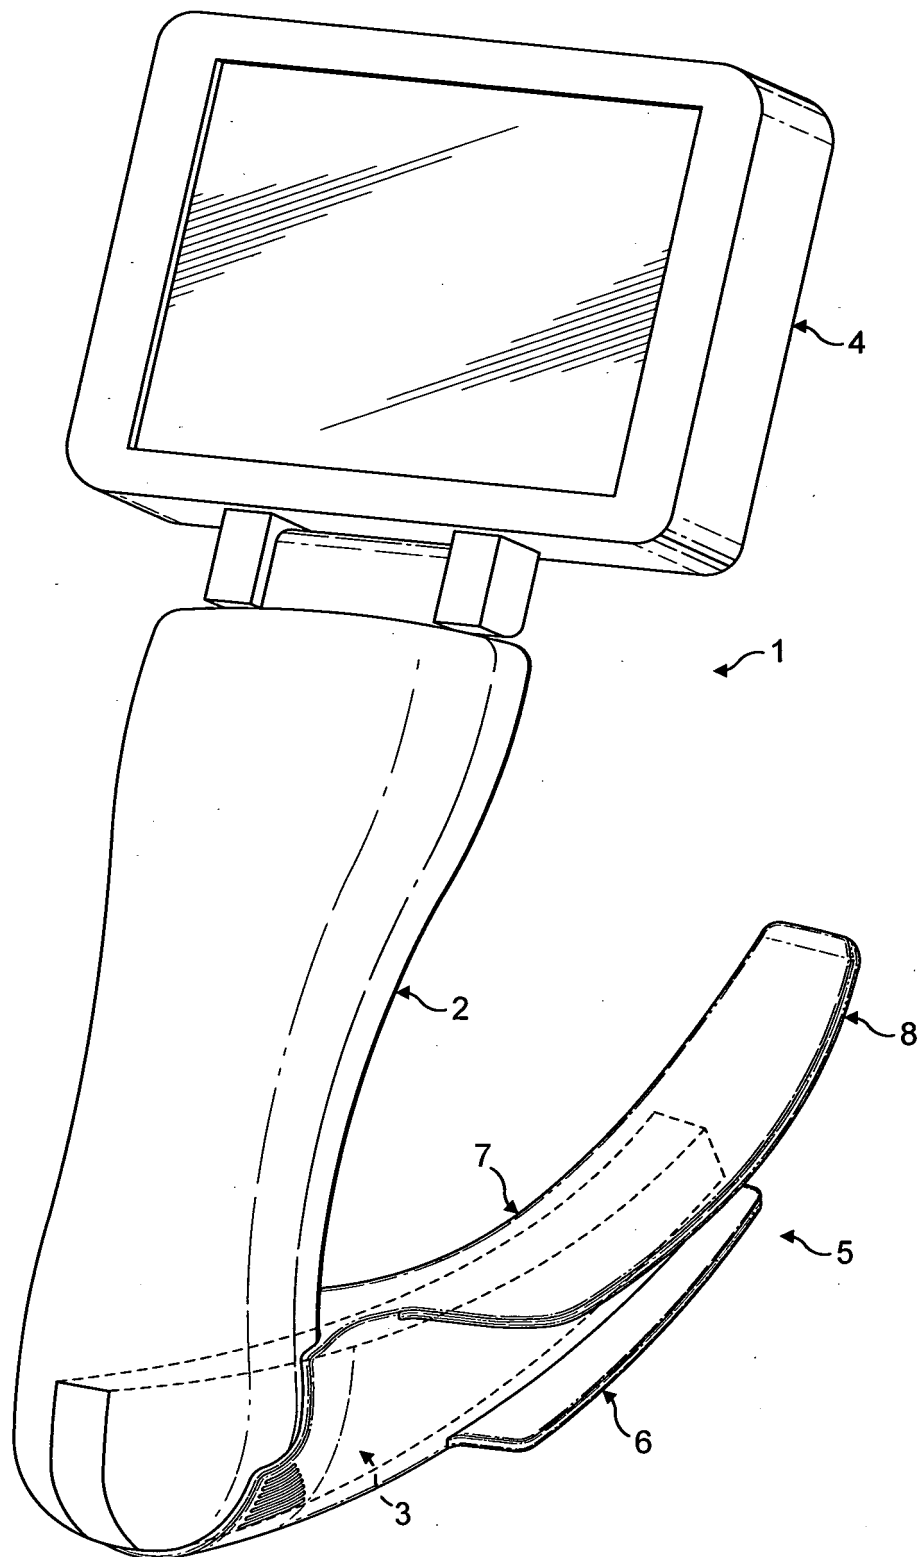


FIG. 1



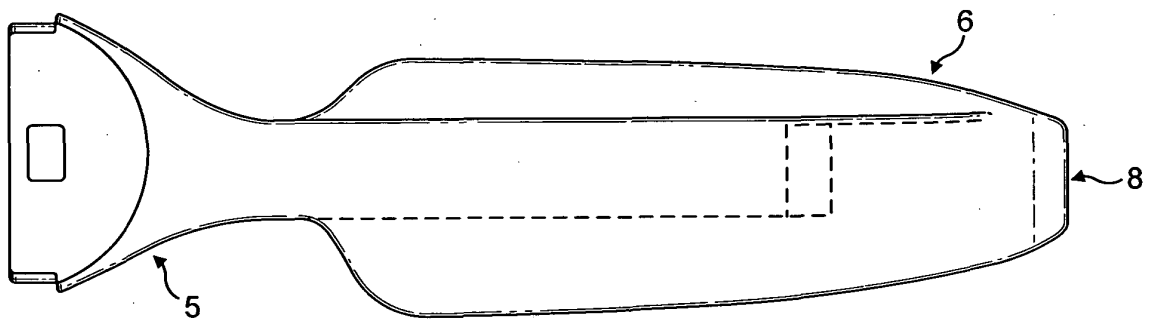


FIG. 2

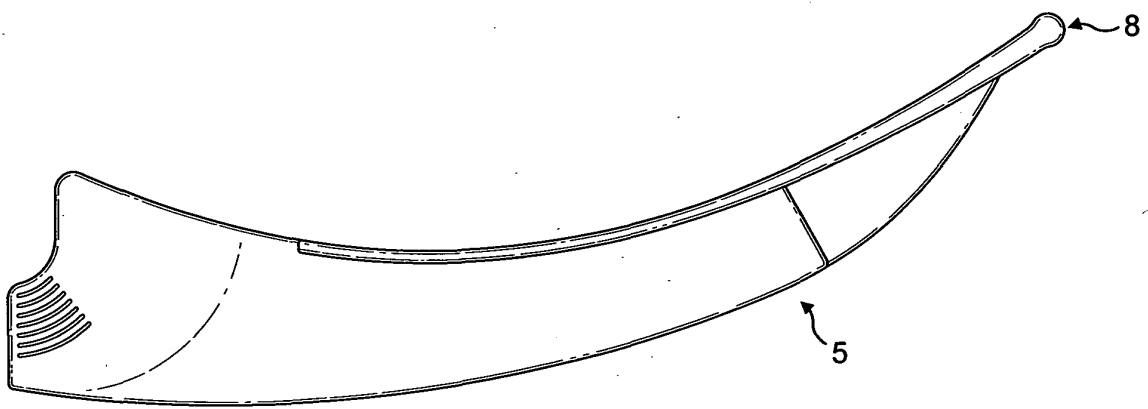


FIG. 3

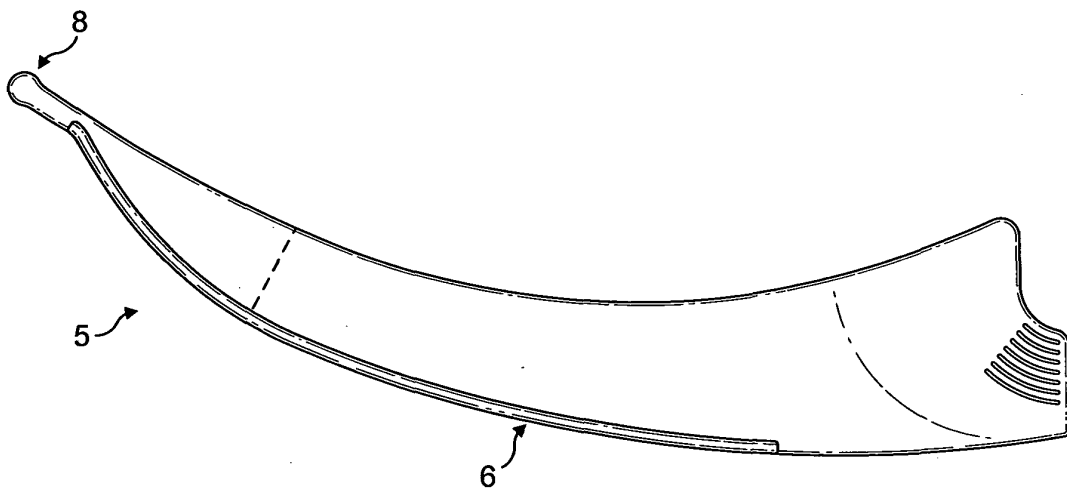


FIG. 4

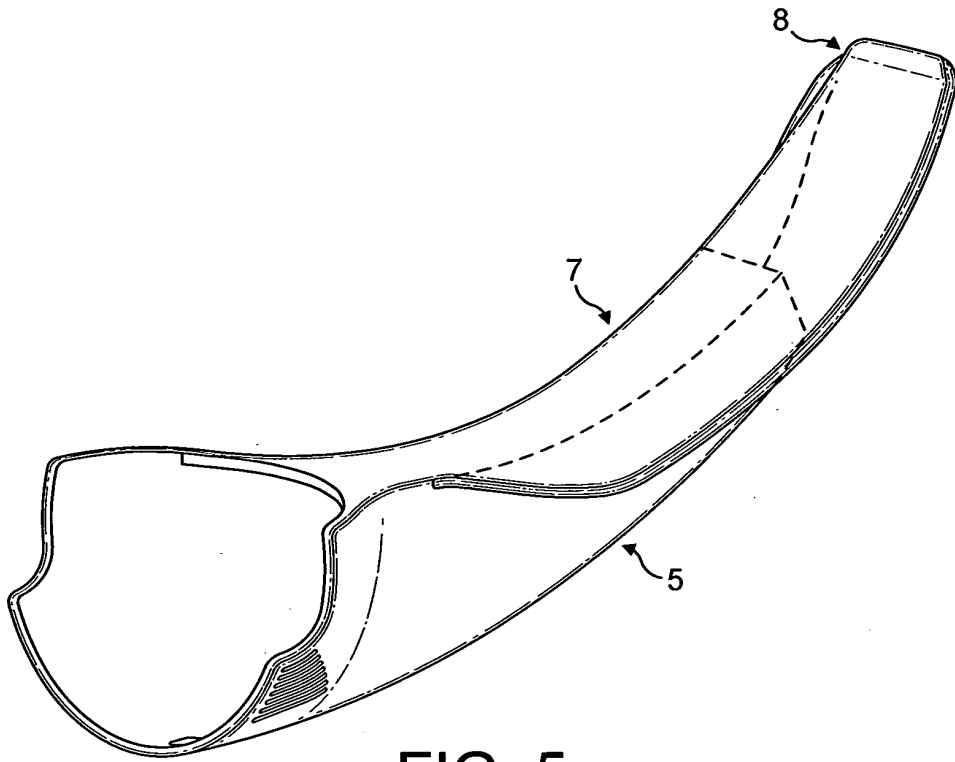


FIG. 5

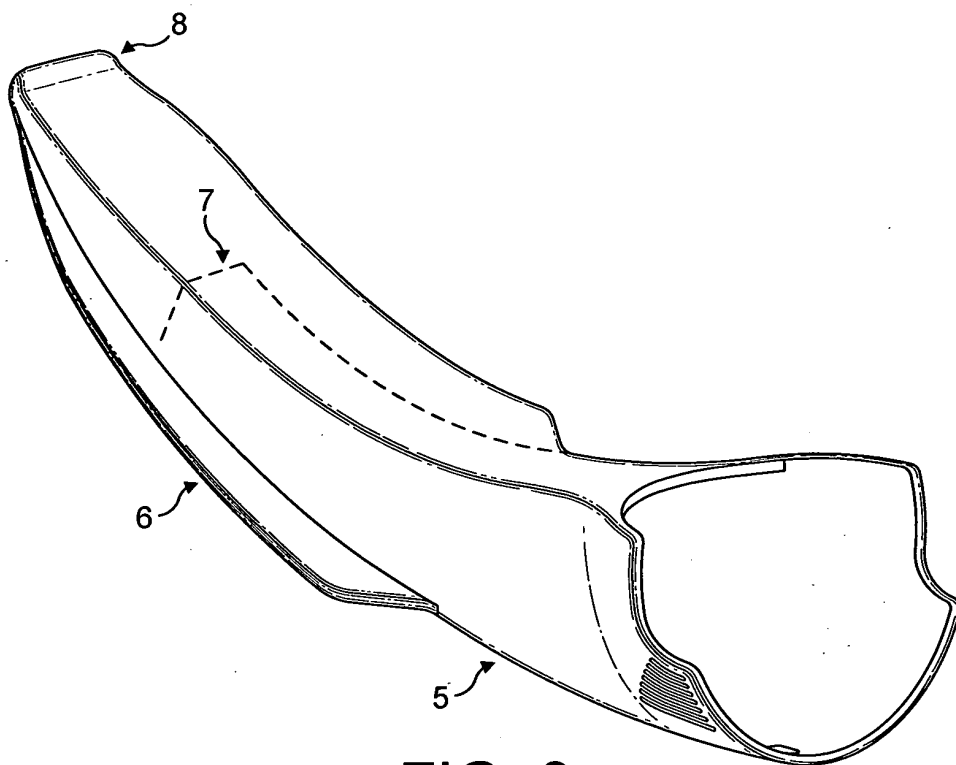


FIG. 6

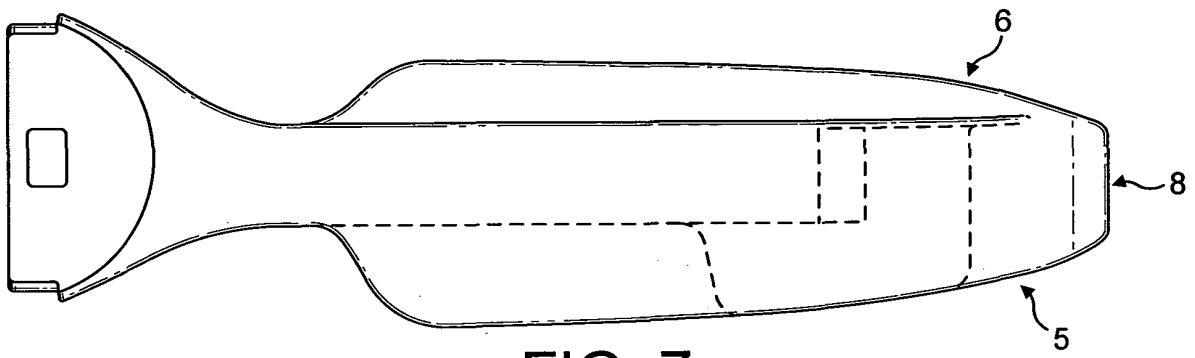


FIG. 7

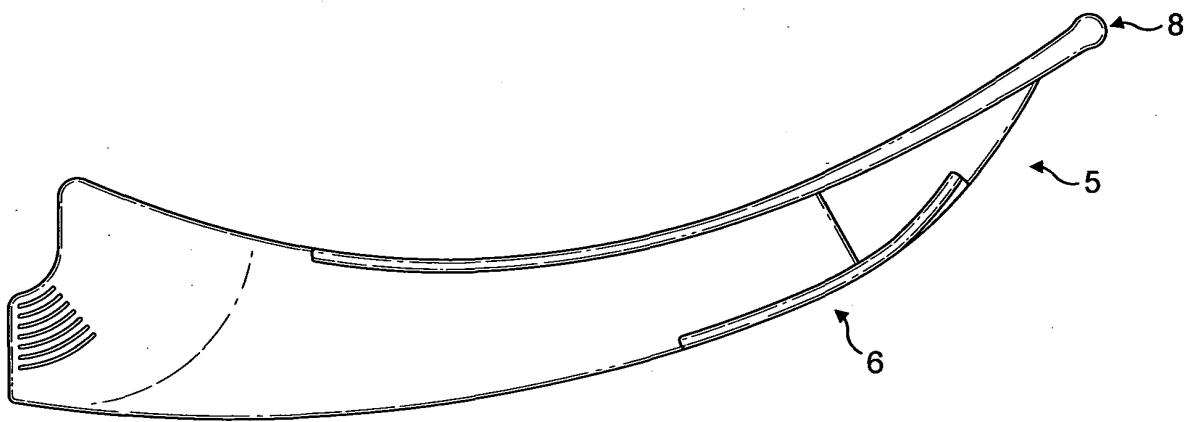


FIG. 8

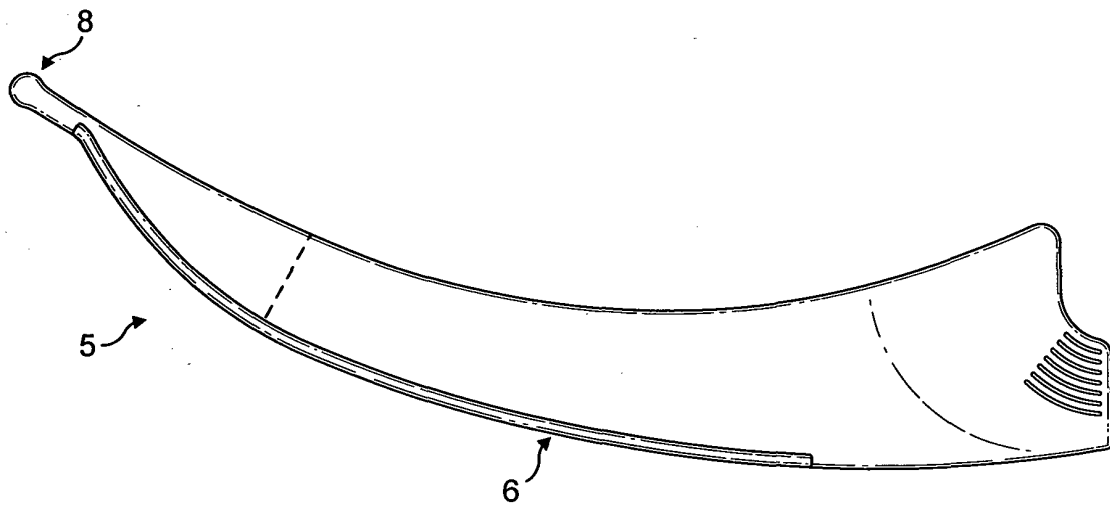


FIG. 9

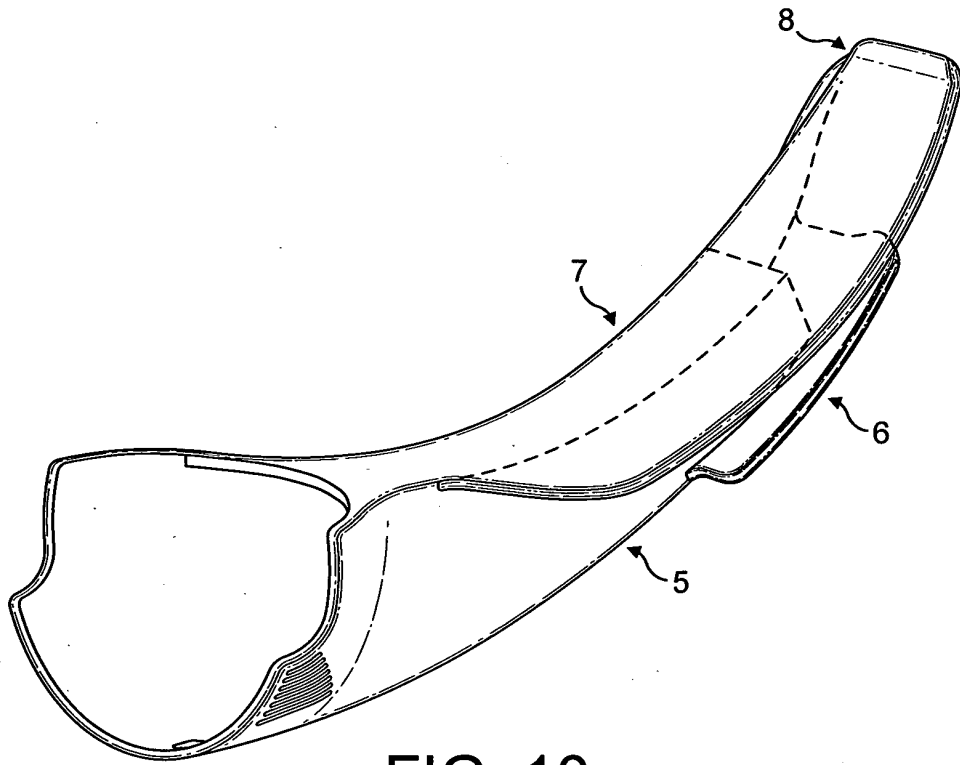


FIG. 10

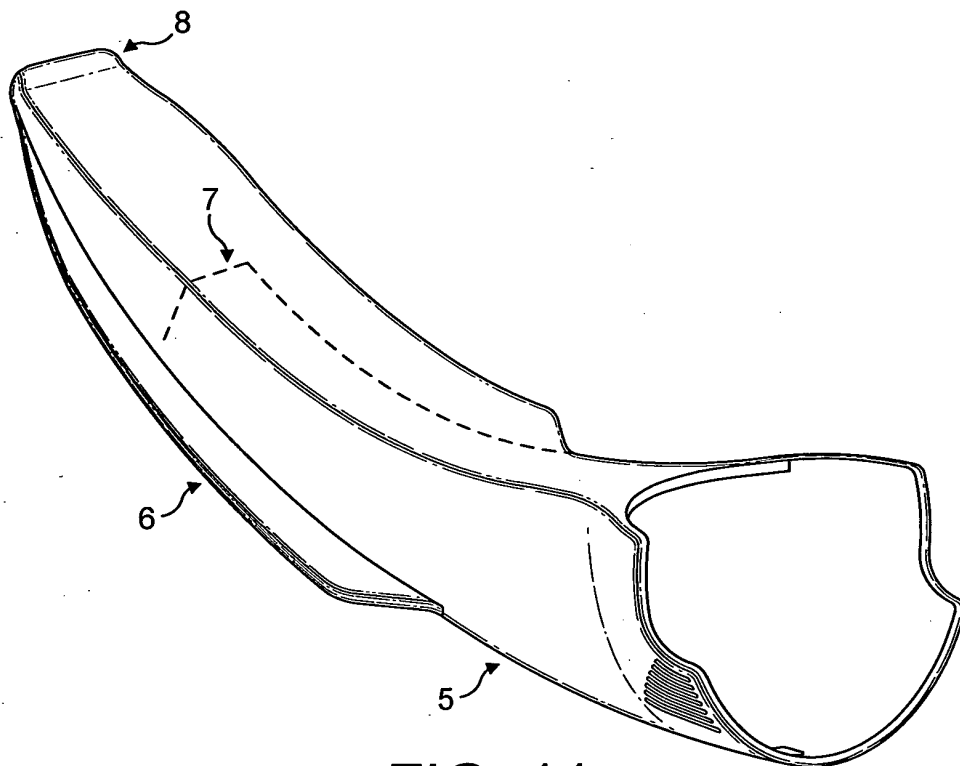


FIG. 11

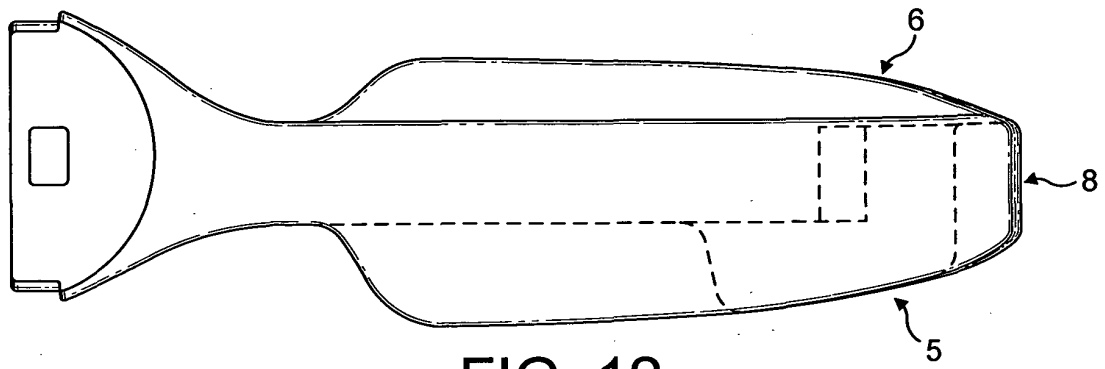


FIG. 12

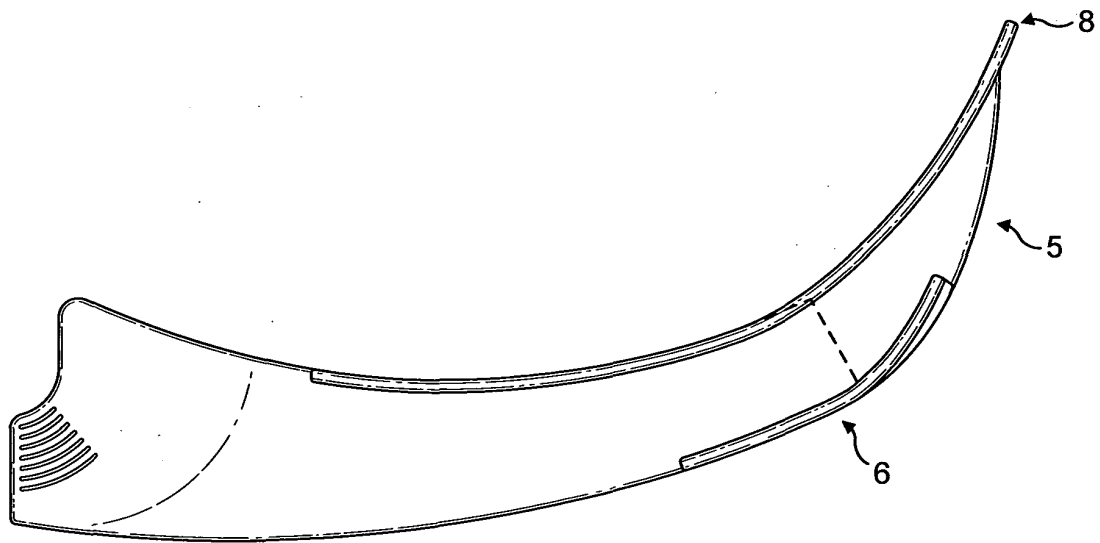


FIG. 13

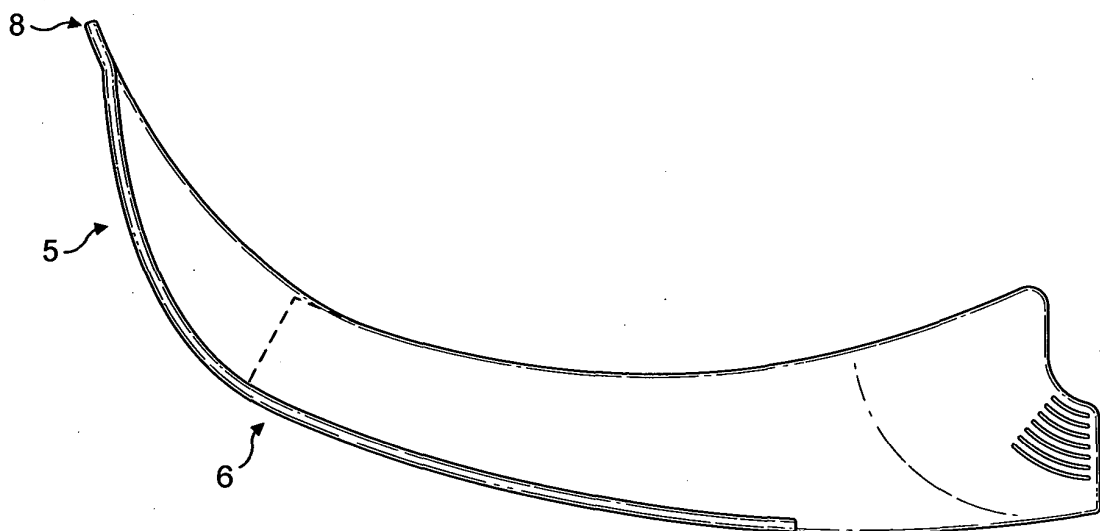


FIG. 14

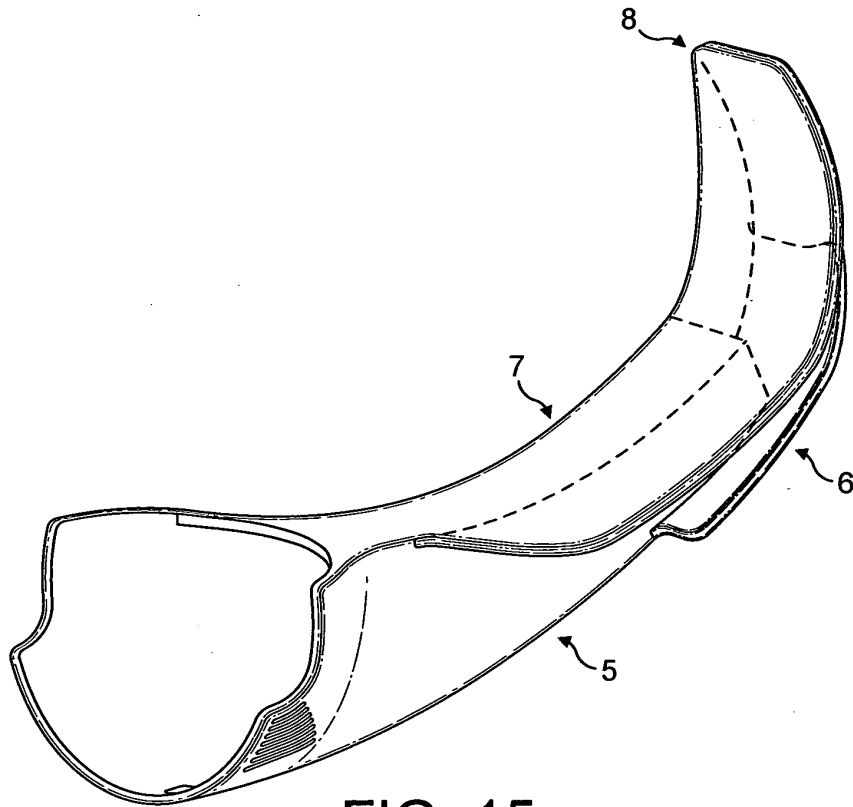


FIG. 15

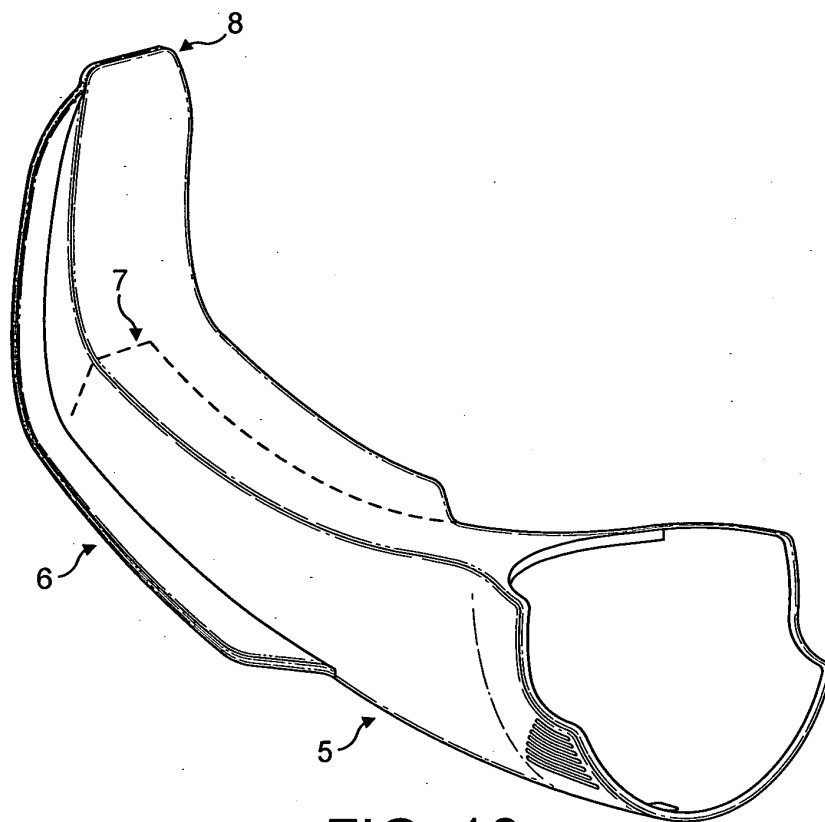


FIG. 16

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 3426749 A [0009]
- US 4834077 A [0009]
- US 20030168059 A [0009]