(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 2 386 459 B1

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
09.07.2014 Bulletin 2014/28

(51) Int Cl.:
B61L 25/02 *(2006.01)* ***B61L 25/06*** *(2006.01)*

(21) Application number: **11165192.3**

(22) Date of filing: **06.05.2011**

(54) **Train location system**

Zugortungssystem

Système de localisation de train

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **07.05.2010 GB 201007659**

(43) Date of publication of application:
16.11.2011 Bulletin 2011/46

(73) Proprietor: **Siemens Rail Automation Holdings Limited**
Frimley, Camberley GU16 8QD (GB)

(72) Inventor: **Chadwick, Simon**
Devizes, Wiltshire SN10 3JP (GB)

(74) Representative: **Maier, Daniel Oliver et al**
Siemens AG
Postfach 22 16 34
80506 München (DE)

(56) References cited:
EP-A1- 1 970 280 **US-A- 5 129 605**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 386 459 B1

Printed by Jouve, 75001 PARIS (FR)

Description

[0001] This invention relates to a method for determining the location of a train and train location apparatus.

[0002] It is a desire within the field of railway signalling systems to use a global navigation satellite system (GNSS) to provide train location. Such technology has been developed for the automotive industry (for example "sat nav") already, however it is also seen as beneficial within the rail industry, due to the high availability and relatively low cost of such systems. However, such a system would require sufficient accuracy to resolve between two adjacent tracks on a railway with high levels of dependability, this level of accuracy being required for railway signalling, and this has hitherto been difficult to achieve.

Conventional Map Matching

[0003] Within the automotive industry, the use of global position systems (GPS - a form of GNSS) for navigation is widespread. Within such systems, there is a "map matching" algorithm, which aims to ensure that vehicles are placed on roads within a static map of the area. Such an algorithm is schematically shown in Fig. 1.

[0004] As shown, a map matching algorithm 4 has a number of data inputs, e.g. a GNSS location 2 received from a GNSS receiver 1, a static map 3 which contains e.g. road layout information, and a "previous location" 5. The algorithm 4 correlates as far as possible the GNSS location with the static map, checked against the previous location 5, to determine the location 6 of the vehicle. This location 6 is used to provide the "previous location" input 5 for the next running of the algorithm. The new location 6 is passed to the "Sat. Nav." application 7, for example an in-car device.

[0005] In practice, such map matching algorithms in use take account of current and previous speed, and current and previous heading.

[0006] Of course, roads are generally quite widely spaced, and so such methods generally provide sufficient accuracy for their needs. In contrast, railway tracks may be very closely spaced together, especially near stations for example, and such methods are not usable.

[0007] As prior art in related fields may be mentioned EP 0407875, GB 1532638, US 2003/0236598, WO 2006/136783 and JP 2005247024. As additional prior art there may also be mentioned EP 1970280 and US 5129605, which variously disclose some of the precharacterising features of the accompanying claims.

[0008] It is an aim of the present invention to provide a method and system for achieving train location via GNSS systems with sufficient accuracy for rail signalling systems. This aim is achieved by combining GNSS data with additional information from within the railway signalling systems. In this way, the use of standard low cost GNSS systems within the rail industry is permitted.

[0009] In accordance with a first aspect of the present invention there is provided a method of determining a location of a train (16) within a region of a railway system comprising the initial step of:

creating a dynamic map (10) of a region of a railway system by:

a) providing a static map (12) of said region, showing railway lines present in that region;
b) providing information relating to the state of points within the railway region; and
c) combining said static map (12) and said points information to create the dynamic map (10);

characterised in that said method comprises the steps of providing the dynamic railway map (10) and providing GNSS information relating to the location of said train (16), and combining the map and the GNSS information.

[0010] In accordance with a second aspect of the present invention there is provided train location apparatus comprising:

means for providing information relating to the state of points within the railway region; characterised in that the train location apparatus further comprises:

dynamic map creation means for creating a dynamic map of a railway region using said points information;
GNSS means for determining the location of the train from a GNSS system; and processing means for combining the dynamic map and the GNSS location to determine the location of the train.

[0011] The invention will now be described with reference to the accompanying drawings, in which:

Fig. 1 schematically shows a conventional static map matching system;
Figs. 2a-d schematically show a rail network plan at various stages of a dynamic mapping technique in accordance with an embodiment of the present invention;
Fig. 3 schematically shows a dynamic map matching algorithm in accordance with an embodiment of the present invention;
Figs. 4a, b schematically show a rail network plan at various stages of a location determination technique in accordance with an embodiment of the present invention;
Fig. 5 schematically shows a train-carried dynamic map matching arrangement in accordance with an embodiment of the present invention; and
Fig. 6 schematically shows a trackside dynamic map matching arrangement in accordance with an alternative embodiment of the present invention.

[0012] A first embodiment of the invention is schematically shown in Figs. 2a-e, in which a static rail map is converted to create a dynamic railway map.

[0013] A static railway map is shown in Fig. 2a, which here represents an area in the proximity of a station, with various tracks shown at 8. It can be seen that there are two main tracks 8a, 8b running in the left-right direction, each of these tracks having a "loop" section 8c, 8d respectively. In addition, the main tracks are interconnected by four small lengths of track, 8e-8h. Points (known as "switches" in the US for example) are located where the lines interconnect. Fig. 2a is a straight line drawing - in practice the lines will be within a geographical context, and will therefore probably be curved in three dimensions.

[0014] A dynamic map is created by implementing additional dynamic rules. Trains on a railway do not have as many degrees of freedom as automotive vehicles on a road. Essentially, a train can move forwards or backwards only, along a path determined for the train by the signalling system. The signalling system controls the points, which in turn determine the paths for trains.

[0015] For any one point, at any one time, the signalling system will determine whether the point is:

"Normal" - i.e. controlled and detected to be in the "normal" sense for this point;
"Reverse" - i.e. controlled and detected to be in the "reverse" sense for this point; or
"Out of Correspondence" - essentially this is neither "Normal" nor "Reverse". This could be because the point is moving between "Normal" and "Reverse", or because there has been some failure.

[0016] Fig. 2b shows one possible dynamic state for the railway of Fig. 2a, i.e. where the topmost main track 8a has its points set to divert along the loop section 8c, and where the lower main track 8b has its points set to maintain a straight-through path.

[0017] For a facing point, i.e. in the direction of divergence, it is a reasonable assumption that a train will follow the direction on the railway determined by the signalling system, so long as the point is controlled and detected in a particular position. This may be termed "Assumption 1" for the sake of example.

[0018] Fig. 2c shows the system once Assumption 1 has been applied, resulting in the bold lines as being possible paths for trains, given the states of the points.

[0019] For a trailing point, i.e. in the direction of convergence, it is a reasonable assumption that a train will follow the sense of convergence. This may be termed "Assumption 2" for the sake of example.

[0020] Given these two assumptions, the current sense of the points can be used to refine the railway map. If the state of the points is changed by the signalling control system, then this map will change. This map therefore represents a "dynamic railway map".

[0021] The signalling system should prevent trains approaching points which are "out of correspondence". However, for safety the dynamic railway map must be able to handle such "out of correspondence" points, i.e. points which are not "normal" or "reverse".

[0022] The safest assumption to make for points which are "out of correspondence" is that trains could follow either path at a divergence. This may be termed "Assumption 3" for the sake of example. Fig. 2d illustrates the system once Assumption 3 has been applied, and where "9" designates an out of correspondence point.

[0023] The next step is to provide dynamic map matching, by using the dynamic railway map with a map matching algorithm, as shown in Fig. 3, to determine train location. As far as possible, items similar to those in Fig. 1 have retained the same numbering in Fig. 3.

[0024] As explained above, the dynamic railway map 10 is produced from a static railway map 12 in conjunction or combination with signalling control data 13, providing information about the status of points in the region, used to update (at 14) the map. As such, the dynamic map 10 contains a representation of the railway with the dynamic point states, "Normal", "Reverse" or "Out of Correspondence". This is then used by the dynamic map matching algorithm 11 to determine the new location 6 for a train, based on the previous location 5. The new location 6 is then fed to a signalling application 15. The GNSS receiver 1, which provides a GNSS location 2 is generally similar to that shown in Fig. 1. Additional sensors or information sources 23 may also be used to input train location information 24 to the map matching algorithm 11. Examples of suitable additional sensors 23 include train-carried tachometers, Doppler measurement devices, track-side balises etc. These sensors and their basic operation are well-known in the art. Combining this additional information with the GNSS information and dynamic map may further improve positional accuracy, or be used to cross-check the GNSS information for safety.

[0025] An exemplary system is shown in Fig. 4, where Fig. 4a shows a track layout similar to that of Fig. 2, with a train 16 having entered the region. Fig. 4a in effect shows the "previous location" 5 (see Fig. 3) of the train 16. A new "raw" GNSS location (corresponding to item 2 in Fig. 3) is shown at 17, which indicates that the train location is somewhere near the loop, but between two adjacent tracks. It can be seen that if this information were used with a simple static map algorithm, the location of the train could not be determined sufficiently accurately to place the train on the correct track.

[0026] Here, the new location 6 (see Fig. 3) of the train 16 can be calculated via the dynamic map matching algorithm 11 (see Fig. 3) to be on the track within the loop, as shown in Fig. 4b.

[0027] There are of course temporal aspects to be considered. The dynamic map matching algorithm will need to take account of the time at which that raw GNSS location was determined, and also the time at which the dynamic railway map was last updated.

[0028] If these are not within a threshold time of each

other, then the train location should be recorded as "not determined".

Physical Arrangements

[0029] The dynamic map matching algorithm can be applied within a train, or, in an alternative embodiment, within a trackside system, or with the processing shared between the two, or at an alternative location.

[0030] A train-carried dynamic map matching system is schematically shown in Fig. 5. Here, the status of points is transmitted, e.g. wirelessly, either from trackside-located equipment 19, which may for example comprise the points equipment (i.e. the points status information is obtained from the points themselves, these being driven by the signalling system), or components of the signalling system (i.e. such that the points status information is obtained directly from the signalling system) to a train 18. The train 18 stores a static map of the railway, which may for example be updated automatically as it enters a new locality. The dynamic railway map is created on the train, by onboard processing means. The dynamic map matching algorithm is implemented on the train, by onboard processing means. The train location may then be transmitted from the train to an external signalling application as required.

[0031] With this embodiment, any one train only needs to know about the status of points in front of the train.

[0032] An alternative embodiment, utilising trackside dynamic map matching is schematically shown in Fig. 6. Here, a train 20 reports its GNSS location to signalling system 22, with the system's processing means located either at a trackside location 21 as shown, or elsewhere. As shown, the static map is stored trackside (21), and the dynamic map is created trackside (21). The map matching algorithm is also implemented trackside (21). With this embodiment, the signalling system will need to be able to process GNSS data from multiple trains at any one time.

[0033] The above-described embodiments are exemplary only, and other possibilities and alternatives within the scope of the invention will be apparent to those skilled in the art. For example, in alternative embodiments, the dynamic map matching algorithm 11 can also take account of current and previous speeds, and current and previous headings of the train.

[0034] Additionally, the dynamic map may be created, and indeed updated, using information gathered by a train as it moves around the rail network. For example, information directly obtained by the train from points machines allows a greater accuracy of train position at diverging junctions.

Claims

1. A method of determining a location of a train (16) within a region of a railway system comprising the initial step of:

creating a dynamic map (10) of a region of a railway system by:

a) providing a static map (12) of said region, showing railway lines present in that region;
b) providing information relating to the state of points within the railway region; and
c) combining said static map (12) and said points information to create the dynamic map (10);

characterised in that said method comprises the steps of providing the dynamic railway map (10) and providing GNSS information relating to the location of said train (16), and combining the map and the GNSS information.

2. A method according to claim 1, wherein the points information is obtained from a signalling system (22).

3. A method according to claim 2, comprising step of obtaining said points information from the signalling system (22).

4. A method according to any preceding claim, comprising the step of providing at least one of: a current speed of the train, a previous speed of the train, a current heading of the train, and a previous heading of the train.

5. A method according to any preceding claim, comprising the step of providing train location information (24) from at least one additional source and combining this with the map and GNSS information.

6. A method according to any preceding claim, wherein the step of combining the dynamic map (10) and the GNSS information comprises comparing the time at which the GNSS information was complied with the time at which the dynamic map (10) was created.

7. A method according to any preceding claim, wherein step c) is performed on a train.

8. A method according to any of claims 1-6, wherein step c) is performed at a trackside location (21).

9. Train location apparatus comprising:

means for providing information relating to the state of points within the railway region; **characterised in that** the train location apparatus further comprises:

dynamic map creation means for creating a dynamic map of a railway region using said

points information;
GNSS means for determining the location of the train from a GNSS system; and
processing means for combining the dynamic map and the GNSS location to determine the location of the train.

10. Apparatus according to claim 9, wherein the map creation means is provided on the train.

11. Apparatus according to claim 9, wherein the map creation means is provided at a trackside location (21).

12. Apparatus according to any of claims 9 to 11, wherein the processing means is provided on the train.

13. Apparatus according to any of claims 9 to 11, wherein the processing means is provided at a trackside location (21).

14. Apparatus according to any of claims 9-13, wherein the means for providing information relating to the state of the points comprises a signalling system (22).

Patentansprüche

1. Verfahren zur Bestimmung eines Standortes eines Zuges (16) innerhalb eines Gebiets eines Eisenbahnsystems, welches den folgenden Anfangsschritt umfasst:

Erzeugen einer dynamischen Karte (10) eines Gebiets eines Eisenbahnsystems durch:

a) Bereitstellen einer statischen Karte (12) dieses Gebiets, welche Eisenbahnlinien zeigt, die in dem Gebiet vorhanden sind;
b) Bereitstellen von Informationen, die den Zustand von Weichen innerhalb des Eisenbahngebiets betreffen; und
c) Kombinieren der statischen Karte (12) und der Weicheninformationen, um die dynamische Karte (10) zu erzeugen;

dadurch gekennzeichnet, dass das Verfahren die Schritte des Bereitstellens der dynamischen Eisenbahnkarte (10) und des Bereitstellens von GNSS-Informationen, die den Standort des Zuges (16) betreffen, und des Kombinierens der Karte und der GNSS-Informationen umfasst.

2. Verfahren nach Anspruch 1, wobei die Weicheninformationen von einem Signalisierungssystem (22) gewonnen werden.

3. Verfahren nach Anspruch 2, welches den Schritt des Gewinnens der Weicheninformationen von dem Signalisierungssystem (22) umfasst.

4. Verfahren nach einem der vorhergehenden Ansprüche, welches den Schritt des Bereitstellens wenigstens eines von Folgendem umfasst: einer aktuellen Geschwindigkeit des Zuges, einer vorhergehenden Geschwindigkeit des Zuges, einer aktuellen Fahrtrichtung des Zuges und einer vorhergehenden Fahrtrichtung des Zuges.

5. Verfahren nach einem der vorhergehenden Ansprüche, welches den Schritt des Bereitstellens von Zugstandortinformationen (24) aus mindestens einer zusätzlichen Quelle und des Kombinierens derselben mit der Karte und den GNSS-Informationen umfasst.

6. Verfahren nach einem der vorhergehenden Ansprüche, wobei der Schritt des Kombinierens der dynamischen Karte (10) und der GNSS-Informationen das Vergleichen der Zeit, zu der die GNSS-Informationen kompiliert wurden, mit der Zeit, zu der die dynamische Karte (10) erzeugt wurde, umfasst.

7. Verfahren nach einem der vorhergehenden Ansprüche, wobei der Schritt c) in einem Zug ausgeführt wird.

8. Verfahren nach einem der Ansprüche 1-6, wobei der Schritt c) an einem streckenseitigen Standort (21) ausgeführt wird.

9. Zugortungseinrichtung, welche umfasst:

Mittel zum Bereitstellen von Informationen, die den Zustand von Weichen innerhalb des Eisenbahngebiets betreffen; **dadurch gekennzeichnet, dass** die Zugortungseinrichtung ferner umfasst:

dynamische Kartenerzeugungsmittel zum Erzeugen einer dynamischen Karte eines Eisenbahngebiets unter Verwendung der Weicheninformationen;
GNSS-Mittel zur Bestimmung des Standortes des Zuges aus einem GNSS-System; und
Verarbeitungsmittel zum Kombinieren der dynamischen Karte und des GNSS-Standortes, um den Standort des Zuges zu bestimmen.

10. Einrichtung nach Anspruch 9, wobei die Kartenerzeugungsmittel im Zug vorgesehen sind.

11. Einrichtung nach Anspruch 9, wobei die Kartenerzeugungsmittel an einem streckenseitigen Standort

(21) vorgesehen sind.

12. Einrichtung nach einem der Ansprüche 9 bis 11, wobei die Verarbeitungsmittel im Zug vorgesehen sind.

13. Einrichtung nach einem der Ansprüche 9 bis 11, wobei die Verarbeitungsmittel an einem streckenseitigen Standort (21) vorgesehen sind.

14. Einrichtung nach einem der Ansprüche 9-13, wobei die Mittel zum Bereitstellen von Informationen, die den Zustand der Weichen betreffen, ein Signalisierungssystem (22) umfassen.

Revendications

1. Procédé de localisation d'un train (16) dans une zone d'un système ferroviaire comprenant l'étape initiale consistant :

à créer une carte dynamique (10) d'une zone d'un système ferroviaire :

a) en réalisant une carte statique (12) de ladite zone, montrant les lignes ferroviaires présentes dans cette zone ;
b) en fournissant des informations relatives à l'état des aiguilles dans la zone ferroviaire, et
c) en combinant ladite carte statique (12) et lesdites informations sur les aiguilles pour créer la carte dynamique (10),

caractérisé en ce que ledit procédé comprend les étapes consistant à réaliser la carte ferroviaire dynamique (10) et à fournir des informations GNSS relatives à la position dudit train (16) et à combiner la carte et les informations GNSS.

2. Procédé selon la revendication 1, dans lequel les informations sur les aiguilles sont obtenues d'un système de signalisation (22).

3. Procédé selon la revendication (2), comprenant l'étape consistant à obtenir du système de signalisation (22) lesdites informations sur les aiguilles.

4. Procédé selon l'une quelconque des revendications précédentes, comprenant l'étape consistant à fournir au moins une vitesse actuelle du train, une vitesse précédente du train, une direction actuelle du train ou une direction précédente du train.

5. Procédé selon l'une quelconque des revendications précédentes, comprenant l'étape consistant à fournir des informations (24) sur la position du train à partir d'au moins une source additionnelle et à combiner celles-ci avec la carte et les informations GNSS.

6. Procédé selon l'une quelconque des revendications précédentes, dans lequel l'étape consistant à combiner la carte dynamique (10) et les informations GNSS consiste à comparer l'heure à laquelle les informations GNSS ont été compilées, avec l'heure à laquelle la carte dynamique (10) a été créée.

7. Procédé selon l'une quelconque des revendications précédentes, dans lequel l'étape c) est exécutée sur un train.

8. Procédé selon l'une quelconque des revendications 1-6, dans lequel l'étape c) est exécutée en un endroit (21) le long de la voie.

9. Dispositif de localisation de trains comprenant :

un moyen pour fournir des informations relatives à l'état des aiguilles dans la zone ferroviaire, **caractérisé en ce que** le dispositif de localisation de trains comprend par ailleurs :

un moyen de création de carte dynamique pour créer une carte dynamique d'une zone ferroviaire au moyen desdites informations sur les aiguilles ;
un moyen GNSS pour déterminer la position du train à partir d'un système GNSS ; et un moyen de traitement pour combiner la carte dynamique et la position GNSS afin de déterminer la position du train.

10. Dispositif selon la revendication 9, dans lequel le moyen de création de carte est prévu sur le train.

11. Dispositif selon la revendication 9, dans lequel le moyen de création de carte est prévu en un endroit (21) le long de la voie.

12. Dispositif selon l'une quelconque des revendications 9 à 11, dans lequel le moyen de traitement est prévu sur le train.

13. Dispositif selon l'une quelconque des revendications 9 à 11, dans lequel le moyen de traitement est prévu en un endroit (21) le long de la voie.

14. Dispositif selon l'une quelconque des revendications 9 à 13, dans lequel le moyen permettant de fournir des informations relatives à l'état des aiguilles consiste en un système de signalisation (22).

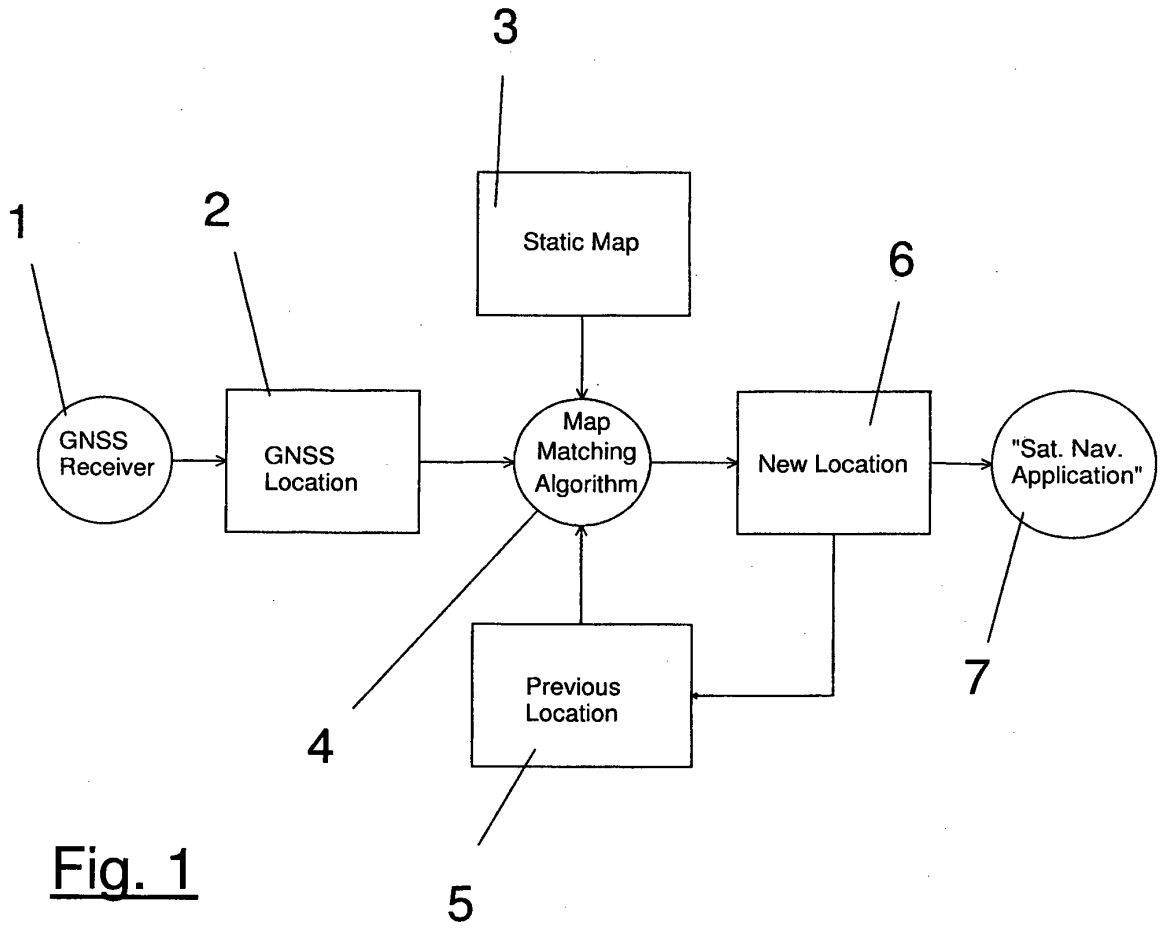

3
1
2
Static Map
6
GNSS Receiver
GNSS Location
Map Matching Algorithm
New Location
"Sat. Nav. Application"
4
Previous Location
7
5

Fig. 1

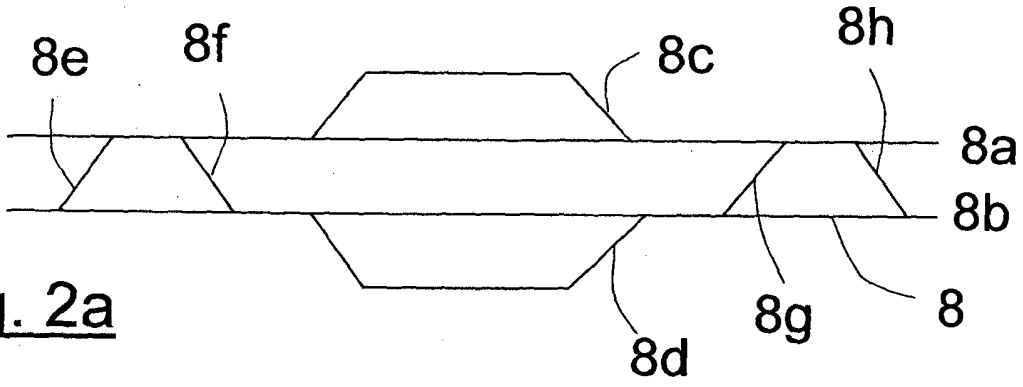


Fig. 2a

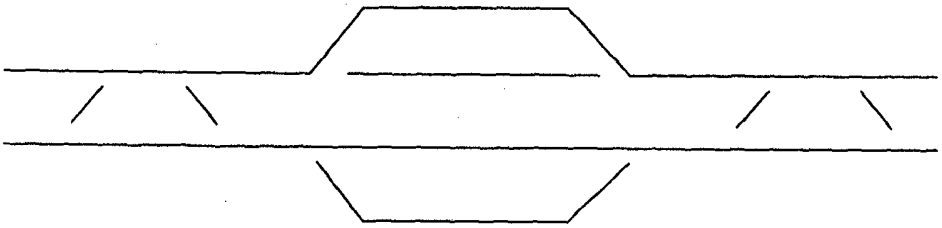


Fig. 2b

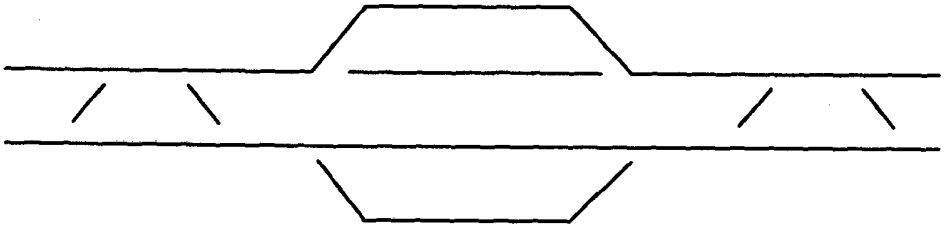


Fig. 2c

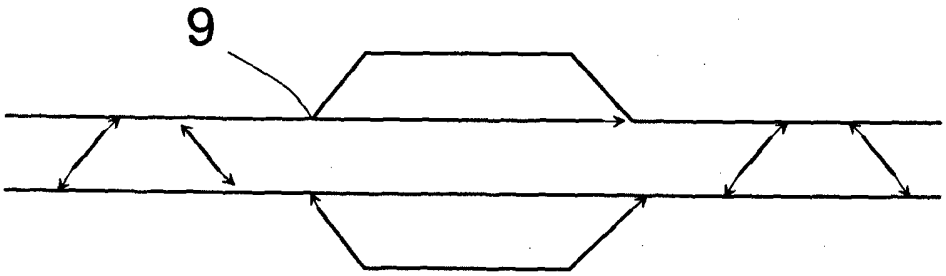


Fig. 2d

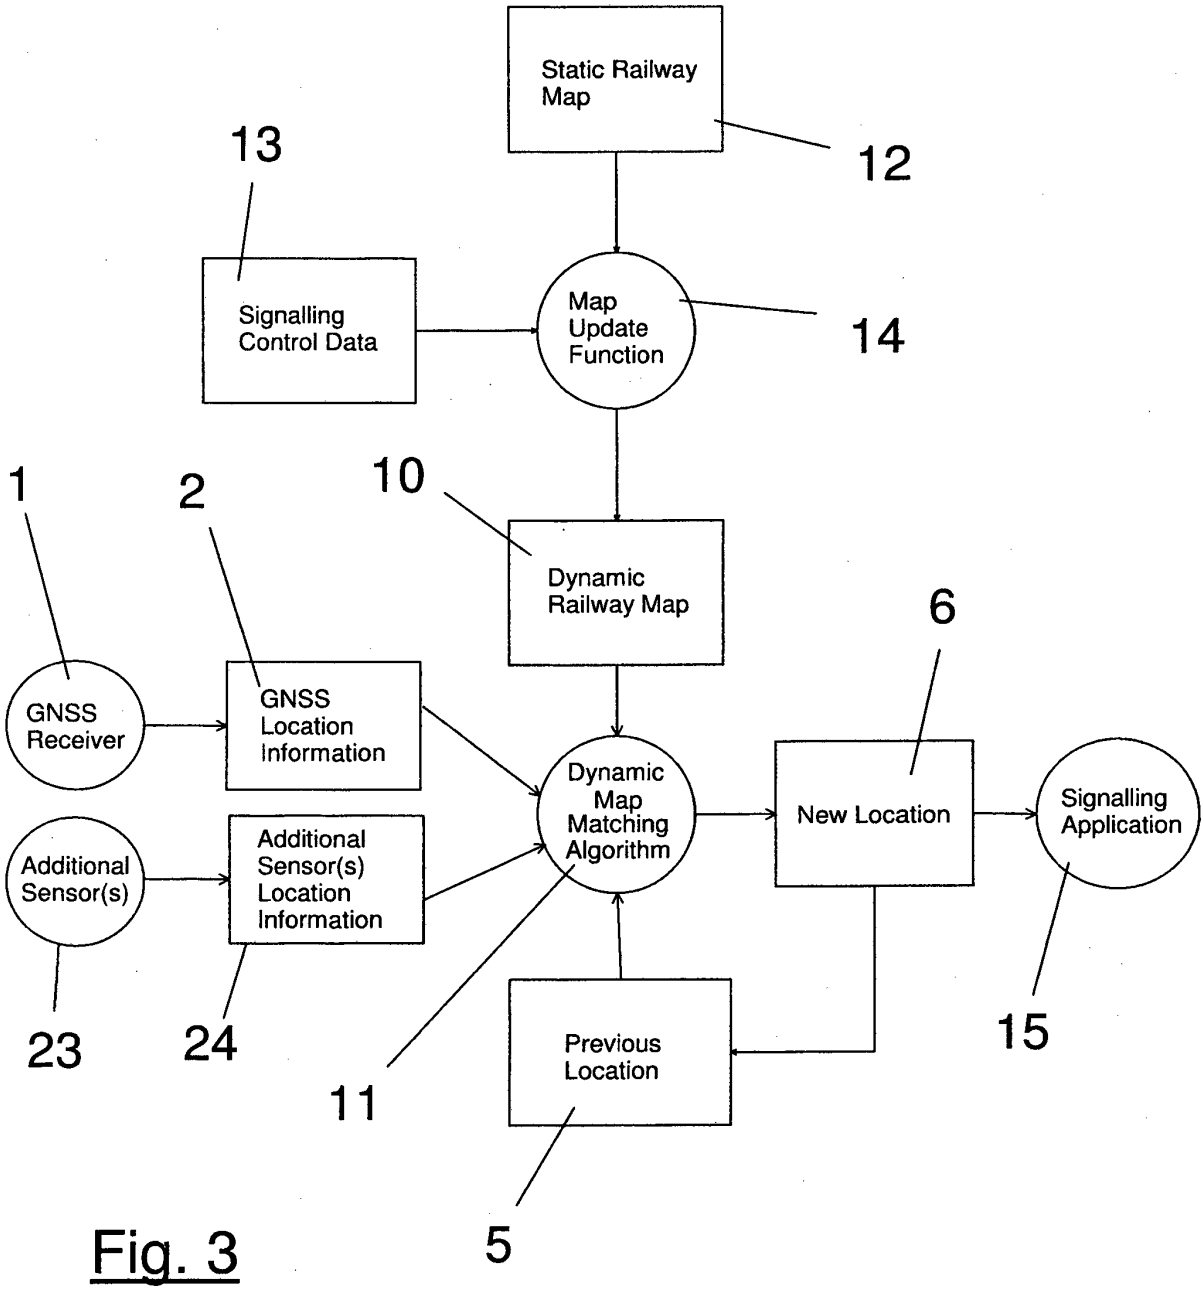

Static Railway Map
12
13
Signalling Control Data
Map Update Function
14
1
2
10
Dynamic Railway Map
6
GNSS Receiver
GNSS Location Information
Dynamic Map Matching Algorithm
New Location
Signalling Application
Additional Sensor(s)
Additional Sensor(s) Location Information
23
24
11
Previous Location
15
5

Fig. 3

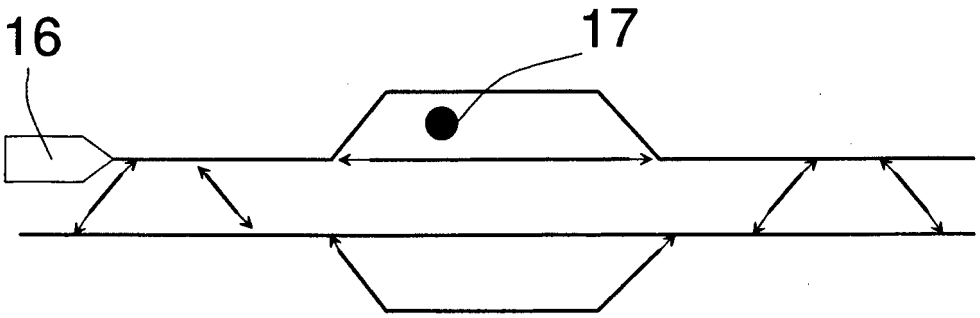


Fig. 4a

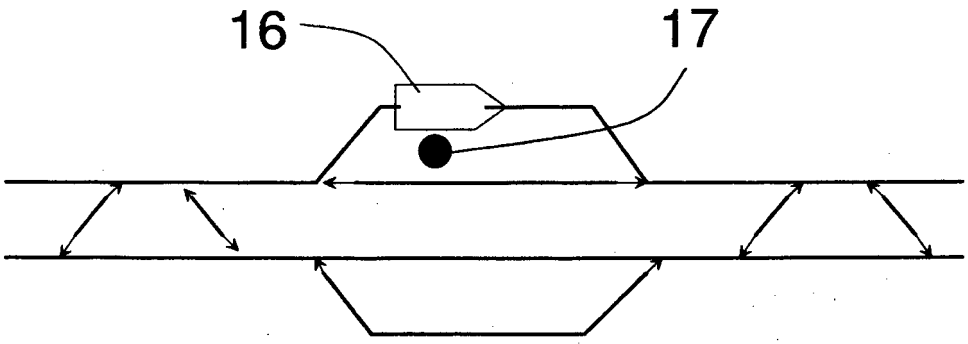


Fig. 4b

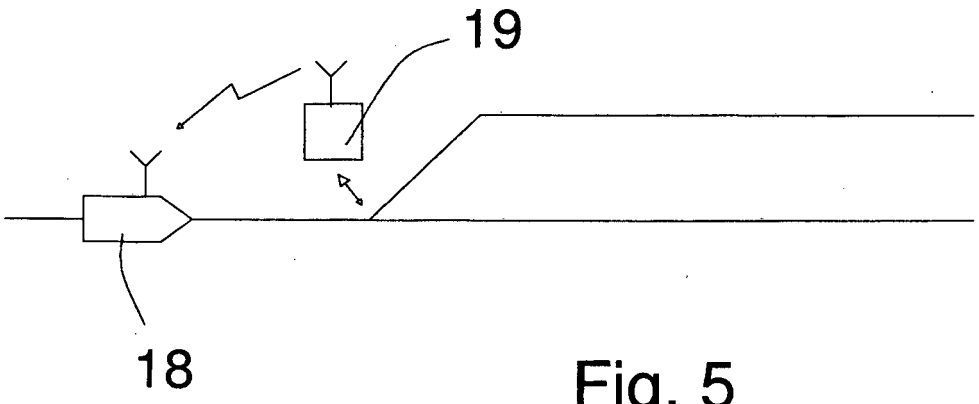


Fig. 5

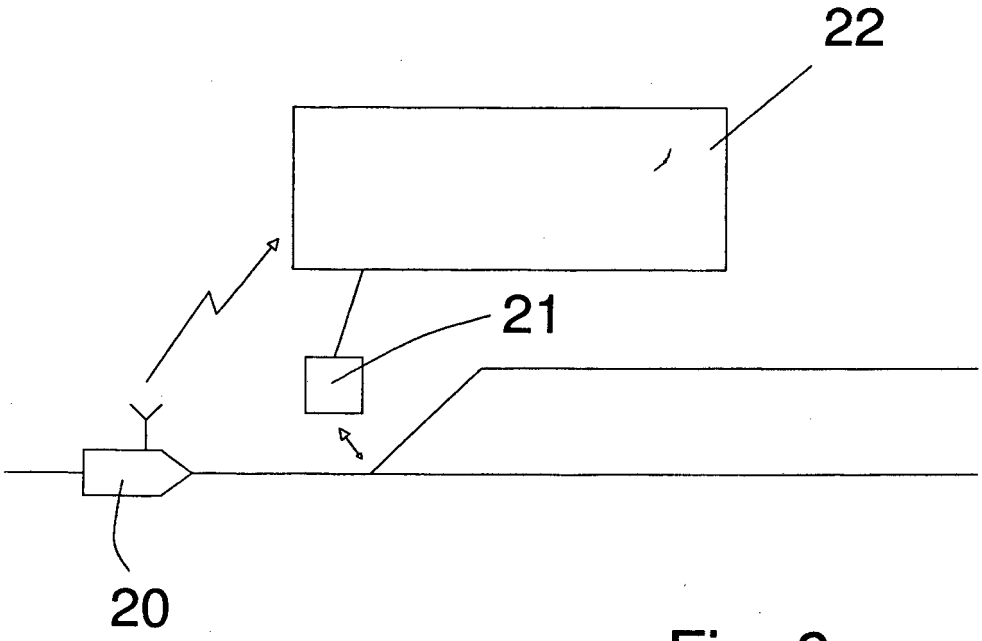


Fig. 6

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 0407875 A **[0007]**
- GB 1532638 A **[0007]**
- US 20030236598 A **[0007]**
- WO 2006136783 A **[0007]**
- JP 2005247024 B **[0007]**
- EP 1970280 A **[0007]**
- US 5129605 A **[0007]**