(11) EP 2 395 158 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication: **14.12.2011 Bulletin 2011/50**

(51) Int Cl.: **E03C** 1/04 (2006.01)

(21) Application number: 11158368.8

(22) Date of filing: 16.03.2011

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

Designated Extension States:

BA ME

(30) Priority: 10.06.2010 TW 099211063

(71) Applicant: Lin, Chen-Chang Shengang Township T'ai chung (TW) (72) Inventor: Lin, Chen-Chang Shengang Township T'ai chung (TW)

(74) Representative: Lang, Christian LangRaible GbR Patent- und Rechtsanwälte Rosenheimerstrasse 139 81671 München (DE)

(54) Water tap

(57) The water tap has a tap stand (10) and a storage frame (20). The tap stand (10) has a flowing channel (13) formed through the tap stand (10). The storage frame (20) is mounted on the tap stand (10) and has a flowing groove (21) and a storage hole (24). The flowing groove

(21) is annular and formed in a top surface of the storage frame (20) and communicates with the flowing channel (13) of the tap stand. The storage hole (24) is formed through the storage frame (20) to provide a storage function.

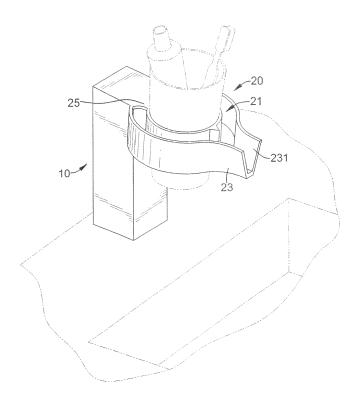


FIG. 3

5

10

20

25

40

45

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention relates to a water tap, and more particularly to a water tap with a storage frame to provide a storage function and keep a sink neat.

1

Description of the Prior Art

[0002] A conventional water tap is set on a sink and communicated to the water pipe of the water supply and provides functions of controlling the release of the water and adjusting the flow rate of the water. The water tap is generally set on the sink in a restroom or a kitchen. Many toiletries like a rinsing cup, a toothpaste, a toothbrush or a hand washing cream are randomly put on the sink near the water tap in order to use conveniently.

[0003] However, because the conventional water tap does not have any storage function, and the toiletries are put randomly on the sink near the water tap, the sink is not neat and the toiletries may be overturned or dropped down and stain the ground of the restroom or kitchen.

[0004] To overcome the shortcomings, the present invention tends to provide a water tap to mitigate or obviate the aforementioned problems.

SUMMARY OF THE INVENTION

[0005] The main object of the present invention is to provide a water tap with a storage frame to provide a storage function and keep a sink clean.

[0006] The water tap has a tap stand and a storage frame. The tap stand has a flowing channel formed through the tap stand. The storage frame is mounted on the tap stand and has a flowing groove and a storage hole. The flowing groove is annular and formed in a top surface of the storage frame and communicates with the flowing channel of the tap stand. The storage hole is formed through the storage frame to provide a storage function.

[0007] Other objects, advantages and novel features of the invention will become more apparent from the following detailed description when taken in junction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[8000]

Fig. 1 is a perspective view of a water tap in accordance with the present invention;

Fig. 2 is another perspective view of the water tap in Fig. 1;

Fig. 3 is an operational perspective view of the water tap in Fig. 1 showing a using condition of the water

tap;

Fig. 4 is a perspective view of another embodiment of a water tap in accordance with the present invention:

Fig. 5 is another perspective view of the water tap in Fig. 4; and

Fig. 6 is an operational perspective view of the water tap in Fig. 4 showing a using condition of the water tap.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0009] With reference to Figs. 1 to 6, a water tap in accordance with the present invention has a tap stand 10 and a storage frame 20. The tap stand 10 is hollow and has a bottom end, a top end, an inlet 11, an outlet 12 and a flowing channel 13.

[0010] The inlet 11 is formed through the bottom end of the tap stand 10 and may comprise a pair of circle holes. The outlet 12 is formed through the top end of the tap stand 10 and may be a rectangular hole. The flowing channel 13 is formed through the tap stand 10 from the bottom end to the top end and communicates with the inlet 11 and the outlet 12 of the tap stand 10.

[0011] The storage frame 20 is annular and mounted on the top end of the tap stand 10 at a position in which the outlet 12 is defined and has a top surface, a flowing groove 21, an inner wall, an outer wall, an entering slot 22, an outfall 23 and a storage hole 24, and may optionally have a connecting tab 25.

[0012] The flowing groove 21 is annular and formed in the top surface of the storage frame 20. The inner wall and the outer wall of the storage frame 20 are respectively defined in two sides of the flowing groove 21 and surround the flowing groove 21. The entering slot 22 is formed through the outer wall of the storage frame 20, communicates with the flowing groove 21 and corresponds to and communicates with the outlet 12 of the tap stand 10.

[0013] The outfall 23 is formed on and protrudes from the outer wall of the storage frame 20 opposite to the entering slot 22 and has a falling slot 231. The falling slot 231 is formed in the outfall 23 and communicates with the flowing groove 21 and makes the outfall 23 shaped as a V-shaped cross section or a U-shaped cross section. The storage hole 24 is circular and formed through the storage frame 20 and is shaped and surrounded by the inner wall of the storage frame 20. The storage hole 24 provides a storage function to hold a rinsing cup or a hand washing cream. The toothpaste and toothbrush may be put in the rinsing cup to keep the sink neat. The shape of the storage hole 24 is unlimited and may be circular, rectangular or semicircular to fit various shapes of the rinsing cups or some other toiletries.

[0014] The connecting tab 25 is mounted between the inner wall and the outer wall and connected to the top end of the tap stand 10 and covers a part of the flowing

15

20

25

30

40

50

groove 21 beside the outlet 12 of the tap stand 10. The connecting tab 25 provides a sufficient strength to connect the tap stand 10 and the storage frame 20.

[0015] Even though numerous characteristics and advantages of the present invention have been set forth in the foregoing description, together with details of the structure and function of the invention, the disclosure is illustrative only. Changes may be made in detail, especially in matters of shape, size and arrangement of parts within the principles of the invention to the full extent indicated by the broad general meaning of the terms in which the appended claims are expressed.

Claims

1. A water tap comprising:

a tap stand (10) being hollow and having a bottom end;

a top end;

an inlet (11) formed through the bottom end of the tap stand;

an outlet (12) formed through the top end of the tap stand; and

a flowing channel (13) formed through the tap stand (10) and communicating with the inlet (11) and the outlet (12) of the tap stand (10); and a storage frame (20) mounted on the top end of the tap stand (10) and having

a top surface;

a flowing groove (21) being annular and formed in the top surface of the storage frame (20); an inner wall and an outer wall respectively defined in two sides of the flowing groove (21) and surround the flowing groove (21);

an entering slot (22) formed through the outer wall of the storage frame (20) and respectively communicating with the flowing groove (21) and the outlet (12) of the tap stand (10);

an outfall (23) formed on and protruding from the outer wall of the storage frame (20) and having a falling slot (231) communicating with the flowing groove (21); and

a storage hole (24) formed through the storage frame (20) and surrounded by the inner wall of the storage frame (20) to provide a storage function.

- 2. The water tap as claimed in claim 1, wherein the storage frame (20) is annular; and the storage hole (24) is circular.
- 3. The water tap as claimed in claim 2, wherein the storage frame (20) further has a connecting tab (25) mounted on the inner wall and the outer wall beside the outlet (12) of the tap stand (10) and connected to the top end of the tap stand (10).

- **4.** The water tap as claimed in claim 3, wherein the outfall (23) is shaped as a V-shaped cross section.
- 5 5. The water tap as claimed in claim 3, wherein the outfall (23) is shaped as a U-shaped cross section.
 - **6.** The water tap as claimed in claim 4, wherein the outfall (23) is formed on and protrudes from the outer wall of the storage frame (20) opposite to the entering slot (22).
 - 7. The water tap as claimed in claim 5, wherein the outfall (23) is formed on and protrudes from the outer wall of the storage frame (20) opposite to the entering slot (22).
- **8.** The water tap as claimed in claim 1, wherein the outfall (23) is shaped as a V-shaped cross section.
- **9.** The water tap as claimed in claim 1, wherein the outfall (23) is shaped as a U-shaped cross section.

3

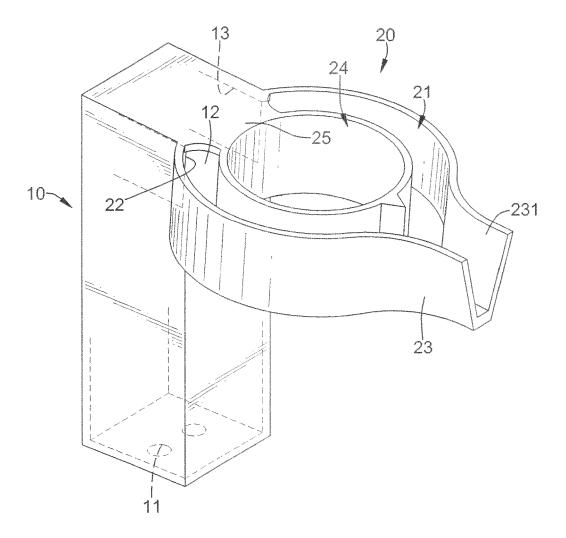


FIG. 1

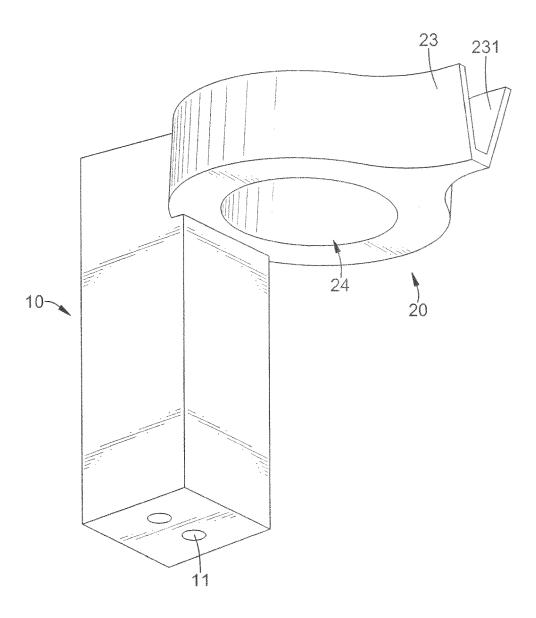


FIG. 2

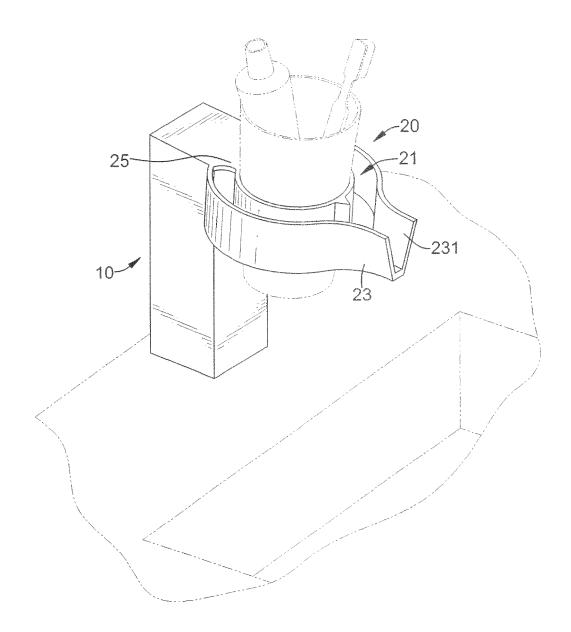


FIG. 3

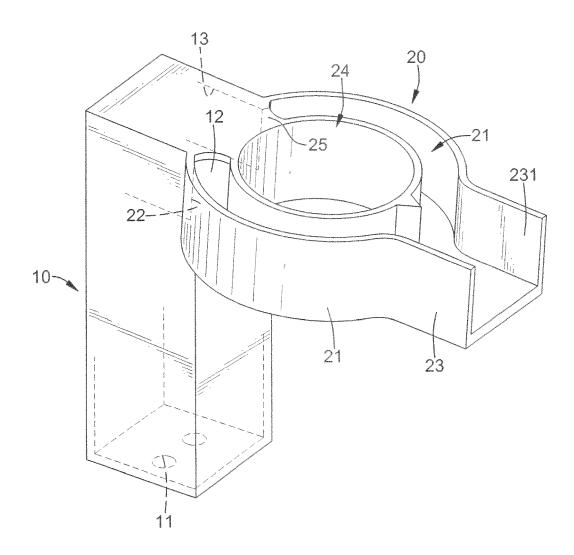


FIG. 4

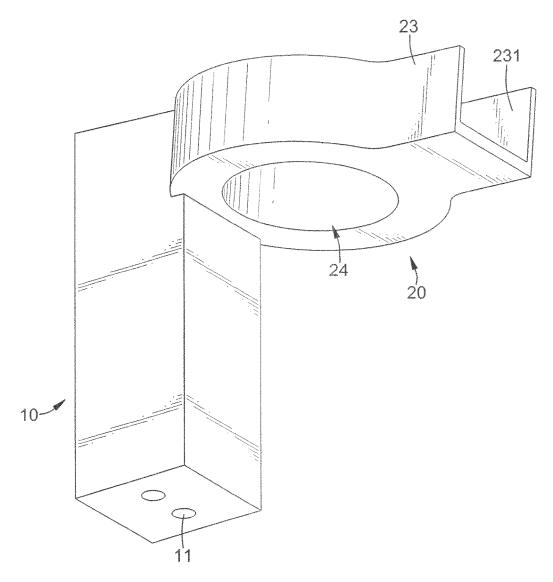


FIG. 5

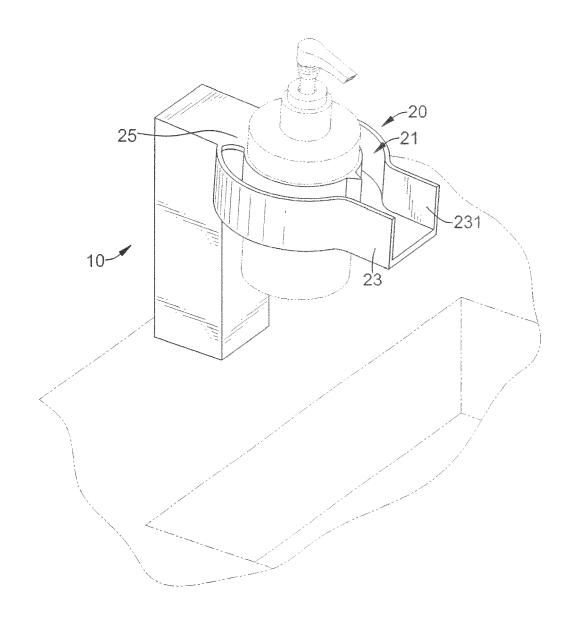


FIG. 6



EUROPEAN SEARCH REPORT

Application Number EP 11 15 8368

Category	Citation of document with ir of relevant passa		ate,	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
Х,Р	DE 20 2010 008200 U 11 November 2010 (2 * figures *		ANG [TW])	1-9	INV. E03C1/04
A,P	DE 20 2010 008201 U 11 November 2010 (2 * figures *	 11 (LIN CHEN CH 1010-11-11)	ANG [TW])	1	
A	JP 2003 184140 A (T 3 July 2003 (2003-0 * figures *			1	
A	DE 20 2008 014476 U SICHERHEITS [DE]) 12 February 2009 (2 * figure 1 *	-	GEL &	1	
A	KR 2009 0112061 A (28 October 2009 (20 * figures *)	1	TECHNICAL FIELDS
A	KR 2009 0112064 A (28 October 2009 (20 * figures *	JO MI AEH [KR] 109-10-28))	1	TECHNICAL FIELDS SEARCHED (IPC) E03C A47K
A	WO 2006/094684 A1 ([DE]; KUNKEL HORST 14 September 2006 (* figures 1a,1c *	[DE])	RKE AG	1	
A	EP 1 757 740 A1 (HA [DE]) 28 February 2 * figures 1,2 *			1	
	The present search report has I	oeen drawn up for all clai	ms		
	Place of search	Date of completion			Examiner
	Munich	27 May 1	2011	I sa	ailovski, Marko
X : part Y : part docu A : tech O : non	ATEGORY OF CITED DOCUMENTS icularly relevant if taken alone icularly relevant if combined with another iment of the same category inclogical background written disclosure rmediate document	E: ner D: L: &:	theory or principle earlier patent doc after the filing date document cited in document cited fo member of the sa document	ument, but publi the application rother reasons	ished on, or

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 11 15 8368

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

27-05-2011

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 202010008200	U1 11-11-2010	NONE	<u>'</u>
DE 202010008201	U1 11-11-2010	NONE	
JP 2003184140	A 03-07-2003	NONE	
DE 202008014476	U1 12-02-2009	NONE	
KR 20090112061	A 28-10-2009	NONE	
KR 20090112064	A 28-10-2009	NONE	
WO 2006094684	A1 14-09-2006	CN 101137796 A DE 102005010349 A1 EP 1856335 A1 JP 2008531895 T US 2008164336 A1	05-03-2008 21-09-2006 21-11-2007 14-08-2008 10-07-2008
EP 1757740	A1 28-02-2007	DE 102005040159 B3	22-02-200

© For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

FORM P0459