



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
04.01.2012 Bulletin 2012/01

(51) Int Cl.:
F41J 5/06 (2006.01)

(21) Application number: **10168277.1**

(22) Date of filing: **02.07.2010**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK SM TR
Designated Extension States:
BA ME RS

(72) Inventor: **Liao, Yin-Hsi**
Cambridge, CB1 1AH (GB)

(74) Representative: **Horak, Michael**
Beukenberg Rechtsanwälte
Uhlemeyerstrasse 9+11
30175 Hannover (DE)

(71) Applicant: **Guay Guay Trading Co., Ltd.**
Taipei County 234 (TW)

(54) **Pressure detection device for a target**

(57) A target pressure detection device (1) includes a housing (10), a resilient membrane (12), and a pressure detection unit (14). The housing (10) forms a chamber (102) having an open end and the housing (10) forms a through hole (104). The resilient membrane (12) is mounted to the housing (10) to cover and close the open end of the housing (10) so as to set the chamber (102) in an air-tight condition. The pressure detection unit (14)

is mounted to the through hole (104) and forms therein an accommodation compartment (140) that movably receives therein a floating element (142). The accommodation compartment (140) receives therein a sensor (144). The sensor (144) can effectively detect a movement of the floating element (142) and thus the precision of detection of the target can be improved through detecting change of airflow.

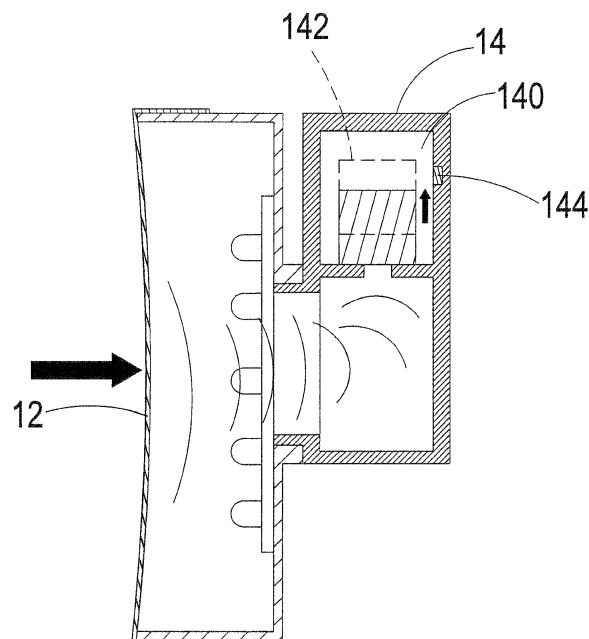


FIG.5

Description

(a) Technical Field of the Invention

[0001] The present invention generally relates to a target pressure detection device that enhances the detection of target shooting.

(b) Description of the Prior Art

[0002] Survival games are getting popular recently. Gun shooting, however, is not legal in certain areas/countries and one substitute for gun shooting is the so-called BB gun game, which provides a recreational activity resembling gun shooting. The BB gun game is often played in a specific field where targets are installed. The BB target currently available in the market is quite simple and monotonous. Several types of BB target are available, including paper targets and simply-erected targets, which, once shot, collapse and must be re-erected manually. Power targets are also available but suffer being easily damaged, lacking of expandability, poor detection capability, and being not sufficiently sensitive, making it sometimes troublesome in use and not convenient. A professional shooting range requires complicated facility that is generally not affordable by general hobbyist of shooting games.

[0003] The existing target adopts digital detection to determine the points obtained. However, such a process is of insufficiency of sensitivity and the costs for installation, assembling, and maintenance are expensive, making it not economic. Further, precise calculation and determination of points acquired can not be properly done once the detection device fails to work and this may affects the final result of a competition.

SUMMARY OF THE INVENTION

[0004] In view of such problems of the existing shooting targets, the present invention aims to provide a target pressure detection device that facilitates detection of a shot on the target.

[0005] The primary objective of the present invention is to provide a target pressure detection device, comprising a housing, a resilient membrane, and a pressure detection unit. The housing comprises a wall delimiting a chamber having an open end and the housing forms a through hole in the wall. The resilient membrane is mounted to the housing to cover and close the open end of the housing to set the chamber in an air-tight condition. The pressure detection unit is mounted to the through hole and forms therein an accommodation compartment that movably receives therein a floating element. The accommodation compartment receives therein a sensor. The sensor can effectively detect a movement of the floating element. Since the chamber is closed by the resilient membrane to be set in an airtight condition, when the resilient membrane is subjected to an external force, the

air contained in the chamber is compressed and a change in air flowing is induced, whereby the floating element that is received in the pressure detection unit that is in fluid communication with the chamber is caused to move and the movement is detected by the sensor. Thus, the precision of detection of the target can be improved.

[0006] Another objective of the present invention is to provide a target pressure detection device that is simple in structure and cheap in cost.

[0007] A further objective of the present invention is to provide a target pressure detection device that improves the detection result of shots on a target so as to minimize a dispute between players of a shooting game.

[0008] The foregoing objectives and summary provide only a brief introduction to the present invention. To fully appreciate these and other objects of the present invention as well as the invention itself, all of which will become apparent to those skilled in the art, the following detailed description of the invention and the claims should be read in conjunction with the accompanying drawings. Throughout the specification and drawings identical reference numerals refer to identical or similar parts.

[0009] Many other advantages and features of the present invention will become manifest to those versed in the art upon making reference to the detailed description and the accompanying sheets of drawings in which a preferred structural embodiment incorporating the principles of the present invention is shown by way of illustrative example.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010]

FIG 1 is a perspective view of a preferred embodiment of the present invention.

FIG 2 is an exploded view of the preferred embodiment of the present invention.

FIG 3 is a cross-sectional view showing a first phase of an operation of the preferred embodiment of the present invention.

FIG 4 is also a cross-sectional view showing a second phase of the operation of the preferred embodiment of the present invention.

FIG 5 is also a cross-sectional view showing a third phase of the operation of the preferred embodiment of the present invention.

FIG 6 is a perspective view illustrating an application of the preferred embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0011] The following descriptions are exemplary embodiments only, and are not intended to limit the scope, applicability or configuration of the invention in any way. Rather, the following description provides a convenient

illustration for implementing exemplary embodiments of the invention. Various changes to the described embodiments may be made in the function and arrangement of the elements described without departing from the scope of the invention as set forth in the appended claims.

[0012] Referring to FIGS. 1 and 2, which are respectively a perspective view and an exploded view of a target constructed in accordance with a preferred embodiment of the present invention, the present invention provides a target pressure detection device to be used with a target. The target pressure detection device 1 comprises a housing 10, a resilient membrane 12, and a pressure detection unit 14. The housing 10 comprises a wall delimiting a chamber 102 that defines an open end. The housing 10 also forms a through hole 104 in the wall thereof. The open chamber 102 of the housing 10 is covered and closed by the resilient membrane 12, so that the chamber 102 is set in an airtight condition. The through hole 104 receives the pressure detection unit 14 mounted thereto in a fluid-communicating manner. The pressure detection unit 14 forms therein an accommodation compartment 140, which receives, in a movable manner, a floating element 142 (made of polyurethane or expanded polystyrene) therein. A sensor 144 is mounted in the accommodation compartment 140 to effectively detect the movement of the floating element 142. The housing 10 also receives therein a circuit board 2 that controls and drives a set of illumination elements 20. The circuit board 2 is electrically connected to the sensor 144.

[0013] With the above-described arrangement, the operation of the present invention will be described with reference to FIGS. 3-5, which are cross-sectional views showing the operation of the target. As shown in the drawings, the pressure detection unit 14 is mounted to the through hole 104 of the housing 10 so that air is allowed to freely move between the pressure detection unit 14 and the chamber 102 for the housing 10 is covered by the resilient membrane 12 to make the chamber 102 in an airtight condition.

[0014] When the resilient membrane 12 is subjected to contact by an external object, such as a BB, the resilient membrane 12 undergoes deformation, inducing a shock wave in the air contained in the chamber 102, and the floating element 142 received in the pressure detection unit 14 is driven by the airflow to move and change the position thereof.

[0015] When the sensor 144 of the accommodation compartment 140 detects the movement of the floating element 142, a detection signal is transmitted to a computation unit (not shown). Thus, even the contact is made at a periphery of the resilient membrane 12, the contact on the resilient membrane 12 can be detected, and therefore, the precision of detection is enhanced.

[0016] FIG. 6 is a perspective view showing an application of the target according to the present invention. Reference is also made to FIG. 2. In the illustrated application, multiple units of the target of the present invention are arranged in a three-by-three square matrix. Ac-

cording to the present invention, to display various possible conditions that each unit of the target pressure detection device of the present invention can be of, including target to be shot, target that has been shot, target that acquires a point, the housing 10 receives therein a circuit board 2 that controls and drives a set of illumination elements 20 and the circuit board 2 is electrically connected to the sensor 144 in order to properly display the various conditions of each target unit.

[0017] It will be understood that each of the elements described above, or two or more together may also find a useful application in other types of methods differing from the type described above.

[0018] While certain novel features of this invention have been shown and described and are pointed out in the annexed claim, it is not intended to be limited to the details above, since it will be understood that various omissions, modifications, substitutions and changes in the forms and details of the device illustrated and in its operation can be made by those skilled in the art without departing in any way from the spirit of the present invention.

Claims

1. A target pressure detection device (1), comprising:

a housing (10), which forms a chamber (102) having an open end, the housing forming a through hole (104);
a resilient membrane (12), which is mounted to the housing (10) to cover and close the open end of the housing (10) so as to set the chamber (102) in an air-tight condition; and
a pressure detection unit (14), which is mounted to the through hole (104) and forms therein an accommodation compartment (140) that movably receives therein a floating element (142), the accommodation compartment (140) receiving therein a sensor (144) that detects movement of the floating element (142).

2. The target pressure detection device according to claim 1 further comprising a circuit board (2) that is received in the housing (10) to control and drive a set of illumination elements (20).

3. The target pressure detection device according to claim 1, wherein the floating element (142) is made of polyurethane.

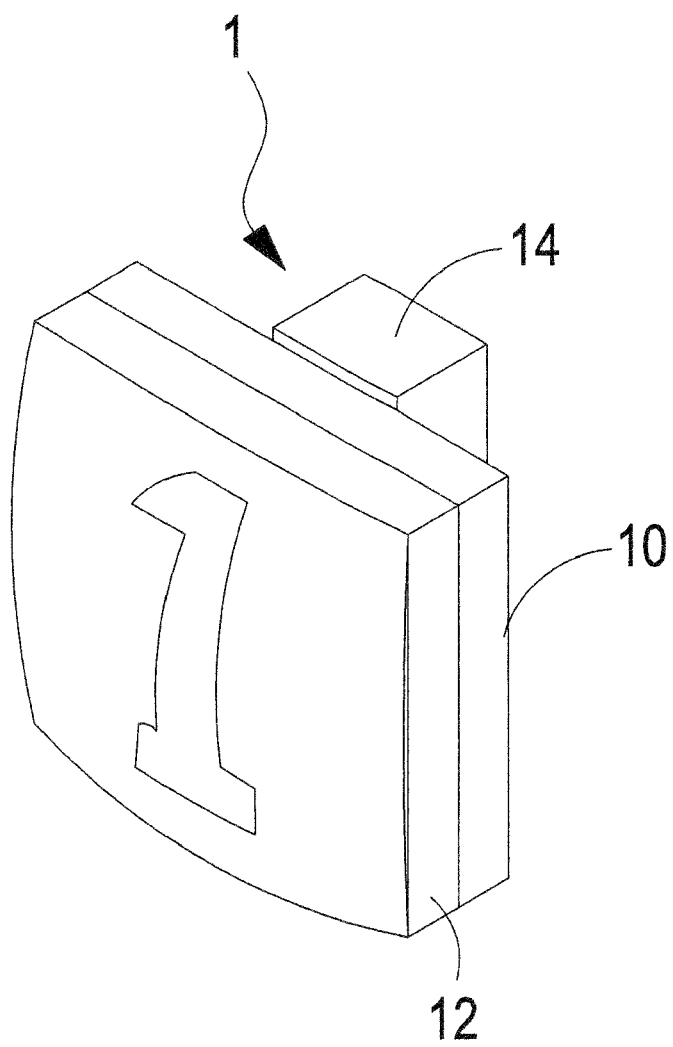


FIG.1

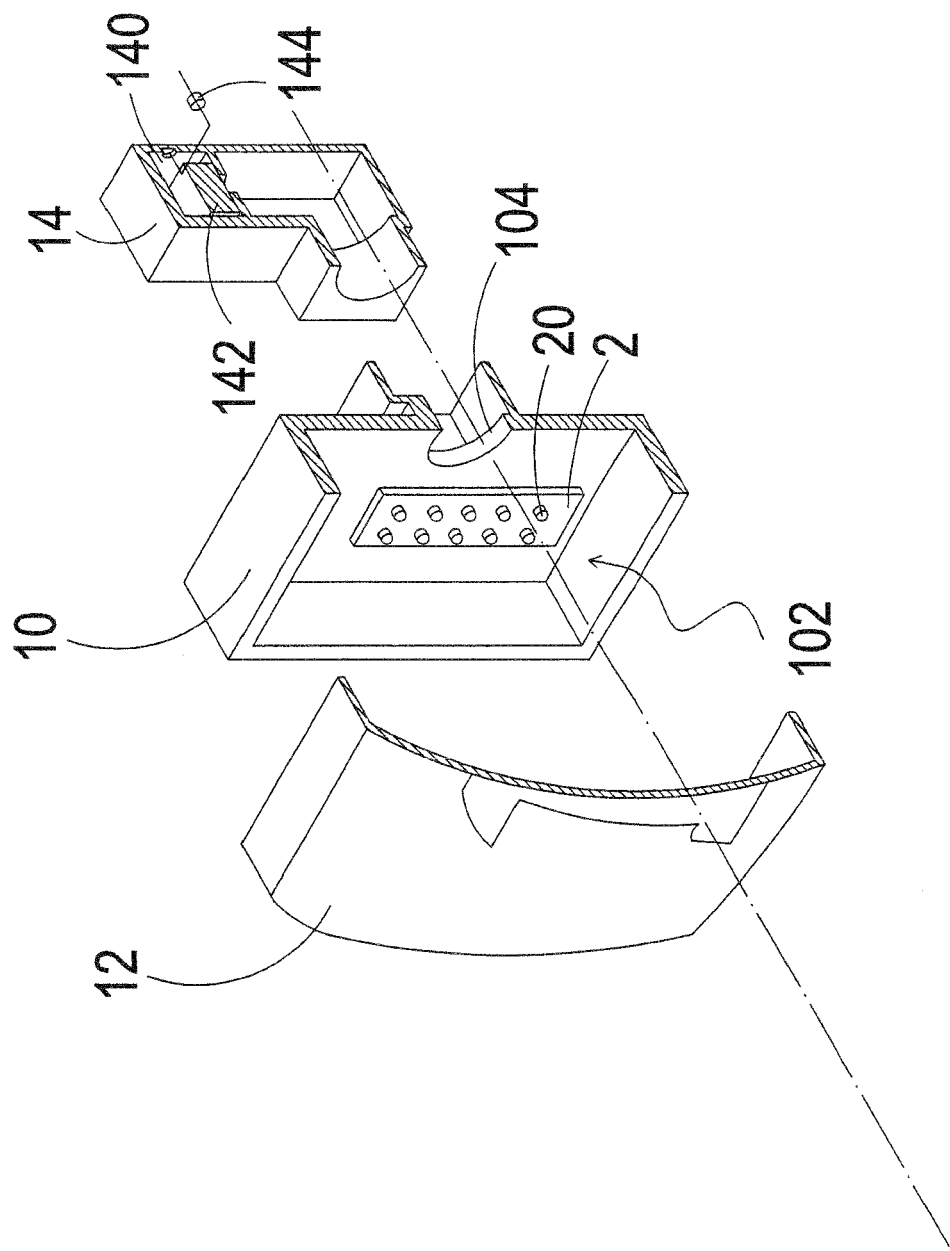


FIG.2

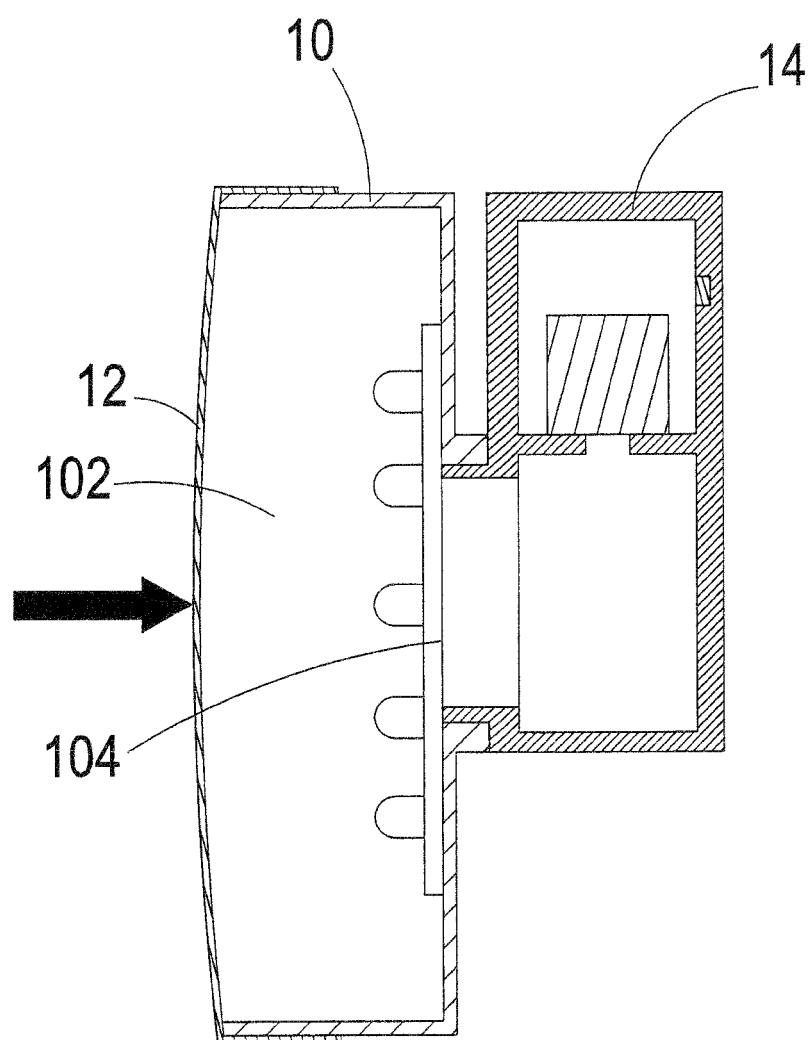


FIG.3

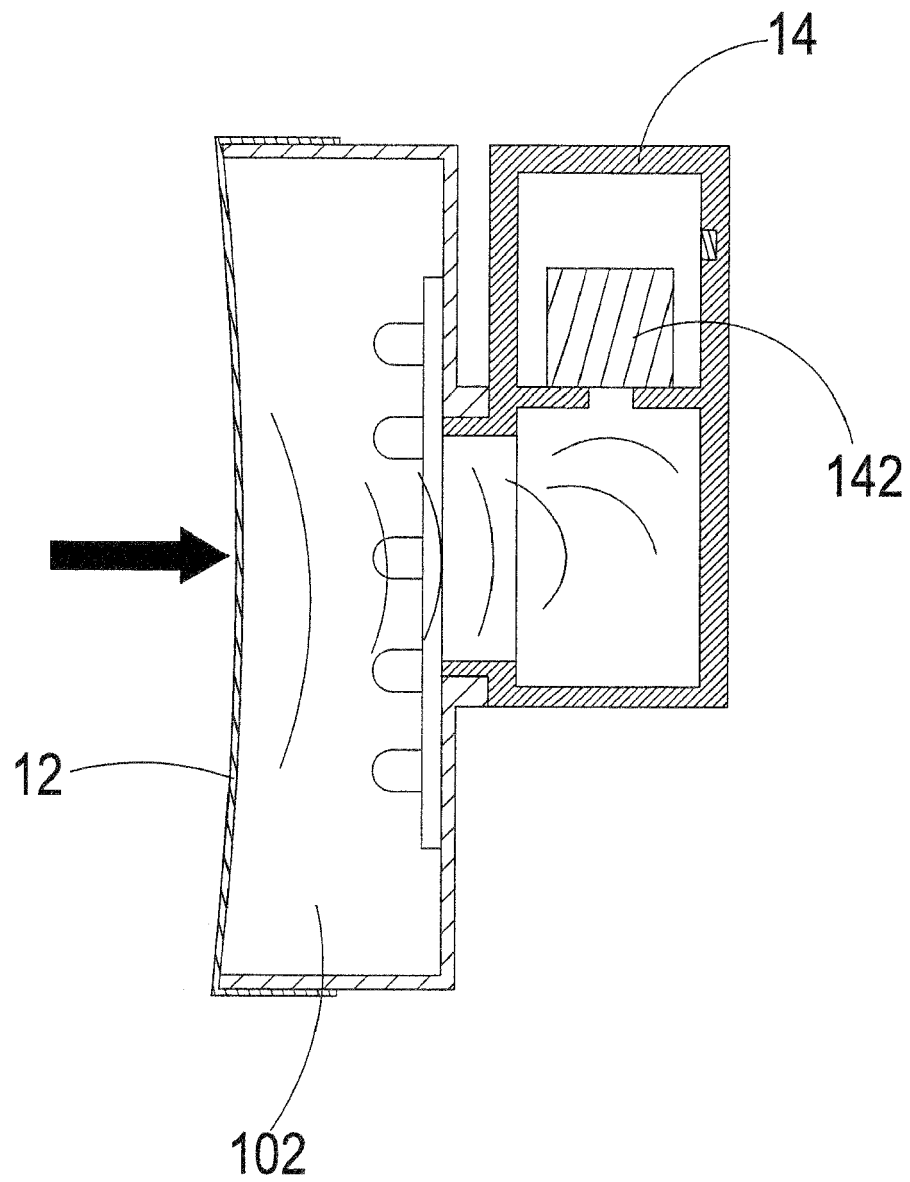


FIG.4

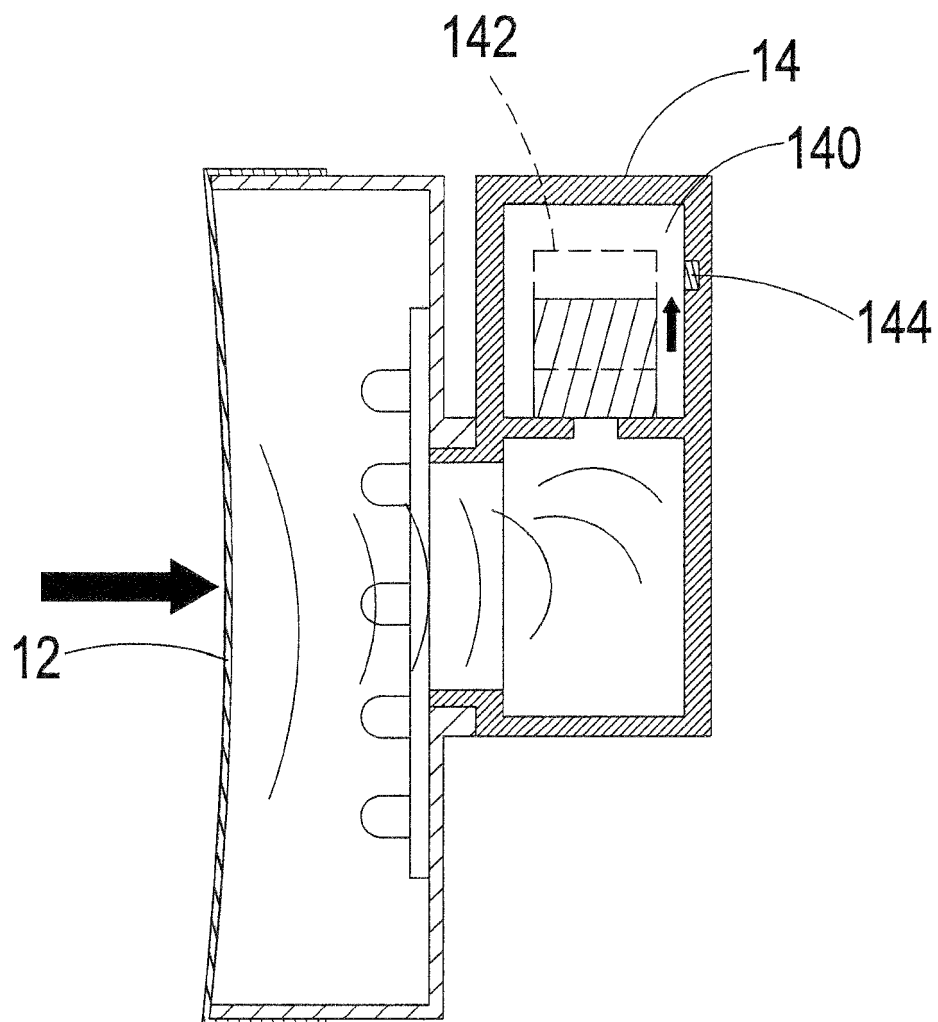


FIG.5

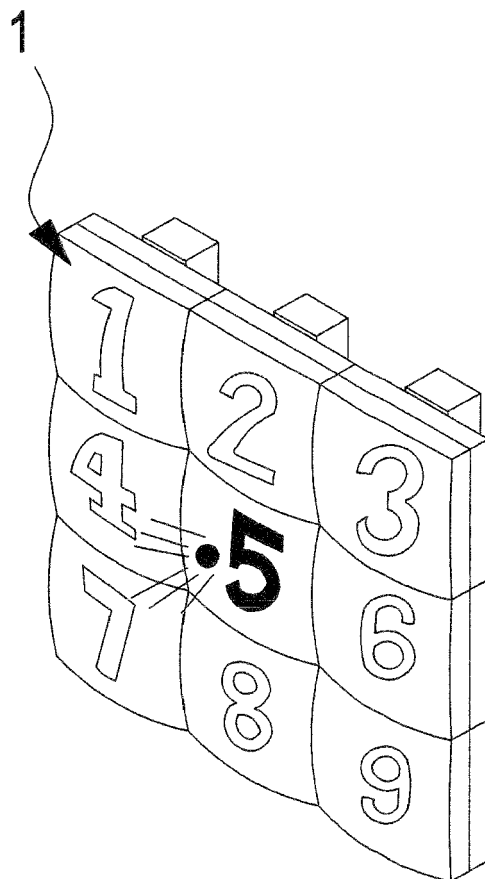


FIG.6



EUROPEAN SEARCH REPORT

Application Number
EP 10 16 8277

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
Y	CH 645 457 A5 (POLYTRONIC AG [CH]) 28 September 1984 (1984-09-28) * abstract; figure 1 * * page 2, line 34 - line 55 * -----	1-3	INV. F41J5/06
Y	US 3 931 739 A (MOURIER JEAN) 13 January 1976 (1976-01-13) * abstract; figures * * column 1, line 52 - column 2, line 19 * -----	1-3	
Y	WO 2010/019327 A1 (MRAZ ROCKY [US]) 18 February 2010 (2010-02-18) * abstract; figures 1,5 * * paragraphs [0029], [0044], [0050]; figures 1,2,5 * -----	2	
			TECHNICAL FIELDS SEARCHED (IPC)
			F41J
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 2 December 2010	Examiner Schwingel, Dirk
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

2
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 10 16 8277

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-12-2010

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
CH 645457	A5	28-09-1984	AT 366176 B 25-03-1982
			BE 880019 A1 03-03-1980
			JP 1471945 C 27-12-1988
			JP 55075199 A 06-06-1980
			JP 63018119 B 16-04-1988

US 3931739	A	13-01-1976	NONE

WO 2010019327	A1	18-02-2010	US 2010038854 A1 18-02-2010
