



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
04.01.2012 Bulletin 2012/01

(51) Int Cl.:
H01H 13/85 (2006.01) H01H 13/88 (2006.01)

(21) Application number: **10167824.1**

(22) Date of filing: **30.06.2010**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK SM TR
Designated Extension States:
BA ME RS

(72) Inventor: **Chen, Chao**
Waterloo Ontario N2L 3W8 (CA)

(74) Representative: **Moore, Barry et al**
Hanna Moore & Curley
13 Lower Lad Lane
Dublin 2 (IE)

(71) Applicant: **Research In Motion Limited**
Waterloo, ON N2L 3W8 (CA)

Remarks:

Amended claims in accordance with Rule 137(2) EPC.

(54) **Deflection Web for a Keypad Assembly**

(57) A deflection web is provided for use in a keypad assembly. The deflection web comprises a plurality of actuators resiliently coupled together by a flexible membrane. Each actuator of the deflection web corresponds to a key of the keypad assembly, and for each actuator, the flexible membrane comprises a corresponding radi-

ally outwardly extending flange whose thickness varies in a direction from the corresponding actuator. In some instances, the thickness of the flange may increase as the flange extends a distance radially outward from its corresponding actuator. A method for creating the deflection web of the keypad assembly and a method for assembling the keypad assembly are also provided.

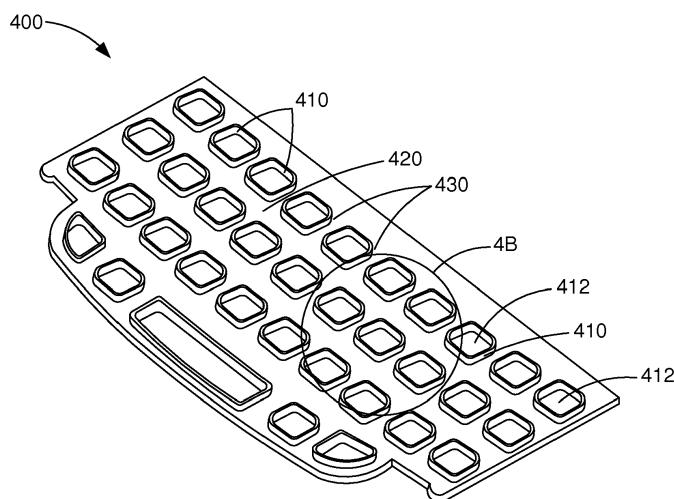


FIG. 4A

Description

[0001] The field of the disclosure relates generally to keypads and keypad assemblies, with particular but by no means exclusive application to keypads of mobile communications devices.

[0002] Keypad assemblies used in electronic devices such as mobile communications devices may incorporate deflection webs. Deflection webs are typically flexible membranes interposed between the keys of a keypad and an underlying printed circuit board (PCB) containing switches which may be activated upon depression of the corresponding key(s). Deflection webs provide some protection against water and other contaminants interfering with the operation of the PCB. As well, deflection webs may be used as positioning and depression guides for the keys of the keypad assembly.

General

[0003] In one broad aspect, there may be provided a keypad assembly. The keypad assembly includes a plurality of keys; and a deflection web comprising a plurality of actuators resiliently coupled together by a flexible membrane. Each actuator may correspond to a key, and for each actuator, the flexible membrane comprises a corresponding radially outwardly extending flange whose thickness varies in a direction from the corresponding actuator. In some instances, the thickness of the flange may increase as the flange extends in the direction from the corresponding actuator.

[0004] In some embodiments, the upper and lower surfaces of the flange may be non-parallel. Each actuator may comprise a seat for receiving a key. The keypad assembly may include a keypad base having a plurality of switches, each switch corresponding to one of the plurality of keys. Further, the keypad base may have an overlay superimposed thereon, with a dome corresponding to, and covering, each switch. The height of each dome may be approximately equal to the displacement of the corresponding actuator required to cause an upper surface of the corresponding flange to lie substantially orthogonal to said displacement.

[0005] The deflection web may be provided between the plurality of keys and the keypad base, and in some embodiments, the deflection web may be anchored to the keypad base. When a key is in a first undepressed position, the corresponding actuator may be displaced by the height of the corresponding dome. Further, this may cause an upper surface of the corresponding flange to lie substantially flat proximate the corresponding actuator.

[0006] In some embodiments, when each key is in a first undepressed position, the upper surface of the flexible membrane may be substantially planar. Further, when each key is in a first undepressed position, for each actuator, the corresponding flange may exert a pre-load force on the actuator and a component of the pre-load

force may be exerted in a downward direction.

[0007] In other embodiments, the keypad assembly may further comprise a light shielding layer provided between the plurality of keys and the deflection web. A maximum downward displacement of each key may be approximately equal to a displacement required to activate the corresponding switch. In another embodiment, the keypad assembly may be configured for use in a mobile device. In yet another embodiment, a mobile device comprising the keypad assembly is provided.

[0008] In another broad aspect, a deflection web for a keypad assembly may be provided. The deflection web comprises a plurality of actuators; and a flexible membrane resiliently coupling each of the actuators together. For each actuator, the flexible membrane comprises a corresponding radially outwardly extending flange and the thickness of the flange varies in a direction from the corresponding actuator.

[0009] In some embodiments, when each actuator is depressed, the corresponding flange may exert a force on the actuator to counteract the depression. A chamfer may be provided at the intersection of each flange and corresponding actuator. Further, the flexible membrane may comprise an elastomeric material. Each actuator may be configured to receive a key of a keypad assembly, and the deflection web may be configured for anchoring to a keypad base.

[0010] In other embodiments, when the deflection web is anchored to a keypad base, each actuator may be depressible from a first undepressed position wherein the flexible membrane is substantially planar.

[0011] In another broad aspect, a method for creating a deflection web for a keypad assembly may be provided. The method comprises providing a plurality of actuators in a substantially planar configuration; and providing a flexible membrane resiliently coupling the plurality of actuators together. For each actuator, the flexible membrane comprises a corresponding radially outwardly extending flange, and the thickness of the flange varies in a direction from the corresponding actuator. In some embodiments, a portion of the deflection web may be co-molded to frame. The frame may be made of hard plastic and may be injection molded. In some embodiments, the flexible membrane comprises an elastomeric material.

[0012] In another broad aspect, a method for assembling a keypad assembly may be provided. The method comprises providing a deflection web having a plurality of actuators resiliently coupled together with a flexible membrane. For each actuator, the flexible membrane comprises a corresponding radially outwardly extending flange with a thickness that varies in a direction from the actuator. The method further comprises anchoring the deflection web to a keypad base such that a pre-load force is generated in each flange; providing a plurality of keys, each key configured to sit within an actuator of the deflection web; and positioning the plurality of keys such that each actuator is seated within an actuator of the deflection web.

[0013] In yet another broad aspect, there may be provided a deflection web for a keypad assembly. The deflection web comprises an actuator; and a flange extending radially outwardly from the actuator. The thickness of the flange varies in a direction from the actuator. In some embodiments, the actuator may be configured to receive a key.

[0014] Some embodiments of the system and methods described herein make reference to a mobile device. A mobile device may be a two-way communication device with advanced data communication capabilities having the capability to communicate with other computer systems. A mobile device may also include the capability for voice communications. Depending on the functionality provided by a mobile device, it may be referred to as a data messaging device, a two-way pager, a cellular telephone with data messaging capabilities, a wireless Internet appliance, or a data communication device (with or without telephony capabilities), for example. A mobile device may communicate with other devices through a network of transceiver stations.

Brief Description of the Drawings

[0015] Embodiments are described in further detail below, by way of example only, with reference to the accompanying drawings, in which:

FIG. 1 is a block diagram of a mobile device in one example implementation;

FIG. 2 is a block diagram of a communication subsystem component of the mobile device of **FIG. 1**;
FIG. 3 is a block diagram of a node of a wireless network;

FIG. 4A is a perspective view of a deflection web according to an embodiment of the present invention;

FIG. 4B is an enlargement of the portion of the deflection web of **FIG. 4A** contained within the circle **4B**;

FIG. 4C is an exploded perspective view of the deflection web of **FIG. 4A** to which a light shielding layer is overlaid;

FIG. 5A is a section view of the deflection web of **FIG. 4B** along section line A-A and in the direction indicated;

FIG. 5B is a section view of a deflection web without chamfers at the intersection of each flange and corresponding actuator, in accordance with the invention;

FIG. 6A is a section view of a keypad assembly similar to the section view of the deflection web shown in **FIG. 5A**;

FIG. 6B is an enlargement of the portion of the keypad assembly of **FIG. 6A** within the circle **6B**;

FIG. 7 is a logical flow diagram of a method for creating a deflection web according to an embodiment of the present invention; and

FIG. 8 is a logical flow diagram of a method for assembling a keypad assembly according to an embodiment of the present invention.

Description of Preferred Embodiments

[0016] To aid the reader in understanding the structure of a mobile device and how it communicates with other devices, reference is made to **FIGS. 1** through **3**.

[0017] Referring first to **FIG. 1**, a block diagram of a mobile device in one example implementation is shown generally as **100**. Mobile device **100** comprises a number of components, the controlling component being microprocessor **102**. Microprocessor **102** controls the overall operation of mobile device **100**. Communication functions, including data and voice communications, may be performed through communication subsystem **104**. Communication subsystem **104** may be configured to receive messages from and send messages to a wireless network **200**. In one example implementation of mobile device **100**, communication subsystem **104** may be configured in accordance with the Global System for Mobile Communication (GSM) and General Packet Radio Services (GPRS) standards. The GSM/GPRS wireless network is used worldwide and it is expected that these standards may be supplemented or superseded eventually by Enhanced Data GSM Environment (EDGE) and Universal Mobile Telecommunications Service (UMTS), and Ultra Mobile Broadband (UMB), etc. New standards are still being defined, but it is believed that they will have similarities to the network behaviour described herein, and it will also be understood by persons skilled in the art that the embodiments of the present disclosure are intended to use any other suitable standards that are developed in the future. The wireless link connecting communication subsystem **104** with network **200** represents one or more different Radio Frequency (RF) channels, operating according to defined protocols specified for GSM/GPRS communications. With newer network protocols, these channels are capable of supporting both circuit switched voice communications and packet switched data communications.

[0018] Although the wireless network associated with mobile device **100** is a GSM/GPRS wireless network in one example implementation of mobile device **100**, other wireless networks may also be associated with mobile device **100** in variant implementations. Different types of wireless networks that may be employed include, for example, data-centric wireless networks, voice-centric wireless networks, and dual-mode networks that can support both voice and data communications over the same physical base stations. Combined dual-mode networks include, but are not limited to, Code Division Multiple Access (CDMA) or CDMA2000 networks, GSM/GPRS networks (as mentioned above), and future third-generation (3G) networks like EDGE and UMTS. Some older examples of data-centric networks include the Mobitex™ Radio Network and the DataTAC™ Radio Net-

work. Examples of older voice-centric data networks include Personal Communication Systems (PCS) networks like GSM and Time Division Multiple Access (TDMA) systems. Other network communication technologies that may be employed include, for example, Integrated Digital Enhanced Network (iDEN™), Evolution-Data Optimized (EV-DO), and High Speed Packet Access (HSPA), etc.

[0019] Microprocessor **102** may also interact with additional subsystems such as a Random Access Memory (RAM) **106**, flash memory **108**, display **110**, auxiliary input/output (I/O) subsystem **112**, serial port **114**, keyboard **116**, speaker **118**, microphone **120**, short-range communications subsystem **122** and other device subsystems **124**.

[0020] Some of the subsystems of mobile device **100** perform communication-related functions, whereas other subsystems may provide "resident" or on-device functions. By way of example, display **110** and keyboard **116** may be used for both communication-related functions, such as entering a text message for transmission over network **200**, as well as device-resident functions such as a calculator or task list. Operating system software used by microprocessor **102** is typically stored in a persistent store such as flash memory **108**, which may alternatively be a read-only memory (ROM) or similar storage element (not shown). Those skilled in the art will appreciate that the operating system, specific device applications, or parts thereof, may be temporarily loaded into a volatile store such as RAM **106**.

[0021] Mobile device **100** may send and receive communication signals over network **200** after network registration or activation procedures have been completed. Network access may be associated with a subscriber or user of a mobile device **100**. To identify a subscriber, mobile device **100** may provide for a Subscriber Identity Module ("SIM") card **126** to be inserted in a SIM interface **128** in order to communicate with a network. SIM **126** may be one example type of a conventional "smart card" used to identify a subscriber of mobile device **100** and to personalize the mobile device **100**, among other things. Without SIM **126**, mobile device **100** may not be fully operational for communication with network **200**. By inserting SIM **126** into SIM interface **128**, a subscriber may access all subscribed services. Services may include, without limitation: web browsing and messaging such as e-mail, voice mail, Short Message Service (SMS), and Multimedia Messaging Services (MMS). More advanced services may include, without limitation: point of sale, field service and sales force automation. SIM **126** may include a processor and memory for storing information. Once SIM **126** is inserted in SIM interface **128**, it may be coupled to microprocessor **102**. In order to identify the subscriber, SIM **126** may contain some user parameters such as an International Mobile Subscriber Identity (IMSI). By using SIM **126**, a subscriber may not necessarily be bound by any single physical mobile device. SIM **126** may store additional subscriber information for a mobile

device as well, including datebook (or calendar) information and recent call information.

[0022] Mobile device **100** may be a battery-powered device and may comprise a battery interface **132** for receiving one or more rechargeable batteries **130**. Battery interface **132** may be coupled to a regulator (not shown), which assists battery **130** in providing power $V+$ to mobile device **100**. Although current technology makes use of a battery, future technologies such as micro fuel cells may provide power to mobile device **100**. In some embodiments, mobile device **100** may be solar-powered.

[0023] Microprocessor **102**, in addition to its operating system functions, enables execution of software applications on mobile device **100**. A set of applications that control basic device operations, including data and voice communication applications, may be installed on mobile device **100** during its manufacture. Another application that may be loaded onto mobile device **100** is a personal information manager (PIM). A PIM has functionality to organize and manage data items of interest to a subscriber, such as, but not limited to, e-mail, calendar events, voice mails, appointments, and task items. A PIM application has the ability to send and receive data items via wireless network **200**. PIM data items may be seamlessly integrated, synchronized, and updated via wireless network **200** with the mobile device subscriber's corresponding data items stored and/or associated with a host computer system. This functionality may create a mirrored host computer on mobile device **100** with respect to such items. This can be particularly advantageous where the host computer system is the mobile device subscriber's office computer system.

[0024] Additional applications may also be loaded onto mobile device **100** through network **200**, auxiliary I/O subsystem **112**, serial port **114**, short-range communications subsystem **122**, or any other suitable subsystem **124**. This flexibility in application installation increases the functionality of mobile device **100** and may provide enhanced on-device functions, communication-related functions, or both. For example, secure communication applications may enable electronic commerce functions and other such financial transactions to be performed using mobile device **100**.

[0025] Serial port **114** enables a subscriber to set preferences through an external device or software application and extends the capabilities of mobile device **100** by providing for information or software downloads to mobile device **100** other than through a wireless communication network. The alternate download path may, for example, be used to load an encryption key onto mobile device **100** through a direct and thus reliable and trusted connection to provide secure device communication.

[0026] Short-range communications subsystem **122** provides for communication between mobile device **100** and different systems or devices, without the use of network **200**. For example, subsystem **122** may include an infrared device and associated circuits and components for short-range communication. Examples of short range

communication include standards developed by the Infrared Data Association (IrDA), Bluetooth®, and the 802.11 family of standards (Wi-Fi®) developed by IEEE.

[0027] In use, a received signal such as a text message, an e-mail message, or web page download is processed by communication subsystem **104** and input to microprocessor **102**. Microprocessor **102** then processes the received signal for output to display **110** or alternatively to auxiliary I/O subsystem **112**. A subscriber may also compose data items, such as e-mail messages, for example, using keyboard **116** in conjunction with display **110** and possibly auxiliary I/O subsystem **112**. Auxiliary subsystem **112** may include devices such as: a touch screen, mouse, track ball, optical trackpad, infrared fingerprint detector, or a roller wheel with dynamic button pressing capability. Keyboard **116** may comprise an alphanumeric keyboard and/or telephone-type keypad, for example. A composed item may be transmitted over network **200** through communication subsystem **104**.

[0028] For voice communications, the overall operation of mobile device **100** may be substantially similar, except that the received signals may be processed and output to speaker **118**, and signals for transmission may be generated by microphone **120**. Alternative voice or audio I/O subsystems, such as a voice message recording subsystem, may also be implemented on mobile device **100**. Although voice or audio signal output is accomplished primarily through speaker **118**, display **110** may also be used to provide additional information such as the identity of a calling party, duration of a voice call, or other voice call related information.

[0029] Referring now to FIG. 2, a block diagram of the communication subsystem component **104** of FIG. 1 is shown. Communication subsystem **104** may comprise a receiver **150**, a transmitter **152**, one or more embedded or internal antenna elements **154**, **156**, Local Oscillators (LOs) **158**, and a processing module such as a Digital Signal Processor (DSP) **160**.

[0030] The particular design of communication subsystem **104** is dependent upon the network **200** in which mobile device **100** is intended to operate; thus, it should be understood that the design illustrated in FIG. 2 serves only as one example. Signals received by antenna **154** through network **200** are input to receiver **150**, which may perform such common receiver functions as signal amplification, frequency down conversion, filtering, channel selection, and analog-to-digital (A/D) conversion. A/D conversion of a received signal allows more complex communication functions such as demodulation and decoding to be performed in DSP **160**. In a similar manner, signals to be transmitted are processed, including modulation and encoding, by DSP **160**. These DSP-processed signals are input to transmitter **152** for digital-to-analog (D/A) conversion, frequency up conversion, filtering, amplification and transmission over network **200** via antenna **156**. DSP **160** not only processes communication signals, but also provides for receiver and transmitter control. For example, the gains applied to communication

signals in receiver **150** and transmitter **152** may be adaptively controlled through automatic gain control algorithms implemented in DSP **160**.

[0031] The wireless link between mobile device **100** and a network **200** may contain one or more different channels, typically different RF channels, and associated protocols used between mobile device **100** and network **200**. A RF channel is generally a limited resource, typically due to limits in overall bandwidth and limited battery power of mobile device **100**.

[0032] When mobile device **100** is fully operational, transmitter **152** may be typically keyed or turned on only when it is sending to network **200** and may otherwise be turned off to conserve resources. Similarly, receiver **150** may be periodically turned off to conserve power until it is needed to receive signals or information (if at all) during designated time periods.

[0033] Referring now to FIG. 3, a block diagram of a node of a wireless network is shown as **202**. In practice, network **200** comprises one or more nodes **202**. Mobile device **100** communicates with a node **202** within wireless network **200**. In the example implementation of FIG. 3, node **202** is configured in accordance with GPRS and GSM technologies; however, in other embodiments, different standards may be implemented as discussed in more detail above. Node **202** includes a base station controller (BSC) **204** with an associated tower station **206**, a Packet Control Unit (PCU) **208** added for GPRS support in GSM, a Mobile Switching Center (MSC) **210**, a Home Location Register (HLR) **212**, a Visitor Location Registry (VLR) **214**, a Serving GPRS Support Node (SGSN) **216**, a Gateway GPRS Support Node (GGSN) **218**, and a Dynamic Host Configuration Protocol (DHCP) server **220**. This list of components is not meant to be an exhaustive list of the components of every node **202** within a GSM/GPRS network, but rather a list of components that are commonly used in communications through network **200**.

[0034] In a GSM network, MSC **210** is coupled to BSC **204** and to a landline network, such as a Public Switched Telephone Network (PSTN) **222** to satisfy circuit switched requirements. The connection through PCU **208**, SGSN **216** and GGSN **218** to the public or private network (Internet) **224** (also referred to herein generally as a shared network infrastructure) represents the data path for GPRS capable mobile devices. In a GSM network extended with GPRS capabilities, BSC **204** also contains a Packet Control Unit (PCU) **208** that connects to SGSN **216** to control segmentation, radio channel allocation and to satisfy packet switched requirements. To track mobile device location and availability for both circuit switched and packet switched management, HLR **212** is shared between MSC **210** and SGSN **216**. Access to VLR **214** is controlled by MSC **210**.

[0035] Station **206** may be a fixed transceiver station. Station **206** and BSC **204** together may form the fixed transceiver equipment. The fixed transceiver equipment provides wireless network coverage for a particular coverage area commonly referred to as a "cell". The fixed

transceiver equipment transmits communication signals to and receives communication signals from mobile devices within its cell via station **206**. The fixed transceiver equipment normally performs such functions as modulation and possibly encoding and/or encryption of signals to be transmitted to the mobile device in accordance with particular, usually predetermined, communication protocols and parameters, under control of its controller. The fixed transceiver equipment similarly demodulates and possibly decodes and decrypts, if necessary, any communication signals received from mobile device **100** within its cell. Communication protocols and parameters may vary between different nodes. For example, one node may employ a different modulation scheme and operate at different frequencies than other nodes.

[0036] For all mobile devices **100** registered with a specific network, permanent configuration data such as a user profile may be stored in HLR **212**. HLR **212** may also contain location information for each registered mobile device and can be queried to determine the current location of a mobile device. MSC **210** is responsible for a group of location areas and stores the data of the mobile devices currently in its area of responsibility in VLR **214**. Further VLR **214** also contains information on mobile devices that are visiting other networks. The information in VLR **214** includes part of the permanent mobile device data transmitted from HLR **212** to VLR **214** for faster access. By moving additional information from a remote HLR **212** node to VLR **214**, the amount of traffic between these nodes can be reduced so that voice and data services can be provided with faster response times while requiring less use of computing resources.

[0037] SGSN **216** and GGSN **218** are elements that may be added for GPRS support; namely packet switched data support, within GSM. SGSN **216** and MSC **210** have similar responsibilities within wireless network **200** by keeping track of the location of each mobile device **100**. SGSN **216** also performs security functions and access control for data traffic on network **200**. GGSN **218** provides internetworking connections with external packet switched networks and connects to one or more SGSNs **216** via an Internet Protocol (IP) backbone network operated within the network **200**. During normal operations, a given mobile device **100** performs a "GPRS Attach" to acquire an IP address and to access data services. This normally is not present in circuit switched voice channels as Integrated Services Digital Network (ISDN) addresses may be generally used for routing incoming and outgoing calls. Currently, GPRS capable networks may use private, dynamically assigned IP addresses, thus requiring a DHCP server **220** connected to the GGSN **218**. There are many mechanisms for dynamic IP assignment, including using a combination of a Remote Authentication Dial-In User Service (RADIUS) server and DHCP server, for example. Once the GPRS Attach is complete, a logical connection is established from a mobile device **100**, through PCU **208**, and SGSN **216** to an Access Point Node (APN) within GGSN **218**, for ex-

ample. The APN represents a logical end of an IP tunnel that can either access direct Internet compatible services or private network connections. The APN also represents a security mechanism for network **200**, insofar as each mobile device **100** must be assigned to one or more APNs and mobile devices **100** cannot generally exchange data without first performing a GPRS Attach to an APN that it has been authorized to use. The APN may be considered to be similar to an Internet domain name such as "my-connection.wireless.com".

[0038] Once the GPRS Attach is complete, a tunnel is created and all traffic is exchanged within standard IP packets using any protocol that can be supported in IP packets. This includes tunneling methods such as IP over IP as in the case with some IPsec connections used with Virtual Private Networks (VPN). These tunnels are also referred to as Packet Data Protocol (PDP) Contexts and there are a limited number of these available in the network **200**. To maximize use of the PDP Contexts, network **200** will run an idle timer for each PDP Context to determine if there is a lack of activity. When a mobile device **100** is not using its PDP Context, the PDP Context can be deallocated and the IP address returned to the IP address pool managed by DHCP server **220**.

[0039] Referring now to **FIGS. 4A and 4B**, a deflection web according to an embodiment of the present invention is shown generally as **400**. The deflection web **400** may be used as a component of a keypad assembly of a mobile device **100**, such as the mobile device **100** described above. The interaction of the deflection web **400** with various components of a keypad assembly of a mobile device **100** will be described in more detail below in relation to **FIGS. 6A and 6B**.

[0040] With specific reference to **FIG. 4A**, the deflection web **400** may comprise a plurality of actuators **410** aligned in a planar arrangement and resiliently coupled together by a flexible membrane **420**. The actuators **410** may correspond in number, shape, and configuration to the plurality of keys to be used therewith. The embodiment illustrated in **FIG. 4A** is configured to accommodate a full QWERTY keyboard. Other configurations may also exist to correspond to keyboards with different numbers of and arrangements of keys.

[0041] **FIG. 4B** is an enlargement of the portion **4B** of the deflection web **400** circled in **FIG. 4A**. Each actuator **410** comprises a seat **412** for receiving a key of a keyboard **116**. A portion of the flexible membrane **420** coupling the actuators **410** together comprises a flange **430** (represented by the area of the flexible membrane **420** around each actuator **410** within the surrounding dotted lines) that extends radially outwardly from the periphery of each actuator **410**. In some embodiments, an upper surface **425** (**FIG. 5A**) of the flexible membrane **420** may not be coplanar with an upper surface **435** (**FIG. 5A**) of the flange **430** when the deflection web **400** is in a relaxed state (i.e. when the deflection web **400** is free of externally applied forces). Advantages of such a non-planar con-

figuration will be discussed further below.

[0042] As will be discussed further below, a light shielding layer may be overlaid onto the deflection web 400 and/or provided between the plurality of keys and the deflection web 400 when assembled within a keypad assembly. Reference is briefly made to FIG. 4C, in which an example of a light shielding layer 450 is shown overlaid onto the deflection web 400 in the direction of arrows 10.

[0043] Reference is now made to FIG. 5A, which illustrates a sectional view of the deflection web 400 along section line A-A of FIG. 4B. As illustrated, the thickness of the flange 430 of each actuator 410 (i.e. the distance between the upper surface 435 and a lower surface 437 of the flange 430) varies in a direction D from each actuator 410. The direction D may be a direction radially outward from the corresponding actuator 410. In the embodiment illustrated, the thickness of each flange 430 increases at a substantially constant rate for at least a portion of the flange 430 as the flange 430 extends outwardly away (in a direction D) from its corresponding actuator 410—this is due to the upper surface 435 of the flange 430 extending from the actuator 410 at an incline while the lower surface 437 of the flange 430 extends with substantially no incline (i.e. substantially horizontally) from the actuator 410. In other embodiments, the thickness of the flange 430 may increase or decrease at either an increasing or decreasing rate (or a combination thereof) as it extends outwardly from the actuator 410. As will be discussed further below, the thickness of the flange 430 may be varied in order to achieve desired pre-loading characteristics when the deflection web 400 experiences a deformation.

[0044] In operation, the repetitive forces sustained by the deflection web 400 from continuous depression of one or more of the keys may cause concentrated stress zones in the deflection web 400 where each flange 430 meets its corresponding actuator 410. In order to help alleviate the increased stress in these areas, the deflection web 400 may be provided with a chamfer 432 where each flange 430 and corresponding actuator 410 converge. A chamfer helps to alleviate stress at sharp edges of structures by effectively smoothing out the edge, making it more gradual. Such chamfers 432 can be observed on the deflection web 400 of FIG. 5A. FIG. 5B illustrates an alternate embodiment of a deflection web 400* having corresponding parts but lacking described chamfers.

[0045] The deflection web 400 (i.e. the actuators and the flexible membrane 420) may comprise a flexible material (e.g. an elastomer or rubber material such as silicon rubber). The use of an elastomeric material for the deflection web 400 typically allows the web 400 to deform in response to an externally applied force and return to its natural orientation once the force is released. The web 400 may tend to return to its natural orientation (or relaxed state) due to pre-load or tension forces produced within the web material when deformed. As an example, depression of an actuator 410 of the deflection web 400 may induce a tension (or pre-load) force in the corre-

sponding flange 430, which is exerted on the actuator 410, to counteract the depression.

[0046] Reference is now made to FIG. 6A, which illustrates the sectional view of FIG. 5A showing the interaction of the deflection web 400 with various components of a keypad assembly 600. In addition to the deflection web 400, the keypad assembly 600 may comprise a plurality of keys 612, 612' and a keypad base 620. As illustrated, when assembled in the keypad assembly 600, the deflection web 400 may be provided between the keys 612, 612' of a keypad assembly 600 and the base 620 of the keypad assembly 600. Additionally (and as mentioned above), the keypad assembly 600 may comprise a light shielding layer 450 superimposed over the deflection web 400.

[0047] In FIG. 6A, the key 612' is shown in a first undepressed position, whereas the key 612 is shown in the depressed position as a result of an externally applied force F applied in a key depression direction 614 (i.e. towards a corresponding switch 632). The force F may be applied, for example, by a user of the keypad assembly 600 while composing a message on a mobile device 100.

[0048] The keypad base 620 may comprise a printed circuit board assembly having a plurality of switches 632 (one switch 632 provided for and corresponding to each key 612 and actuator 410). The base 620 of the keypad assembly 600 may also comprise an overlay 633 having a plurality of domes 634, 634', each covering a corresponding switch 632 of the base 620. The deflection web 400 is anchored to the base 620 at selected locations 640 between the flanges 430, 430' in order to facilitate pre-loading of the flanges in response to a displacement of the corresponding actuator 410, 410' relative to the base 620. Anchoring of the deflection web 400 to the base 620 may be accomplished, for example, by co-molding the portions of the web 400 between each flange 430, 430' to a frame (e.g. made of a hard plastic) and affixing the frame to the base 620. Alternatively, the web 400 may be affixed to a plurality of pins (not shown), which penetrate the web 400 between some or all of the flanges 430, 430' and attach to the base 620. When the deflection web 400 is anchored to the base 620, each actuator 410, 410' aligns with a switch 632, and the dome 634 covering each switch 632 exerts a force F_D (sometimes referred to as the dome peak force, and further discussed below with reference to FIG. 6B), on each actuator 410, 410', causing a displacement of each actuator 410, 410' into the first undepressed position. The displacement of the actuators 410, 410', in combination with the anchoring of the deflection web 400 to the base 620, causes the corresponding flanges 430, 430' to stretch. As will be discussed in further detail below, when a key 612' is in the undepressed position, the stretched flange 430' exerts a pre-load force T on the corresponding actuator 410 partially in the key depression direction 614.

[0049] When a key 612 is depressed, the corresponding actuator 410 may make contact with the correspond-

ing switch **632** (either directly or through an intermediary element such as the dome **634**, **634'** of the overlay **633**), signaling the depression of the key **612**. Each switch **632** may comprise a pressure sensor or, alternatively, may comprise an electrical contact for contacting a complementary electrical contact (not shown) coupled to the underside of each dome **634**, **634'**.

[0050] As discussed above, when the web **400** is anchored to the keypad base **620**, the dome **634'** displaces the actuator **410'** from its relaxed state (as illustrated in **FIG. 5A**, wherein the upper surface **435** of the flanges **430** extends from the actuators **410** at an incline) such that when the key **612'** is in the first undepressed position, the upper surface **435'** of the flange **430'** is substantially flat and extends from the actuator **410'** at substantially no incline (i.e. substantially horizontally). Accordingly, the flanges **430**, **430'** of the deflection web **400** may be designed taking into account the specifications of the overlay **633** that is to be used in the keypad assembly **600**. Where the overlay **633** comprises a plurality of domes **634**, the travel of the flanges **430**, **430'** in the key depression direction **614** may be designed to be approximately equal to the height **H** of the domes **634**, **634'** of the overlay **633** when the domes **634**, **634'** are undeformed (or uncrushed). In other words, the difference between the position **x'** of the upper surface **435'** of the flange **430'** proximate the actuator **410'** when the key **612'** is undeformed, and the position **y'** of the lowest point of the upper surface **435** of the flange **430** when the key **612** is depressed is roughly equal to the approximate height **H** of an uncrushed dome **634'** less the thickness of the dome material. In some embodiments, the approximate height **H** of an uncrushed dome **634'** is also roughly equal to the difference between the position **x** (**FIG. 5A**) of the upper surface **425** of the flexible membrane **420** (between the flanges **435**), and the position **y** (**FIG. 5A**) of the lowest point of the upper surface **435** of the flange **430** proximate its corresponding actuator **410**. It will be appreciated that the distance between position **x** and position **y** (**FIG. 5A**) corresponds approximately to the upward displacement to an actuator **410** required to cause the upper surface **435** of the corresponding flange **430** to lie substantially flat as it extends from the actuator **410**. When the flanges **430**, **430'** lie substantially flat as they extend from the actuators **410**, **410'**, the top surface of the deflection web **400** through the interstices of the actuators **410**, **410'** (i.e. the combined top surface **435**, **435'** of the flanges **430**, **430'** and top surface **425** of the flexible membrane **420**) may also be substantially flat.

[0051] Designing the flanges **430**, **430'** of the deflection web **400** to be substantially flat when the keypad assembly **600** is assembled and the actuators **410**, **410'** are in the undeformed position may help reduce the amount of light leakage from the keypad assembly **600**. As illustrated in **FIG. 6A**, where the light shielding layer **450** is overlaid on the deflection web **400**, the light shielding layer **450** may be unaffected by movement of the actuators **410**, **410'** between the undeformed position

and the deformed position. Consequently, cracking of the light shielding layer **450** (which may cause increased light leakage) resulting from localized deformation may be reduced or avoided.

[0052] Further, preventing deformation of the light shielding layer **450** may help to provide a user of the keypad assembly **600** with a better tactile feel when depressing the keys **410**, **410'** by helping to ensure that external forces are not exerted on the flange **430'** by the light shielding layer **450** when the actuator **410'** is in the undeformed position. The forces typically exerted on deflection webs by light shielding layers (from a tension force present within the light shielding layer as a result of its deformation) tend to be uneven and unpredictable. By reducing and/or eliminating such unpredictable forces exerted on the deflection web **400**, keypad assembly **600** designers may be better able to control the tactile feel provided to a user of the keypad assembly **600**.

[0053] Reference is now made briefly to **FIG. 6B**, which shows an enlargement of the portion **6B** of the keypad assembly **600** circled in **FIG. 6A** and more clearly illustrates the pre-load force acting on the actuators **410'** when the actuators **410'** (and keys **612'**) are in the first undeformed position. As previously discussed, in the absence of any externally applied forces to a key **612'** (e.g. from a user of the keypad assembly **600**), the actuator **410'** is in the first undeformed position. In this position, the actuator **410'** is displaced from its relaxed state (illustrated in **FIG. 5A**) by the dome **634'** with which it is in contact. A tension (or pre-load) force **T** is induced within the flange **430'** proximate its lower surface **437'** as a result of deformation of the web. It will be appreciated by those skilled in the art that although a single tension force **T** is illustrated for simplicity, the tension force **T** may be exerted substantially evenly around the actuator **410'**. The tension force **T** may be broken down into a first component **T_x**, which acts in a direction substantially parallel to the base **620** and extending radially outwardly from the actuator **410'**, and a second component **T_y**, which acts in a direction perpendicular to **T_x** (i.e. toward the base **620**).

[0054] Accordingly, when the actuator **410'** is in the first undeformed position, the forces acting on the actuator **410'** include **F_D**, **T_x**, and **T_y** (as discussed above, the actuator may be free from forces exerted by the light shielding layer **450**). Therefore, in order to cause a depression of the key **612'** (and corresponding actuator **410'**), the force **F** (**FIG. 6A**) applied to the key **612'** must be greater than (**F_D - T_y**). It will be appreciated that the domes **634**, **634'** must comprise a material strong enough to exert a force **F_D** on the actuator **410'** that is greater than the component **T_y** of the tension force **T** in order for the dome **634'** to cause the actuator **410'** to return to the first undeformed position when the force **F** is released (e.g. the key **612'** is released by a user of the keypad assembly **600**).

[0055] The tension (or pre-load) force **T** may vary with the thickness of the flange **430**, **430'** and with the com-

position of the flange **430**, **430'** and the web **400**. Therefore, the thickness of the flange **430**, **430'** (and/or the material from which the flange **430**, **430'** and the web **400** are made) may be appropriately selected to provide the pre-load forces required to achieve the desired tactile feel (by controlling the magnitude of the force **F** required to depress the keys **612**, **612'**). In some embodiments, the flange may be designed such that the component T_y of the pre-load force **T** is between ten and twenty-five percent of the dome peak force F_D .

[0056] With reference to the logical flow diagram of FIG. 7, a method for creating a deflection web **400** for a keypad assembly **600** (referred to generally as **700**) will now be discussed. A plurality of actuators **410**, **410'** are provided in a substantially planar configuration at Block **710**. At Block **720**, the plurality of actuators **410**, **410'** are resiliently coupled together with a flexible membrane **420**. For each actuator **410**, **410'**, the flexible membrane **420** comprises a surrounding portion (i.e. an outwardly radially extending flange **430**, **430'**) the thickness of which varies in a direction from the corresponding actuator **410**, **410'**. The deflection web **400** may be molded using an appropriately configured mold, or alternatively, may be created having separate flexible membrane **420** and actuator **410**, **410'** components. Further, in some embodiments, a portion of the deflection web **400** (e.g. the portion not encompassing the actuators **410**, **410'** or the flanges **435**, **435'**) may be co-molded to a frame. The frame may be made of hard plastic, for example, and may be injection molded.

[0057] As discussed above, the flexible membrane **420** and actuators **410**, **410'** may comprise a suitably resilient material, such as an elastomeric material. Further, the thickness of the flange **430** may be appropriately varied in order to induce the desired pre-load force **T** when the web **400** undergoes a deformation.

[0058] Referring now to the logical flow diagram of FIG. 8, a method for assembling a keypad assembly **600** (referred to generally as **800**) will now be discussed. A deflection web **400** having a plurality of actuators resiliently coupled together is provided at Block **810**. The actuators may be coupled together using a flexible membrane **420** and the actuators and flexible membrane **420** may comprise an elastomeric material in order to provide suitable pre-loading characteristics when the web **400** is deformed.

[0059] At Block **820**, the deflection web **400** may be anchored to a keypad base **620** such that a pre-load force **T** is generated in a flange **430**, **430'** portion of the flexible membrane **420** surrounding each actuator **410**, **410'**. The deflection web **400** may be anchored using known techniques including, but not limited to, adhesive bonding and riveting. The keypad base **620** may comprise a plurality of switches **632** and an overlay **633** with a plurality of domes **634**, **634'** (a dome **634**, **634'** corresponding to, and covering, each switch **632**). The domes **634**, **634'** of the overlay **633** may cause the actuator **410** to deform and settle in the first undepressed position (as described

above). While in the undepressed position, the upper surface **435** of the flange may be substantially flat proximate its corresponding actuator **410**.

[0060] At Block **830**, a plurality of keys **612**, **612'** is provided. Each key **612**, **612'** is configured to sit within an actuator **410** of the deflection web **400**. At Block **840**, the plurality of keys **612**, **612'** are positioned such that each key **612**, **612'** sits in a seat **412**, **412'** of an actuator **410**, **410'** of the deflection web **400**. Optionally, the keys **612**, **612'** may be coupled to the actuators **410**, **410'** (e.g. using an adhesive) in order to ensure that the proper positioning of the keys **612**, **612'** within the actuators **410**, **410'** is maintained.

[0061] The embodiments of keypad assemblies described herein may allow for desired pre-loading of the flange portions of the deflection web of the assembly. Accordingly, a user of the assemblies may experience a greater tactile feel and response when pressing keys.

[0062] The steps of a method in accordance with any of the embodiments described herein may not be required to be performed in any particular order, whether or not such steps are described in the claims or otherwise in numbered or lettered paragraphs.

[0063] Various embodiments of a keypad assembly were described as having a plurality of keys. Similarly, various embodiments of a deflection web for use in a keypad assembly were described for accommodating a plurality of keys. Those of ordinary skill in the art will appreciate that the embodiments described above may be modified to accommodate a single key.

[0064] The present keypad assembly has been described with regard to a number of embodiments. However, it will be understood by persons skilled in the art that other variants and modifications may be made without departing from the scope of the disclosure as defined in the claims appended hereto.

Claims

1. A keypad assembly (600) comprising:

- (a) a plurality of keys (612, 612');
- (b) a deflection web (400) comprising a plurality of actuators (410, 410') resiliently coupled together by a flexible membrane (420), wherein each actuator (410, 410') corresponds to a key (612, 612');
- (c) wherein about each actuator (410, 410), the flexible membrane (420) comprises a corresponding radially outwardly extending flange (430, 430'); and
- (d) wherein a thickness of the flange (430, 430') varies in a direction (D) from the corresponding actuator (410, 410').

2. The keypad assembly (600) of claim 1, wherein a lower surface (437, 437') of the flange (430, 430')

and an upper surface (435, 435') of the flange (430, 430') are non-parallel.

3. The keypad assembly (600) of claim 1 or claim 2, wherein when a key (612, 612') is in a first undepressed position, the corresponding flange (430, 430') exerts a pre-load force (T) on the corresponding actuator (410, 410').
4. The keypad assembly (600) of claim 3, wherein a component (T_y) of the pre-load force (T) is exerted in a key depression direction (614).
5. The keypad assembly (600) of any preceding claim, further comprising a keypad base (620) having a plurality of switches (632), wherein each switch corresponds to one of the plurality of keys (612, 612').
6. The keypad assembly (600) of claim 5, further comprising an overlay (633) superimposed on the keypad base (620), the overlay (633) having a dome (634) corresponding to each switch (632).
7. The keypad assembly (600) of claim 6, wherein when the key (612, 612') is in the first undepressed position, an upper surface (435, 435') of the corresponding flange (430, 430') is substantially flat proximate the corresponding actuator (410, 410').
8. A keypad assembly (600) of any preceding claim wherein the assembly is configured for use in a mobile device.
9. A deflection web (400) for a keypad assembly (600), the deflection web (400) comprising:
 - (a) a plurality of actuators (410, 410');
 - (b) a flexible membrane (425) resiliently coupling each of the actuators (410, 410') together;
 - (c) wherein about each actuator (410, 410'), the flexible membrane (425) comprises a corresponding radially outwardly extending flange (430, 430'); and
 - (d) wherein a thickness of the flange (430, 430') varies in a direction (D) from the corresponding actuator (410, 410').
10. The deflection web (400) of claim 9, wherein the thickness of the flange (430, 430') increases as the flange (430, 430') extends in the direction (D) from the corresponding actuator (410, 410').
11. The deflection web (400) of claim 9 or claim 10, further comprising a chamfer at an intersection of each flange (430, 430') and corresponding actuator (410, 410').
12. The deflection web (400) of any one of claims 9 to

11, wherein each actuator (410, 410') is configured to receive a key (612, 612') of the keypad assembly (600).

13. The deflection web (400) of any one of claims 9 to 12, further configured for anchoring to a keypad base (620).
14. A method of creating a deflection web (400) for a keypad assembly (600), the method comprising:
 - (a) providing a plurality of actuators (410, 410') in a substantially planar configuration; and
 - (b) providing a flexible membrane (425) resiliently coupling the plurality of actuators (410, 410') together, wherein about each actuator (410, 410'), the flexible membrane (425) comprises a corresponding radially outwardly extending flange (430, 430'), and wherein a thickness of the flange (430, 430') varies in a direction (D) from the corresponding actuator (410, 410').
15. The method of claim 14, further comprising co-molding a portion of the deflection web (400) to a frame.

Amended claims in accordance with Rule 137(2) EPC.

1. A keypad assembly (600) comprising:
 - (a) a plurality of keys (612, 612');
 - (b) a deflection web (400) comprising a plurality of actuators (410, 410') resiliently coupled together by a flexible membrane (420), wherein each actuator (410, 410') corresponds to a key (612, 612');
 - (c) wherein around each actuator (410, 410'), the flexible membrane (420) comprises a corresponding radially outwardly extending flange (430, 430');
 - (d) wherein a thickness of the flange (430, 430') varies in a direction (D) from the corresponding actuator (410, 410'); and
 - (e) wherein when a key (612, 612') is in a first undepressed position, the corresponding flange (430, 430') exerts a pre-load force (T) on the corresponding actuator (410, 410').
2. The keypad assembly (600) of claim 1, wherein a lower surface (437, 437') of the flange (430, 430') and an upper surface (435, 435') of the flange (430, 430') are non-parallel.
3. The keypad assembly (600) of claim 1, wherein a component (T_y) of the pre-load force (T) is exerted in a key depression direction (614).

4. The keypad assembly (600) of any preceding claim, further comprising a keypad base (620) having a plurality of switches (632), wherein each switch corresponds to one of the plurality of keys (612, 612'). 5

5. The keypad assembly (600) of claim 4, further comprising an overlay (633) superimposed on the keypad base (620), the overlay (633) having a dome (634) corresponding to each switch (632). 10

6. The keypad assembly (600) of claim 5, wherein when the key (612, 612') is in the first undepressed position, an upper surface (435, 435') of the corresponding flange (430, 430') is substantially flat proximate the corresponding actuator (410, 410'). 15

7. A keypad assembly (600) of any preceding claim wherein the assembly is configured for use in a mobile device. 20

8. The keypad assembly (600) of any preceding claim, wherein the thickness of the flange (430, 430') increases as the flange (430, 430') extends in the direction (D) from the corresponding actuator (410, 410'). 25

9. The keypad assembly (600) of claim 8, further comprising a chamfer at an intersection of each flange (430, 430') and corresponding actuator (410, 410'). 30

10. The keypad assembly (600) of any preceding claim, wherein each actuator (410, 410') is configured to receive a key (612, 612') of the keypad assembly (600). 35

11. The keypad assembly (600) of any preceding claim wherein the deflection web (400) is further configured for anchoring to a keypad base (620). 40

12. A method of creating a deflection web (400) for a keypad assembly (600), the method comprising:

(a) providing a plurality of actuators (410, 410') in a substantially planar configuration, wherein each actuator (410, 410') is configured to receive a key (612, 612') of the keypad assembly (600); 45

(b) providing a flexible membrane (420) resiliently coupling the plurality of actuators (410, 410') together, wherein around each actuator (410, 410'), the flexible membrane (420) comprises a corresponding radially outwardly extending flange (430, 430'), and wherein a thickness of the flange (430, 430') varies in a direction (D) from the corresponding actuator (410, 410'); 50
(c) anchoring the flexible membrane to a keypad 55

base (620), wherein when a key (612, 612') is in a first undepressed position, the corresponding flange (430, 430') exerts a pre-load force (T) on the corresponding actuator (410, 410').

13. The method of claim 12, further comprising co-molding a portion of the deflection web (400) to a frame.

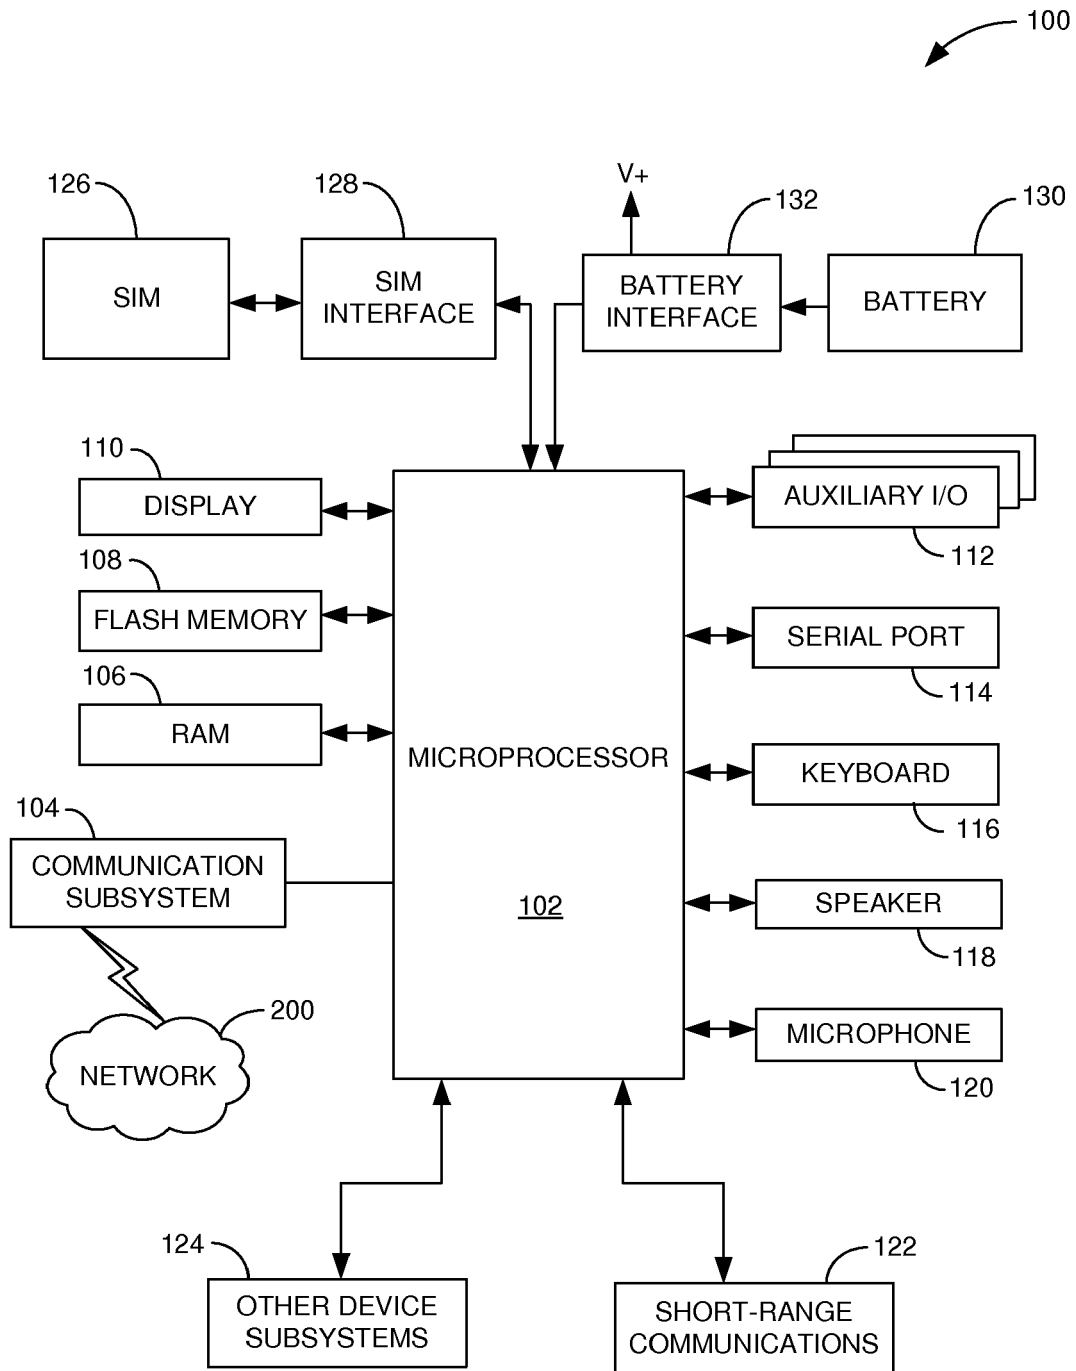


FIG. 1

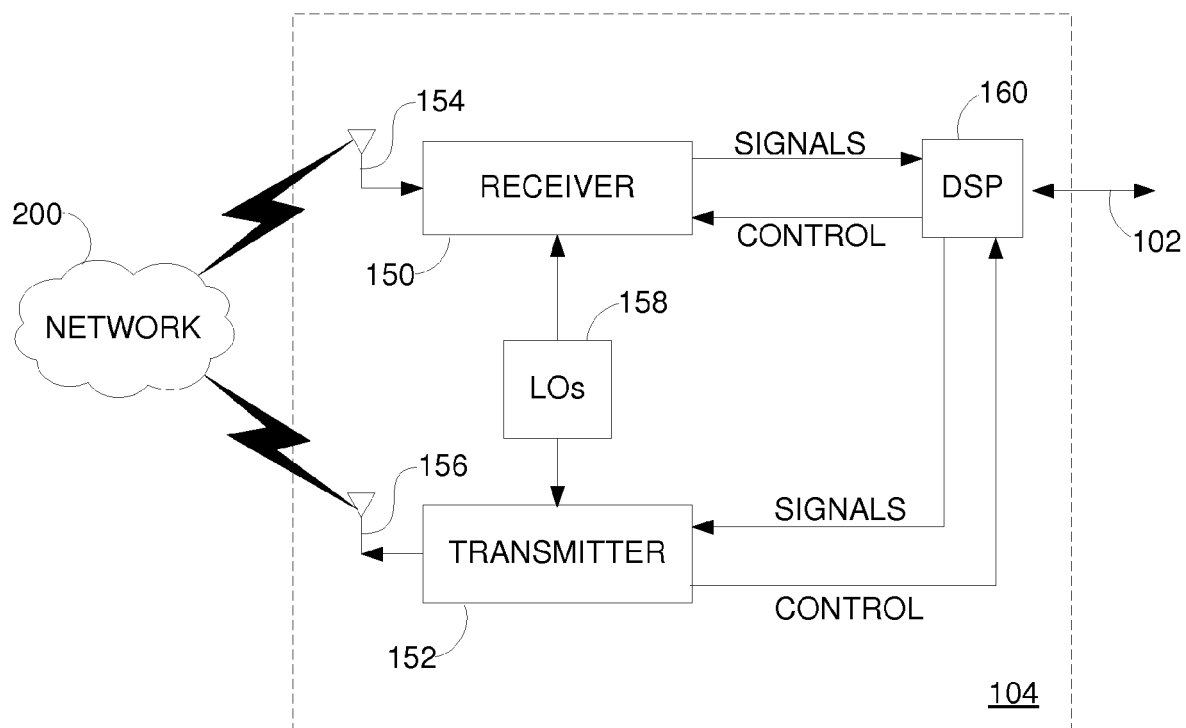


FIG. 2

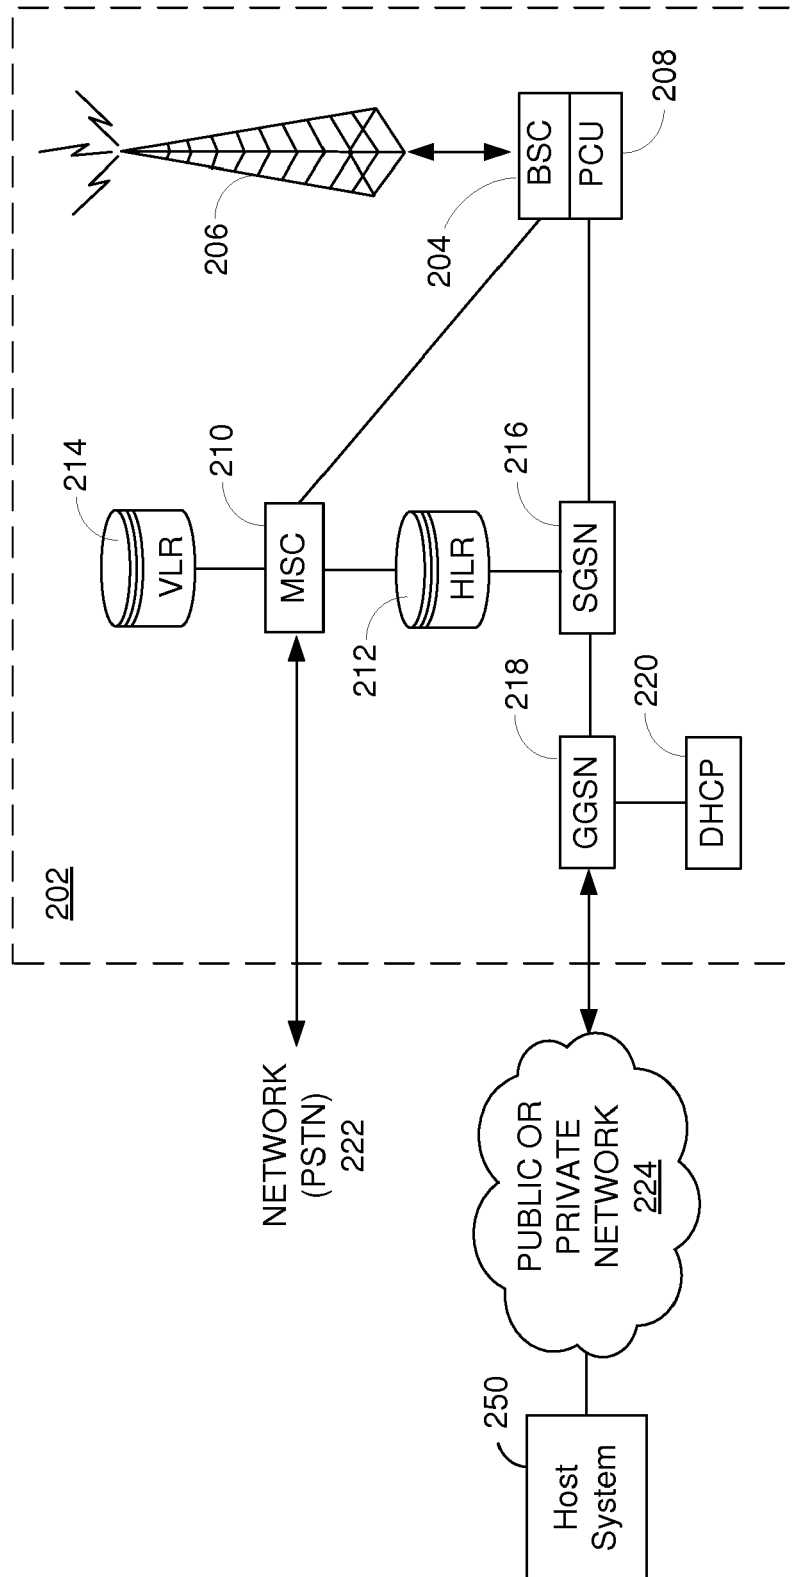


FIG. 3

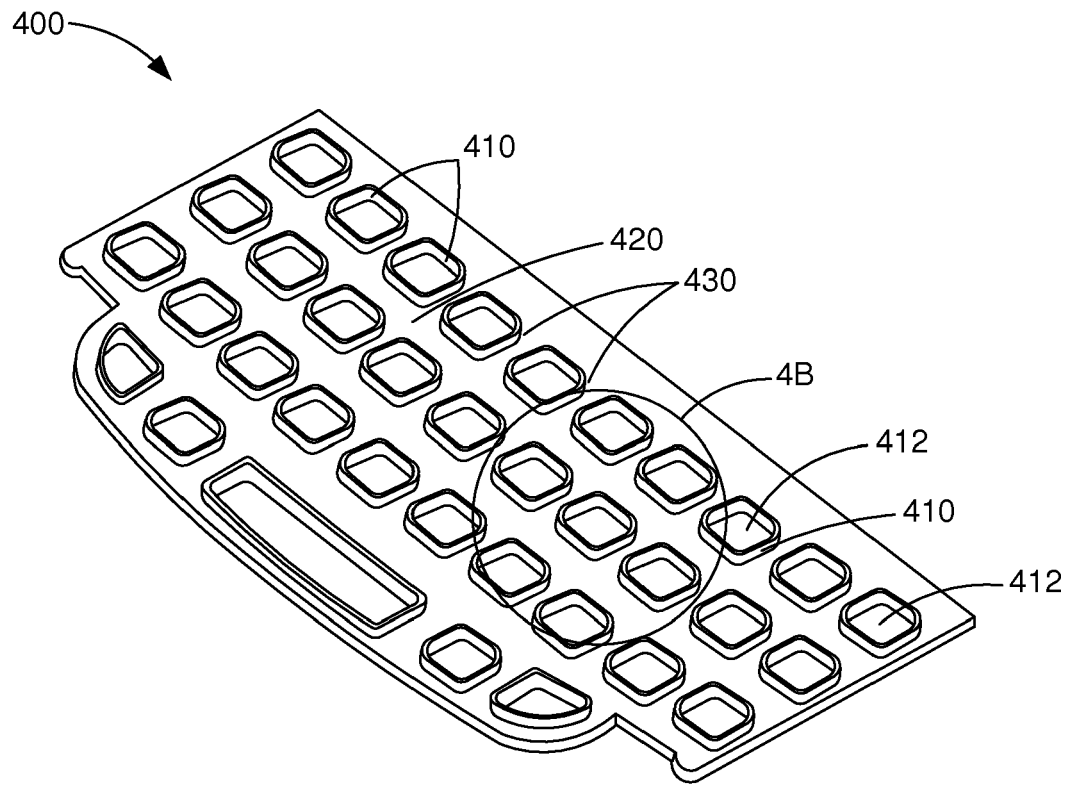


FIG. 4A

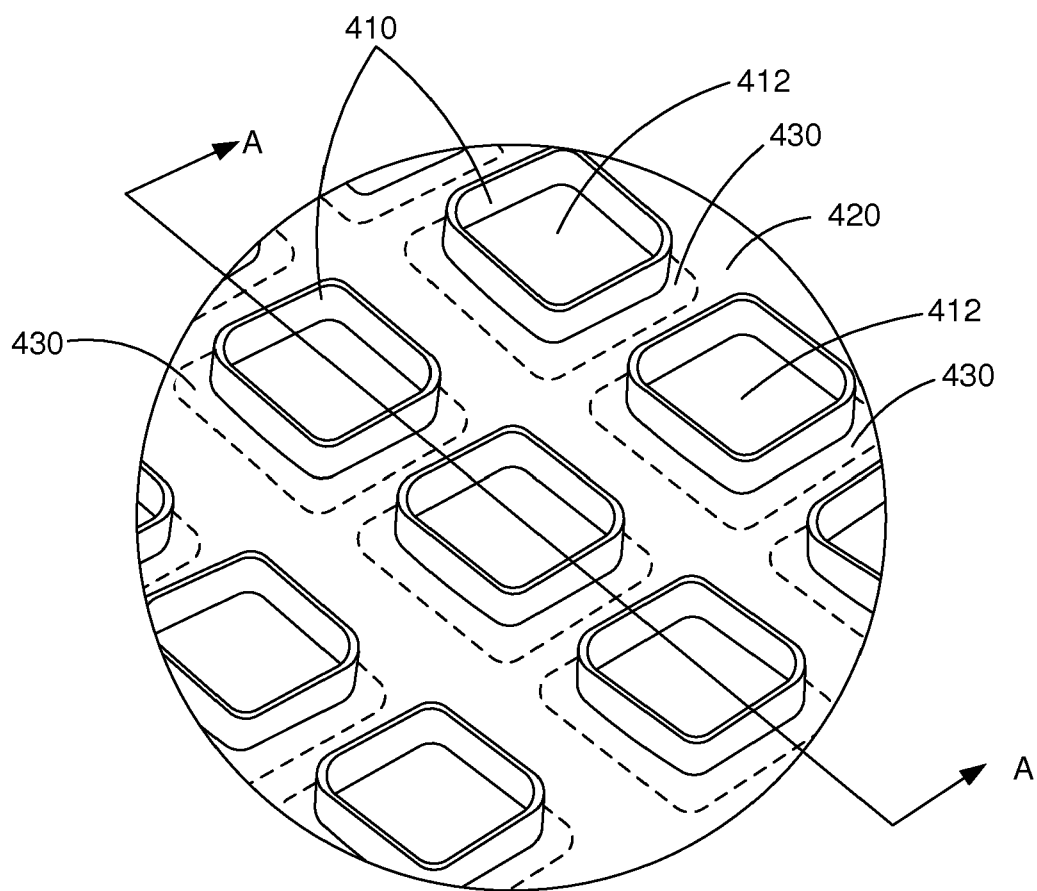


FIG. 4B

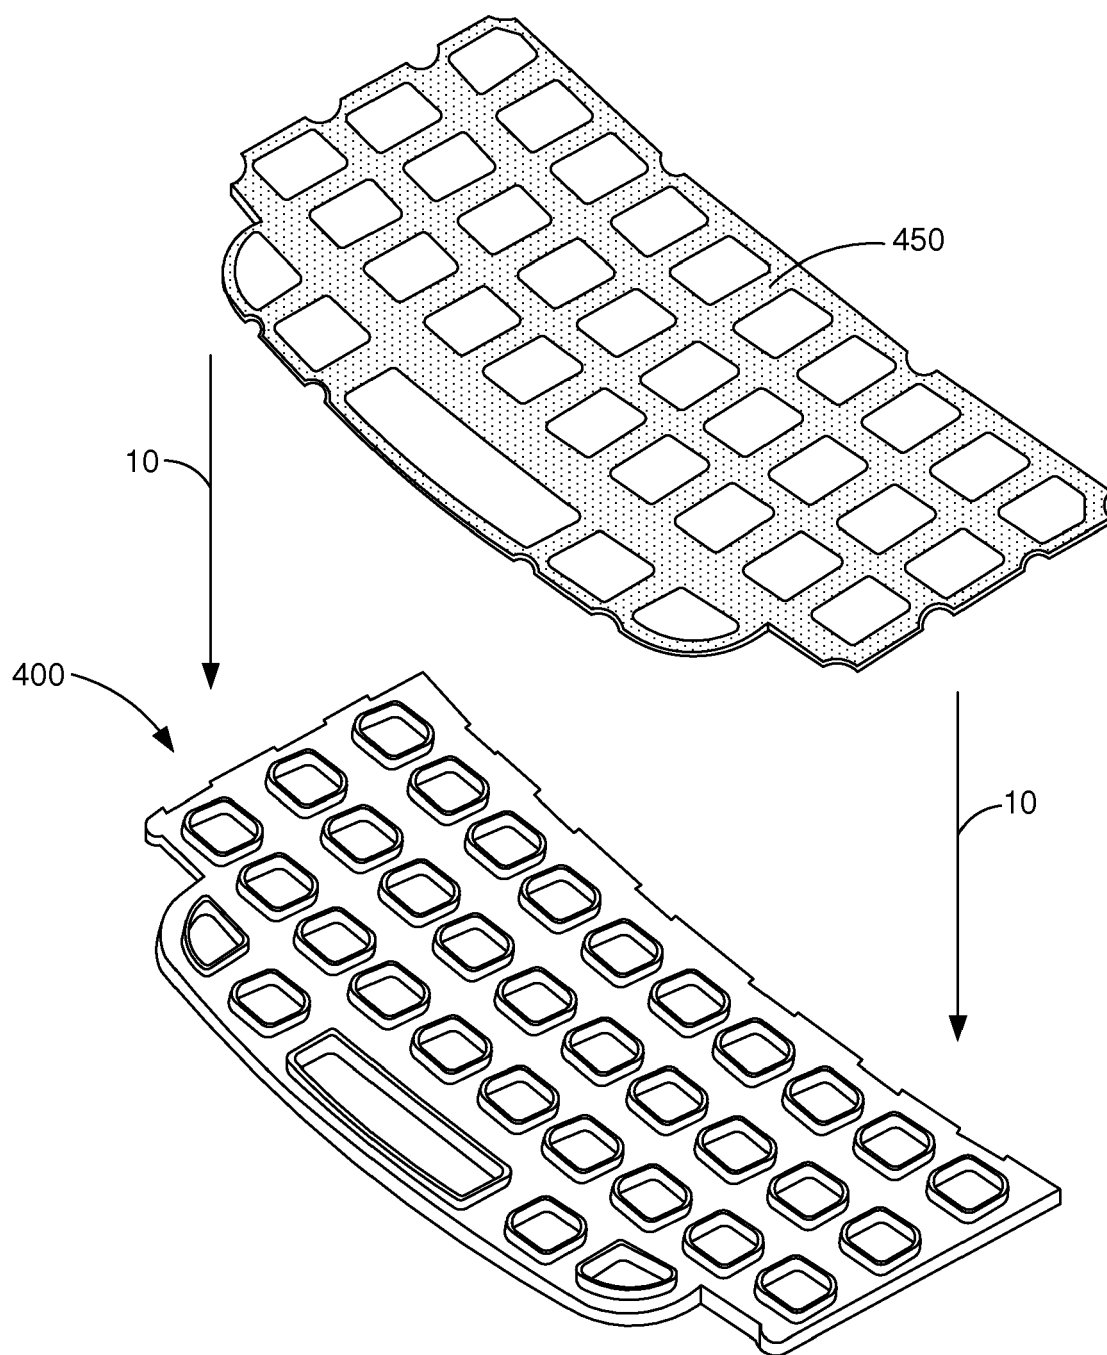


FIG. 4C

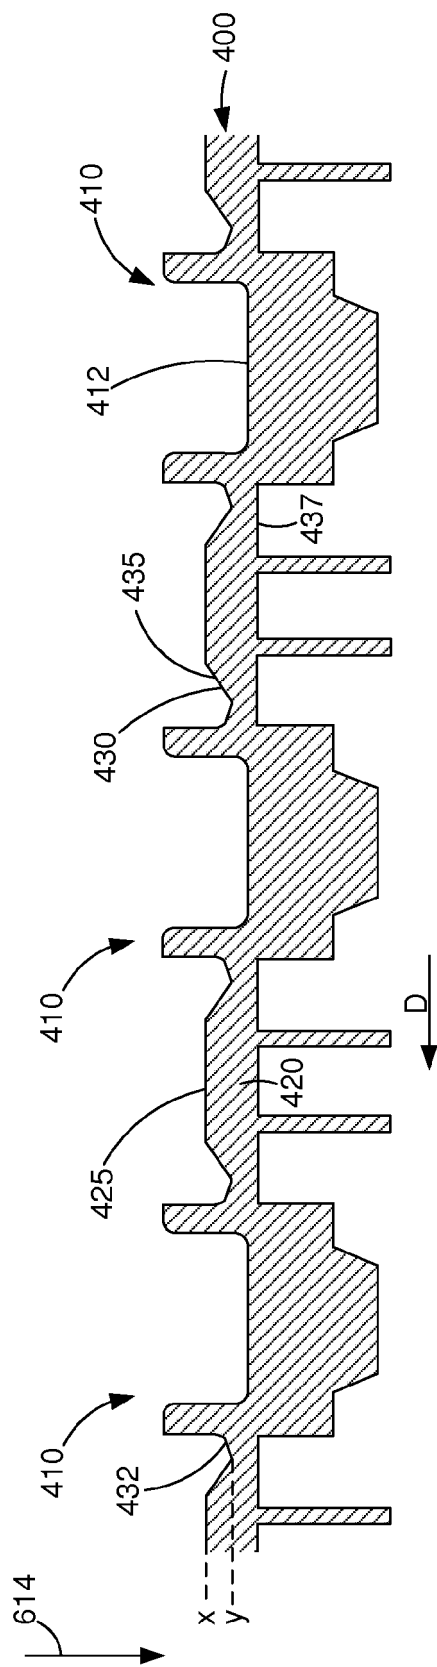


FIG. 5A

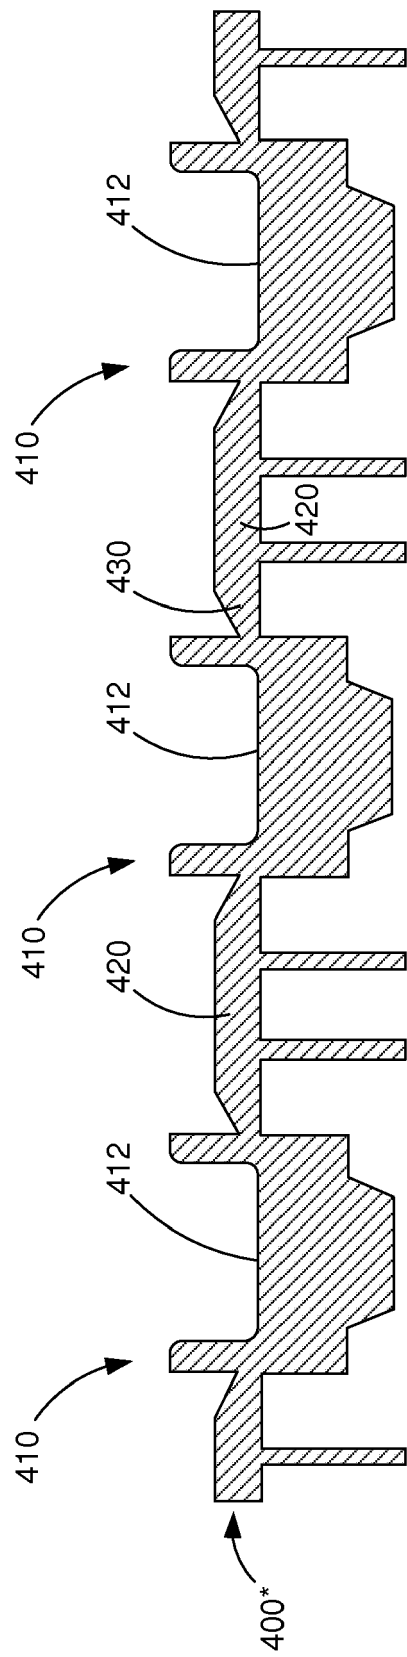


FIG. 5B

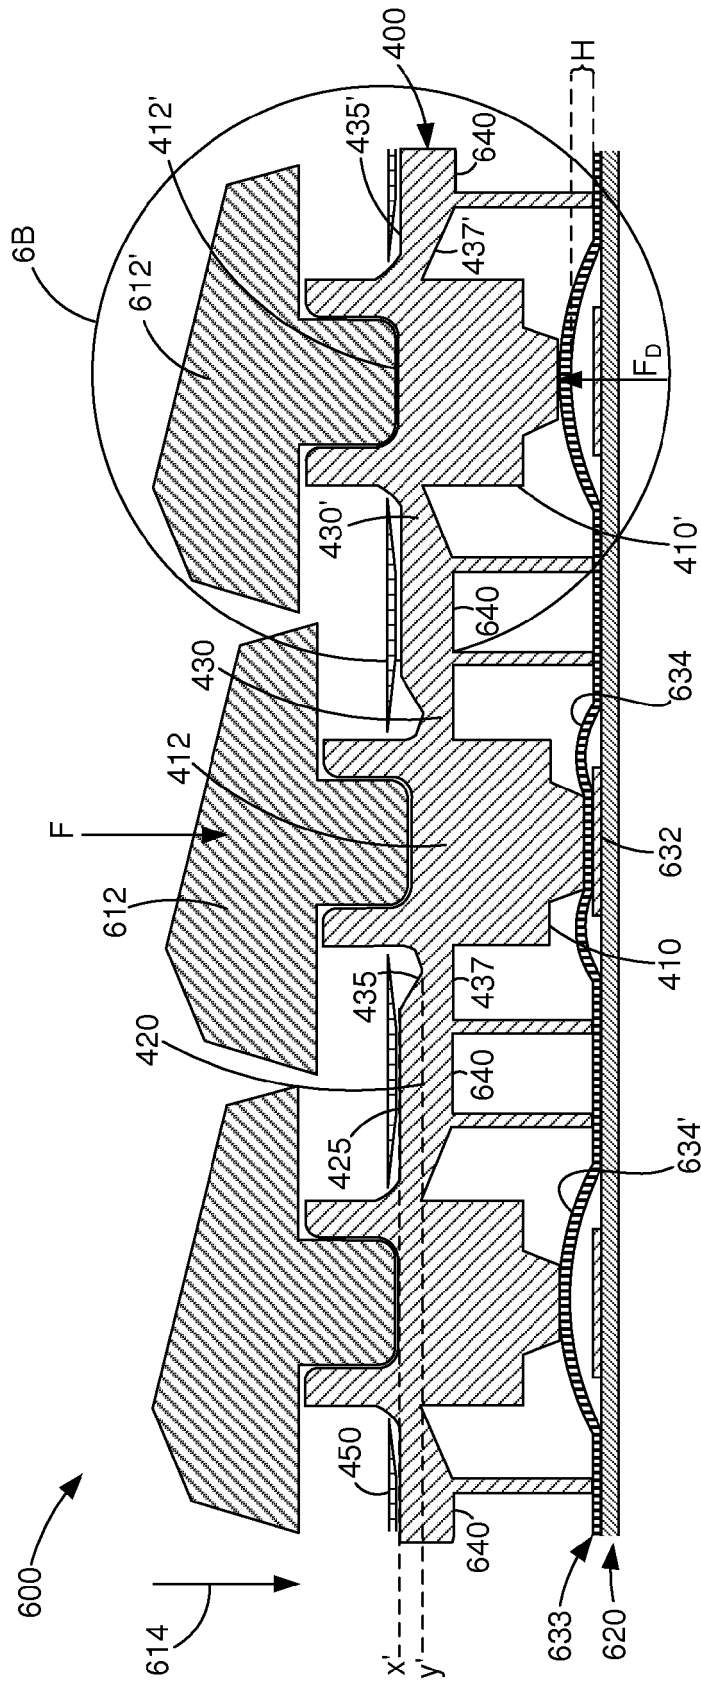


FIG. 6A

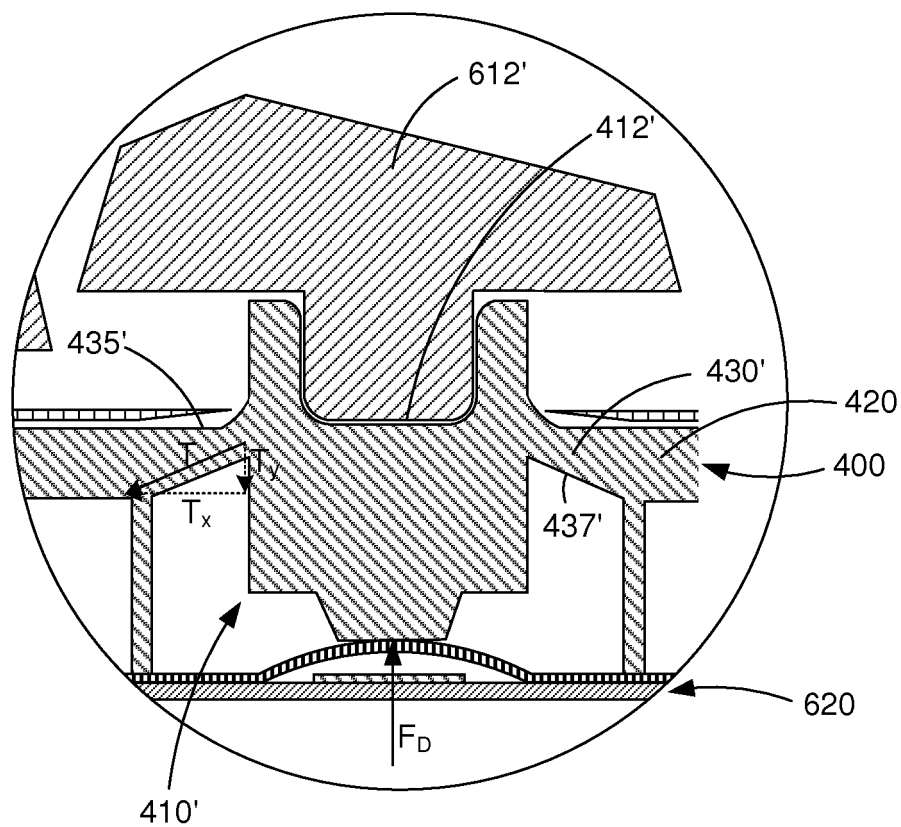


FIG. 6B

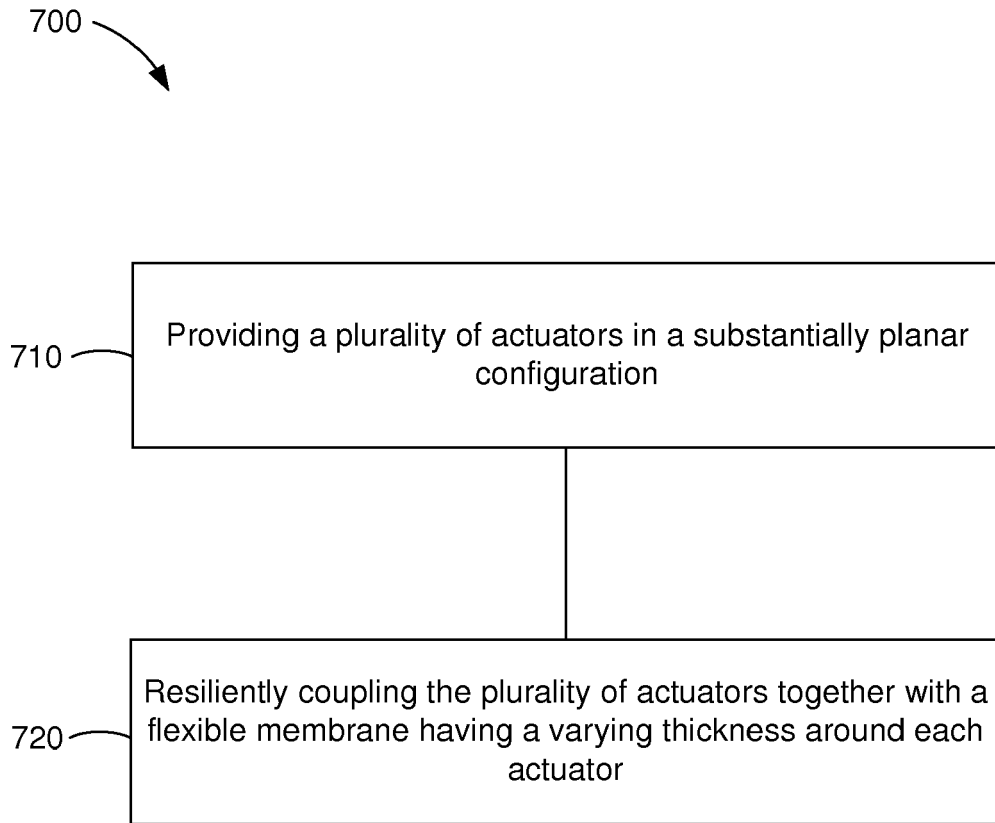


FIG. 7

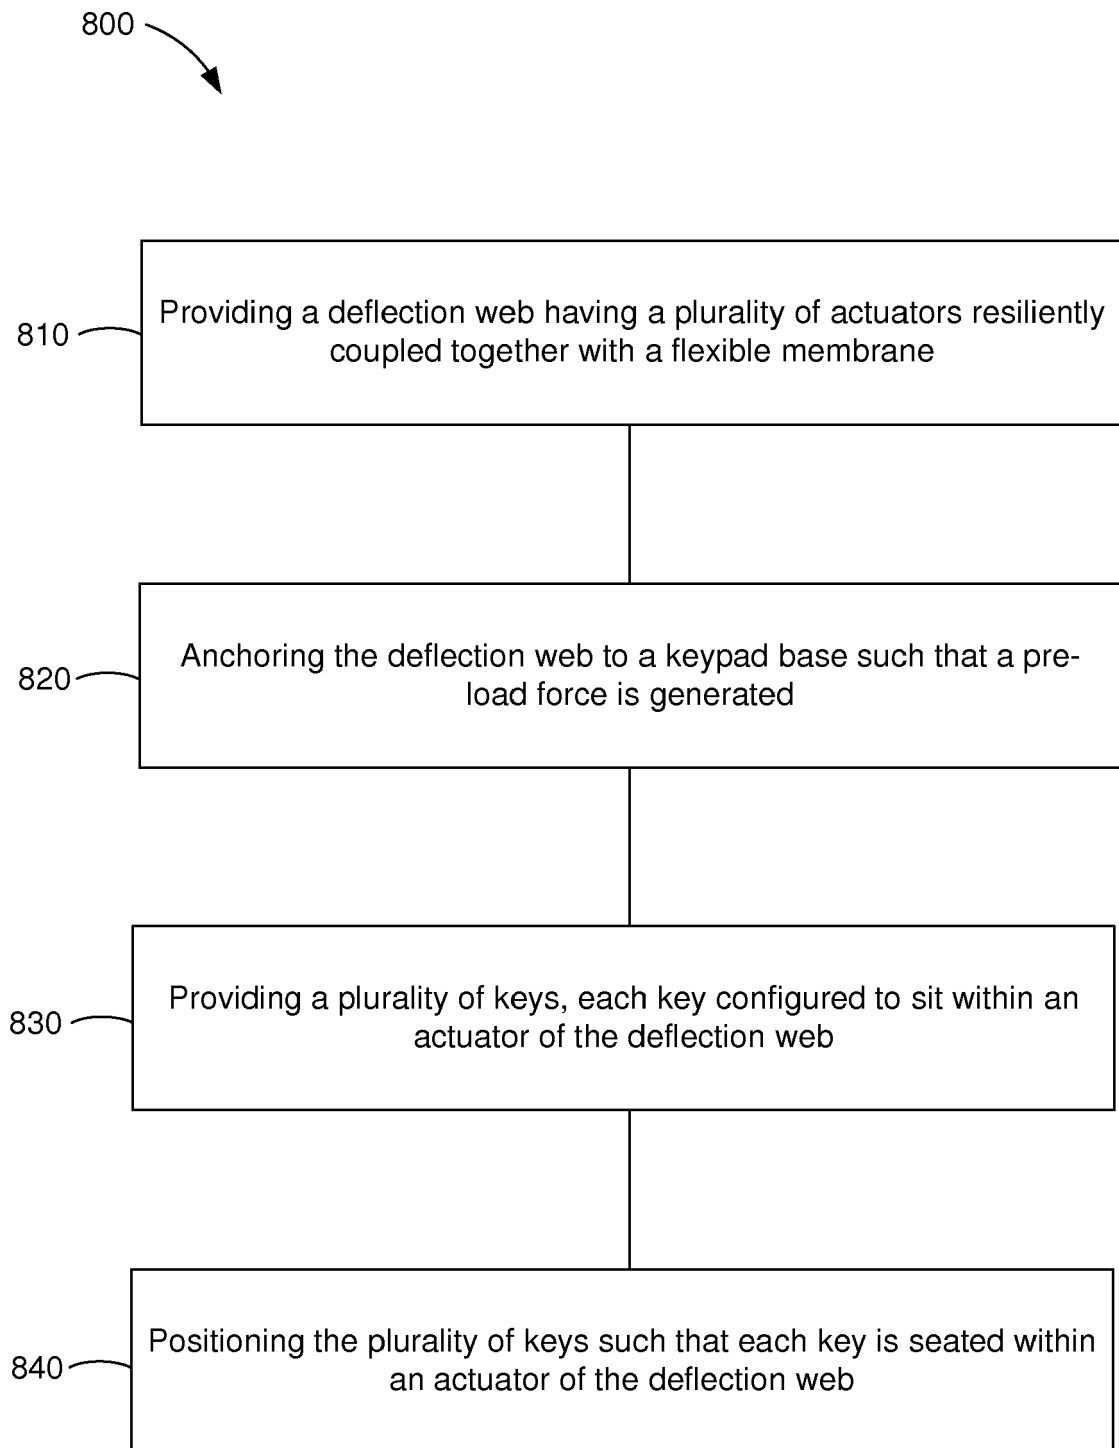


FIG. 8



EUROPEAN SEARCH REPORT

 Application Number
 EP 10 16 7824

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2008/019115 A1 (PARK DEUK II [KR] ET AL) 24 January 2008 (2008-01-24)	1	INV. H01H13/85 H01H13/88
Y	* paragraph [0074] - paragraph [0178]; figures 1-39 *	2-15	
Y	----- US 5 568 367 A (PARK YOUNG M [KR]) 22 October 1996 (1996-10-22) * column 3, line 35 - column 5, line 3; figures 1-6 *	2-14	
Y	----- EP 1 391 905 A1 (LEICA GEOSYSTEMS AG [CH]) 25 February 2004 (2004-02-25) * paragraph [0026] - paragraph [0037]; figures 1-3 *	2-14	
Y	----- WO 2004/088694 A1 (DANFOSS DRIVES AS [DK]; SCHMIDT STEFFEN HASLUND [DK]) 14 October 2004 (2004-10-14) * page 9, line 25 - page 13, line 11; claim 20 *	15	
			TECHNICAL FIELDS SEARCHED (IPC)
			H01H
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 13 December 2010	Examiner Nieto, José Miguel
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1
 EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 10 16 7824

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-12-2010

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2008019115	A1	24-01-2008	NONE	
US 5568367	A	22-10-1996	NONE	
EP 1391905	A1	25-02-2004	NONE	
WO 2004088694	A1	14-10-2004	DE 112004000492 T5	02-02-2006
			DE 112004000492 B4	06-11-2008