



(11) **EP 2 412 566 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**

(15) Correction information:  
**Corrected version no 1 (W1 A2)**  
**Corrections, see**  
**Bibliography INID code(s) 72**

(51) Int Cl.:  
**B60N 2/28** (2006.01) **A47D 1/00** (2006.01)  
**A47D 15/00** (2006.01)

(48) Corrigendum issued on:  
**28.03.2012 Bulletin 2012/13**

(43) Date of publication:  
**01.02.2012 Bulletin 2012/05**

(21) Application number: **11187083.8**

(22) Date of filing: **05.10.2006**

(84) Designated Contracting States:  
**DE ES FR GB IT**

(30) Priority: **07.10.2005 JP 2005295016**  
**01.11.2005 JP 2005318585**

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:  
**06121846.7 / 1 772 308**

(71) Applicant: **Combi Corporation**  
**Taito-ku**  
**Tokyo (JP)**

(72) Inventors:  

- **Nishimoto, Noriko**  
**Saitama (JP)**

- **Yumoto, Ryoichi**  
**Saitama (JP)**
- **Kamei, Mamoe**  
**Saitama (JP)**
- **Inoue, Masaharu**  
**Saitama (JP)**
- **Hosoya, Shushi**  
**Saitama (JP)**

(74) Representative: **Viering, Hans-Martin**  
**Viering, Jentschura & Partner**  
**Grillparzerstrasse 14**  
**81675 München (DE)**


Remarks:

This application was filed on 28-10-2011 as a divisional application to the application mentioned under INID code 62.

(54) **Cushion for retaining posture of child and structure using same cushion**

(57) A cushion adapted to be placed on a child safety seat is provided. The cushion has a head pad (10) having a neck supporting portion (12) protruding outwardly along the lower rim of the head pad; and a pair of head side supporting surfaces (14) inclined upwardly toward the left/right end of the head pad; a back pad (30) having a pair of body side supporting surfaces (32) inclined upwardly toward the left/right end of the back pad; and a hip pad (50) having a hip supporting surface (51) inclined upwardly from the rear end of the hip pad toward the front end of the hip pad; and a pair of knee supporting surfaces (52) inclined upwardly toward the left/right end of the hip pad and a belt pass-through hole (54).

FIG.1

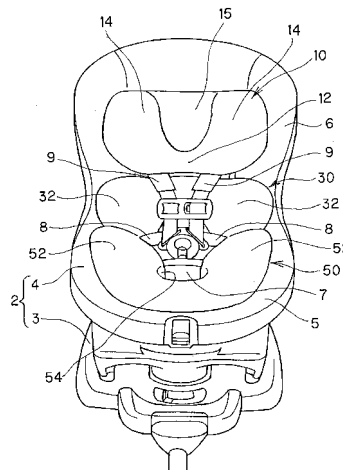

**EP 2 412 566 A8**