



(11) **EP 2 421 197 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 72

(51) Int Cl.:
H04L 12/24 (2006.01)

(86) International application number:
PCT/CN2009/071711

(48) Corrigendum issued on:
11.04.2012 Bulletin 2012/15

(87) International publication number:
WO 2010/127508 (11.11.2010 Gazette 2010/45)

(43) Date of publication:
22.02.2012 Bulletin 2012/08

(21) Application number: **09844260.1**

(22) Date of filing: **08.05.2009**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK TR

- **WANG, Sichen**
Guangdong 518129 (CN)
- **FENG, Mingzheng**
Guangdong 518129 (CN)
- **ZHANG, Renzhoun**
Guangdong 518129 (CN)
- **HUANG, Chen**
Guangdong 518129 (CN)

(71) Applicant: **Huawei Technologies Co., Ltd.**
Shenzhen, Guangdong 518129 (CN)

(72) Inventors:

- **ZHANG, Yongjing**
Guangdong 518129 (CN)
- **DING, Chuansuo**
Guangdong 518129 (CN)

(74) Representative: **Körber, Martin Hans**
Mitscherlich & Partner
Patent- und Rechtsanwälte
Sonnenstraße 33
80331 München (DE)

(54) **METHOD AND APPARATUS FOR PERFORMING DEVICE MANAGEMENT VIA GATEWAY DEVICE AND DEVICE MANAGEMENT SERVER THEREOF**

(57) The present invention relates to the field of communications technologies and discloses a method and an apparatus for performing device management through a gateway device and a Device Management Server (DMS). The method for performing device management through a gateway device includes: receiving a register message which carries a terminal ID and a gateway device address; associating and storing the terminal ID and the gateway device address; obtaining the gateway device address according to the association record; and sending a Device Management (DM) notification message to the gateway device according to the gateway device address so that the gateway device performs corresponding processing according to the DM notification message. With the technical solution of the present invention, a DMS is able to send a DM notification to a user terminal through a gateway device.

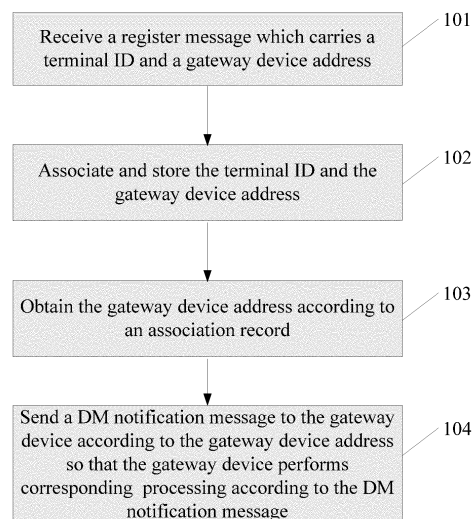


FIG. 1

EP 2 421 197 A8