



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
07.03.2012 Bulletin 2012/10

(51) Int Cl.:
H01H 13/86 ^(2006.01) **H01H 13/704** ^(2006.01)
H01H 13/83 ^(2006.01)

(21) Application number: **10175018.0**

(22) Date of filing: **02.09.2010**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK SM TR
Designated Extension States:
BA ME RS

(72) Inventor: **Chen, Chao**
Waterloo Ontario N2L 3W8 (CA)

(74) Representative: **Moore, Barry et al**
Hanna Moore & Curley
13 Lower Lad Lane
Dublin 2 (IE)

(71) Applicant: **Research In Motion Limited**
Waterloo, ON N2L 3W8 (CA)

(54) **Backlighting assembly for a keypad**

(57) A backlighting assembly (560) for use in a keypad assembly (400). The backlighting assembly (560) includes at least one light emitting source (461) configured to emit light (462); and a light guide assembly (470)

configured to receive the emitted light (462) and direct the light toward the at least one key (410). The light guide assembly (470) includes both a light guide film (471) and a light guide frame (475) for directing light from the light source (461) toward the key(s) (410).

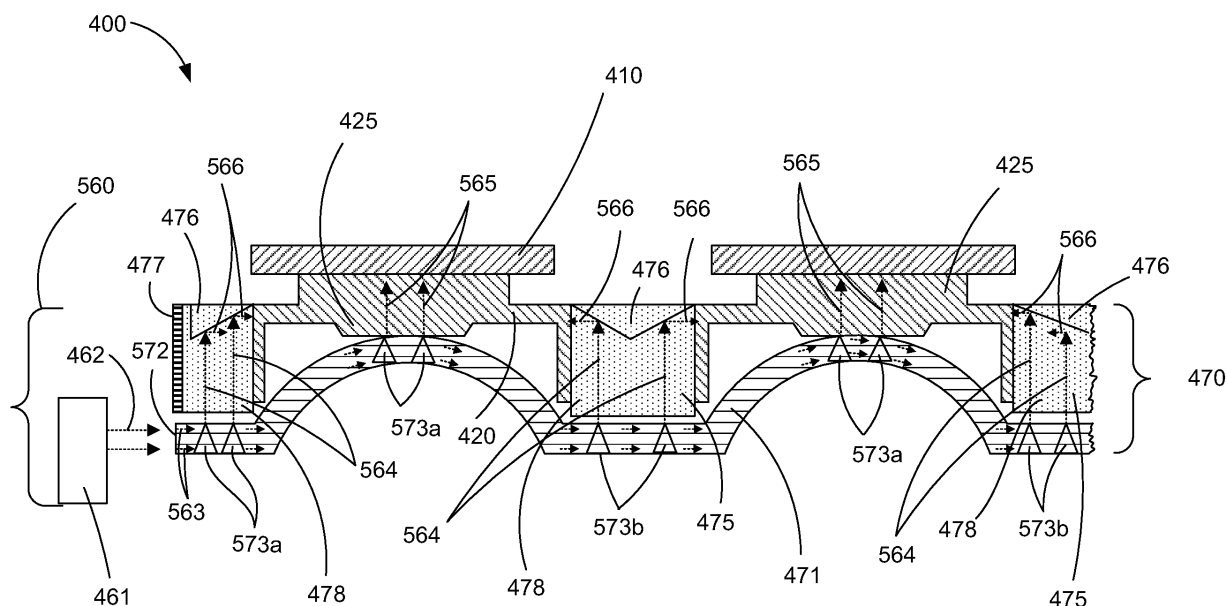


FIG. 5

Description

[0001] The field of this disclosure relates generally to keypads and keypad backlighting assemblies, with particular but by no means exclusive application to keypads of mobile communications devices.

[0002] It is often desirable to provide backlighting to the keys of a keypad assembly used in electronic devices such as mobile communications devices in darkened lighting conditions. Light may be emitted from a light source located within the electronic device, and directed toward one or multiple keys, illuminating such key(s).

GENERAL

[0003] In one broad aspect, there may be provided a keypad assembly. The keypad assembly includes at least one key; at least one light emitting source configured to emit light; and a light guide assembly configured to receive the emitted light and direct the light toward the at least one key. The light guide assembly may comprise both a light guide film and a light guide frame. The keypad assembly may be configured for use in a mobile device.

[0004] In another broad aspect, a backlighting assembly may be provided for use within a keypad assembly having at least one key. The backlighting assembly may comprise: at least one side firing light emitting source configured to emit light; and a light guide assembly configured to receive the emitted light and direct the light toward the at least one key. The light guide assembly may comprise both a light guide film, and a light guide frame. The keypad assembly may be configured for use in a mobile device.

[0005] The light guide film may be configured to receive the emitted light (or light emitted from the light emitting source) and communicate the received light to the light guide frame. In turn, the light guide frame may be configured to direct the communicated light toward the at least one key. Further, the light guide film may be configured to direct the received light toward the at least one key.

[0006] In another broad aspect, a method for providing backlighting for a keypad assembly having at least one key may be provided. The method may comprise providing a keypad assembly having at least one light emitting source, wherein the light emitting source is configured to emit light; providing a light guide assembly configured to receive the emitted light and to direct the received light toward the at least one key, wherein the light guide assembly comprises a light guide film and a light guide frame; and causing the light emitting source to emit light.

[0007] The light guide film may be configured to receive the emitted light and communicate the received light to the light guide frame. The light guide film may be configured to direct the emitted light toward the at least one key.

[0008] Some embodiments of the system and methods described herein make reference to a mobile device. A

mobile device may be a two-way communication device with advanced data communication capabilities having the capability to communicate with other computer systems. A mobile device may also comprise the capability for voice communications. Depending on the functionality provided by a mobile device, it may be referred to as a data messaging device, a two-way pager, a cellular telephone with data messaging capabilities, a wireless Internet appliance, or a data communication device (with or without telephony capabilities), for example. A mobile device may communicate with other devices through a network of transceiver stations.

Brief Description of the Drawings

[0009] Embodiments are described in further detail below, by way of example only, with reference to the accompanying drawings, in which:

FIG. 1 is a block diagram of a mobile device in one example implementation;

FIG. 2 is a block diagram of a communication subsystem component of the mobile device of **FIG. 1**;

FIG. 3 is a block diagram of a node of a wireless network;

FIG. 4 is a section view of a portion of a keypad assembly according to an embodiment of the present disclosure;

FIG. 5 is a section view of selected elements of the keypad assembly of **FIG. 4**;

FIG. 6 is a perspective view of an example light guide frame according to the present disclosure;

FIG. 7 is an exploded perspective view of the light guide frame of **FIG. 6** to which an example light shielding layer is overlaid; and

FIG. 8 is a logical flow diagram of a method for providing backlighting for a keypad assembly according to the present disclosure.

Detailed Description

[0010] To aid the reader in understanding the structure of a mobile device and how it communicates with other devices, reference is made to **FIGS. 1** through **3**.

[0011] Referring first to **FIG. 1**, a block diagram of a mobile device in one example implementation is shown generally as **100**. Mobile device **100** comprises a number of components, the controlling component being microprocessor **102**. Microprocessor **102** controls the overall operation of mobile device **100**. Communication functions, including data and voice communications, may be performed through communication subsystem **104**. Communication subsystem **104** may be configured to receive messages from and send messages to a wireless network **200**. In one example implementation of mobile device **100**, communication subsystem **104** may be configured in accordance with the Global System for Mobile Communication (GSM) and General Packet Radio Serv-

ices (GPRS) standards. The GSM/GPRS wireless network is used worldwide and it is expected that these standards may be supplemented or superseded eventually by Enhanced Data GSM Environment (EDGE) and Universal Mobile Telecommunications Service (UMTS), and Ultra Mobile Broadband (UMB), etc. New standards are still being defined, but it is believed that they will have similarities to the network behaviour described herein, and it will also be understood by persons skilled in the art that the embodiments of the present disclosure are intended to use any other suitable standards that are developed in the future. The wireless link connecting communication subsystem **104** with network **200** represents one or more different Radio Frequency (RF) channels, operating according to defined protocols specified for GSM/GPRS communications. With newer network protocols, these channels are capable of supporting both circuit switched voice communications and packet switched data communications.

[0012] Although the wireless network associated with mobile device **100** is a GSM/GPRS wireless network in one example implementation of mobile device **100**, other wireless networks may also be associated with mobile device **100** in variant implementations. Different types of wireless networks that may be employed include, for example, data-centric wireless networks, voice-centric wireless networks, and dual-mode networks that can support both voice and data communications over the same physical base stations. Combined dual-mode networks include, but are not limited to, Code Division Multiple Access (CDMA) or CDMA2000 networks, GSM/GPRS networks (as mentioned above), and future third-generation (3G) networks like EDGE and UMTS. Some older examples of data-centric networks include the Mobitex™ Radio Network and the DataTAC™ Radio Network. Examples of older voice-centric data networks include Personal Communication Systems (PCS) networks like GSM and Time Division Multiple Access (TDMA) systems. Other network communication technologies that may be employed include, for example, Integrated Digital Enhanced Network (iDEN™), Evolution-Data Optimized (EV-DO), and High Speed Packet Access (HSPA), etc.

[0013] Microprocessor **102** may also interact with additional subsystems such as a Random Access Memory (RAM) **106**, flash memory **108**, display **110**, auxiliary input/output (I/O) subsystem **112**, serial port **114**, keyboard **116**, speaker **118**, microphone **120**, short-range communications subsystem **122** and other device subsystems **124**.

[0014] Some of the subsystems of mobile device **100** perform communication-related functions, whereas other subsystems may provide "resident" or on-device functions. By way of example, display **110** and keyboard **116** may be used for both communication-related functions, such as entering a text message for transmission over network **200**, as well as device-resident functions such as a calculator or task list. Operating system software

used by microprocessor **102** is typically stored in a persistent store such as flash memory **108**, which may alternatively be a read-only memory (ROM) or similar storage element (not shown). Those skilled in the art will appreciate that the operating system, specific device applications, or parts thereof, may be temporarily loaded into a volatile store such as RAM **106**.

[0015] Mobile device **100** may send and receive communication signals over network **200** after network registration or activation procedures have been completed. Network access may be associated with a subscriber or user of a mobile device **100**. To identify a subscriber, mobile device **100** may provide for a Subscriber Identity Module ("SIM") card **126** to be inserted in a SIM interface **128** in order to communicate with a network. SIM **126** may be one example type of a conventional "smart card" used to identify a subscriber of mobile device **100** and to personalize the mobile device **100**, among other things. Without SIM **126**, mobile device **100** may not be fully operational for communication with network **200**. By inserting SIM **126** into SIM interface **128**, a subscriber may access all subscribed services. Services may include, without limitation: web browsing and messaging such as e-mail, voice mail, Short Message Service (SMS), and Multimedia Messaging Services (MMS). More advanced services may include, without limitation: point of sale, field service and sales force automation. SIM **126** may include a processor and memory for storing information. Once SIM **126** is inserted in SIM interface **128**, it may be coupled to microprocessor **102**. In order to identify the subscriber, SIM **126** may contain some user parameters such as an International Mobile Subscriber Identity (IMSI). By using SIM **126**, a subscriber may not necessarily be bound by any single physical mobile device. SIM **126** may store additional subscriber information for a mobile device as well, including datebook (or calendar) information and recent call information.

[0016] Mobile device **100** may be a battery-powered device and may comprise a battery interface **132** for receiving one or more rechargeable batteries **130**. Battery interface **132** may be coupled to a regulator (not shown), which assists battery **130** in providing power V+ to mobile device **100**. Although current technology makes use of a battery, future technologies such as micro fuel cells may provide power to mobile device **100**. In some embodiments, mobile device **100** may be solar-powered.

[0017] Microprocessor **102**, in addition to its operating system functions, enables execution of software applications on mobile device **100**. A set of applications that control basic device operations, including data and voice communication applications, may be installed on mobile device **100** during its manufacture. Another application that may be loaded onto mobile device **100** is a personal information manager (PIM). A PIM has functionality to organize and manage data items of interest to a subscriber, such as, but not limited to, e-mail, calendar events, voice mails, appointments, and task items. A PIM application has the ability to send and receive data items

via wireless network **200**. PIM data items may be seamlessly integrated, synchronized, and updated via wireless network **200** with the mobile device subscriber's corresponding data items stored and/or associated with a host computer system. This functionality may create a mirrored host computer on mobile device **100** with respect to such items. This **can** be particularly advantageous where the host computer system is the mobile device subscriber's office computer system.

[0018] Additional applications may also be loaded onto mobile device **100** through network **200**, auxiliary I/O subsystem **112**, serial port **114**, short-range communications subsystem **122**, or any other suitable subsystem **124**. This flexibility in application installation increases the functionality of mobile device **100** and may provide enhanced on-device functions, communication-related functions, or both. For example, secure communication applications may enable electronic commerce functions and other such financial transactions to be performed using mobile device **100**.

[0019] Serial port **114** enables a subscriber to set preferences through an external device or software application and extends the capabilities of mobile device **100** by providing for information or software downloads to mobile device **100** other than through a wireless communication network. The alternate download path may, for example, be used to load an encryption key onto mobile device **100** through a direct and thus reliable and trusted connection to provide secure device communication.

[0020] Short-range communications subsystem **122** provides for communication between mobile device **100** and different systems or devices, without the use of network **200**. For example, subsystem **122** may include an infrared device and associated circuits and components for short-range communication. Examples of short range communication include standards developed by the Infrared Data Association (IrDA), Bluetooth®, and the 802.11 family of standards (Wi-Fi®) developed by IEEE.

[0021] In use, a received signal such as a text message, an e-mail message, or web page download is processed by communication subsystem **104** and input to microprocessor **102**. Microprocessor **102** then processes the received signal for output to display **110** or alternatively to auxiliary I/O subsystem **112**. A subscriber may also compose data items, such as e-mail messages, for example, using keyboard **116** in conjunction with display **110** and possibly auxiliary I/O subsystem **112**. Auxiliary subsystem **112** may include devices such as: a touch screen, mouse, track ball, optical trackpad, infrared fingerprint detector, or a roller wheel with dynamic button pressing capability. Keyboard **116** may comprise an alphanumeric keyboard and/or telephone-type keypad, for example. A composed item may be transmitted over network **200** through communication subsystem **104**.

[0022] For voice communications, the overall operation of mobile device **100** may be substantially similar, except that the received signals may be processed and output to speaker **118**, and signals for transmission may

be generated by microphone **120**. Alternative voice or audio I/O subsystems, such as a voice message recording subsystem, may also be implemented on mobile device **100**. Although voice or audio signal output is accomplished primarily through speaker **118**, display **110** may also be used to provide additional information such as the identity of a calling party, duration of a voice call, or other voice call related information.

[0023] Referring now to **FIG. 2**, a block diagram of the communication subsystem component **104** of **FIG. 1** is shown. Communication subsystem **104** may comprise a receiver **150**, a transmitter **152**, one or more embedded or internal antenna elements **154**, **156**, Local Oscillators (LOs) **158**, and a processing module such as a Digital Signal Processor (DSP) **160**.

[0024] The particular design of communication subsystem **104** is dependent upon the network **200** in which mobile device **100** is intended to operate; thus, it should be understood that the design illustrated in **FIG. 2** serves only as one example. Signals received by antenna **154** through network **200** are input to receiver **150**, which may perform such common receiver functions as signal amplification, frequency down conversion, filtering, channel selection, and analog-to-digital (A/D) conversion. A/D conversion of a received signal allows more complex communication functions such as demodulation and decoding to be performed in DSP **160**. In a similar manner, signals to be transmitted are processed, including modulation and encoding, by DSP **160**. These DSP-processed signals are input to transmitter **152** for digital-to-analog (D/A) conversion, frequency up conversion, filtering, amplification and transmission over network **200** via antenna **156**. DSP **160** not only processes communication signals, but also provides for receiver and transmitter control. For example, the gains applied to communication signals in receiver **150** and transmitter **152** may be adaptively controlled through automatic gain control algorithms implemented in DSP **160**.

[0025] The wireless link between mobile device **100** and a network **200** may contain one or more different channels, typically different RF channels, and associated protocols used between mobile device **100** and network **200**. A RF channel is generally a limited resource, typically due to limits in overall bandwidth and limited battery power of mobile device **100**.

[0026] When mobile device **100** is fully operational, transmitter **152** may be typically keyed or turned on only when it is sending to network **200** and may otherwise be turned off to conserve resources. Similarly, receiver **150** may be periodically turned off to conserve power until it is needed to receive signals or information (if at all) during designated time periods.

[0027] Referring now to **FIG. 3**, a block diagram of a node of a wireless network is shown as **202**. In practice, network **200** comprises one or more nodes **202**. Mobile device **100** communicates with a node **202** within wireless network **200**. In the example implementation of **FIG. 3**, node **202** is configured in accordance with GPRS and

GSM technologies; however, in other embodiments, different standards may be implemented as discussed in more detail above. Node **202** includes a base station controller (BSC) **204** with an associated tower station **206**, a Packet Control Unit (PCU) **208** added for GPRS support in GSM, a Mobile Switching Center (MSC) **210**, a Home Location Register (HLR) **212**, a Visitor Location Registry (VLR) **214**, a Serving GPRS Support Node (SGSN) **216**, a Gateway GPRS Support Node (GGSN) **218**, and a Dynamic Host Configuration Protocol (DHCP) server **220**. This list of components is not meant to be an exhaustive list of the components of every node **202** within a GSM/GPRS network, but rather a list of components that are commonly used in communications through network **200**.

[0028] In a GSM network, MSC **210** is coupled to BSC **204** and to a landline network, such as a Public Switched Telephone Network (PSTN) **222** to satisfy circuit switched requirements. The connection through PCU **208**, SGSN **216** and GGSN **218** to the public or private network (Internet) **224** (also referred to herein generally as a shared network infrastructure) represents the data path for GPRS capable mobile devices. In a GSM network extended with GPRS capabilities, BSC **204** also contains a Packet Control Unit (PCU) **208** that connects to SGSN **216** to control segmentation, radio channel allocation and to satisfy packet switched requirements. To track mobile device location and availability for both circuit switched and packet switched management, HLR **212** is shared between MSC **210** and SGSN **216**. Access to VLR **214** is controlled by MSC **210**.

[0029] Station **206** may be a fixed transceiver station. Station **206** and BSC **204** together may form the fixed transceiver equipment. The fixed transceiver equipment provides wireless network coverage for a particular coverage area commonly referred to as a "cell". The fixed transceiver equipment transmits communication signals to and receives communication signals from mobile devices within its cell via station **206**. The fixed transceiver equipment normally performs such functions as modulation and possibly encoding and/or encryption of signals to be transmitted to the mobile device in accordance with particular, usually predetermined, communication protocols and parameters, under control of its controller. The fixed transceiver equipment similarly demodulates and possibly decodes and decrypts, if necessary, any communication signals received from mobile device **100** within its cell. Communication protocols and parameters may vary between different nodes. For example, one node may employ a different modulation scheme and operate at different frequencies than other nodes.

[0030] For all mobile devices **100** registered with a specific network, permanent configuration data such as a user profile may be stored in HLR **212**. HLR **212** may also contain location information for each registered mobile device and can be queried to determine the current location of a mobile device. MSC **210** is responsible for a group of location areas and stores the data of the mobile devices currently in its area of responsibility in VLR **214**.

Further VLR **214** also contains information on mobile devices that are visiting other networks. The information in VLR **214** includes part of the permanent mobile device data transmitted from HLR **212** to VLR **214** for faster access. By moving additional information from a remote HLR **212** node to VLR **214**, the amount of traffic between these nodes can be reduced so that voice and data services can be provided with faster response times while requiring less use of computing resources.

[0031] SGSN **216** and GGSN **218** are elements that may be added for GPRS support; namely packet switched data support, within GSM. SGSN **216** and MSC **210** have similar responsibilities within wireless network **200** by keeping track of the location of each mobile device **100**. SGSN **216** also performs security functions and access control for data traffic on network **200**. GGSN **218** provides internetworking connections with external packet switched networks and connects to one or more SGSNs **216** via an Internet Protocol (IP) backbone network operated within the network **200**. During normal operations, a given mobile device **100** performs a "GPRS Attach" to acquire an IP address and to access data services. This normally is not present in circuit switched voice channels as Integrated Services Digital Network (ISDN) addresses may be generally used for routing incoming and outgoing calls. Currently, GPRS capable networks may use private, dynamically assigned IP addresses, thus requiring a DHCP server **220** connected to the GGSN **218**. There are many mechanisms for dynamic IP assignment, including using a combination of a Remote Authentication Dial-In User Service (RADIUS) server and DHCP server, for example. Once the GPRS Attach is complete, a logical connection is established from a mobile device **100**, through PCU **208**, and SGSN **216** to an Access Point Node (APN) within GGSN **218**, for example. The APN represents a logical end of an IP tunnel that can either access direct Internet compatible services or private network connections. The APN also represents a security mechanism for network **200**, insofar as each mobile device **100** must be assigned to one or more APNs and mobile devices **100** cannot generally exchange data without first performing a GPRS Attach to an APN that it has been authorized to use. The APN may be considered to be similar to an Internet domain name such as "my-connection.wireless.com".

[0032] Once the GPRS Attach is complete, a tunnel is created and all traffic is exchanged within standard IP packets using any protocol that can be supported in IP packets. This includes tunneling methods such as IP over IP as in the case with some IP Security (IPsec) connections used with Virtual Private Networks (VPN). These tunnels are also referred to as Packet Data Protocol (PDP) Contexts and there are a limited number of these available in the network **200**. To maximize use of the PDP Contexts, network **200** will run an idle timer for each PDP Context to determine if there is a lack of activity. When a mobile device **100** is not using its PDP Context, the PDP Context can be deallocated and the IP address

returned to the IP address pool managed by DHCP server 220.

[0033] Referring now to FIG. 4, a keypad assembly according to an embodiment of the present invention is shown generally as 400. The keypad assembly 400 may be used within electronic devices, such as within the keyboard 116 of the mobile device 100 described above. The keypad assembly 400 includes keys (or keycaps) 410 positioned within a flexible deflection web 420. The keys 410 are positioned atop, and operatively coupled to, corresponding actuator portions 425 of the deflection web 420. The keys 410 may be adhered to the actuators 425 or, alternatively, the keys 410 and actuators 425 may be provided with complementary male and female features to permit the keys 410 to sit within the actuators 425.

[0034] Within the keypad assembly 400, each key 410 and actuator 425 correspond to, and are aligned with, a dome 430 (which may be made of metal) and a switch sensor 433 coupled to a base 440 of the keypad assembly 400. Each key 410 is operatively coupled to its corresponding dome 430. When a key 410 is depressed (i.e. in the key press direction 431), the corresponding metal dome 430 collapses and engages the corresponding sensor switch 433. Accordingly, engagement of a sensor switch 433 produces a signal that a corresponding key 410 has been depressed. Those of ordinary skill in the art will appreciate the metal domes 430 and sensor switches 433 operate like dome switches commonly used in the field.

[0035] Optionally, and as illustrated in FIG. 4, a dome overlay 436 may be provided within the keypad assembly 400 in order to restrict lateral movement of the domes 430 within the assembly 400. The portions 437 of the dome overlay 436 not in contact with a dome 430 may be operatively coupled to the base 440 via coupling elements 450, in order to localize the domes between the portions 437 of the dome overlay 436. The coupling elements 450 may comprise, for example, an adhesive or alternatively, a spacer having adhesive tape on either side. The spacer may comprise a material with favorable sealing characteristics, in order to prevent dust and/or water from contaminating the dome and switch area within the keypad assembly 400.

[0036] The keypad assembly 400 is also provided with a light emitting source 461 and a light guide assembly 470. When installed within the keypad assembly 400, the light emitting source 461 and light guide assembly 470 are appropriately positioned with respect to one another such that emitted light 462 from the light emitting source (or light source) 461 is received by the light guide assembly 470. Further, the light guide assembly 470 is configured to direct light it receives from the light emitting source 461 towards the keys 410 of the keypad assembly 400. The light guide assembly 470 will be discussed in greater detail below.

[0037] The light emitting source (or light source) 461 may comprise a commercially available side firing (or side emitting) light emitting diode (LED). As ordinarily

skilled persons will appreciate, a side firing LED typically comprises a housing for the LED that is mountable at a base of the housing and an LED configured to emit light from a side wall-adjacent the base-of the housing. In contrast, the housing of a top firing LED, which is also mountable at its base, contains an LED configured to emit light from a top surface-opposite the base-of the housing.

[0038] Ordinarily skilled persons will appreciate that LEDs typically require there to be a certain amount of clearance (or space) between the surface of the LED, from which the light is emitted, and a light guide or other object in order for the LEDs to function efficiently. This space is typically referred as the LED leading space gap. When using "side" firing LEDs (i.e. LEDs which emit light laterally to their base), as opposed to "top" firing LEDs (i.e. LEDs which emit light in a direction to their base) as the light emitting source 461 within a keypad assembly 400, any required leading space gap is lateral (i.e. generally perpendicular to the key press direction 431) rather than vertical (i.e. generally parallel to the key press direction 431). Consequently, the thickness of the keypad assembly 400 may be reduced by using side firing LEDs instead of top firing LEDs as the light source 461 within a keypad assembly 400.

[0039] With reference to FIG. 5, the configuration of an example light guide assembly 470 is described in greater detail. FIG. 5 illustrates an enlargement of a selected number of components-namely, the light guide assembly 470, the light source 461, the deflection web 420, and the keys 410-of the embodiment of the keypad assembly 400 shown in FIG. 4, in isolation. Despite some of the components of the keypad assembly 400 being absent, the elements included in FIG. 5 are illustrated having an operative relationship with one another that they would have when installed within the keypad assembly 400. For the purposes of this disclosure, the light emitting source 461 and the light guide assembly 470 collectively make up a backlighting assembly 560 as referred to herein.

[0040] The light guide assembly 470 comprises a light guide film 471 and a light guide frame 475. An edge 572 of the light guide film 471 is positioned adjacent the light source 461 such that light 462 emitted from the light source 461 is received by the light guide film 471 through its edge 572. For the purposes of this disclosure, once light emitted from the light source 461 (emitted light 462) enters the light guide film 471, it is referred to as received light 563. As those skilled in the art will appreciate, the light guide film 471, absent any light directing features, is configured to contain a substantial portion of the received light 563 as it travels through the film.

[0041] The light guide film 471 may be provided with several micro features 573a, 573b configured to emit received light 563 out from the light guide film 471. Those of ordinary skill in the art will appreciate that the micro features 573a, 573b have been illustrated schematically. In some embodiments, one or more micro features 573a, 573b may be provided at predetermined locations of the

light guide film **471** so as to align with the keys **410** of the keypad assembly **400** when the light guide film **471** is positioned within the assembly **400**. In some embodiments-e.g. where a dome overlay **436** (**FIG. 4**) is provided within the keypad assembly **400**, and the light guide film **471** is configured to conform substantially with the shape of the dome overlay **436**-the micro features **573a** may be located near the apex of domes formed in the light guide film **471**.

[0042] When received light **563** traveling through the light guide film **471** intersects with a micro feature **573a**, a portion of the light **563** is directed toward the key **410** in alignment with that micro feature **573a**. For the purposes of this disclosure, received light **563** directed by micro features **573a** (in line with the key(s) **410**) from the light guide film **471** toward the key(s) **410** is referred to as primary directed light **565**. The primary directed light **565** may serve as the primary source of backlighting for the key(s) **410** of the keypad assembly **400**.

[0043] It may be desirable for the deflection web **420** to be made from a substantially translucent (or semitransparent) material to ensure that a relatively high portion of the primary directed light **565** is able to pass through the deflection web **420** (including the actuators **425**) and reach the key(s) **410**.

[0044] One or more micro features **573b** may also be provided at predetermined locations of the light guide film **471** so as to align with the light guide frame **475**, when the two light guide components (film and frame) are in their installed positions within the keypad assembly **400**. When received light **563** meets a micro feature **573b**, a portion of the received light **563** is communicated to the light guide frame **475**. For the purposes of this disclosure, received light **563** communicated from the light guide film **471** to the light guide frame **475** is referred to as communicated light **564**. As will be discussed in greater detail below, the light guide frame **475** may then direct the communicated light **564** toward the keys **410**.

[0045] The micro features **573a**, **573b** provided in the light guide film **471** may comprise one or more cavities etched into a surface of the film. The cavities may, for example, comprise v-shaped cuts, or white printing dots (or micro dots). A plurality of micro features **573a**, **573b** may form a two dimensional array on the light guide film's **471** surface that helps to emit received light **563** from the light guide film **471** evenly. Those of ordinary skill in the art will appreciate that these and/or other known micro optical features may be provided to the light guide film **471** to direct light therefrom.

[0046] Referring now jointly to **FIGS. 5** and **6**, the configuration of the light guide frame **475** is discussed in greater detail. **FIG. 6** shows a perspective view of a light guide frame **475** according to an embodiment of the present disclosure, and is illustrative of the exterior structure of the frame **475**. The example light guide frame **475** shown is for use with a standard alphanumeric twelve-key keypad assembly (0-9, #, *). Those of ordinary skill in the art will appreciate that other configurations of frame

475 may also exist to correspond to keypad assemblies with different numbers of and arrangements of keys, e.g. a full QWERTY keypad assembly.

[0047] In some embodiments, the light guide frame **475** may be manufactured as a two-shot injection molded part. The first shot **478** may be made of a material with a relatively high transmittance in the visible light spectrum (e.g. a clear resin) in order to afford the frame **475** light transferring capabilities; and, the second shot **477** may be of a substantially reflective material (e.g. a black, or opaque white resin) for preventing light from leaking out.

[0048] The light guide frame **475** may be configured to direct the communicated light **564** (from the light guide film **471**) toward one or several keys **410**. For the purposes of this disclosure, communicated light **564** directed toward the key(s) **410** by the light guide frame **475** is referred to as secondary directed light **566**. In order to appropriately direct the communicated light **564**, the light guide frame **475** may be provided with one or more directional elements **476**. As was the case with the micro features **573a**, **573b**, directional elements **476** have been illustrated schematically. Those of ordinary skill in the art will appreciate that the directional elements **476** may not be representative of the actual characteristics of such elements, physical or otherwise.

[0049] Where the light guide frame **475** is manufactured as a two-shot injection molded part (as discussed above), the directional elements **476** may be provided in the material of the first shot **478**. The directional features **476** may comprise resin blocks with sloped surfaces which act to redirect some or all of the communicated light **564** toward the key(s) **410**. In some variants, the directional elements **476** may be provided in the mold before the first shot **478** is injected.

[0050] As the secondary directed light **566** may be required to travel through a deflection web **420** to reach the key(s) **410**, the deflection web **420**, as discussed above, may comprise a substantially translucent (or semitransparent) material to help ensure that a relatively large portion of the secondary directed light **566** reaches the key(s) **410**.

[0051] The light guide frame **475** may be made of one or more substantially rigid materials. In embodiments where a deflection web **420** is provided within the keypad assembly **400**, the light guide frame **475** and the deflection web **420** may be co-molded. As a result, the light guide frame **475** may provide structural support for the deflection web **420**. The structural support afforded to the deflection web **420** by the light guide frame **475** may effectively isolate each key **410** and corresponding elements (i.e. dome **430** and in some cases actuator portion **425** of the deflection web **420**) from the depression of adjacent keys **410**. In other words, a light guide frame **475** with substantial rigidity, co-molded to a deflection web **420** may substantially prevent movement of one portion of the deflection web **420** (corresponding to a key **410**) from translating to any of the other portions of the deflection web **420** (corresponding to any of the other

keys **410**). This mechanical isolation of each actuator portion **425** of the deflection web **420** may lead to a better tactile feel to a user of the keypad assembly **400**.

[0052] In some embodiments, the light guide frame **475** may be provided with location pins (not shown), and the light guide film **471** may be provided with location pin holes (not shown). To help achieve greater and more sustainable alignment of the light guide frame **475** with respect to the light guide film **471**, the location pins (not shown) of the frame **475** may be slotted through the location pin holes (not shown) of the film **471** when the two light guide components are installed within the keypad assembly **400**.

[0053] In some embodiments, a light shielding layer **480** may be provided atop the light guide frame **475** in order to help prevent light from escaping the light guide frame **475** in undesired areas. In some embodiments, the light shielding layer **480** may be made of polyethylene terephthalate colored black with white painting on the surface which faces the light guide frame **475**. **FIG. 7** illustrates an example light shielding layer **480** that may be overlaid onto the light guide frame **475** in the direction of arrows **10**. The light shielding layer **480** may be attached to the "top" surface of the light guide frame **475** using an adhesive.

[0054] Referring now to the logical flow diagram of **FIG. 8**, a method for providing backlighting for a keypad assembly **400** having at least one key **410** (the method referred to generally as **800**) will now be discussed. A keypad assembly **400** having at least one light emitting source **461**, configured to emit light, is provided at Block **810**.

[0055] At Block **820**, a light guide assembly **470**, comprising both a light guide film **471** and a light guide frame **475**, is provided for use within the keypad assembly **400**. The light guide assembly **470** may be configured within the keypad assembly **400** so as to receive light emitted (or emitted light **462**) from the light source(s) **461** toward the key(s) **410** of the keypad assembly **400**. As discussed above, a suitable configuration may be achieved by aligning an edge **572** of the light guide film **471** with the light emitted from the light emitting source **461**, and appropriately aligning the light guide frame **475** with the light guide film **471**. Also as discussed above, when the light guide frame **475** is appropriately aligned with the light guide film **471**, the two light guide components **471**, **475** may cooperate to direct light **462** emitted from the light source **461** toward the key(s) **410** of the keypad assembly **400** via micro features **573a**, **573b** and directional elements **476** in the light guide film **471** and light guide frame **475**, respectively.

[0056] At Block **830**, the at least one light emitting source **461** is caused to emit light. The emitted light **462** enters the light guide film **471** as received light **563** which is then directed from the light guide film **471** toward the key(s) **410**, or communicated from the light guide film **471** to the light guide frame **475** and subsequently directed toward the key(s) **410** by the light guide frame **475**.

[0057] The various embodiments of keypad assemblies **400** and backlighting assemblies **560** described herein incorporate light guide assemblies **470** having both a light guide film **471** and a light guide frame **475**. The thickness of a keypad assembly **400** (and therefore the electronic device incorporating the keypad assembly **400**) may be reduced by using a side firing LED and eliminating the need to accommodate the leading space gap typically required of top firing light sources. Commonly, side firing light sources are used in conjunction with light guide films **471**, as opposed to light guide frames **475**. Supplementing the light guiding capabilities of the light guide film **471** with those of a light guide frame **475** may allow for the use of a thinner light guide film **471**, potentially resulting in a thinner keypad assembly **400**. Further, the use of the light guide frame **475** may provide structural support to a deflection web **420** of a keypad assembly **400**, which may effectively isolate the keys **410** from one another, and in turn, result in a greater tactile feel to a user of the keypad assembly **400**.

[0058] The steps of a method in accordance with any of the embodiments described herein may not be required to be performed in any particular order, whether or not such steps are described in the claims or otherwise in numbered or lettered paragraphs.

[0059] The keypad assembly and backlighting assembly have been described with regard to a number of embodiments. However, it will be understood by persons skilled in the art that other variants and modifications may be made without departing from the scope of the disclosure as defined in the claims appended hereto.

Claims

1. A keypad assembly (400) comprising:

- (a) at least one key (410);
- (b) at least one light emitting source (461) configured to emit light (462);
- (c) a light guide assembly (470) configured to receive the emitted light (462) and direct the light toward the at least one key; and
- (d) wherein the light guide assembly (470) comprises:

- (i) a light guide film (471), and
- (ii) a light guide frame (475).

2. The keypad assembly of claim 1, wherein the light guide film (471) is configured to receive the emitted light (462) and communicate the received light (563) to the light guide frame (475).

3. The keypad assembly of claim 1, wherein the light guide film (471) is configured to direct the received light (563) toward the at least one key (410).

4. The keypad assembly of any preceding claim, further comprising a deflection web (420) comprising at least one actuator (425) corresponding to that at least one key (410). 5
5. The keypad assembly of claim 4, wherein the light guide frame (475) is further configured to provide structural support to the deflection web (420). 10
6. The keypad assembly of claim 2, wherein the light guide film (471) comprises at least one cavity configured for directing light toward the light guide frame (475). 15
7. The keypad assembly of any preceding claim, further comprising at least one metal dome (430) configured for operable engagement by the at least one key (410), and a dome overlay (436) between the key (410) and the metal dome. 20
8. A backlighting assembly (460) adapted to backlight a keypad assembly (400) having at least one key (410), the backlighting assembly comprising:
 - (a) at least one light emitting source (461) configured to emit light (462); 25
 - (b) a light guide assembly (470) configured to receive the emitted light (462) and direct the light toward the at least one key (410); and
 - (c) wherein the light guide assembly comprises: 30
 - (i) a light guide film (471), and
 - (ii) a light guide frame (475).
9. The backlighting assembly of claim 8, wherein the light guide film (471) is configured to receive the emitted light (462) and communicate the received light (563) to the light guide frame (475). 35
10. The backlighting assembly of claim 9, wherein the light guide frame (475) is configured to direct the communicated light (564) toward the at least one key (410). 40
11. The backlighting assembly of claim 8, wherein the light guide film (471) is configured to direct the received light (462) toward the at least one key (410). 45
12. The backlighting assembly of any one of claims 8 to 11, wherein the assembly is configured for use in a mobile device (100). 50
13. A method of providing backlighting of a keypad assembly (400) having at least one key (410), the method comprising: 55
 - (a) providing a keypad assembly having at least one light emitting source (461), wherein the light emitting source is configured to emit light (462);
 - (b) providing a light guide assembly (470) configured to receive the emitted light (462) and to direct the received light (563) toward the at least one key (410), wherein the light guide assembly comprises a light guide film (471) and a light guide frame (475); and
 - (c) causing the light emitting source (461) to emit light.
14. The method of claim 13, wherein the light guide film (471) is configured to receive the emitted light (462) and communicate the received light (563) to the light guide frame (475).
15. The method of claim 13, wherein the light guide film is configured to direct the emitted light (462) toward the at least one key (410).

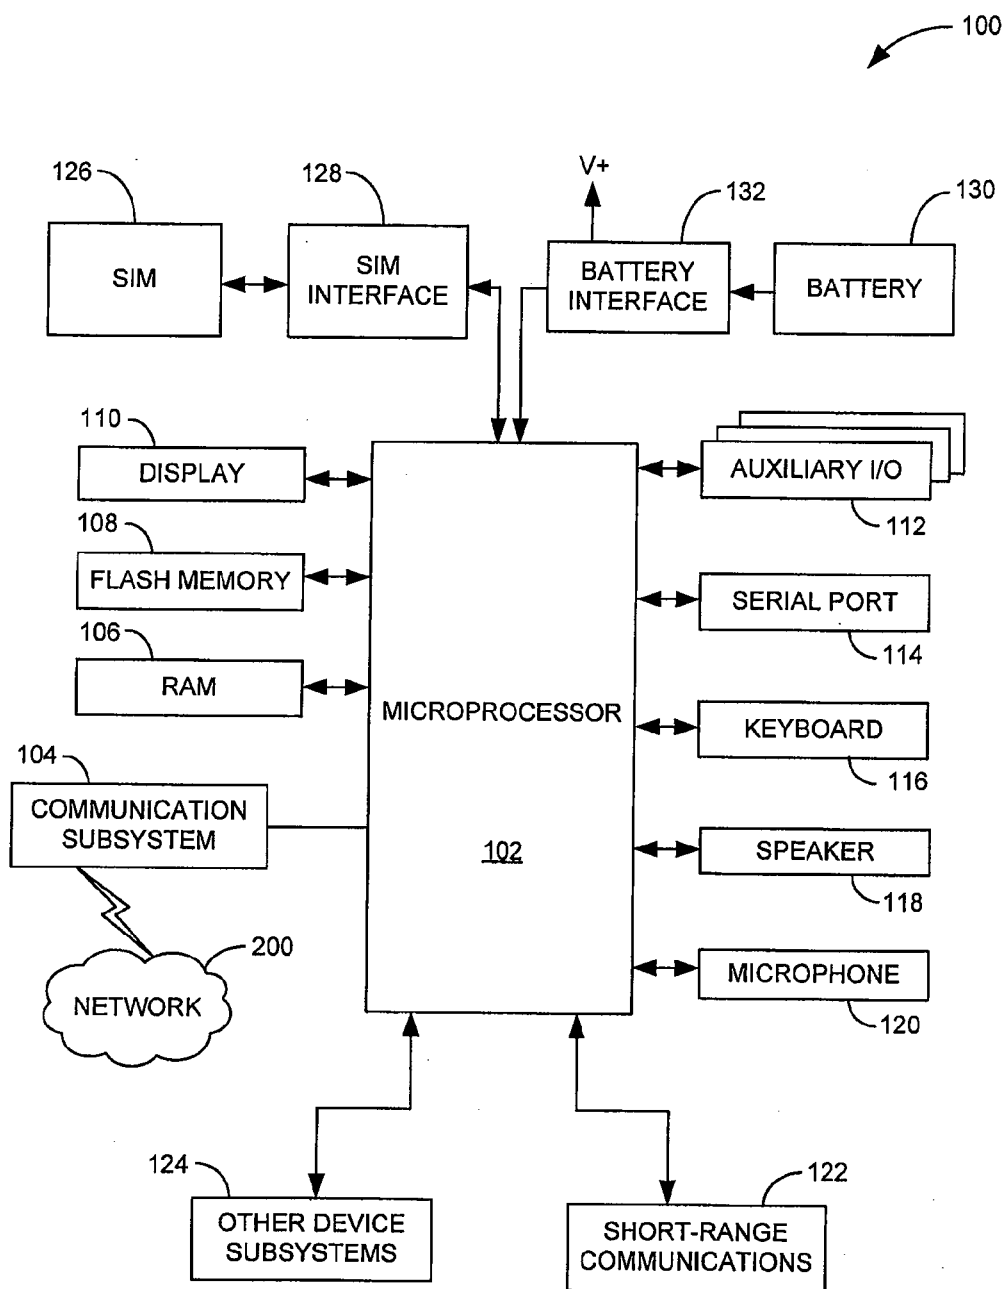


FIG. 1

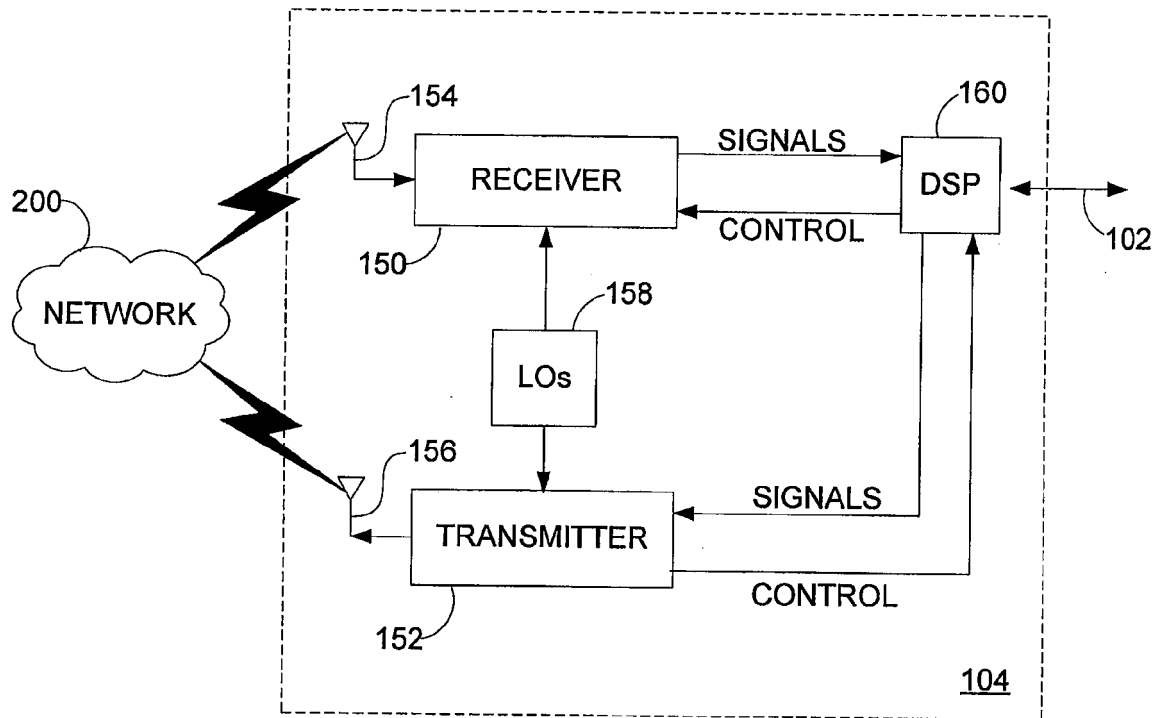


FIG. 2

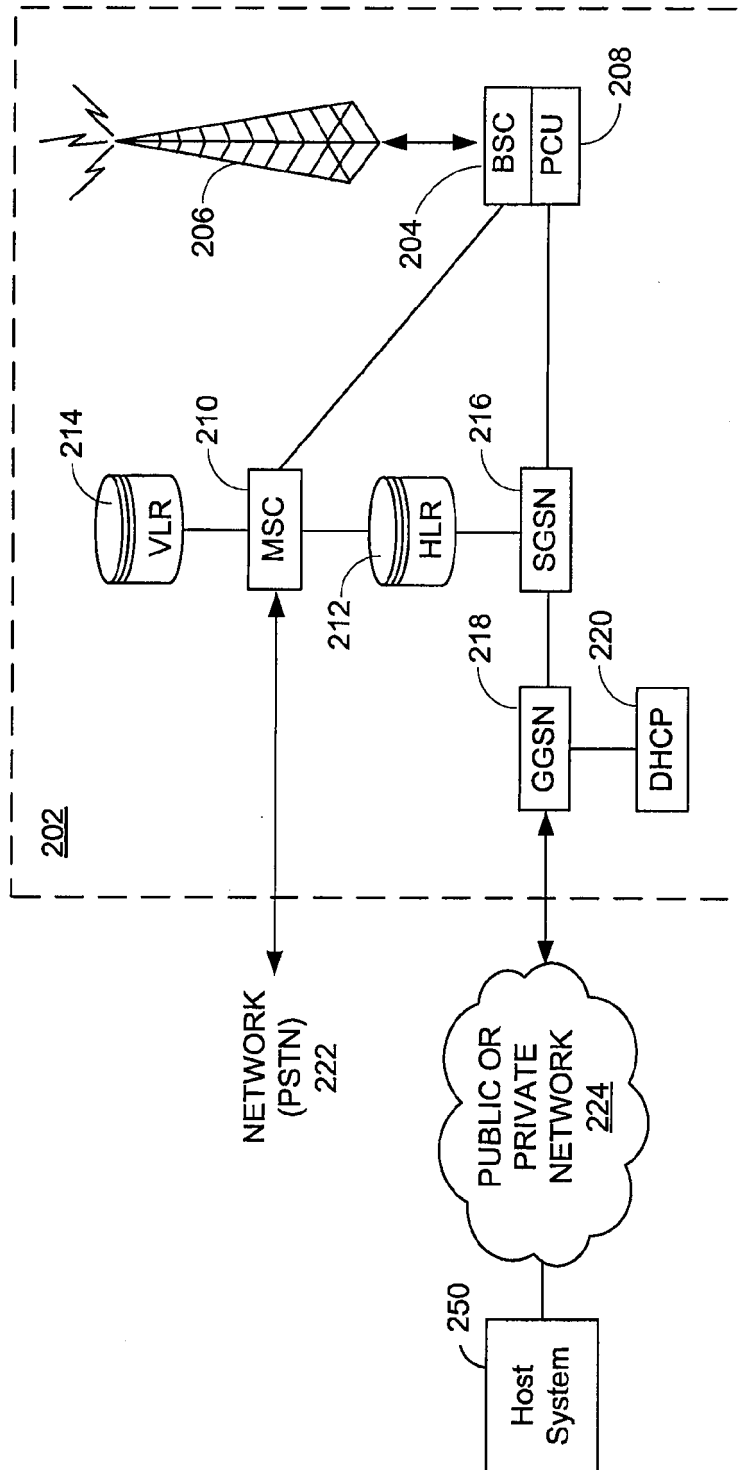


FIG. 3

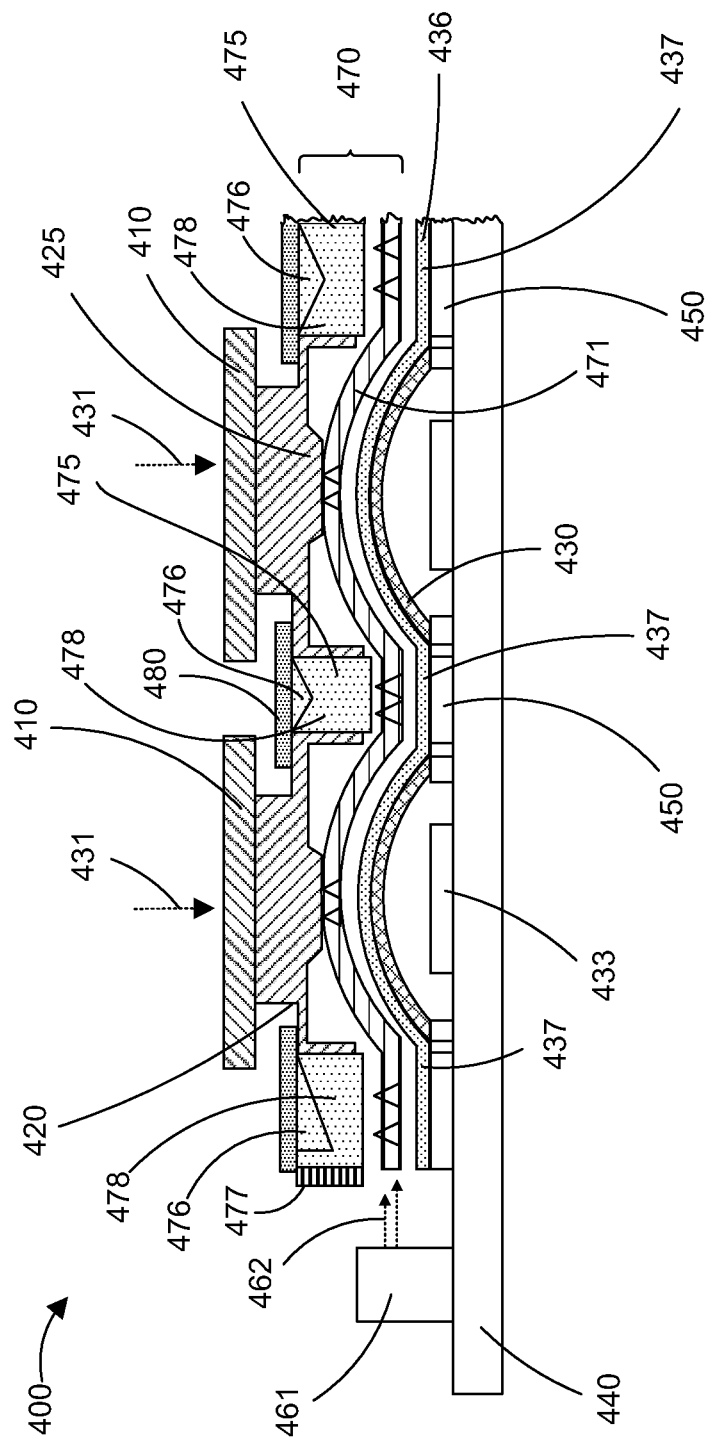


FIG. 4

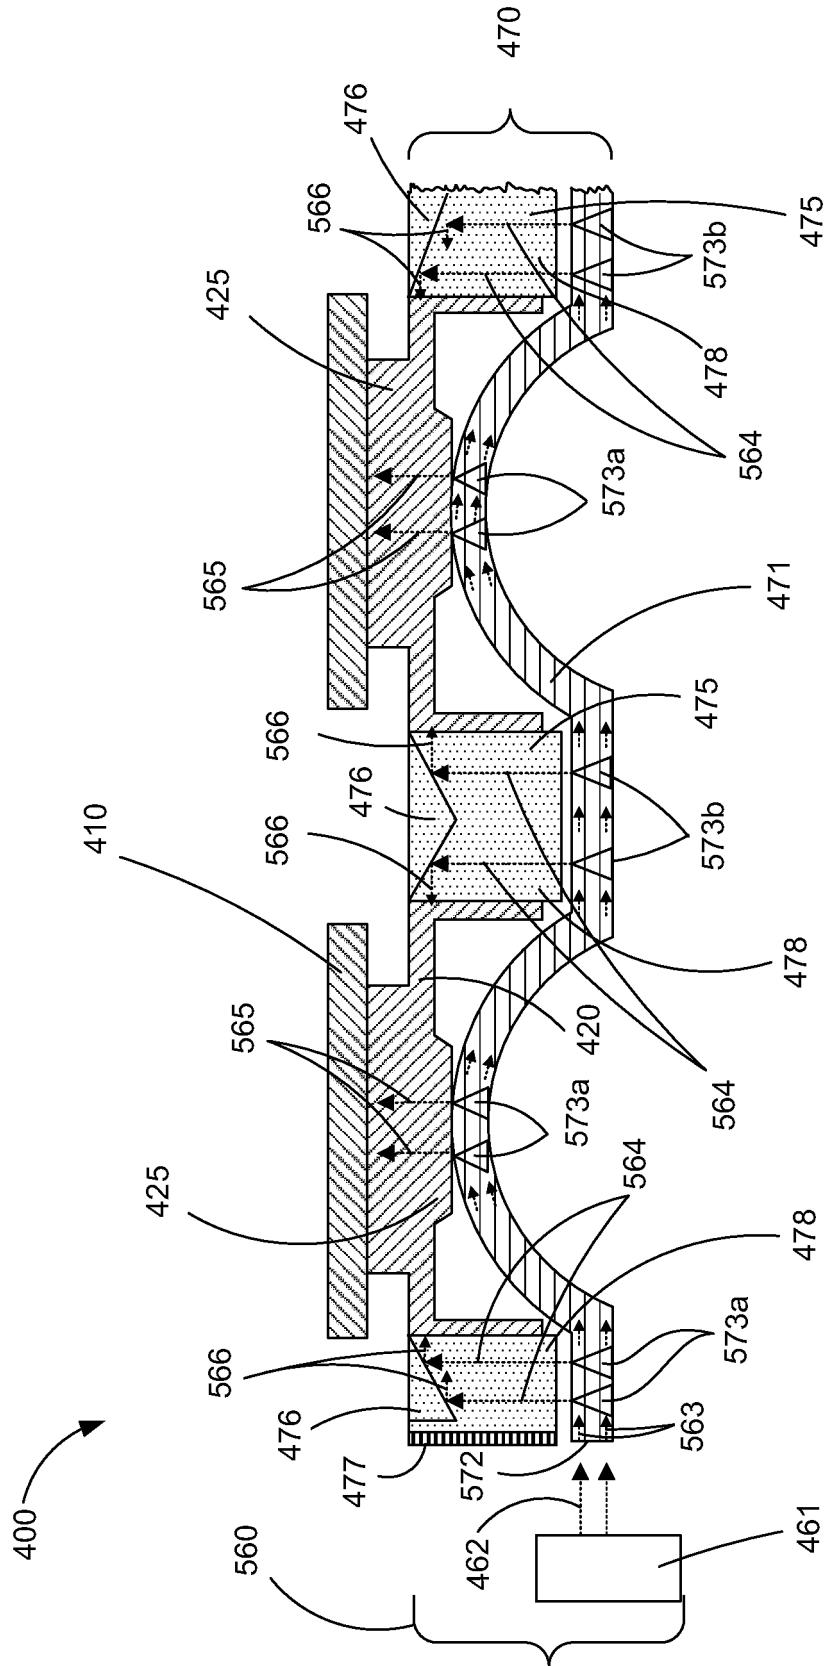


FIG. 5

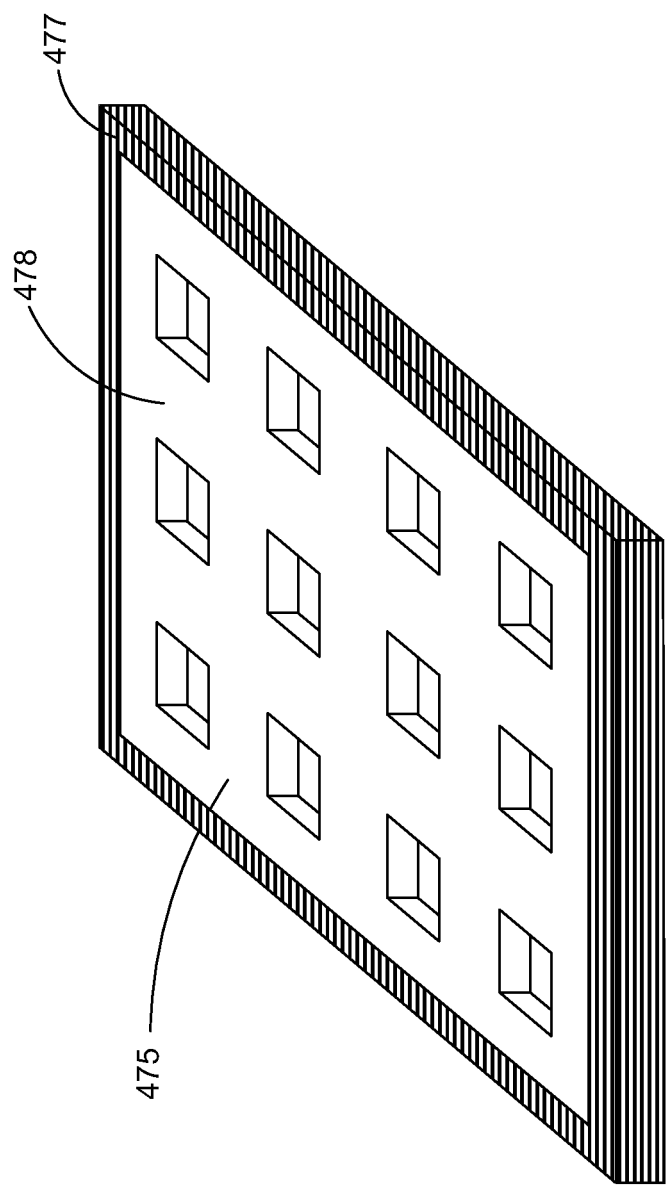


FIG. 6

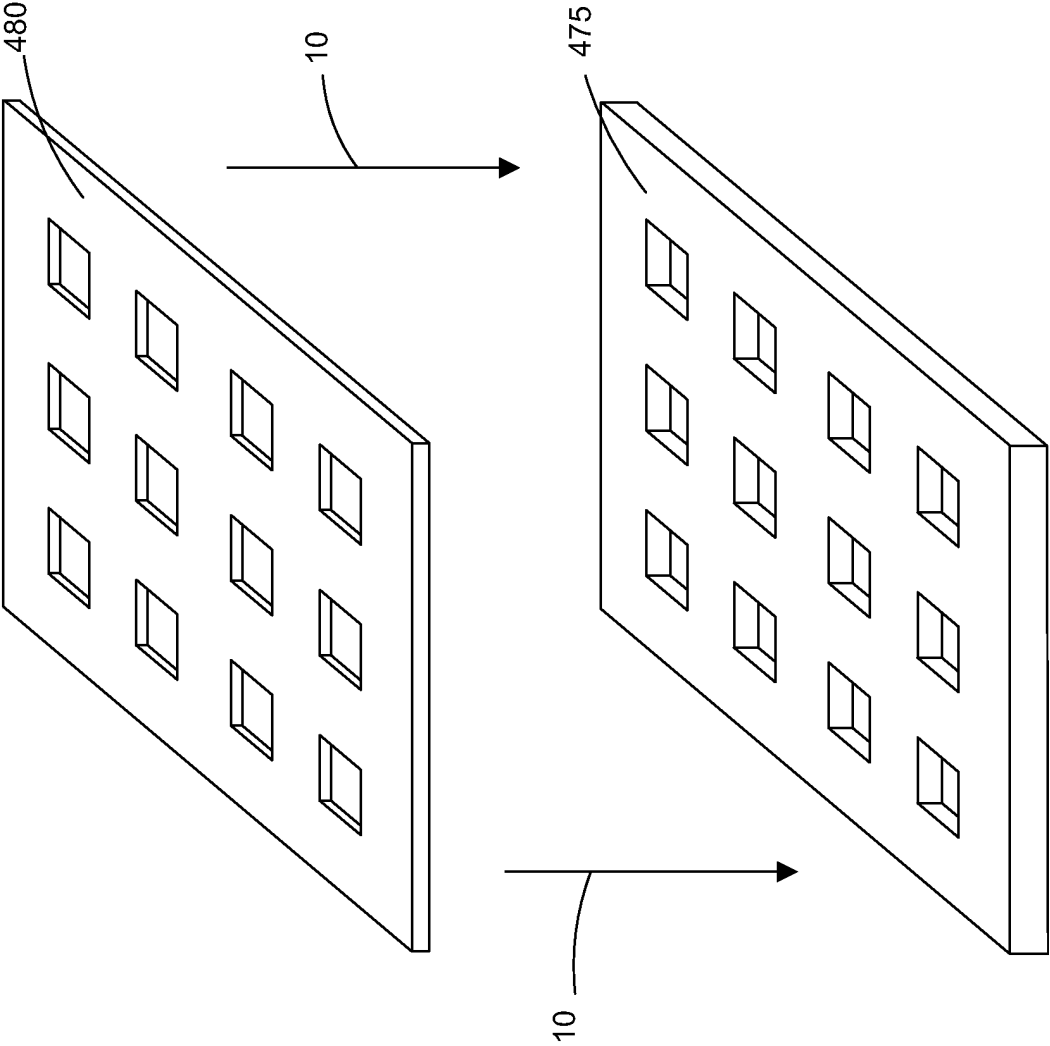


FIG. 7

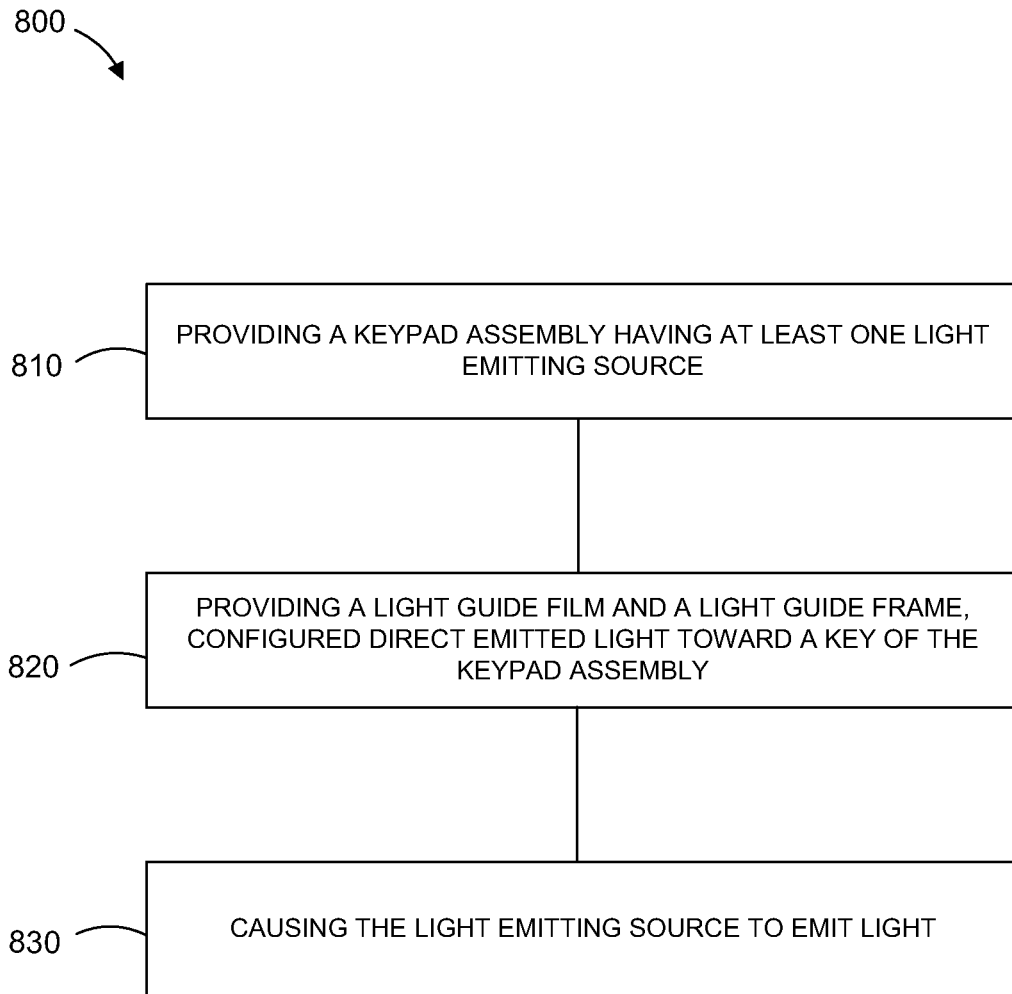


FIG. 8



EUROPEAN SEARCH REPORT

Application Number
EP 10 17 5018

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2009/122016 A1 (HUANG CHING-CHIH [TW]) 14 May 2009 (2009-05-14) * paragraph [0004] - paragraph [0009]; figures 5(a)-5(c), 6, 7 * * paragraph [0025] - paragraph [0029] * -----	1-15	INV. H01H13/86 H01H13/704 H01H13/83
X	US 2010/148996 A1 (WANG CHIEN-LUNG [TW]) 17 June 2010 (2010-06-17) * paragraph [0005] - paragraph [0006]; figure 3 * -----	1-6, 8-15	
A		7	
X	US 4 177 501 A (KARLIN JAMES H [US]) 4 December 1979 (1979-12-04) * column 2, line 33 - column 4, line 57; figures 1, 3 * -----	1-15	
A	EP 1 729 205 A2 (SAMSUNG ELECTRONICS CO LTD [KR]) 6 December 2006 (2006-12-06) * paragraph [0012] - paragraph [0036]; figures 3-5 * -----	1-15	TECHNICAL FIELDS SEARCHED (IPC)
			H01H
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 26 January 2011	Examiner Ernst, Uwe
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

1
EPO FORM 1503 03/82 (P04/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 10 17 5018

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-01-2011

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2009122016 A1	14-05-2009	NONE	
US 2010148996 A1	17-06-2010	NONE	
US 4177501 A	04-12-1979	NONE	
EP 1729205 A2	06-12-2006	CN 1866439 A	22-11-2006
		JP 4358204 B2	04-11-2009
		JP 2006324253 A	30-11-2006
		KR 20060119292 A	24-11-2006
		US 2006260921 A1	23-11-2006