

(19)



(11)

EP 2 431 192 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

21.03.2012 Bulletin 2012/12

(51) Int Cl.:

B43K 8/08 (2006.01)

(21) Application number: **10176794.5**

(22) Date of filing: **15.09.2010**

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO SE SI SK SM TR**

Designated Extension States:

BA ME RS

(72) Inventor: **Hui, Ve Chung
Chai Wan (CN)**

(74) Representative: **Perani, Aurelio et al
Perani & Partners
Piazza San Babila, 5
20122 Milano (IT)**

(71) Applicant: **Tung Yik International Ltd.
Hong Kong (HK)**

(54) Writing pen with ink storage

(57) A writing pen with ink storage is provided, comprising a writing nib, an ink storage compartment for storing ink, an ink inducing device for inducing ink into the writing nib, wherein the writing pen further comprises an air pressure balancing plug which is plugged in an open end of the ink storage compartment to seal ink, and a

breathable core having nanopores, the breathable core being inserted into the air pressure balancing plug with one end extending into ink and the other end communicating with ambient air. The writing pen with ink storage of the present invention has simple structure, provides fluent writing and no ink leakage.

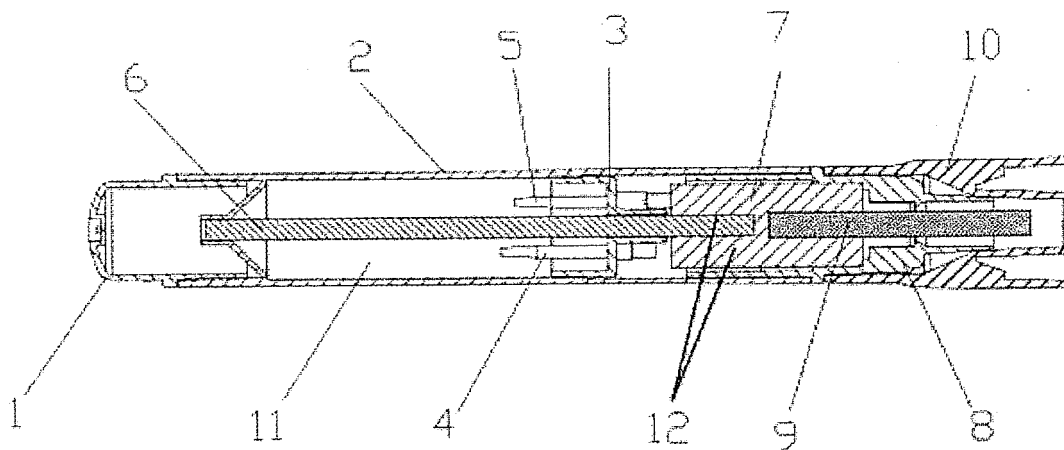


Fig. 1

EP 2 431 192 A1

Description

FIELD OF THE INVENTION

[0001] The present invention relates generally to writing instruments and more specifically, to a writing pen with ink storage, which has simple structure, provides fluent writing and no ink leakage.

BACKGROUND OF THE INVENTION

[0002] Generally, a writing pen comprises at least an ink storage device and an ink inducing device, wherein the ink storage device is used for storing liquid ink or even gelatin ink as an ink source, and the ink inducing device for inducing ink to the nib for the purpose of writing. As consumption of ink during writing, ambient air needs to be allowed into the ink storage device, otherwise vacuum pressure may be generated in the ink storage device and affect outflow of ink. That means, there should be an air communicating passage between the ink storage device and the ambient air to balance air pressure, which is a key point to ensure that the writing pen can provide fluent writing with no ink leakage.

[0003] China patent No. 01235948.3 discloses a writing pen with ink storage, which has a dust-proof plate, a labyrinth breathable plug, a nano-permeable plate and an one-way valve to achieve air communication between the ink storage device and ambient air. Such a writing pen can keep air pressure balance, but has some disadvantages such as complicated structure with many parts, too much assembly procedures and high manufacture cost.

SUMMARY OF THE INVENTION

[0004] Aimed at disadvantages of complicated structure of the conventional writing pen with ink storage, the present invention is intended to provide a writing pen with ink storage that has simple structure.

[0005] According to an aspect of the present invention, a writing pen with ink storage is provided, comprising a writing nib, an ink storage compartment for storing ink, an ink inducing device for inducing ink into the writing nib, wherein the writing pen further comprises an air pressure balancing plug which is plugged in an open end of the ink storage compartment to seal ink, and a breathable core having nanopores, the breathable core being inserted into the air pressure balancing plug with one end extending into ink and the other end communicating with ambient air.

[0006] In an embodiment of the present invention, the ink inducing device comprises a transfer core having one end being connected to the writing nib and a relay core connected to the other end of the transfer core, a tail end of said relay core passing through the air pressure balancing plug and entering into the ink. Further, the opposite ends of the relay core and the writing nib are located

in the transfer core with an interval between each other.

[0007] In an embodiment of the present invention, the writing pen further comprises a pen body and a pen cap, the ink storage compartment and the ink inducing device are arranged at the tail end and the middle of the pen body respectively, while the writing nib is arranged at the front end of the pen body with a portion extending out of the front holder, and the pen cap is assembled at the front end of the front holder to cover the writing nib.

[0008] In an embodiment of the present invention, the writing pen comprises two breathable cores, including a first breathable core and a second breathable core, and the first breathable core extends into the transfer core. The air pressure balancing plug has three holes for the relay core, the first breathable core and the second breathable core to be inserted into respectively. The first breathable core contacts with the transfer core.

[0009] In an embodiment of the present invention, diameter of the nanopores in the breathable core is larger than particle diameter of the ink. The diameter of the nanopores in the breathable core is 500nm, and porosity of the breathable core is 50%.

[0010] Advantages of the writing pen with ink storage in accordance with embodiments of the present invention lie in that: ambient air can be allowed into the ink storage compartment through the breathable cores having nanopores, while ink won't leak out of the ink storage compartment, therefore, air pressure in and out of the ink storage compartment can be kept balance, so the pen can provide fluent writing. The writing pen with ink storage of the present invention utilizes breathable cores to replace the conventional air balancing assembly composed of many parts, thereby it has simple structure, low manufacture cost, and stable and reliable performance.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] The accompanying drawings illustrate one or more embodiments of the invention and, together with the written description, serve to explain the principles of the invention, and wherein:

Fig.1 is a structural diagram showing a writing pen with ink storage in accordance with an embodiment of the present invention.

Fig.2 is an exploded view showing parts of the writing pen as shown in Fig. 1.

Fig.3 is a structural diagram showing a pressure balancing plug in the writing pen as shown in Fig. 1.

DETAILED DESCRIPTION OF THE INVENTION

[0012] These and other aspects of the present invention will become apparent from the following description of the preferred embodiment taken in conjunction with the following drawings. It should be understood that the embodiments described here are only for the purposes of illustration and description and is not intended to be

exhaustive or to limit the invention to the precise forms disclosed.

[0013] As shown in Fig. 1 and Fig. 2, the writing pen with ink storage in accordance with an embodiment of the present invention comprises a fiber writing nib 9, a pen body 2, a front holder 8, a back holder 1, a pen cap 10, an ink storage compartment 11, an ink inducing device 12, an air pressure balancing plug 3 and breathable cores. The ink inducing device comprises a transfer core 7 and a relay core 6 which is made of fiber materials. The breathable cores have cylindrical shape, and there are two breathable cores comprising a first breathable core 5 and a second breathable core 4, while the former is in communication with transfer core 7.

[0014] As shown in Fig. 1, the front holder 8 and the back holder 1 are assembled at two ends of the pen body 2 respectively. And in the pen body 2 are the ink storage compartment 11, the ink inducing device 12 and the writing nib 9 successively, while the ink storage compartment 11 is arranged in the tail end of the pen body 2 and the ink inducing device is arranged in the middle of the pen body 2. The writing nib 9 is arranged at the front end of the pen body 2 with a portion extending out of the front holder 8. The pen cap 10 is assembled at the front end of the pen body 2 and covers the writing nib 9. The ink inducing device 12 connects the ink storage compartment 11 and the writing nib 9 to induce ink from the ink storage compartment 11 to the writing nib 9. Ink in the ink storage compartment 11 may be fluorescent ink, marking ink, whiteboard ink, blackboard ink, correction fluid or any type of marking fluid.

[0015] The ink storage compartment 11 comprises a closed end and an open end opposite to each other. The closed end of the ink storage compartment 11 is funnel shaped, and at the open end of the ink storage compartment 11 is a air pressure balancing plug 3, which is tightly fitted to the open end. As shown in Fig. 3, the air pressure balancing plug 3 has a through hole of 4mm in diameter and two through holes of 2mm in diameter. The relay core 6 passes through the 4mm through hole and enters into the funnel shaped structure at the closed end of the ink storage pipe 11. The first breathable core 5 and the second breathable core 4 are inserted into the 2mm through holes respectively, to enable their left end inserted into the storage compartment 11 and their right end to ambient air. Further, the first breathable core 5 is connected to the transfer core 7 to enhance the performance of inducing ink.

[0016] The breathable cores in the writing pen of embodiments of the present invention are made of fiber materials treated by nanopore technology, thus the breathable cores are full of nanopores. Here the nanopores means that the nanopore has a diameter less than 1000 nanometers and measured as nm to be the measuring unit. In various embodiments of the present invention, diameter of the nanopores is in a range of 400 to 800nm, preferably 500nm. Usually, particle diameter of ink is 300 to 350 nm, which is smaller than that of the nanopores,

so that air passages are formed in the breathable cores. Besides, due to the selected proper pore diameter, the breathable cores have adequate capability of water absorption to prevent ink leakage. Porosity of the breathable core, i.e., a percentage rate of the total volume of all the nanopores to the volume of the breathable core, is in a range of 50 to 60%, and a preferred percentage is 55%, which can ensure fluent air flow.

[0017] The breathable cores and the relay core 6 are tightly mated with the through holes on the air pressure balancing plug 3 to prevent ink leakage. On the end surface of the air pressure balancing plug 3, three baffles 13 are arranged for fixing the distance from the transfer core 7.

[0018] The transfer core 7 is made of cotton batting, and is covered by a layer of plastic film surrounding its outer surface. Cotton batting has good performance of water absorption to prevent liquid leakage. The relay core 6 and the writing nib 9 are inserted into and connected with two ends of the transfer core 7 respectively, and the relay core 6 is spaced from the transfer core 7 with an interval, rather than directly contacts the transfer core 7. Such a design facilitates ink in the relay core 6 to first flow into the transfer core 7, then flow into the writing nib 9, in such a way ink flow in the pen tip 9 can be kept constant, and thus color of the handwriting is more uniform.

[0019] When writing with the writing pen with ink storage, liquid level in the ink storage compartment 11 drops, and negative pressure in the pipe increases, then ambient air enters into the ink storage compartment 11 through the breathable cores to achieve air pressure balance.

[0020] In various embodiments of the present invention, the writing pen with ink storage realizes air pressure balance between the ink storage compartment 11 and ambient air by means of the two breathable cores and the air pressure balancing plug 3. The structure of the writing pen is simple, and manufacture process of the breathable cores is already mature, thus the cost is reduced greatly.

[0021] In various embodiments of the present invention, number of the breathable cores is not limited to two as shown in the above described embodiment, there may be one or three or more breathable cores. Also, shape of the breathable cores is not limited to be cylindrical, but can be square or other shape. Additionally, the writing nib can be formed in various manners, such as a metal nib with a ball or others, etc. Therefore, the foregoing description of the exemplary embodiments of the invention has been presented only for the purposes of illustration and description and is not intended to be exhaustive or to limit the invention to the precise forms disclosed. Many modifications and variations are possible in light of the above teaching without departing from the protection scope of the present invention.

Claims

breathable core is 500nm, and porosity of the breathable core is 50%.

1. A writing pen with ink storage, comprising a writing nib, an ink storage compartment for storing ink, an ink inducing device for inducing ink into the writing nib, wherein the writing pen further comprises an air pressure balancing plug which is plugged in an open end of the ink storage compartment to seal ink, and a breathable core having nanopores, the breathable core being inserted into the air pressure balancing plug with one end extending into ink and the other end communicating with ambient air. 5
10
2. The writing pen with ink storage according to claim 1, wherein the ink inducing device comprises a transfer core having one end being connected to the writing nib and a relay core connected to the other end of the transfer core, a tail end of said relay core passing through the air pressure balancing plug and entering into the ink. 15
20
3. The writing pen with ink storage according to claim 2, wherein the opposite ends of the relay core and the writing nib are located in the transfer core with an interval between each other. 25
4. The writing pen with ink storage according to claims 1 or 2, wherein the writing pen further comprises a pen body and a pen cap, the ink storage compartment and the ink inducing device are arranged at the tail end and the middle of the pen body respectively, while the writing nib is arranged at the front end of the pen body with a portion extending out of the front holder, and the pen cap is assembled at the front end of the front holder to cover the writing nib. 30
35
5. The writing pen with ink storage according to claim 1, wherein the writing pen comprises two breathable cores, including a first breathable core and a second breathable core, and the first breathable core extends into the transfer core. 40
6. The writing pen with ink storage according to claim 5, wherein the air pressure balancing plug has three holes for the relay core, the first breathable core and the second breathable core to be inserted into respectively. 45
7. The writing pen with ink storage according to claim 5, wherein the first breathable core contacts with the transfer core. 50
8. The writing pen with ink storage according to claim 1, wherein diameter of the nanopores in the breathable core is larger than particle diameter of the ink. 55
9. The writing pen with ink storage according to claim 8, wherein the diameter of the nanopores in the

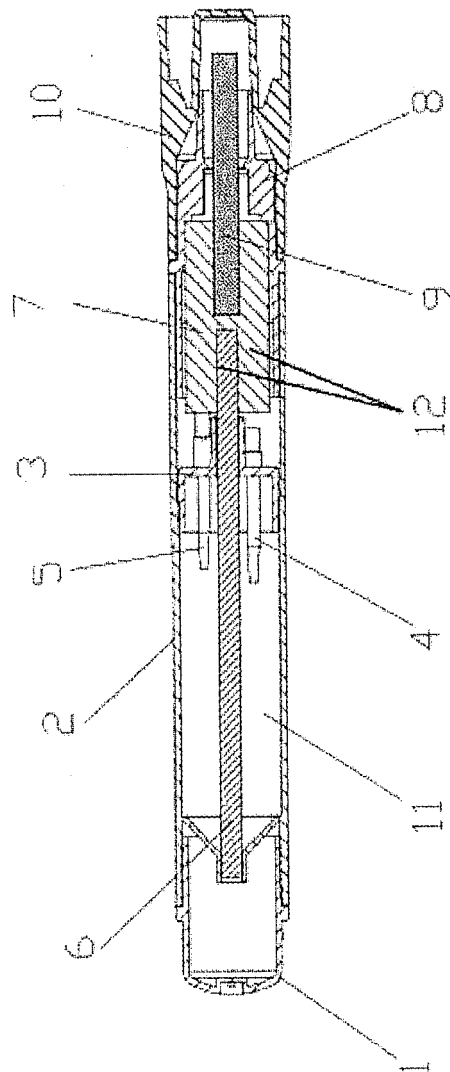


Fig. 1

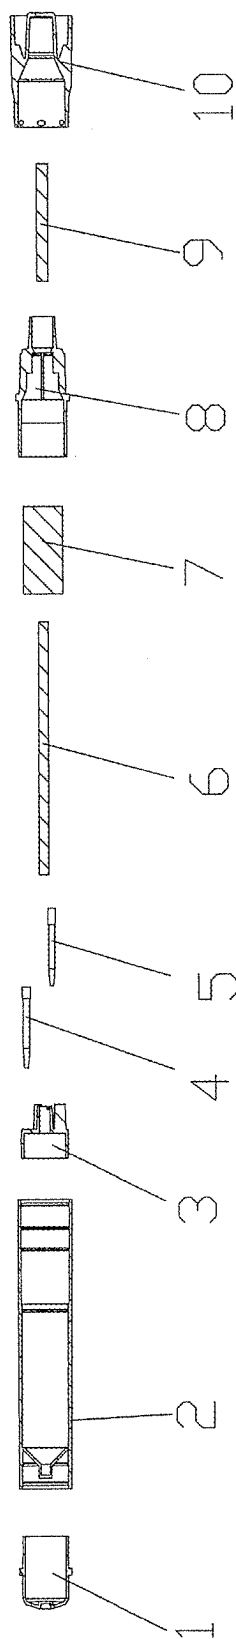


Fig. 2

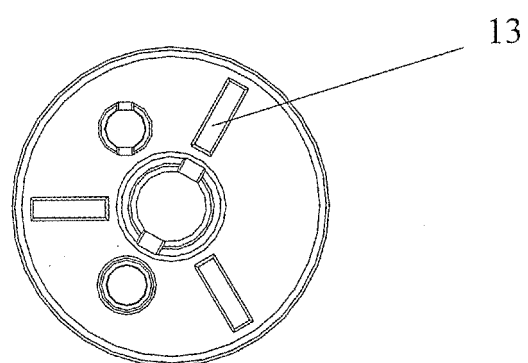


Fig. 3



EUROPEAN SEARCH REPORT

Application Number
EP 10 17 6794

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	DE 92 05 942 U1 (R. KAUFMANN DATAPRINT DATENDRUCKSYSTEME) 10 September 1992 (1992-09-10)	1	INV. B43K8/08
Y	* page 6, line 32 - page 9, line 24; figures 4-6 *	4	
Y	----- GB 2 248 549 A (MITSUBISHI PENCIL CO [JP]) 15 April 1992 (1992-04-15) * figure 1 *	4	
A	----- EP 1 832 442 A1 (PILOT INK CO LTD [JP]) 12 September 2007 (2007-09-12) * the whole document *	1-9	
A	----- US 5 551 789 A (OKAWA AKIRA [JP] ET AL) 3 September 1996 (1996-09-03) * the whole document *	1-9	
A	----- WO 98/17482 A1 (BIC CORP [US]) 30 April 1998 (1998-04-30) * the whole document *	1-9	
			TECHNICAL FIELDS SEARCHED (IPC)
			B43K
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 2 December 2010	Examiner Kelliher, Cormac
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 10 17 6794

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-12-2010

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 9205942	U1	10-09-1992	NONE

GB 2248549	A	15-04-1992	DE 4132829 A1 16-04-1992
			FR 2667489 A1 10-04-1992
			IT 1251599 B 17-05-1995
			JP 8000019 Y2 10-01-1996
			JP H0460117 U 22-05-1992

EP 1832442	A1	12-09-2007	HK 1109371 A1 19-11-2010
			KR 20070092611 A 13-09-2007
			SG 136064 A1 29-10-2007
			US 2007212159 A1 13-09-2007

US 5551789	A	03-09-1996	CN 1113133 A 13-12-1995
			DE 19611545 A1 25-09-1997
			FR 2711045 A1 21-04-1995
			GB 2310998 A 17-09-1997

WO 9817482	A1	30-04-1998	AT 275483 T 15-09-2004
			AU 720203 B2 25-05-2000
			AU 6811398 A 15-05-1998
			BR 9713488 A 29-02-2000
			CA 2269609 A1 30-04-1998
			CN 1240387 A 05-01-2000
			CZ 9901337 A3 15-12-1999
			DE 69730614 D1 14-10-2004
			DE 69730614 T2 22-09-2005
			EP 0948436 A1 13-10-1999
			ES 2226003 T3 16-03-2005
			HK 1024671 A1 20-12-2002
			JP 2001502619 T 27-02-2001
			KR 20000052707 A 25-08-2000
			NO 991892 A 22-06-1999
			NZ 335238 A 27-03-2000
			PL 333281 A1 22-11-1999
			PT 948436 E 31-01-2005
			RU 2153987 C1 10-08-2000
			TW 378180 B 01-01-2000
			US 5906446 A 25-05-1999

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 01235948 [0003]