



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
04.04.2012 Bulletin 2012/14

(51) Int Cl.:
D06F 25/00 (2006.01) **D06F 39/08** (2006.01)
D06F 58/20 (2006.01)

(21) Application number: **11181937.1**

(22) Date of filing: **20.09.2011**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(72) Inventors:
• **Matsuda, Eiji**
Osaka, 540-6207 (JP)
• **Kotani, Junji**
Osaka, 540-6207 (JP)

(30) Priority: **30.09.2010 JP 2010222611**

(74) Representative: **Schwabe - Sandmair - Marx**
Patentanwälte
Stuntzstraße 16
81677 München (DE)


(71) Applicant: **Panasonic Corporation**
Kadoma-shi
Osaka 571-8501 (JP)

(54) **Washing and drying apparatus**

(57) A washing and drying apparatus (100) has a washing and drying tub (410) for washing and drying laundry (C), a circulation system (600) for circulating dry air for drying the laundry (C), and a drainage system (350) for discharging a washing water used to wash the laundry (C). The drainage system (350) includes a drainage duct (351) connected to the washing and drying tub (410) and

a drainage valve (352) for controlling drainage of the washing water in the drainage duct (351), and the circulation system (600) includes a dehumidifier (635) for removing water contained in the dry air and a drain tube (639) for guiding the water removed by the dehumidifier (635) to the drainage duct (351) below the dehumidifier (635).

FIG.1

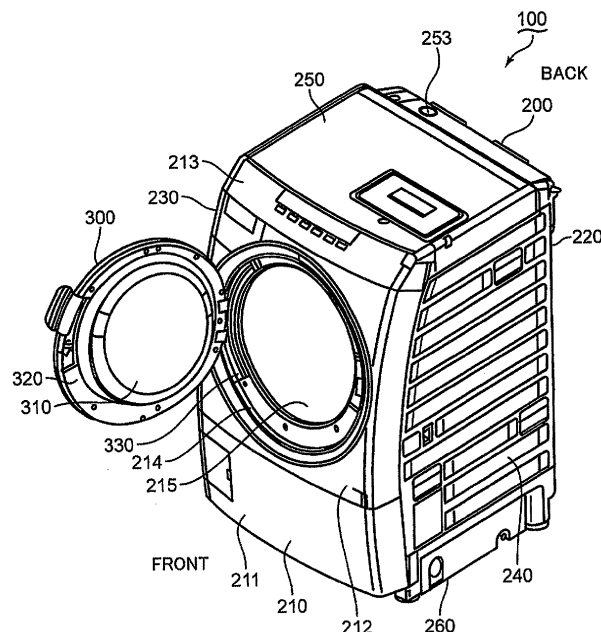

Description**BACKGROUND OF THE INVENTION****Field of the Invention**

[0001] The present invention is related to a washing and drying apparatus for washing and drying laundry.

Description of the Related Art

[0002] A washing and drying machine for washing and drying laundry typically comprises a drainage system configured to drain washing water, which has been used for washing laundry, and a circulation system configured to circulate dry air for drying the laundry. The drainage system comprises a drainage valve configured to control drainage of the washing water. The drainage valve is opened to drain the washing water as appropriate. In many cases, the circulation system comprises a dehumidifier configured to remove water (moisture) from the dry air, which has been used to dry the laundry.

[0003] Each of Japanese Patent Application Laid-open No. 2005-52533 and Japanese Patent Application Laid-open No. 2006-218067 discloses a washing and drying machine comprising a heat pump with a heat absorber for cooling dry air to condense moisture in the dry air. The heat absorber of the heat pump functions as the aforementioned dehumidifier.

[0004] In accordance with the aforementioned Patent Documents, the washing and drying machine comprises a dedicated drainage pump, which is solely used to flow the water, which has been removed by the heat absorber, toward a drainage valve configured to control drainage of the washing water. If the drainage valve is opened and the drainage pump is operated, the water removed by the heat absorber is drained together with the washing water.

[0005] The use of the dedicated drainage pump increases not only the manufacturing cost of the washing and drying machine but also the size and weight thereof.

SUMMARY OF THE INVENTION

[0006] An object of the present invention is to provide a washing and drying apparatus with a drainage system which is effective for cost reduction, downsizing and light-weight of the washing and drying machine.

[0007] A washing and drying apparatus according to one aspect of the present invention has: a washing and drying tub configured to wash and dry laundry; a circulation system configured to circulate dry air to dry the laundry; and a drainage system configured to drain washing water used to wash the laundry, wherein the drainage system includes a drainage duct connected to the washing and drying tub and a drainage valve configured to control drainage of the washing water in the drainage duct, and the circulation system includes a dehumidifier

configured to remove water in the dry air and a drain tube configured to guide the water removed by the dehumidifier to the drainage duct situated below the dehumidifier.

BRIEF DESCRIPTION OF THE DRAWINGS**[0008]**

Fig. 1 is a schematic perspective view of a washing and drying machine according to one embodiment; Fig. 2 is a schematic cross-sectional view of the washing and drying machine depicted in Fig. 1; Fig. 3 is a schematic cross-sectional view of the washing and drying machine depicted in Fig. 1; Fig. 4 is a schematic view of a heat pump of the washing and drying machine depicted in Fig. 1; Fig. 5 is a schematic plan view of the heat pump depicted in Fig. 4 and a support plate configured to support the heat pump; Fig. 6 is a schematic plan view of the support plate depicted in Fig. 5; Fig. 7 is a schematic side view of the support plate depicted in Fig. 6; Fig. 8 is a schematic view of a right support wall of the support plate depicted in Fig. 6; Fig. 9 is a schematic view of a first partition wall of the support plate depicted in Fig. 6; and Fig. 10 is a schematic view of a second partition wall of the support plate depicted in Fig. 6.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0009] A washing and drying apparatus according to one embodiment is described hereinafter with reference to the accompanying drawings. It should be noted that directional terms used hereinafter such as "above", "below", "left", "right" and alike are used only for the purpose of clarification of the description, and are not intended to limit methodologies of the washing and drying apparatus.

(Entire Structure of Washing and Drying Machine)

[0010] Fig. 1 is a schematic perspective view of a washing and drying machine exemplified as the washing and drying apparatus according to the one embodiment.

[0011] The washing and drying machine 100 comprises a housing 200 and a door 300. The housing 200 is formed into a generally rectangular boxed shape. The housing 200 includes an upright front wall 210, a back wall 220 opposite to the front wall 210, left and right walls 230, 240 which vertically stands between the front and back walls 210, 220, a top wall 250 which forms the upper surface of the housing 200, and a bottom wall 260 which forms the lower surface of the housing 200.

[0012] The front wall 210 includes a lower wall 211 situated in a lower portion thereof, a central wall 212 above the lower wall 211, and an upper wall 213 above

the central wall 212. The central wall 212 and the upper wall 213 are tilted upward to curve toward the back wall 220.

[0013] The central wall 212 includes an annular concave surface 214 which forms a concave region substantially complementary to the substantially disk-shaped door 300. The concave surface 214 surrounds a feeding opening 215 configured to extend through a substantially central portion of the central wall 212. The feeding opening 215 communicates with a washing and drying tub (described later), which is stored inside the housing 200. A user may put and take clothing (laundry and alike) in and out of the housing 200 through the feeding opening 215.

[0014] The washing and drying machine 100 comprises a hinge structure 330 which pivotally connects the door 300 to the housing 200. The hinge structure 330 allows the door 300 to pivot between a closing position where the door 300 closes the feeding opening 215 and an opening position where the door 300 opens the feeding opening 215. The door 300 pivoted to the closing position is accommodated in the concave region surrounded by the concave surface 214. It should be noted that the door 300 depicted in Fig. 1 is positioned at the opening position.

[0015] Fig. 2 is a schematic cross-sectional view of the washing and drying machine 100 with the door 300 positioned at the closing position. Arrangements, shapes, and structures of elements in the housing 200 depicted in Fig. 2 should not be restrictively interpreted. The arrangements, shapes, and structures of the elements in the housing 200 may be appropriately determined in accordance with designs and functions of the washing and drying apparatus. The entire structure of the washing and drying machine 100 is further described with reference to Figs. 1 and 2.

[0016] As shown in Fig. 2, a processing apparatus 400 configured to perform a drying process is constructed in the housing 200. In the present embodiment, the processing apparatus 400 executes processes required for washing and drying laundry C such as a washing process, a rinsing process, and a spin-drying process in addition to the drying process.

[0017] The processing apparatus 400 comprises a washing and drying tub 410 configured to dry and wash the laundry C. The washing and drying tub 410 configured to store the laundry C includes a water tub 420 shaped in a bottomed cylinder which is supported but allowed to rock in the housing 200, and a rotary drum 440 shaped in a bottomed cylinder which is supported in the water tub 420. The processing apparatus 400 comprises a suspension 490 configured to elastically support the washing and drying tub 410. The suspension 490 connected to the bottom wall 260 of the housing 200 appropriately absorbs vibration during various processes such as the aforementioned drying process, washing process, rinsing process, and spin-drying process.

[0018] The processing apparatus 400 further includes

a motor 430 configured to rotate the rotary drum 440. The main body of the motor 430 is mounted to the outer surface of the bottom wall 431 of the water tub 420. The rotary shaft of the motor 430 extends through the bottom wall 431 of the water tub 420, and is connected to the bottom wall 432 of the rotary drum 440. The motor 430 rotates the rotary drum 440 during various processes such as the drying process, washing process, rinsing process, and spin-drying process.

[0019] A front wall 433 opposite to the bottom wall 431 of the water tub 420 is provided with an opening 434 substantially concentric with the substantially circular door 300 at the closing position. Similarly, a front wall 435 opposite to the bottom wall 432 of the rotary drum 440 is provided with an opening 436 substantially concentric with the opening 434 formed on the front wall 433 of the water tub 420. A user may turn the door 300 to the opening position to feed laundry C into the rotary drum 440 through the feeding opening 215. The processing apparatus 400 further comprises a bellows 437 situated between the central wall 212 of the housing 200 and the front wall 433 of the water tub 420. The water tub 420 is elastically connected to the housing 200 via the bellows 437.

[0020] As shown in Fig. 1, the door 300 includes a transparent window 310, which looks like a bottomed generally trapezoidal conical shape, and a substantially disk-like support frame 320 configured to support the window 310. As shown in Fig. 2, if the door 300 is positioned at the closing position, the window 310 is inserted into the feeding opening 215 formed on the housing 200. If the door 300 is positioned at the closing position, a user may visually access the laundry C in the washing and drying tub 410 through the transparent window 310.

[0021] The washing and drying machine 100 comprises a watering system 340 configured to supply water, which is used for washing laundry, to the washing and drying tub 410, and a circulatory drainage system 350 configured to circulate and drain the water, which is supplied to the washing and drying tub 410 (washing water). In the present embodiment, the watering system 340 is formed in an upper portion of the internal space of the housing 200. The circulatory drainage system 350 is formed in a lower portion of the internal space of the housing 200.

[0022] The top wall 250 of the housing 200 is provided with a water inlet 253, which is connected to, for example, a hose (not shown). The watering system 340 comprises a storage chamber 341 configured to store detergent, and a first watering duct 342 which connects the water inlet 253 with the storage chamber 341. The storage chamber 341 is adjacent to the inner surface of the top wall 250 of the housing 200. The watering system 340 further comprises a second watering duct 343 which extends from the storage chamber 341 to the water tub 420.

[0023] Water supplied through the water inlet 253 flows into the storage chamber 341 through the first watering duct 342. The water and the detergent are mixed up in

the storage chamber 341 to become washing water. The washing water is supplied into the water tub 420 through the second watering duct 343.

[0024] The water tub 420 is formed with an outlet port 423 from which the washing water is discharged, and an inlet port 424 through which the washing water flows into the water tub 420. The bottom wall 260 of the housing 200 is provided with a drainage port 261 from which the washing water is drained to the outside of the housing 200. The circulatory drainage system 350 comprises a drainage duct 351 which extends between the outlet port 423 of the water tub 420 and the drainage port 261 of the housing 200, and a drainage valve 352 which is mounted to the drainage duct 351. The drainage valve 352 is used to control drainage of the washing water to the outside of the housing 200. The drainage valve 352 is opened and closed as appropriate. In the present embodiment, the circulatory drainage system 350 is exemplified as the drainage system.

[0025] The circulatory drainage system 350 comprises a circulation duct 353, which is branched from the drainage duct 351 before the drainage valve 352, and a circulation pump 354 which is mounted to the circulation duct 353. The circulation duct 353 is connected to the inlet port 424 of the water tub 420. If the drainage valve 352 is closed and the circulation pump 354 is operated, the washing water in the water tub 420 is sucked to the circulation pump 354. Thereafter, the washing water is pumped to the inlet port 424 by the circulation pump 354, and then is used for washing the laundry C in the washing and drying tub 410.

[0026] The water tub 420 is further formed with a limitation hole 422 configured to limit a liquid level in the water tub 420. The circulatory drainage system 350 further comprises an overflow pipe 355 which is connected to the limitation hole 422. The overflow pipe 355 is also connected to the drainage duct 351 before the drainage valve 352. If the liquid level of the washing water in the water tub 420 exceeds a given level, the drainage valve 352 is opened. The redundant washing water in the water tub 420 flows into the overflow pipe 355 through the limitation hole 422, and is eventually drained from the drainage port 261 of the housing 200.

[0027] The circulatory drainage system 350 further comprises a hollow block 356 which is mounted to the drainage duct 351, and a liquid level sensor 357 which is connected to the hollow block 356. A layer of the washing water and an air layer are formed in the hollow block 356 mounted between the drainage valve 352 and the washing and drying tub 410. Since the hollow block 356 is connected to the water tub 420 via the drainage duct 351, a thickness of the washing water layer in the hollow block 356 fluctuates correspondingly to the liquid level of the washing water in the water tub 420. The fluctuation in thickness of the washing water layer inside the hollow block 356 varies pressure of the air layer in the hollow block 356. The liquid level sensor 357 detects the fluctuation in the air layer pressure in the hollow block 356.

The output from the liquid level sensor 357 is used to adjust the liquid level of the washing water in the water tub 420.

[0028] Fig. 3 is a schematic cross-sectional view of the washing and drying machine 100. The entire structure of the washing and drying machine 100 is further described with reference to Figs. 1 and 3.

[0029] The washing and drying machine 100 has a circulation system 600 configured to circulate dry air for drying the laundry C stored in the rotary drum 440. The circulation system 600 is also constructed in the housing 200, like the washing and drying tub 410 and the circulatory drainage system 350.

[0030] The water tub 420 includes a cylindrical circumferential wall 438 which extends between the bottom and front walls 431, 433. The circumferential wall 438 of the water tub 420 is provided with an exhaust port 601 through which the dry air is exhausted from the washing and drying tub 410. The bottom wall 431 of the water tub 420 is provided with an inflow port 643 through which the dry air is sucked into the washing and drying tub 410. The circulation system 600 circulates the dry air to dry the laundry C between the exhaust and inflow ports 601, 643.

[0031] The bottom wall 432 of the rotary drum 440 is provided with a bottom hole 645 to introduce the dry air, which has been sucked through the inflow port 643, into the rotary drum 440. The rotary drum 440 includes a cylindrical circumferential wall 439 which extends between the bottom and front walls 432, 435. The circumferential wall 439 of the rotary drum 440 is provided with a lot of circumferential holes 646 to flow the dry air into the exhaust port 601 formed on the circumferential wall 438 of the water tub 420. The dry air from the bottom hole 645 to the circumferential holes 646 facilitates to dry the laundry C in the rotary drum 440.

[0032] The circulation system 600 comprises a first duct 610, which protrudes from the exhaust port 601 of the water tub 420 and extends along the top wall 250 of the housing 200, a filter apparatus 700 which removes lint (dust such as a yarn waste) from the dry air discharged from the washing and drying tub 410, a heat pump 630 adjacent to the filter apparatus 700, and a fan 621 which circulates the dry air. The first duct 610 includes a support plate described later, and a connection duct 602 which connects the support plate to the exhaust port 601. In the present embodiment, the support plate supports the filter apparatus 700, the heat pump 630, and the fan 621. The fan 621 is exemplified as the blower. The connection duct 602 is exemplified as the connection pipe.

[0033] The first duct 610 guides the dry air from the washing and drying tub 410 to the fan 621. The filter apparatus 700 in the first duct 610 removes the lint from the dry air. The heat pump 630 performs heat exchange with the dry air to dehumidify and heat the dry air. The fan 621 sucks the dehumidified and heated dry air, and then sends the dry air to the washing and drying tub 410.

[0034] The circulation system 600 further comprises a

second duct 620 which guides the dry air from the fan 621 to the washing and drying tub 410. The dry air sent from the fan 621 is guided by the second duct 620, and flows into the washing and drying tub 410 via the inflow port 643.

[0035] The circulation system 600 comprises a branch duct 650 which is branched from the second duct 620, and a switching valve 651 situated at a junction between the second and branch ducts 620, 650. The branch duct 650 includes a tip end which communicates with the opening 436 formed on the front wall 435 of the rotary drum 440. The switching valve 651 pivots between a first position where the switching valve 651 blocks the dry air flow from the fan 621 to the inflow port 643 and a second position where the switching valve 651 aligns the dry air flow from the fan 621 to the inflow port 643. If the switching valve 651 is at the first position, most of the dry air is blown on the laundry C from the opening 436 of the rotary drum 440 through the branch duct 650 whereas if the switching valve 651 is at the second position, most of the dry air flows to the inflow port 643. After the drying process is started, the switching valve 651 is set to the second position for a given time period. Thereafter, the switching valve 651 is set to the first position until the drying process is completed. Thus, the drying operation is changed in response to a dryness level of the laundry C.

(Heat Pump)

[0036] Fig. 4 is a schematic view diagrammatically showing the heat pump 630. The heat pump 630 is described with reference to Figs. 3 and 4.

[0037] The heat pump 630 comprises a circulation pipe 631. Coolant flows in the circulation pipe 631. The heat pump 630 comprises a compressor 632 configured to compresses the coolant. The compressor 632 is situated along the path of the circulation pipe 631, which contours a closed loop.

[0038] The circulation pipe 631, in which the coolant sent from the compressor 632 flows, protrudes into the first duct 610 to form a radiator 633. The radiator 633 configured to radiate heat of the coolant heated by means of compression in the compressor 632 includes the circulation pipe 631 which meanders in the first duct 610, and fins 638 which are attached to the circulation pipe 631. The dry air passing through the first duct 610 is heated by the radiator 633. In the present embodiment, the radiator 633 is exemplified as the heater.

[0039] The heat pump 630 has a decompressor 634 configured to decompress the coolant, which has been highly compressed by the compressor 632. The coolant passing through the radiator 633 is simultaneously decompressed and cooled by the decompressor 634.

[0040] The coolant passing through the decompressor 634 flows in the circulation pipe 631, which protrudes again into the first duct 610 to form a heat absorber 635. The heat absorber 635 configured to absorb heat by means of the coolant cooled by decompression in the

decompressor 634 includes the circulation pipe 631 which meanders in the first duct 610, and fins 636 which are attached to the circulation pipe 631. The heat of the dry air in the first duct 610 is absorbed by the heat absorber 635. As a result, the moisture in the dry air is condensed on the fins 636 and/or the circulation pipe 631, and is removed from the dry air. In the following description, the moisture in the dry air condensed on the fins 636 and/or the circulation pipe 631 is referred to as condensation water. In the present embodiment, the heat absorber 635 is exemplified as the dehumidifier.

[0041] As shown in Fig. 3, the circulation system 600 comprises a drain tube 639 connected between the first duct 610 and the drainage duct 351 below the heat absorber 635. In the present embodiment, the drain tube 639 is connected to the hollow block 356 provided in the drainage duct 351. The drain tube 639 is used to guide the condensation water to the drainage duct 351.

[0042] The heat pump 630 is adjacent to the top wall 250 of the housing 200 to cause a relatively large water head of the condensation water in the drain tube 639. Thus, the condensation water appropriately flows into the drainage duct 351 by the gravity action.

[0043] The circulation system 600 further comprises a check valve 637 which is attached to the drain tube 639. Most of the internal space in the first duct 610 is negatively pressurized under operation of the fan 621. The check valve 637 checks the negative pressure environment in the first duct 610 along the path of the drain tube 639, so that it becomes less likely that fluid elevates from the drainage duct 351 to the first duct 610. The attachment position of the check valve 637 in the drain tube 639 is appropriately determined such that the water head between the check valve 637 and the first duct 610 becomes high enough to send the condensation water into the drainage duct 351.

(Support Plate)

[0044] Fig. 5 is a schematic plan view of the filter apparatus 700, the heat pump 630, and the fan 621 which are situated on the support plate. Fig. 6 is a schematic plan view of the support plate. Fig. 7 is a schematic right side view of the support plate. The support plate is described with reference to Figs. 3 and 5 to 7.

[0045] The support plate 500 includes a bottom wall 510 which supports the filter apparatus 700, the heat pump 630, and the fan 621, and a circumferential wall 520 which vertically stands from the circumferential edge of the bottom wall 510. The circumferential wall 520 includes a connection wall 521 which is connected to the connection duct 602. The connection wall 521 is formed with an opening 522 which is connected to the connection duct 602.

[0046] The filter apparatus 700 adjacent to the connection wall 521 removes lint from the dry air introduced from the opening 522. The fan 621 is mounted on the bottom wall 510 so that the fan 21 is offset leftward with

respect to the opening 522. It should be noted that, in the present embodiment, the connection wall 521 stands from the front edge of the bottom wall 510 whereas the fan 621 is mounted near the back edge of the bottom wall 510.

[0047] The heat absorber 635 of the heat pump 630 adjacent to the filter apparatus 700 removes the moisture from the dry air immediately after the dry air passes through the filter apparatus 700. A right portion 635R of the heat absorber 635 faces the opening 522. A left portion 635L adjacent to the right portion 635R faces the fan 621. In the present embodiment, the support plate 500 configured to support the heat absorber 635 is exemplified as the support element. The right portion 635R of the heat absorber 635 is exemplified as the first dehumidification section. The left portion 635L of the heat absorber 635 is exemplified as the second humidification section.

[0048] The radiator 633 of the heat pump 630 is adjacent to the heat absorber 635. The radiator 633 situated between the heat absorber 635 and the fan 621 has the substantially same shape and size as the heat absorber 635. A right portion 633R of the radiator 633 is adjacent to the right portion 635R of the heat absorber 635. A left portion 633L of the radiator 633 is adjacent to the left portion 635L of the heat absorber 635. In the present embodiment, the right portion 633R of the radiator 633 is exemplified as the first heating section. The left portion 633L adjacent to the right portion 633R is exemplified as the second heating section.

[0049] The bottom wall 510 includes a main tilted surface 511 which is formed at the right sides of the heat absorber 635 and the radiator 633. The condensation water from the heat absorber 635 flows to the main tilted surface 511. The main tilted surface 511 is tilted such that the condensation water on the main tilted surface 511 flows backward.

[0050] The support plate 500 includes a pool 530 adjacent to a backside end of the main tilted surface 511. The pool 530 is depressed downward with respect to the main tilted surface 511. Consequently, the condensation water reached the backside end of the main tilted surface 511 flows into the pool 530. The pool 530 may temporarily stores a given amount of the condensation water.

[0051] The support plate 500 includes a connection port 531 which is formed at the bottom of the pool 530. The connection port 531 formed to drain the condensation water in the pool 530 from the support plate 500 is connected to the upper end of the drain tube 639. As described above, the main tilted surface 511 is tilted to guide the condensation water to the pool 530. In the present embodiment, the connection port 531 is exemplified as the drainage port.

[0052] The support plate 500 includes a cylindrical wall 540 which surrounds the compressor 632 of the heat pump 630. The cylindrical wall 540 is adjacent to the pool 530.

[0053] Fig. 8 is a schematic right side view of the heat

absorber 635 and the radiator 633 supported by the support plate 500. The support plate 500 is described with reference to Figs. 5, 6, and 8.

[0054] The support plate 500 includes a right support wall 512 which supports the right ends of the heat absorber 635 and the radiator 633. The right support wall 512 defines the left boundary of the main tilted surface 511. The left ends of the heat absorber 635 and the radiator 633 are appropriately supported by a left support wall 513 which protrudes from the circumferential wall 520 of the support plate 500.

[0055] The right support wall 512 which protrudes from the upper surface of the bottom wall 510 includes a first right support wall 514 along the front and bottom edges of the right side surface of the heat absorber 635, a second right support wall 515 along the back edge and a part of the bottom edge of the right side surface of the radiator 633, and a third right support wall 516 which supports the bottom edge of the right side surface of the radiator 633 between the first and second right support walls 514, 515. The right support wall 512 is formed with notches 517 and 518. The notch 517 is formed between the first and third right support walls 514, 516. The notch 518 is formed between the second and third right support walls 515, 516.

[0056] As shown in Fig. 6, the support plate 500 includes a boundary wall 541 which protrudes upward between the heat absorber 635 and the radiator 633. The bottom wall 510 of the support plate 500 includes a first tilted surface 542 which is formed below the heat absorber 635, and a second tilted surface 543 which is formed below the radiator 633. The right support wall 512 separates the main tilted surface 511 from the first tilted surface 542. The right support wall 512 also separates the main tilted surface 511 from the second tilted surface 543. In the present embodiment, the right support wall 512 which protrudes between the main tilted surface 511 and the first and/or second tilted surfaces 542, 543 is exemplified as the support wall.

[0057] The support plate 500 comprises a first partition wall 546 which partitions the first tilted surface 542 into a first upstream tilted surface 544 and a first downstream tilted surface 545 which is farther from the connection wall 521 (situated nearby the fan 621) than the first upstream tilted surface 544. The first partition wall 546 which protrudes from the first tilted surface 542 extends in a left-to-right direction (a transverse direction with respect to the dry air flow toward the fan 621).

[0058] The support plate 500 comprises a second partition wall 549 which partitions the second tilted surface 543 into a second upstream tilted surface 547 and a second downstream tilted surface 548 which is farther from the connection wall 521 (situated nearby the fan 621) than the second upstream tilted surface 547. The second partition wall 549 which protrudes from the second tilted surface 543 extends in the left-to-right direction (a transverse direction with respect to the dry air flow toward the fan 621).

[0059] Fig. 9 is a schematic cross-sectional view around a connection between the right support wall 512 and the first partition wall 546. The support plate 500 is further described with reference to Figs. 5, 6, and 9.

[0060] A series of the fins 636 of the heat absorber 635 are disposed along the first partition wall 546. The circulation pipe 631 extends through the fins 636. Thus, the fins 636 are sufficiently cooled by the coolant flowing in the circulation pipe 631. The dry air which is brought into contact with the fins 636 and/or the circulation pipe 631 is cooled. As a result, the condensation water occurs on the surfaces of the fins 636 and/or the circulation pipe 631. The condensation water drips onto the first tilted surface 542 (the first upstream tilted surface 544, the first downstream tilted surface 545) formed below the heat absorber 635. The first tilted surface 542 is tilted such that the condensation water dripped on the first tilted surface 542 flows toward the right support wall 512/the main tilted surface 511 (i.e. from below the left portion 635L of the heat absorber 635 toward below the right portion 635R thereof).

[0061] The first partition wall 546 is formed with a notch 551 nearby the right support wall 512. The notch 551 of the first partition wall 546 allows the condensation water to flow from the first upstream tilted surface 544 to the first downstream tilted surface 545. The notch 517 formed between the first and third right support walls 514, 516 allows the condensation water to flow from the first downstream tilted surface 545 to the main tilted surface 511. In the present embodiment, the notch 517 formed between the first and third right support walls 514, 516 is exemplified as the first notch. The notch 551 of the first partition wall 546 is exemplified as the second notch.

[0062] Fig. 10 is a schematic cross-sectional view around a connection between the right support wall 512 and the second partition wall 549. The support plate 500 is further described with reference to Figs. 4 to 6 and 10.

[0063] A series of the fins 638 of the radiator 633 are disposed along the second partition wall 549. The circulation pipe 631 extends through the fins 638. As described in the context of Fig. 4, the coolant in the radiator 633 is sufficiently heated by the compressor 632. Consequently, unlike the heat absorber 635, it is less likely that there is condensation directly on the fins 638 or the circulation pipe 631 in the radiator 633. However, the condensation water occurred in the heat absorber 635 is potentially carried by the dry air flow and adheres to the fins 638 and the circulation pipe 631 in the radiator 633. It should be noted that the boundary wall 541 protruding between the first downstream tilted surface 545 and the second upstream tilted surface 547 extends in the left-to-right direction (a transverse direction with respect to the dry air flow toward the fan 621) to partially interfere with transit of the condensation water from the heat absorber 635 to the radiator 633.

[0064] The condensation water adhered to the fins 638 and the circulation pipe 631 in the radiator 633 drips onto the second tilted surface 543 (the second upstream tilted

surface 547, the second downstream tilted surface 548) formed below the radiator 633. The second tilted surface 543 is tilted such that the condensation water dripped on the second tilted surface 543 flows toward the right support wall 512/the main tilted surface 511 (i.e. from below the left portion 633L of the radiator 633 toward below the right portion 633R thereof).

[0065] The second partition wall 549 is formed with a notch 552 nearby the right support wall 512. The notch 552 of the second partition wall 549 allows the condensation water to flow from the second upstream tilted surface 547 to the second downstream tilted surface 548. The notch 518 formed between the second and third right support walls 515, 516 allows the condensation water to flow from the second downstream tilted surface 548 to the main tilted surface 511. In the present embodiment, the notch 518 formed between the second and third right support walls 515, 516 is exemplified as the third notch. The notch 552 of the second partition wall 549 is exemplified as the fourth notch.

(Drainage of Condensation Water)

[0066] A drainage process of the condensation water is described with reference to Figs. 2, 3, and 6.

[0067] The condensation water dripped on the first and/or second tilted surfaces 542, 543 is flows onto the main tilted surface 511. Thereafter, the condensation water is collected into the pool 530. The condensation water stored in the pool 530 occasionally flows into the drain tube 639, which results in a high water head between the check valve 637, which is attached to the drain tube 639, and the connection port 531. The high head causes the condensation water flow toward the portion below the check valve 637 against the negative pressure environment resulting from the operation of the fan 621. Thus, the condensation water is occasionally sent to the hollow block 356 below the check valve 637.

[0068] In the present embodiment, the condensation water flow from the support plate 500 to the hollow block 356 is caused by the gravity action. Consequently, the condensation water flow becomes less influential to the circulation of the dry air by the fan 621.

[0069] In conventional technologies, the condensation water flow is caused by a pump. The suction of the pump frequently affects the dry air circulation. However, in the present embodiment, the condensation water flow is independent from the dry air circulation.

[0070] The condensation water flow into the hollow block 356 potentially increases the thickness of the washing water layer in the hollow block 356. The liquid level sensor 357 may detect a fluctuation in the air pressure in the hollow block 356 resulting from the condensation water flow into the hollow block 356. The drainage valve 352 may be opened in response to the increase in air pressure in the hollow block 356, so that the condensation water is drained to the outside of the housing 200. Alternatively, if the drainage valve 352 is opened in ac-

cordance with a program for conducting various processes such as the washing process, the rinsing process, and the spin-drying process, the condensation water may be drained together with the washing water.

[0071] The washing and drying machine 100 according to the present embodiment may execute the appropriate drainage of the condensation water without an additional component or program. It is also unnecessary to use conventional dedicated pump equipment for drainage of the condensation water.

[0072] The aforementioned embodiment mainly includes a washing and drying apparatus with the following structure. The washing and drying apparatus with the following structure may have a drainage system which is effective for cost reduction, downsizing and lightweight of the washing and drying machine.

[0073] A washing and drying apparatus according to one aspect of the aforementioned embodiment has: a washing and drying tub configured to wash and dry laundry; a circulation system configured to circulate dry air to dry the laundry; and a drainage system configured to drain washing water used to wash the laundry, wherein the drainage system includes a drainage duct connected to the washing and drying tub and a drainage valve configured to control drainage of the washing water in the drainage duct, and the circulation system includes a dehumidifier configured to remove water in the dry air and a drain tube configured to guide the water removed by the dehumidifier to the drainage duct situated below the dehumidifier.

[0074] According to the aforementioned configuration, the laundry is washed and dried in the washing and drying tub. The circulation system circulates the dry air to dry the laundry. The drainage system configured to drainage the washing water, which has been used to wash the laundry, includes the drainage duct connected to the washing and drying tub and the drainage valve configured to control drainage of the washing water in the drainage duct. The drainage duct is situated below the dehumidifier configured to remove the water contained in the dry air. Consequently, the water removed by the dehumidifier is guided into the drain tube, and then is introduced into the drainage duct by the gravity action. Therefore, the drainage of the water removed by the dehumidifier is accomplished without a dedicated pump, which results in the washing and drying apparatus having the drainage system that is effective for cost reduction, downsizing and lightweight of the washing and drying machine.

[0075] In the aforementioned configuration, the circulation system preferably includes a blower configured to circulate the dry air, a first duct configured to guide the dry air from the washing and drying tub to the blower, a second duct configured to guide the dry air from the blower to the washing and drying tub and a check valve attached to the drain tube, and the dehumidifier removes the water from the dry air flowing in the first duct.

[0076] According to the aforementioned configuration, the dry air moves from the washing and drying tub to the

blower through the first duct, and then moves from the blower to the washing and drying tub through the second duct. The blower circulates the dry air along the washing and drying tub, the first duct and the second ducts. Operation of the blower causes a negative pressure environment in the first duct, which results in a dry air flow toward the blower. The check valve attached to the drain tube configured to guide the water, which has been removed by the dehumidifier, to the drainage duct makes it less influential to the drainage duct that the operation of the blower causes the negative pressure environment and causes a water head large enough to maintain the water flow toward the drainage duct. Consequently, the drainage of the water removed by the dehumidifier is accomplished without a dedicated pump, which results in the washing and drying apparatus having the drainage system that is effective for cost reduction, downsizing and lightweight of the washing and drying machine.

[0077] In the aforementioned configuration, the first duct preferably a support element configured to support the dehumidifier, the support element includes a drainage port connected to the drain duct, a main tilted surface tilted to guide the water removed by the dehumidifier to the drainage port, a first tilted surface below the dehumidifier, and a support wall which protrudes between the main tilted surface and the first tilted surface to support the dehumidifier, the first tilted surface is tilted such that the water removed by the dehumidifier flows toward the main tilted surface, and the support wall is formed with a first notch which allows the water to flow from the first tilted surface to the main tilted surface.

[0078] According to the aforementioned configuration, the support element configured to support the dehumidifier includes the drainage port connected to the drain tube, the main tilted surface tilted to guide the water, which has been removed by the dehumidifier, to the drainage port, the first tilted surface below the dehumidifier, and the support wall which protrudes between the main tilted surface and the first tilted surface to support the dehumidifier. The water removed by the dehumidifier drips onto the first tilted surface by the gravity action. Since the first tilted surface is tilted such that the water, which has been removed by the dehumidifier, flows to the main tilted surface, the water on the first tilted surface flows to the main tilted surface. Since the support wall is formed with the first notch, which allows the water to flow from the first tilted surface to the main tilted surface, the water reaches the main tilted surface through the first notch. Thereafter, the water, which has been removed by the dehumidifier, flows on the main tilted surface tilted to guide the water toward the drainage port, and then flows into the drain tube via the drainage port. Consequently, the drainage of the water removed by the dehumidifier is accomplished without a dedicated pump, which results in the washing and drying apparatus having the drainage system that is effective for cost reduction, downsizing and lightweight of the washing and drying machine.

[0079] In the aforementioned configuration, the first

duct preferably includes a connection pipe configured to connect the washing and drying tub with the support element, the support element supporting the blower includes a connection wall formed with an opening connected to the connection pipe, the dehumidifier includes a first dehumidification section facing the opening and a second dehumidification section adjacent to the first dehumidification section, the second dehumidification section faces the blower, and the first tilted surface is tilted such that the water removed by the second dehumidification section flows below the first dehumidification section.

[0080] According to the aforementioned configuration, the first duct includes the connection pipe configured to connect the washing and drying tub with the support element. The support element configured to support the blower includes the connection wall formed with the opening connected to the connection pipe. The dehumidifier includes the first dehumidification section facing the opening and the second dehumidification section adjacent to the first dehumidification section. The second dehumidification section faces the blower. Consequently, the dry air moving from the opening toward the blower obliquely traverses the dehumidifier. As a result, it takes a relatively long time period for the dry air to pass through the dehumidifier, which results in more effective dehumidification of the dry air. The first tilted surface is tilted such that the water removed by the second dehumidification section flows underneath the first dehumidification section. Consequently, the water is accumulated underneath the first dehumidification section so that the water becomes less sensitive to the dry air flow obliquely traversing the dehumidifier from the opening toward the blower. Thus, the water removed by the dehumidifier becomes less likely to be blown up toward the blower.

[0081] In the aforementioned configuration, the support element preferably includes a first partition wall configured to partition the first tilted surface into a first upstream tilted surface and a first downstream tilted surface, which is farther from the connection wall than the first upstream tilted surface, the first partition wall is formed with a second notch which allows the water to flow from the first upstream tilted surface to the first downstream tilted surface near the support wall, and the first notch allows the water to flow from the first downstream tilted surface to the main tilted surface.

[0082] According to the aforementioned configuration, the support element includes the first partition wall configured to partition the first tilted surface into the first upstream tilted surface and the first downstream tilted surface, which is farther from the connection wall than the first upstream tilted surface. Since the first upstream tilted surface is tilted such that the water removed by the second dehumidification section flows underneath the first dehumidification section, the water dripped on the first upstream tilted surface from the dehumidifier moves toward the support wall. It is likely that the first partition wall prevents the water flowing on the first upstream tilted

surface from be blown up by of the dry air flow toward the blower. The first partition wall is formed with the second notch near the support wall. The water flows from the first upstream tilted surface to the first downstream tilted surface through the second notch, and then flows from the first downstream tilted surface onto the main tilted surface through the first notch. Thereafter, the water, which has been removed by the dehumidifier, flows on the main tilted surface tilted to guide the water, and flows into the drain tube via the drainage port. Consequently, the drainage of the water removed by the dehumidifier is accomplished without a dedicated pump, which results in the washing and drying apparatus having the drainage system that is effective for cost reduction, downsizing and lightweight of the washing and drying machine.

[0083] In the aforementioned configuration, the washing and drying apparatus preferably further has a heater configured to heat the dry air, wherein the support wall supports the heater situated between the dehumidifier and the blower, the support element includes a second tilted surface below the heater, the second tilted surface is tilted such that the water removed by the dehumidifier flows to the main tilted surface, and the support wall separating the main tilted surface from the second tilted surface is formed with a third notch which allows the water to flow from the second tilted surface to the main tilted surface.

[0084] According to the aforementioned configuration, the heater heats the dry air, so that the laundry is more effectively dried by the dry air flowing into the washing and drying tub through the second duct. The support wall supports the heater between the dehumidifier and the blower. The support element includes the second tilted surface below the heater. The second tilted surface receives the water, which has tapped into the dry air flow toward the blower and reached the heater from the dehumidifier. Thereafter, the water flows on the second tilted surface toward the main tilted surface. The support wall separating the main tilted surface from the second tilted surface is formed with the third notch, which allows the water to flow from the second tilted surface to the main tilted surface. The water flows from the second tilted surface toward the main tilted surface through the third notch. Thereafter, the water, which has removed by the dehumidifier, flows on the main tilted surface tilted to guide the water toward the drainage port, and then flows into the drain tube via the drainage port. Consequently, the drainage of the water removed by the dehumidifier is accomplished without a dedicated pump, which results in the washing and drying apparatus having the drainage system that is effective for cost reduction, downsizing and lightweight of the washing and drying machine.

[0085] In the aforementioned configuration, the heater preferably includes a first heating section adjacent to the first dehumidification section and a second heating section adjacent to the second dehumidification section, and the second tilted surface is tilted such that the water below the second heating section flows underneath the first

heating section.

[0086] According to the aforementioned configuration, the first heating section of the heater is adjacent to the first dehumidification section. The second heating section of the heater is adjacent to the second dehumidification section. Consequently, the dry air moving from the opening toward the blower obliquely traverses the heater, so that it takes a relatively long time period for the dry air to pass through the heater. Therefore the dry air is more effectively heated. The second tilted surface is tilted such that the water below the second heating section flows underneath the first heating section. Consequently, the water is accumulated below the first heating section, so that the dry air flow obliquely traversing the heater from the opening toward the blower becomes less influential to the accumulated water. Thus, the water removed by the dehumidifier becomes less likely to be blown up toward the blower.

[0087] In the aforementioned configuration, the support element preferably includes a second partition wall configured to partition the second tilted surface into a second upstream tilted surface and a second downstream tilted surface which is closer to the blower than the second upstream tilted surface, the second partition wall is formed with a fourth notch which allows the water to flow from the second upstream tilted surface to the second downstream tilted surface near the support wall, and the third notch allows the water to flow from the second downstream tilted surface to the main tilted surface.

[0088] According to the aforementioned configuration, the support element includes the second partition wall configured to partition the second tilted surface into the second upstream tilted surface and the second downstream tilted surface, which is farther from the connection wall than the second upstream tilted surface. Since the second upstream tilted surface is tilted such that the water below the second heating section flows underneath the first heating section, the water dripped on the second upstream tilted surface from the heater moves toward the support wall. It is likely that the second partition wall prevents the water flowing on the second upstream tilted surface from being blown up by the dry air flow toward the blower. The second partition wall is formed with the third notch near the support wall. The water flows from the second upstream tilted surface to the second downstream tilted surface through the fourth notch, and then flows from the second downstream tilted surface onto the main tilted surface through the third notch. Thereafter, the water, which has been removed by the dehumidifier, toward the drainage port, flows on the main tilted surface tilted to guide the water, and then flows into the drain tube via the drainage port. Consequently, the drainage of the water removed by the dehumidifier is accomplished without a dedicated pump, which results in the washing and drying apparatus having the drainage system that is effective for cost reduction, downsizing and lightweight of the washing and drying machine.

[0089] In the aforementioned configuration, the sup-

port element preferably includes a boundary wall protruding between the first downstream tilted surface and the second upstream tilted surface.

[0090] According to the aforementioned configuration, the boundary wall protruding between the first downstream tilted surface and the second upstream tilted surface is likely to prevent the water on the first downstream tilted surface below the dehumidifier from being blown up by the dry air flow toward the blower.

[0091] In the aforementioned configuration, the drainage system preferably includes a hollow block provided in the drainage duct and a liquid level sensor configured to detect a liquid level in the washing and drying tub, a layer of the washing water and an air layer are formed in the hollow block, and the liquid level sensor detects a fluctuation in pressure of the air layer resulting from a fluctuation in thickness of the layer of the washing water in the hollow block which corresponds to a liquid level in the washing and drying tub.

[0092] According to the aforementioned configuration, the layer of the washing water and the air layer are formed in the hollow block provided in the drainage duct. The thickness of the layer of the washing water in the hollow block fluctuates correspondingly to the liquid level in the washing and drying tub. The fluctuation in the thickness of the layer of the washing water in the hollow block causes the fluctuation in the pressure of the air layer in the hollow block. Therefore the liquid level sensor detecting the fluctuation in the pressure of the air layer may find the liquid level in the washing and drying tub.

[0093] In the aforementioned configuration, the hollow block is preferably situated between the drainage valve and the washing and drying tub, and the drain duct is connected to the hollow block.

[0094] According to the aforementioned configuration, the drain tube is connected to the hollow block between the drainage valve and the washing and drying tub. Consequently, the water flowing downward along the drain tube drops onto the layer of the washing water in the hollow block. Thereafter, the drainage valve is opened to drainage the water. Therefore, the drainage of the water removed by the dehumidifier is accomplished without a dedicated pump, which results in the washing and drying apparatus having the drainage system that is effective for cost reduction, downsizing and lightweight of the washing and drying machine.

[0095] In the aforementioned configuration, the washing and drying apparatus preferably further has a housing configured to store the washing and drying tub, the circulation system, and the drainage system, wherein the housing includes a top wall forming an upper surface of the housing, and the dehumidifier is adjacent to the top wall.

[0096] According to the aforementioned configuration, the dehumidifier is adjacent to the top wall forming the upper surface of the housing configured to store the washing and drying tub, the circulation system, and the drainage system, which results in a relatively high water

head in the drain tube. Consequently, the drainage of the water removed by the dehumidifier is accomplished without a dedicated pump, which results in the washing and drying apparatus having the drainage system that is effective for cost reduction, downsizing and lightweight of the washing and drying machine.

Industrial Applicability

[0097] The methodologies of the present embodiment are preferably used for a washing and drying machine.

Claims

1. A washing and drying apparatus (100) comprising:

a washing and drying tub (410) configured to wash and dry laundry (C);
a circulation system (600) configured to circulate dry air to dry the laundry (C); and
a drainage system (350) configured to drain washing water used to wash the laundry (C), wherein
the drainage system (350) includes a drainage duct (351) connected to the washing and drying tub (410) and a drainage valve (352) configured to control drainage of the washing water in the drainage duct (351), and
the circulation system (600) includes a dehumidifier (635) configured to remove water in the dry air and a drain tube (639) configured to guide the water removed by the dehumidifier (635) to the drainage duct (351) situated below the dehumidifier (635).

2. The washing and drying apparatus (100) according to claim 1, wherein

the circulation system (600) includes a blower (621) configured to circulate the dry air, a first duct (610) configured to guide the dry air from the washing and drying tub (410) to the blower (621), a second duct (620) configured to guide the dry air from the blower (621) to the washing and drying tub (410) and a check valve (637) attached to the drain tube (639), and
the dehumidifier (635) removes the water from the dry air flowing in the first duct (610).

3. The washing and drying apparatus (100) according to claim 2, wherein

the first duct (610) includes a support element (500) configured to support the dehumidifier (635),
the support element (500) includes a drainage port (531) connected to the drain tube (639), a main tilted surface (511) tilted to guide the water removed by the dehumidifier (635) to the drainage port (531), a first tilted surface (542) below the dehumidifier (635),

and a support wall (512) which protrudes between the main tilted surface (511) and the first tilted surface (542) to support the dehumidifier (635),
the first tilted surface (542) is tilted such that the water removed by the dehumidifier (635) flows toward the main tilted surface (511), and
the support wall (512) is formed with a first notch (517) which allows the water to flow from the first tilted surface (542) to the main tilted surface (511).

4. The washing and drying apparatus (100) according to claim 3, wherein

the first duct (610) includes a connection pipe (602) configured to connect the washing and drying tub (410) with the support element (500),
the support element (500) supporting the blower (621) includes a connection wall (521) formed with an opening (522) connected to the connection pipe (602),
the dehumidifier (635) includes a first dehumidification section (635R) facing the opening (522) and a second dehumidification section (635L) adjacent to the first dehumidification section (635R),
the second dehumidification section (635L) faces the blower (621), and
the first tilted surface (542) is tilted such that the water removed by the second dehumidification section (635L) flows below the first dehumidification section (635R).

5. The washing and drying apparatus (100) according to claim 4, wherein

the support element (500) includes a first partition wall (546) configured to partition the first tilted surface (542) into a first upstream tilted surface (544) and a first downstream tilted surface (545), which is farther from the connection wall (521) than the first upstream tilted surface (544),
the first partition wall (546) is formed with a second notch (551) which allows the water to flow from the first upstream tilted surface (544) to the first downstream tilted surface (545) near the support wall (512), and
the first notch (517) allows the water to flow from the first downstream tilted surface (545) to the main tilted surface (511).

6. The washing and drying apparatus (100) according to claim 5, further comprising:

a heater (633) configured to heat the dry air, wherein
the support wall (512) supports the heater (633) situated between the dehumidifier (635) and the blower (621),
the support element (500) includes a second tilted surface (543) below the heater (633),
the second tilted surface (543) is tilted such that

- the water removed by the dehumidifier (635) flows to the main tilted surface (511), and the support wall (512) separating the main tilted surface (511) from the second tilted surface (543) is formed with a third notch (518) which allows the water to flow from the second tilted surface (543) to the main tilted surface (511). 5
7. The washing and drying apparatus (100) according to claim 6, wherein 10
the heater (633) includes a first heating section (633R) adjacent to the first dehumidification section (635R) and a second heating section (633L) adjacent to the second dehumidification section (635L), and 15
the second tilted surface (543) is tilted such that the water below the second heating section (633L) flows underneath the first heating section (633R).
8. The washing and drying apparatus (100) according to claim 7, wherein 20
the support element (500) includes a second partition wall (549) configured to partition the second tilted surface (543) into a second upstream tilted surface (547) and a second downstream tilted surface (548) which is closer to the blower (621) than the 25
second upstream tilted surface (547),
the second partition wall (549) is formed with a fourth notch (552) which allows the water to flow from the second upstream tilted surface (547) to the second 30
downstream tilted surface (548) near the support wall (512), and
the third notch (518) allows the water to flow from the second downstream tilted surface (548) to the main tilted surface (511). 35
9. The washing and drying apparatus (100) according to claim 8, wherein 40
the support element (500) includes a boundary wall (541) protruding between the first downstream tilted surface (545) and the second upstream tilted surface (547).
10. The washing and drying apparatus (100) according to any one of claims 1 to 9, wherein 45
the drainage system (350) includes a hollow block (356) provided in the drainage duct (351) and a liquid level sensor (357) configured to detect a liquid level in the washing and drying tub (410),
a layer of the washing water and an air layer are formed in the hollow block (356), and 50
the liquid level sensor (357) detects a fluctuation in pressure of the air layer resulting from a fluctuation in thickness of the layer of the washing water in the hollow block (356) which corresponds to a liquid level 55
in the washing and drying tub (410).
11. The washing and drying apparatus (100) according
- to claim 10, wherein
the hollow block (356) is situated between the drainage valve (352) and the washing and drying tub (410), and
the drain tube (639) is connected to the hollow block (356).
12. The washing and drying apparatus (100) according to any one of claims 1 to 11, further comprising:
a housing (200) configured to store the washing and drying tub (410), the circulation system (600), and the drainage system (350), wherein the housing (200) includes a top wall (250) forming an upper surface of the housing (200), and the dehumidifier (635) is adjacent to the top wall (250).

FIG.1

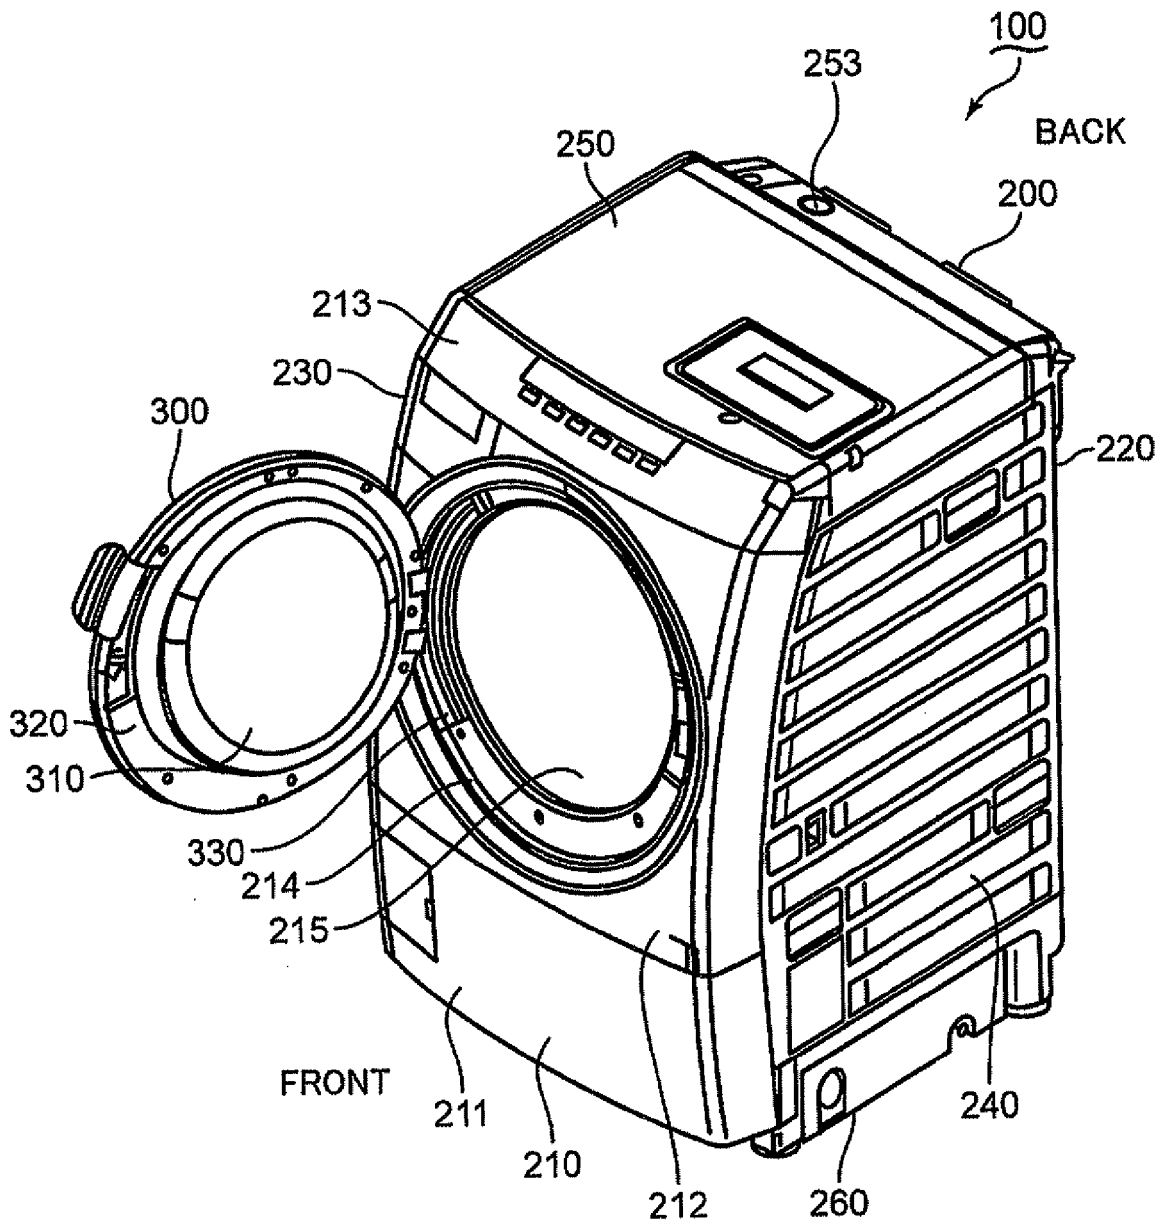


FIG.2

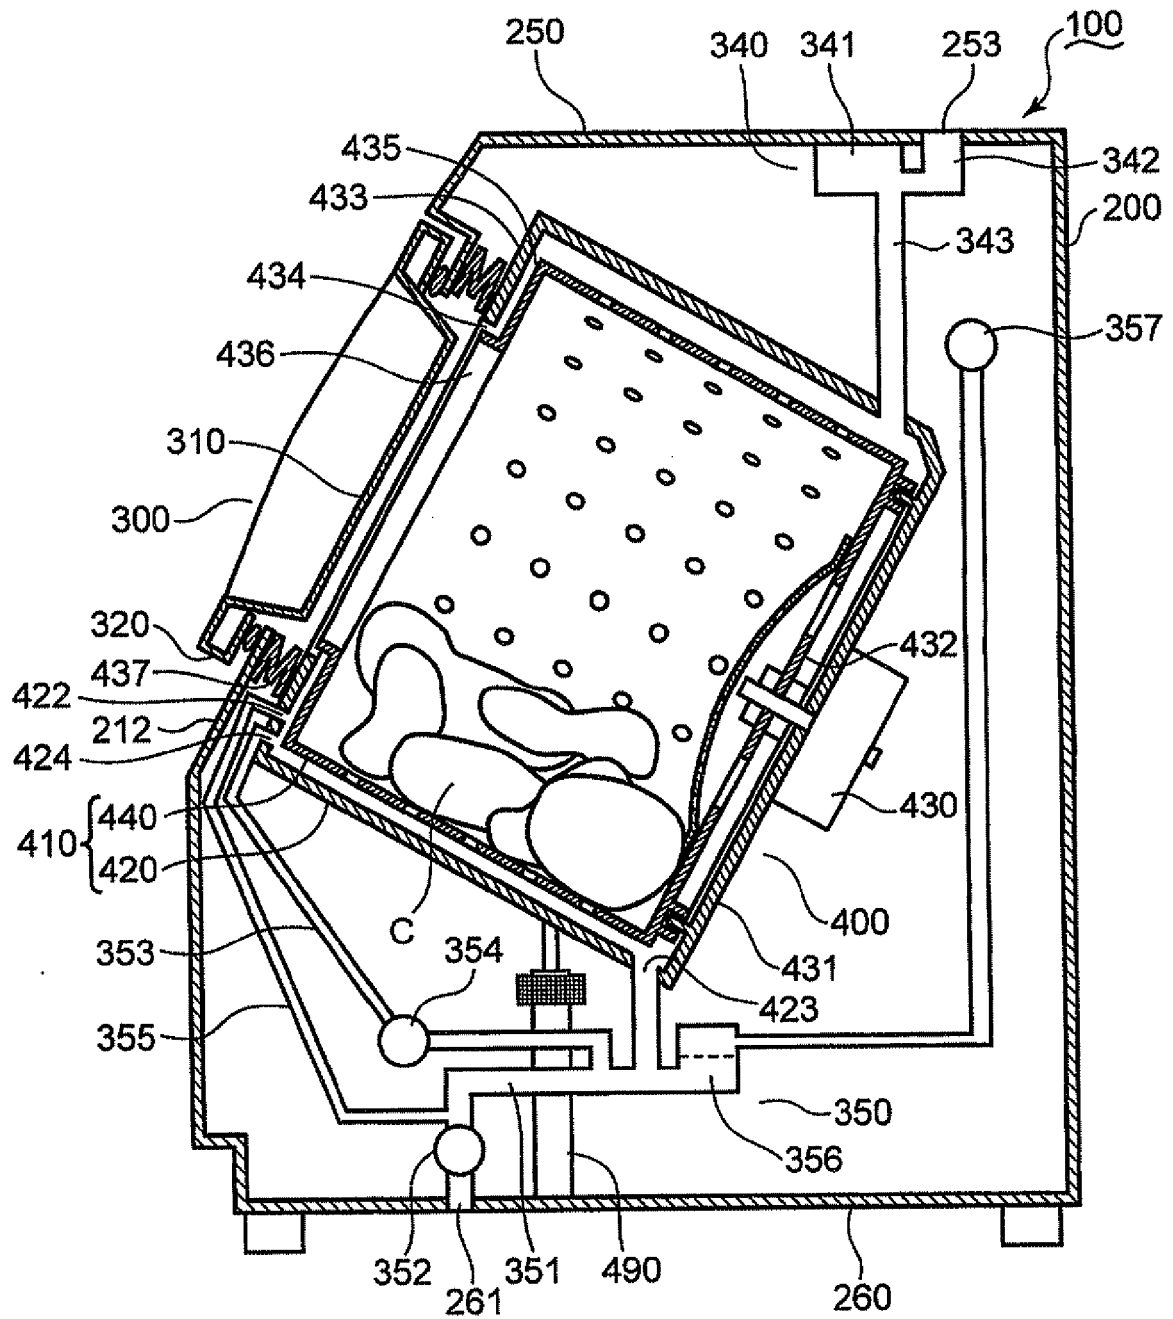


FIG.3

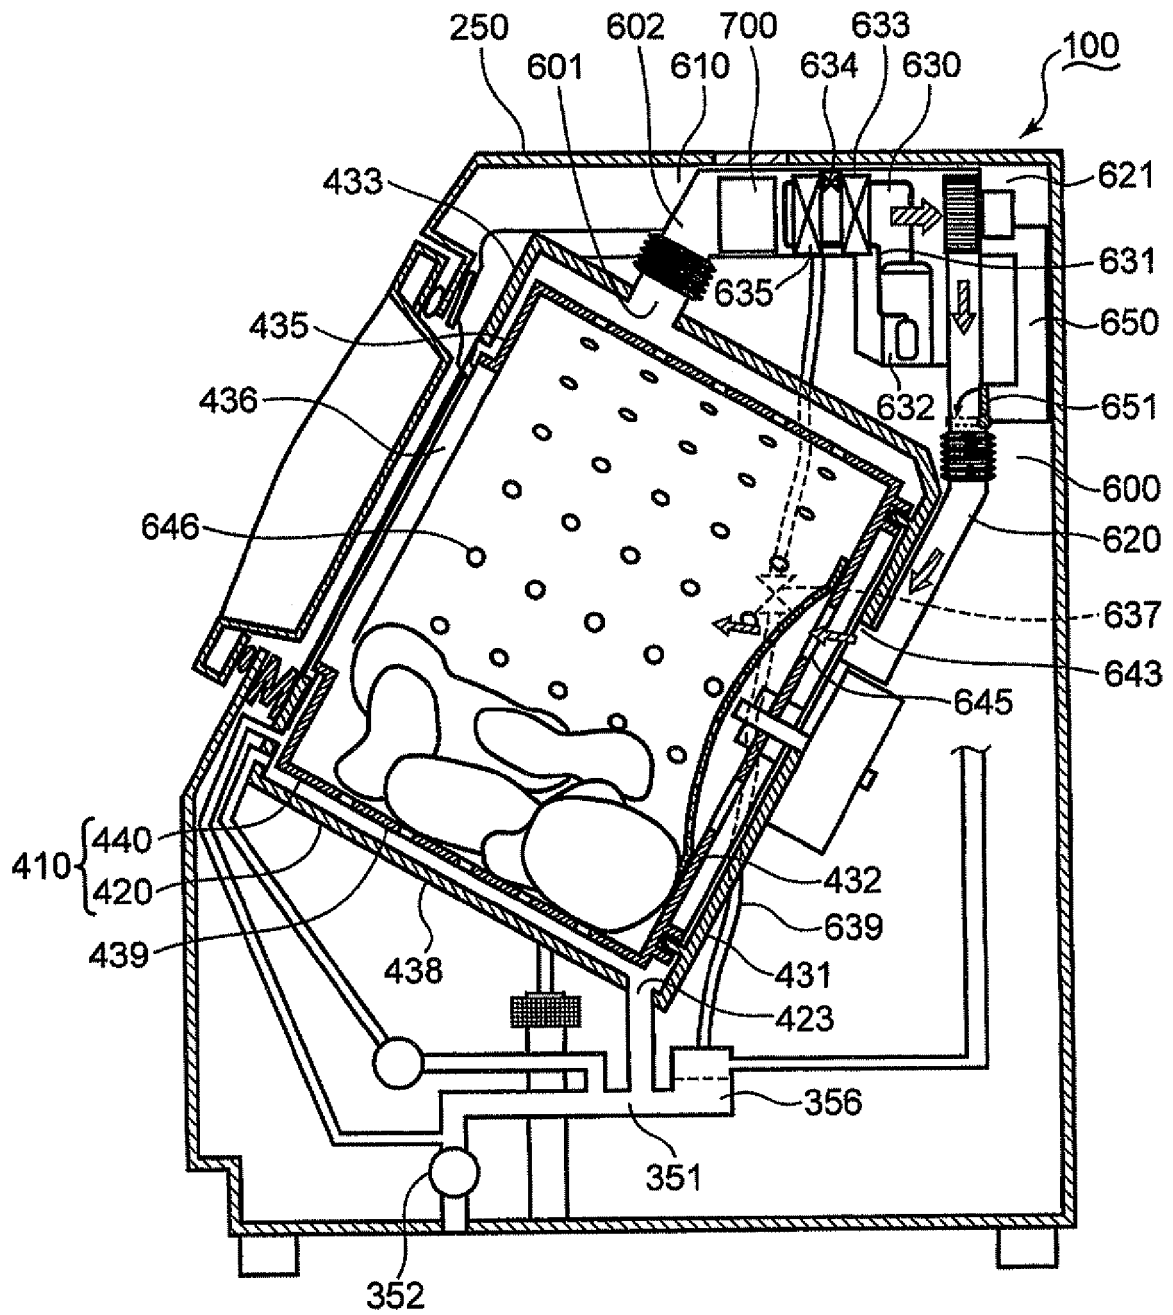
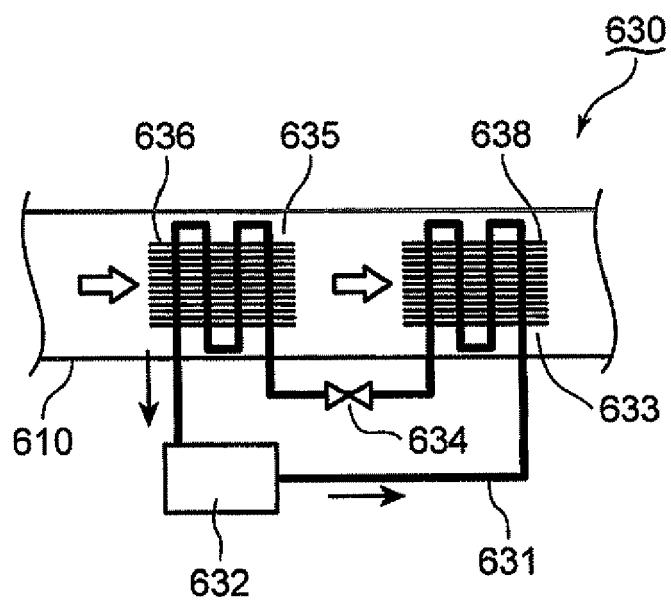
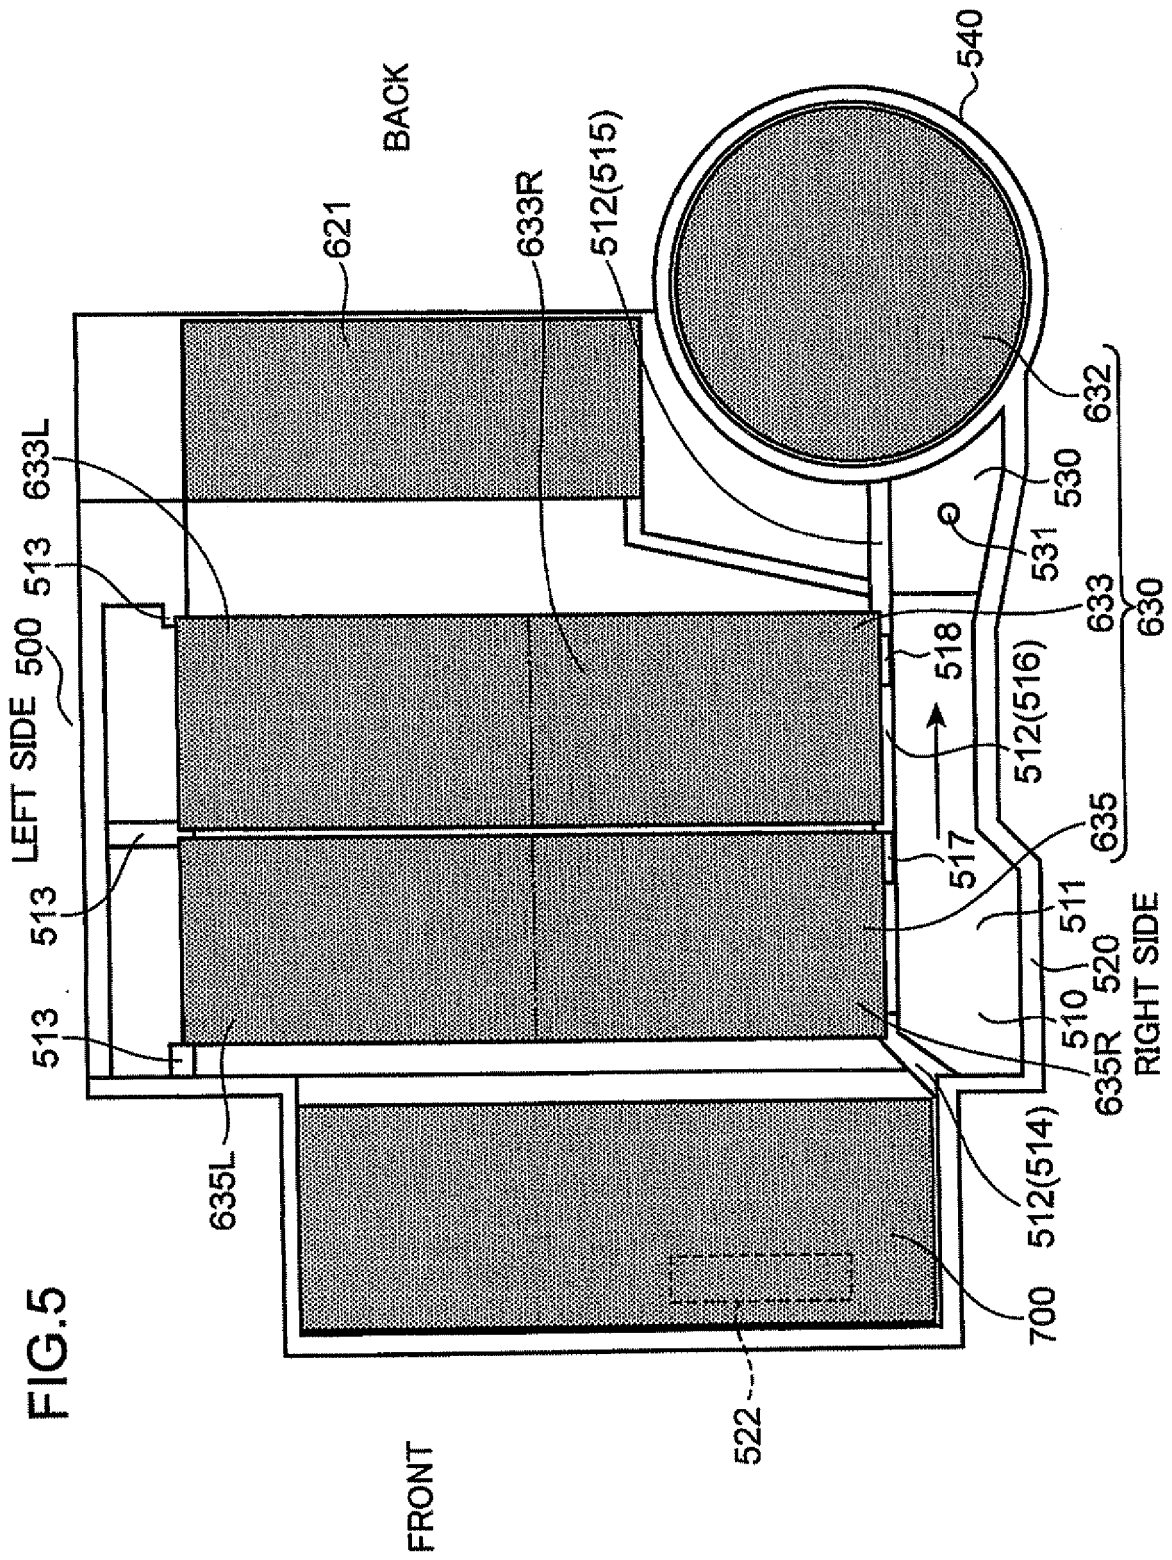


FIG.4





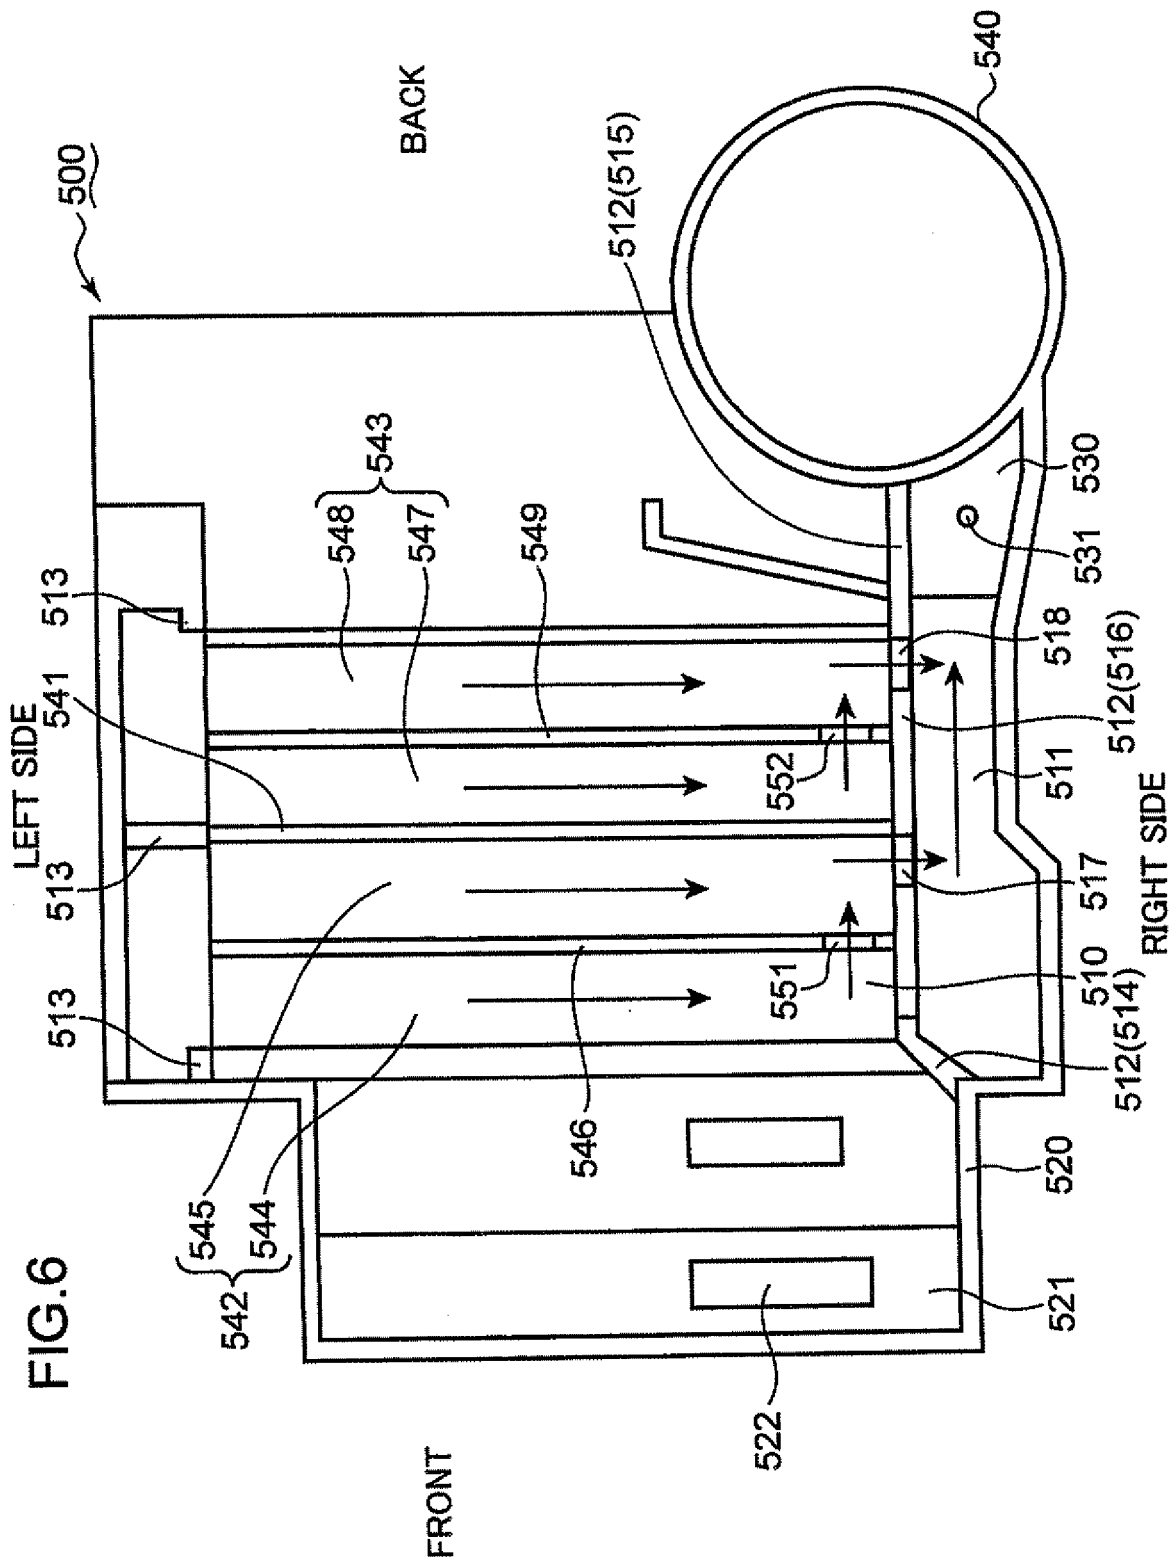


FIG.7

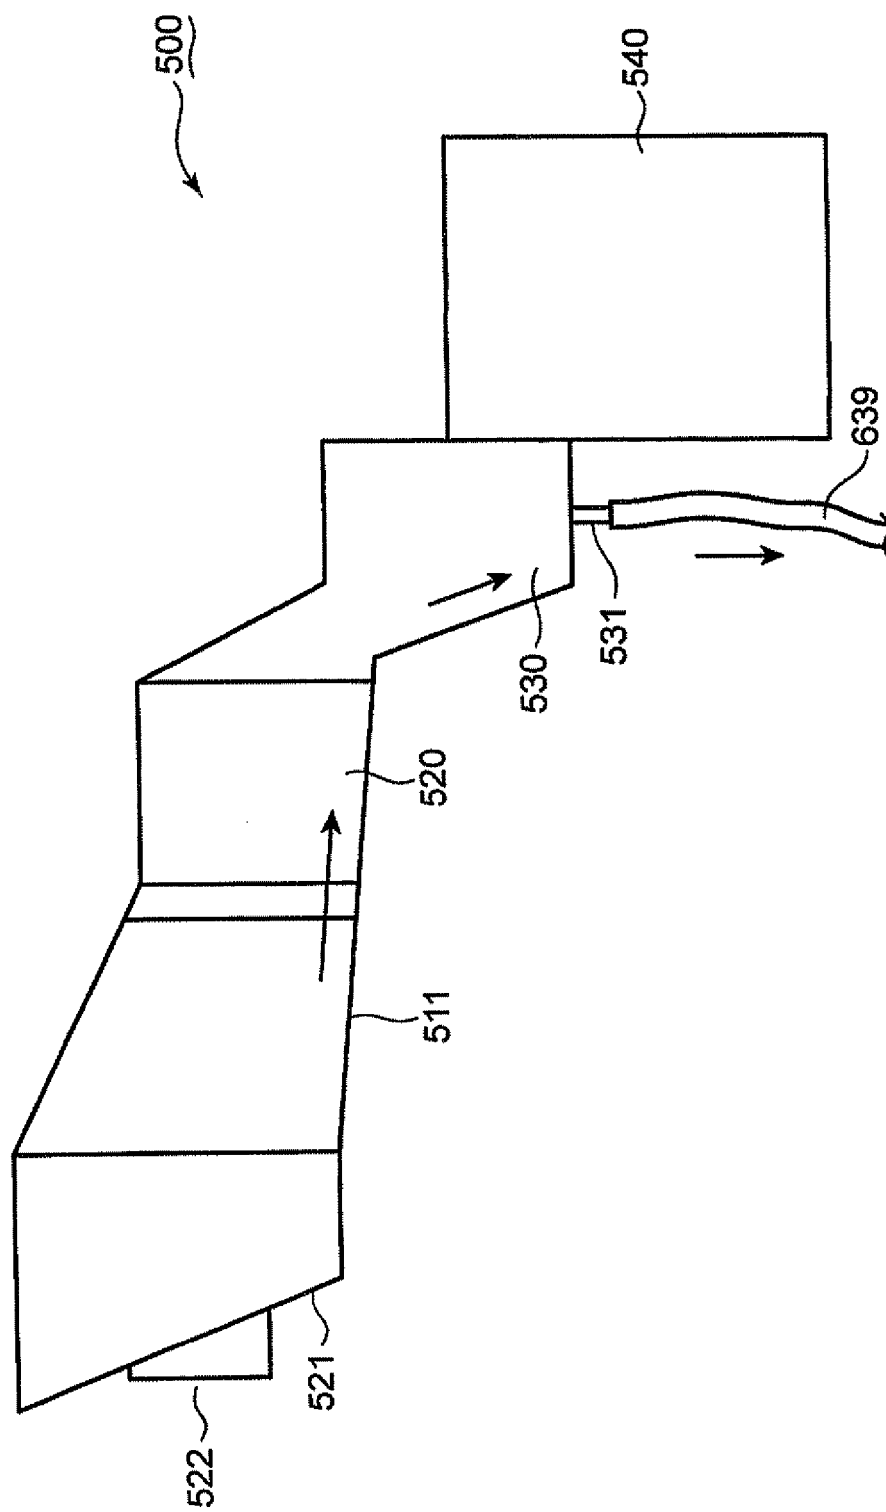


FIG.8

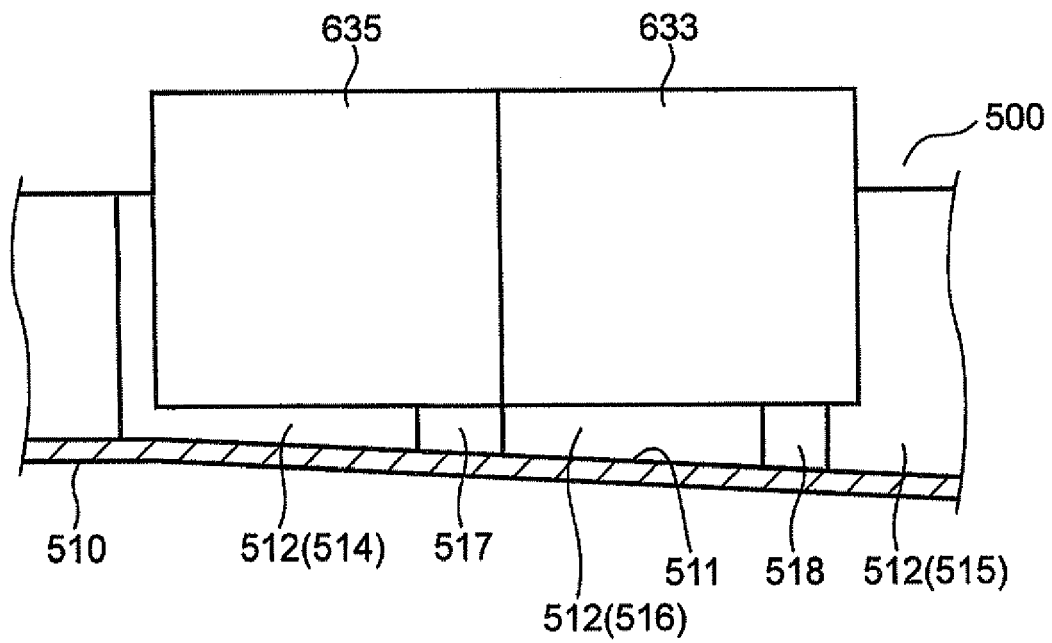


FIG. 9


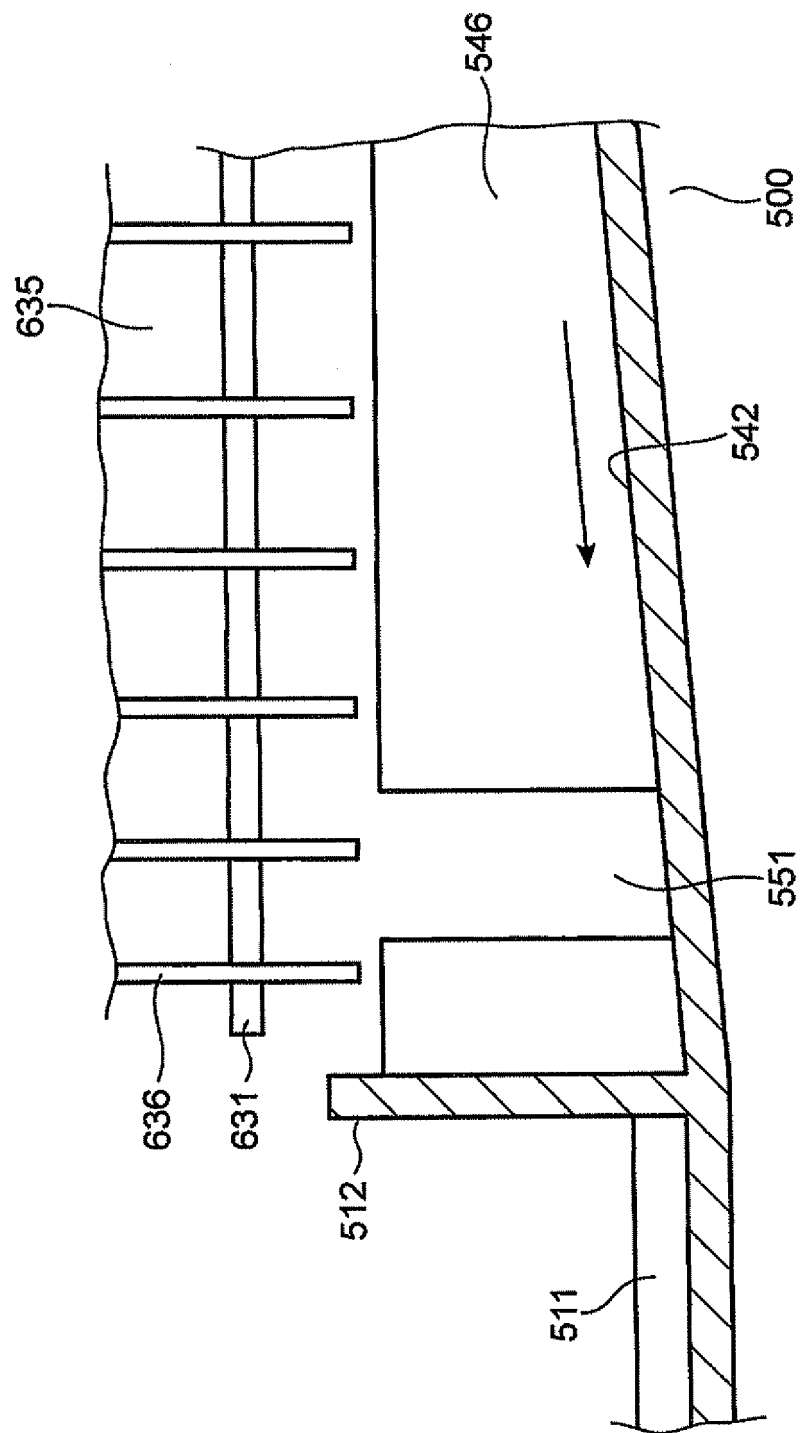


FIG.10



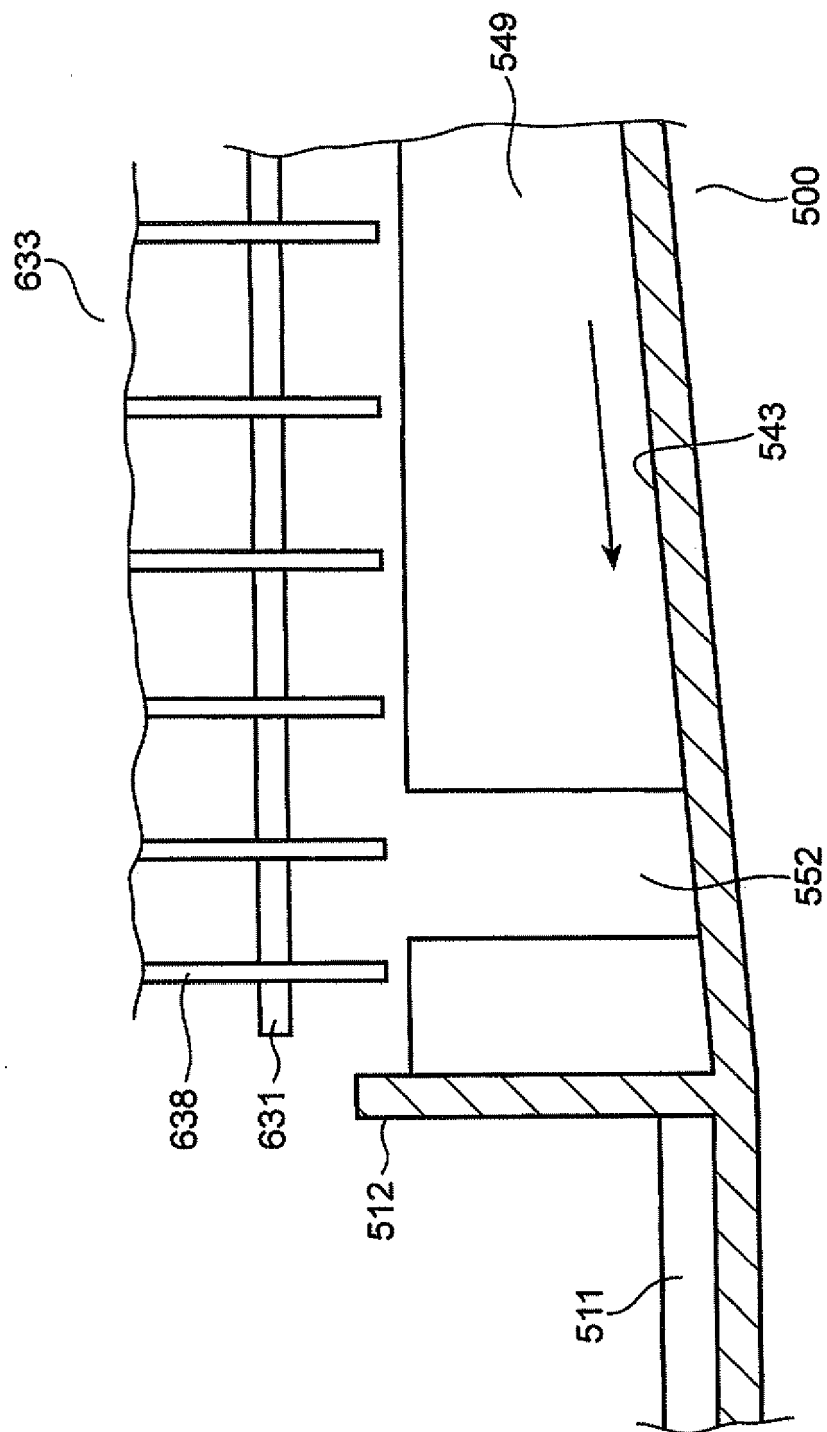

EUROPEAN SEARCH REPORT

Application Number
EP 11 18 1937

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	EP 1 961 852 A1 (TOSHIBA KK [JP]; TOSHIBA CONSUMER MARKETING [JP]; TOSHIBA HA PRODUCTS) 27 August 2008 (2008-08-27) * paragraph [0017] - paragraph [0019]; figures *	1,2, 10-12	INV. D06F25/00 D06F39/08 D06F58/20
X	EP 0 942 093 A1 (MATSUSHITA ELECTRONICS CORP [JP] MATSUSHITA ELECTRIC IND CO LTD [JP]) 15 September 1999 (1999-09-15) * paragraph [0087] - paragraph [0092]; figures 16-17 *	1,2	
X	EP 1 983 094 A1 (SANYO ELECTRIC CO [JP]) 22 October 2008 (2008-10-22) * paragraph [0039] - paragraph [0047]; figures 1-2 *	1	
X	US 2005/072022 A1 (NAGAE ETSUSHI [JP] ET AL) 7 April 2005 (2005-04-07) * paragraphs [0027], [0061]; figure 1 *	1	
			TECHNICAL FIELDS SEARCHED (IPC)
			D06F
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 7 February 2012	Examiner Diaz y Diaz-Caneja
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 11 18 1937

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

07-02-2012

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1961852	A1	27-08-2008	CN 101310067 A	19-11-2008
			EP 1961852 A1	27-08-2008
			JP 2007135897 A	07-06-2007
			KR 20080056000 A	19-06-2008
			TW 200801277 A	01-01-2008
			US 2009178442 A1	16-07-2009
			WO 2007058009 A1	24-05-2007

EP 0942093	A1	15-09-1999	CN 1231357 A	13-10-1999
			DE 69922864 D1	03-02-2005
			DE 69922864 T2	09-06-2005
			EP 0942093 A1	15-09-1999
			US 6282928 B1	04-09-2001

EP 1983094	A1	22-10-2008	CN 101275357 A	01-10-2008
			EP 1983094 A1	22-10-2008
			JP 2008245927 A	16-10-2008
			KR 20080089232 A	06-10-2008
			US 2008235977 A1	02-10-2008

US 2005072022	A1	07-04-2005	CN 1600940 A	30-03-2005
			JP 2005095291 A	14-04-2005
			US 2005072022 A1	07-04-2005

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2005052533 A [0003]
- JP 2006218067 A [0003]