

(19)



(11)

EP 2 441 703 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
02.07.2014 Bulletin 2014/27

(51) Int Cl.:
B65D 90/00 (2006.01)

(21) Application number: **10187789.2**

(22) Date of filing: **15.10.2010**

(54) **Transport system for hanging goods in a freight container and freight container therewith**

Transportsystem für in einem Frachtcontainer hängende Waren und Frachtcontainer damit

Système de transport pour produits suspendus dans un conteneur de fret et conteneur de fret avec un tel système

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:
18.04.2012 Bulletin 2012/16

(73) Proprietor: **Deutsche Post AG
53113 Bonn (DE)**

(72) Inventor: **Mossop, Nick
NG10 IPR
Nottingham (GB)**

(74) Representative: **Jostarndt, Hans-Dieter
Jostarndt Patentanwalts-AG
Brüsseler Ring 51
52074 Aachen (DE)**

(56) References cited:
**WO-A2-99/55601 DE-A1- 2 313 712
US-A- 3 506 136**

EP 2 441 703 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The invention relates to a transport system for hanging transport of goods in a standard freight container with indentations in its sidewalls. Standard freight containers are well known in the state of the art and standardized in ISO 668. Such containers have got a cuboidal design and are produced out of steel plate. At least the side walls of such containers are designed with approximate trapezoidal indentations in order to increase stability. Said containers are used for transportation of general cargo, bulk load and the like. Such containers as such are not suitable for the shipping of hanging goods.

[0002] In US 3,561,634 a frame, which can be built in in a standard freight container is disclosed. This frame contains vertical bearings, which can be assembled in the inner corners of the containers by screwing them at the walls. Telescoping rods can be inserted lengthwise and crosswise in these rods in order to safeguard the load against shifting. Such rods could be used as hanger bars as well. The disadvantage of the systems consists in the fact that the vertical bearings have to be screwed at given screwing holes and positions. In case a plurality of crosswise hanger bars shall be provided, there have to be a plurality of vertical bearings as well due to stability reasons. In standard containers there are no such screwing holes at all, i.e. standard containers have to be upgraded.

[0003] US 3,963,290 discloses a self-supporting assembly formed as a detachable replacement unit for hanging objects to be shipped, particularly garments, which is designed as a frame assembly with a plurality of parts such as perforated rails, suspensions rods and side members. The support frame is being braced within a container by means of spindle drives in such a manner that no fastening with the container itself is necessary thereby avoiding the necessity for structurally altering or damaging the walls of the container or leaving any visible signs of damage in any part of the container. The disadvantage of this system lies in the plurality of parts being used as well as in the time and effort to built in the frame into a container. Furthermore, the frame contains of horizontal, i.e. lengthwise built in perforated rails. These rails are connected to the vertical suspension rods and therefore reduce the utilizable inside width of the container. The system is not able to capitalize on the approximate trapezoidal indentations of the sidewalls of the container.

[0004] Document WO 99/55601 A2 discloses a storage and transportation system for a container comprising a framework of interfitable parts which are sized to the container interior so that the erected framework is of the same general shape as the interior of the container, but only slightly smaller so that the container walls provide the means for retaining the erected framework in position without any part of the framework being anchored thereto, said framework being constructed to support articles such as garments.; The system comprises a plurality of pairs of stanchions which are disposed vertically against

the longer side walls of the container and at a number of positions along the length of the container, cross rails which are connected between each pair stanchions across the width of the container, and cant rails which are connected between separate stanchions along the length of the container to complete the framework. The cant rails and cross rails may be spring loaded at their ends to urge the stanchions against the side walls, and also to urge the stanchions positioned proximate the ends of the container against same. The framework is thus rigidly secured in the container only by means of the container walls against which the stanchions react by means of the spring loading.

[0005] The objective of the invention is to provide a transport system for hanging transport of goods in a standard freight container, especially in rail freight containers, which can be easily inserted in and dismantled out of the standard freight container while making a maximum inside width of the container available for the shipped goods. A further objective of the invention is to provide a freight container for hanging transport of goods.

[0006] According to the invention, the first objective is achieved by a device according to Claim 1. Advantageous embodiments of the device are set forth in the subordinate Claims 2 to 4. The further objective of the invention is achieved by a container having the features of claim 5.

[0007] The advantage of the device according to the invention lies in the effective and reliable possibility of insertion and demounting of the frame as well as in the adaption of the design of the frame to the design of the side walls of standard containers in order to capitalize the maximum inner width of the container.

[0008] The invention suggests a frame which is applicable at the walls of standard freight containers with indentations in its walls and which contains at least one upright with a loadlock strip having a plurality of holes for the seating of a hanger bar. The loadlock strips are shaped with a profile in that way, that the hanger bars can dive through the holes. The holes may have an approximately circular shape, but may also have other shapes, such as circles with excavations or notches or angled holes.

[0009] The frame contains further at least one horizontal bar, whereof the at least one upright with the loadlock strip is bonded with, which is designed in a multi s-shape in that way that it is adapted to fit in the indentations of the standard freight container.

[0010] In case, at least two frames, placed on opposite sides of the container in such way that pairs of the holes of the loadlock strips of the opposite frames are arranged in the same vertical distance from the container base, a hanger bar may be mounted in said holes that the hanger bar is in approximately parallel alignment to the container base. Goods hung at the hanger bar will not slip to one side but remain at the position they were hung up. If the hung goods are garments hung up on clothes hanger, these clothes hanger can be fastened at their position at

the hanger bar with fastening systems which are known to persons skilled in the art, in order to avoid slipping during the transportation of the container.

[0011] The frames may have a horizontal dimension as a fractional amount of the inner length of a standard freight container. It is an advantage that in this case the whole inside length of the standard container can be used for hanging up goods. For example, the horizontal dimension of the frames is an eighth of the inside length of a standard container, so that eight frames on each side of the container are used to line the whole length of the container with the frames. This means, that sixteen frames are needed for one standard container. Frames in such dimension are good manageable by workers. As an example, the frames may contain four uprights with loadlock strips each, so that thirty two hanger bars can be provided with one standard container.

[0012] In an advantageous embodiment of the invention the holes have got an inner dimension, in which the outer dimension of standard sprung loaded hanger bars fit in.

[0013] The frames may contain bearings for being supported from the base of the container. These bearings may be the same uprights like used for the frame or parts thereof. But other bearings are possible as well.

[0014] In another embodiment, the bearings are separate from the frames, and may be located in the approximate trapezoidal indentations of the sidewalls. This implies the advantage that the frames can be built smaller, which facilitates the handling of the frames.

[0015] There exist containers, especially rail freight containers, which contain uprights fixed in the indentations of its sidewalls for purpose of fixing goods with tension belts or the like. Such uprights have got a profile similar to the uprights of the frames and can be used as bearings for the hanging fitting. The frames may exhibit flanges at at least one horizontal bar with the aid of which the frames can be connected to said bearings. This facilitates the installation of the frames in the container until the first hanger bar is fixed.

[0016] Possible as well is a combination of frames with one or more bearings with such ones without bearings. Such combination is advantageous in case a container is not fully equipped with fixed uprights in its indentations in the side walls.

[0017] In a further advantageous embodiment the bearings are mounted to the frames in that way that they are telescopic. In case they are not needed or even objectionable, in case the container itself shows fixed bearings, they can drawn in the frame. For example they can be drawn behind the uprights of the frames in that way that the holes of the loadlock strip of the upright of the frame fall in line with the holes of the bearings, so that the hanger bars can dive through both the holes in the loadlock strips and the bearings. The advantage of such frames is that only one embodiment of frames is needed to equip all kinds of containers, irrespective whether or not they show bearings.

[0018] The frames are fixed at the walls by the hanger bars, which may be sprung loaded. In one embodiment, the sprung bars have got a shoulder at each of their ends in order to fit in the holes of the loadlock strips on the one hand and to push apart the frames on the other hand. The longitudinal dimension of the shoulder is chosen in that way, that the hanger bar can dive with the crank through the hole in the loadlock strip on the one hand, but cannot touch the container side wall on the other hand. The longitudinal dimension of the shoulder is therefore smaller than the distance of the front side, i.e. the side facing the interior of the container, of the loadlock strip to the container wall it is mounted at.

[0019] It is advantageous to secure the frames when being installed into the container and before the hanger bars are fixed. Standard containers usually show securing rings in the container roof. For securing the frames, chains with clippers at at least one end can be used by passing the chain through such ring on the one hand and clipping it on the frame on the other hand. Other possibilities for securing the frames with the aid of the securing rings are imaginable as well.

[0020] The frames and hanger bars can be stored on trolleys in case they are not used or shall be shipped. In an advantageous embodiment of the invention, such trolley can be shipped in the same container as the hanging goods to be shipped with the aid of the transport system accordant to the invention. Such trolley may contain four swivel wheels with brake mechanisms, as known in the state of the art. Further such trolleys may show a rack capable to store at least sixteen frames and circa 80 hanger bars, which are needed to equip a standard container in total. In case the trolley is shipped with the same container as the hanging goods to be shipped with the aid of the transport system accordant to the invention, the frames and hanger bars can be sent back easily to the supplying depot without the need of sending back the same container.

[0021] Additional advantages, special features and practical refinements of the invention can be gleaned from the subordinate claims and from the presentation below of preferred embodiments making reference to the figures.

[0022] The figures show the following:

Fig. 1 frame of the hanging fitting

Fig. 2. A hanging fitting mounted in a standard freight container.

Fig. 3 the cross section A-A from Fig. 2

Fig. 4 a cross section through a container with mounted hanging fitting

Fig. 5 the cross section B-B from Fig. 2

Fig. 6 the cross section C-C from Fig. 2

[0023] Fig. 1 shows a frame (10) of the hanging fitting. The frame has got four uprights (11) with a loadlock strip (12) each, having a plurality of approximately circular through bore-holes (13). Further the frame contains three horizontal bars (15), whereof the uprights (11) are bonded with. One horizontal bar (15) is positioned at each end of the uprights (11), one horizontal bar (15) is positioned in the middle of the vertical dimension of the uprights (11). At the bottom side of the frame (10), flanges (16) are designed at the horizontal bar (15), with which the frame can be connected to bearings in the container. In case, these bearings are fixed in the container, the frame (10) gains stability in the moment of inserting. In Fig. 1, 4 flanges (16) are shown. But it is also possible to provide more or less flanges (16).

[0024] Fig. 2 shows the frame (10) mounted in a standard freight container (20). The side walls of the container (20) exhibits indentations (21). These indentations (21) are approximately trapezoidal shaped. The horizontal bars (15) as well as the uprights (11) follow this form in order to capitalize the maximum inside width of the container. The frame (10) is supported by bearings (30), which are located in the indentations (21) of the sidewalls of the container (20). As bearings (30) the same uprights (11) are used as for the frame (10). In Fig. 2 one bearing (30) is positioned in every indentation (21) of the container. But it is also possible to use only every second indentation (21) or even less indentations (21) of the container (20), depending on the load which is to be hung on the hanger bars (40).

[0025] Fig. 3 is the cross-section A-A from Fig. 2. A loadlock strip (12) with through bore-holes (13) is located in the indentation (21) of the container (20) in that way, that there is space (22) between the end of the through bore-hole evincible to the wall of the container (20) and the wall of the container (20) itself.

[0026] Fig. 4 is a cross section through a container at an extend of an indentation with a mounted hanging fitting and one mounted hanger bar. There are two embodiments shown in Fig. 4: one the left hand side of the figure, the hanger bar (40) is one with the same dimension over its entire length. This dimension is that small that it fits in the through bore-holes (13) of the loadlock strip (12). The hanger bar is of the standard sprung loaded type. This is a telescopic rod, which can be pushed together against the force of a sprung. In the mounted case, the ends of the rod push against the walls of the container (20). The frame (10) is fixed at the walls of the container in vertically direction while being supported through bearings (30) (not visible). In horizontal direction they cannot collapse into the interior of the container due to the hanger bar (40) which is dived through the through bore-holes.

[0027] The second embodiment is shown on the right hand side of the figure. The hanger bar (40) has got a bigger dimension than the inner dimension of the through bore-holes (13), and a shoulder (41) at both ends of the bar (40) with an outer part of the bar (40) with an outer dimension which fits in the through bore-holes (13). The

longitudinal dimension of the outer part (42) with the smaller dimension of the bar is smaller than the distance of the front side, i.e. the side facing the interior of the container (20), of the loadlock strip to the container (20) wall it is mounted at. Therefore the hanger bar (40) with its shoulder (41) pushes the frames against the walls of the container (20).

[0028] Fig. 5 is the cross section B-B of Fig. 2. The upright (11) is mounted in the container (20) in such way that the loadlock strip (12) is positioned in a indentation (21) of the wall of the container (20). The loadlock strip (12) is shaped with a profile in that way, that there is space (22) between the loadlock strip (12) and the wall of the container (20), in which the hanger bars (40) can dive through the holes (13).

[0029] Fig. 6 is the cross section C-C of Fig. 2. A horizontal bar (15) is designed in a multi s-shape in that way that it fits in the indentations (21) of the wall of the container (20).

List of reference numerals

[0030]

10	frame
11	upright
12	loadlock strip
13	hole
15	horizontal bar
16	flange
20	container
21	indentation
22	space
30	bearing
40	hanger bar
41	shoulder
42	part of the hanger bar with smaller dimension

Claims

1. Transport system for hanging transport of goods in a standard freight container (20) with indentations (21) in its sidewalls, containing a hanging fitting and a hanger bar (40), wherein the hanging fitting contains a frame (10) which is applicable at the walls of the standard freight container (20) with its indentations (21) and which contains at least one upright (11) with a loadlock strip (12) having a plurality of holes (13) for the seating of the hanger bar (40) and which further contains at least one horizontal bar (15), whereof the at least one upright (11) with the loadlock strip (12) is bonded with, **characterized in, that** the at least one horizontal bar (15) is designed in a multi s-shape **in that** way that it is adapted to fit in the indentations (21) of the walls of the standard freight container (20).

2. Transport system according to claim 1,
characterized in, that
the transport systems contains at least two frames (10), placeable on opposite sides of the container (20) in such way that pairs of the-holes (13) of the loadlock strips (12) of the opposite frames (10) are arranged in the same vertical distance from the base of the container (20).
3. Transport system according to the previous claim,
characterized in, that
the frames (10) have got a horizontal dimension as a fractional amount of the inner length of a standard freight container (20), so that the whole length of a standard freight container (20) can be lined with the frames (10).
4. Transport system according to one or more of the previous claims,
characterized in, that
the hanger bar (40) is a standard sprung loaded hanger bar.
5. Freight container,
characterized in, that
the container (20) contains the transport system according to one of the previous claims.

Patentansprüche

1. Transportsystem für den hängenden Warentransport in einem Standard-Frachtcontainer (20) mit Einbuchtungen (21) in den Seitenwänden, enthaltend eine Aufhängvorrichtung und eine Tragestange (40), wobei
die Aufhängvorrichtung einen Rahmen (10) beinhaltet, der an den Wänden des Standard-Frachtcontainers (20) mit Einbuchtungen (21) anbringbar ist und der mindestens einen Ständer (11) mit einem Ladungsarretierungs-Streifen (12) mit einer Vielzahl von Löchern (13) für die Passung der Tragestange (40) beinhaltet, und der darüber hinaus mindestens eine horizontale Stange (15) beinhaltet, wobei der mindestens eine Ständer (11) mit dem Ladungsarretierungs-Streifen (12) mit der mindestens einen horizontalen Stange (15) verbunden ist,
dadurch gekennzeichnet, dass
diese in Form von mehreren S so konstruiert ist, dass es in die Einbuchtungen (21) der Wände des Standard-Frachtcontainers (20) passt.
2. Transportsystem nach Anspruch 1,
dadurch gekennzeichnet, dass
das Transportsystem mindestens zwei Rahmen (10) beinhaltet, die so auf gegenüberliegende Seiten des Containers (20) platziert werden können, dass Löcher (13) der Ladungsarretierungs-Streifen (12) der

gegenüberliegenden Rahmen (10) paarweise in demselben vertikalen Abstand von der Basis des Containers (20) angeordnet sind.

3. Transportsystem nach dem vorhergehenden Anspruch,
dadurch gekennzeichnet, dass
die Rahmen (10) eine horizontale Abmessung aufweisen, die ein Bruchteil der Innenlänge eines Standard-Frachtcontainers (20) darstellt, so dass die gesamte Länge eines Standard-Frachtcontainers (20) mit den Rahmen (10) ausgestattet werden kann.
4. Transportsystem nach einem der vorhergehenden Ansprüche,
dadurch gekennzeichnet, dass
es sich bei der Tragestange (40) um eine standardmäßige federbelastete Tragestange handelt.
5. Frachtcontainer
dadurch gekennzeichnet, dass
der Container (20) das Transportsystem nach einem der vorhergehenden Ansprüche beinhaltet.

Revendications

1. Système de transport pour le transport suspendu de marchandises dans un conteneur de fret standard (20) muni d'encoches (21) dans ses parois latérales, contenant un raccord de suspension et une barre de suspension (40), dans lequel
le raccord de suspension contient un cadre (10) utilisable sur les parois du conteneur de fret standard (20) muni d'encoches (21) et qui contient au moins une colonne (11) avec une bande de sas (12) comportant de multiples trous (13) pour le logement de la barre de suspension (40) et qui contient également au moins une barre horizontale (15), avec laquelle au moins la colonne (11) avec la bande de sas (12) est assemblée, **caractérisé par le fait qu'**au moins la barre horizontale (15) est conçue dans une forme en S multiple de telle manière à s'adapter dans les encoches (21) des parois du conteneur de fret standard (20).
2. Système de transport conformément à la revendication n°1,
caractérisé par le fait que
le système de transport contient au moins deux cadres (10), pouvant être placés sur les parois opposées du conteneur (20) de telle manière à ce que les paires de trous (13) des bandes de sas (12) des cadres opposés (10) soit disposées à la même distance verticale depuis la base du conteneur (20).
3. Système de transport conformément à la revendication précédente,

caractérisé par le fait que

les cadres (10) ont une dimension horizontale comme fraction de la longueur intérieure d'un conteneur de fret standard (20) de telle sorte que toute la longueur d'un conteneur de fret standard (20) puisse être entourée des cadres (10). 5

4. Système de transport conformément à l'une ou plusieurs des revendications précédentes,

caractérisé par le fait que

la barre de suspension (40) est une barre de suspension à ressort de rappel standard. 10

5. Conteneur de fret

caractérisé par le fait que

le conteneur (20) contient le système de transport conformément à l'une des revendications précédentes. 15

20

25

30

35

40

45

50

55

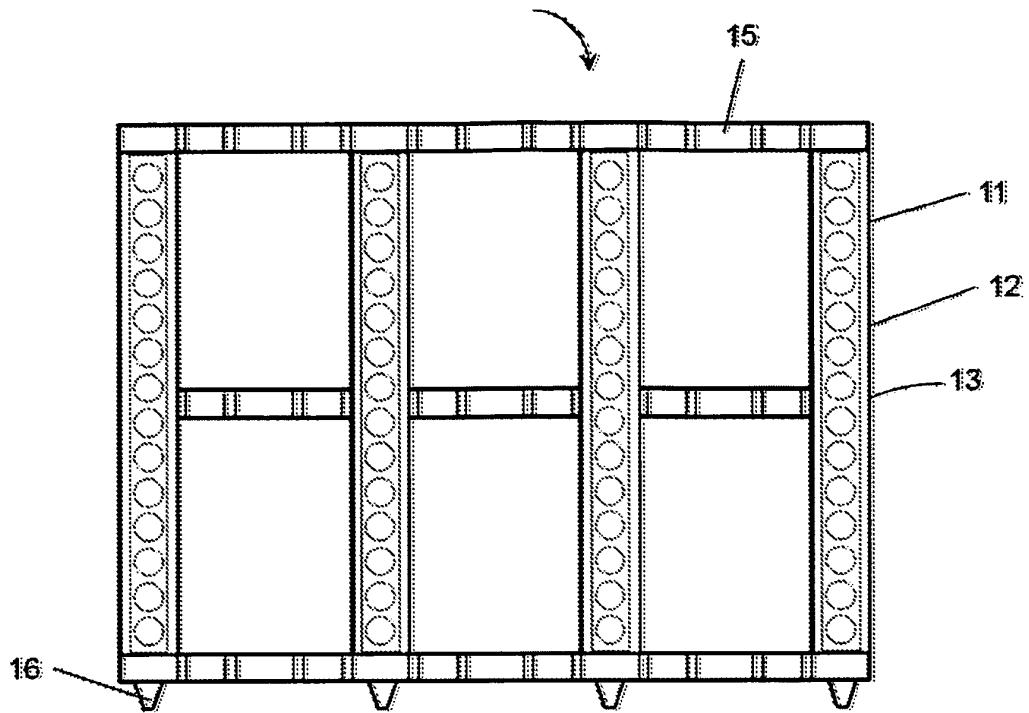


Fig. 1

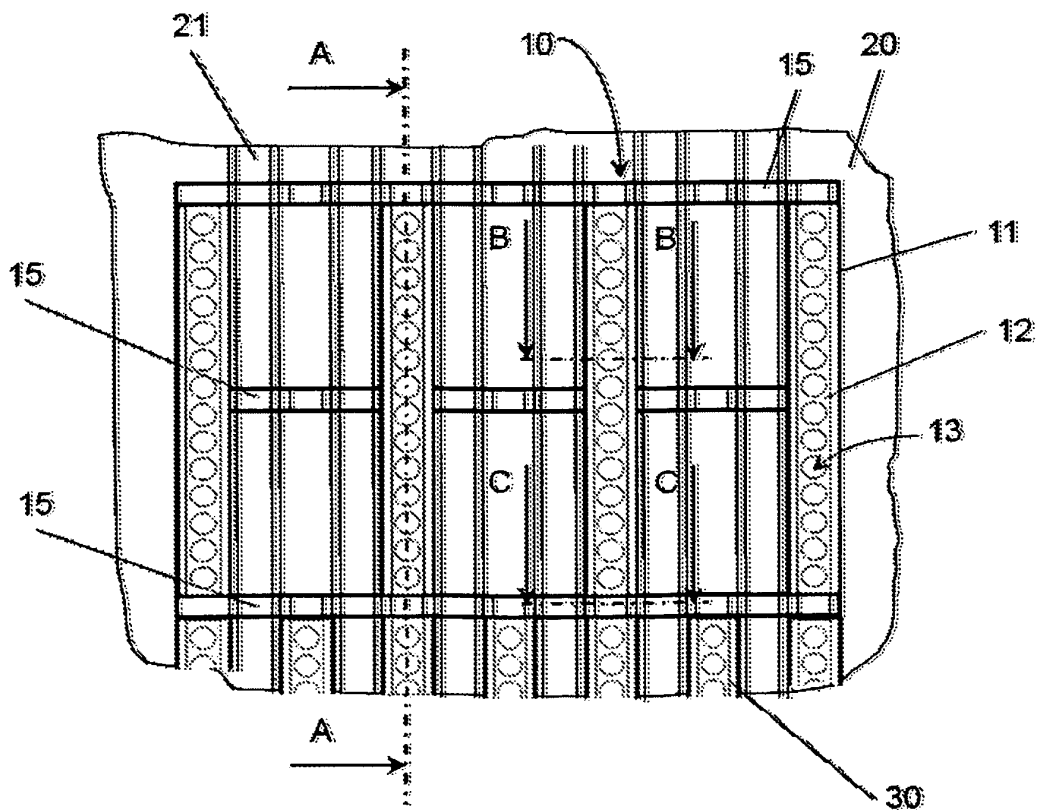


Fig. 2

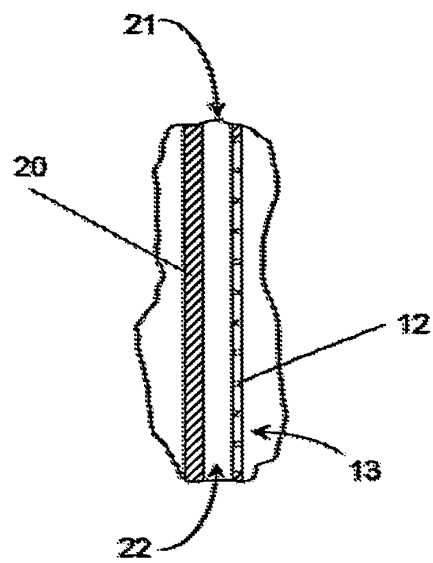


Fig. 3

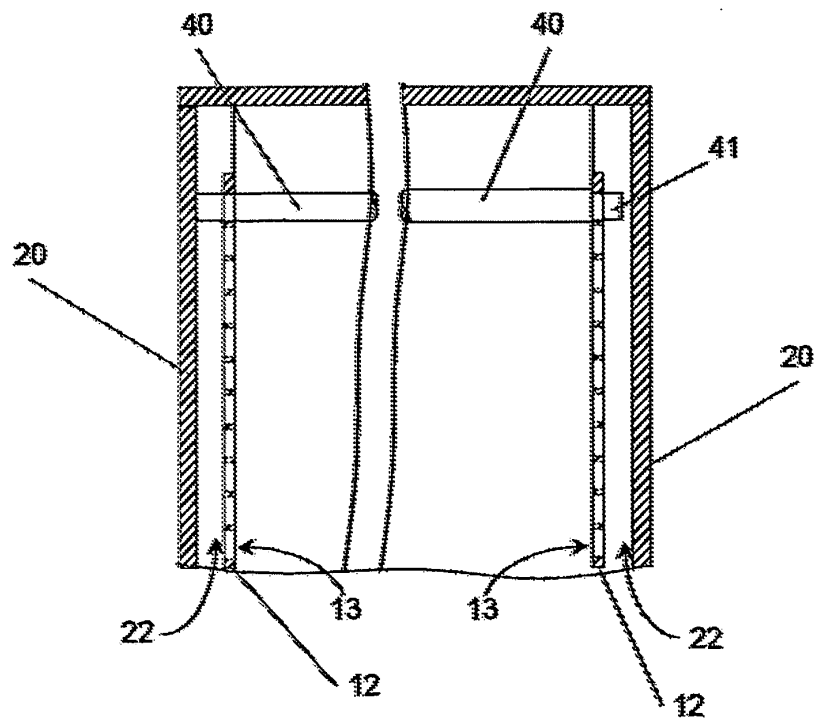


Fig. 4

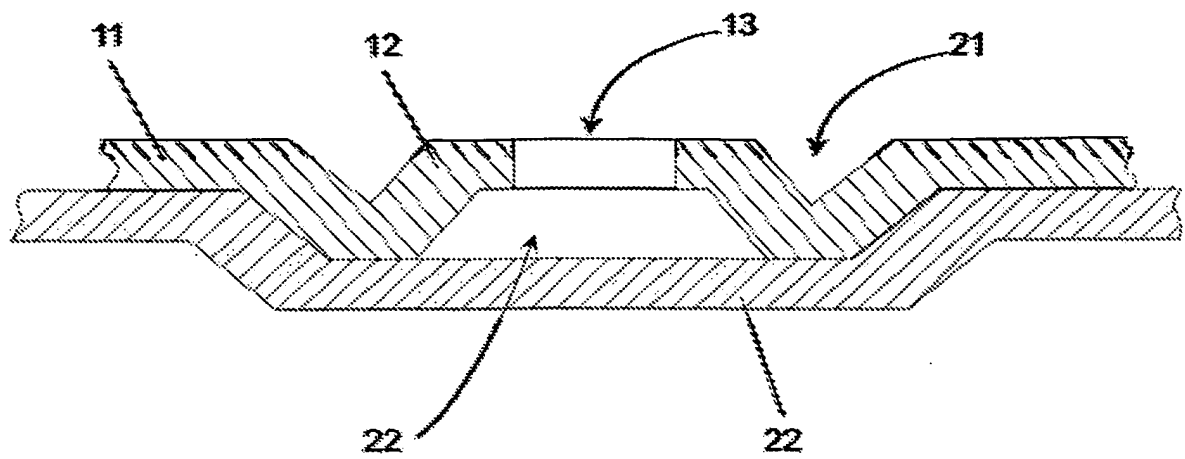


Fig. 5

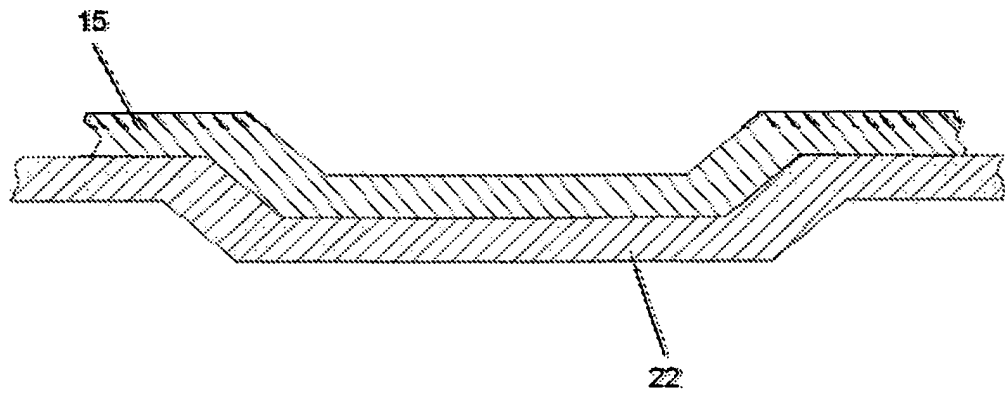


Fig. 6

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 3561634 A [0002]
- US 3963290 A [0003]
- WO 9955601 A2 [0004]