



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
06.06.2012 Bulletin 2012/23

(51) Int Cl.:
F23H 11/10 (2006.01) F23B 30/08 (2006.01)

(21) Application number: **12157001.4**

(22) Date of filing: **01.12.2008**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT RO SE SI SK TR

(30) Priority: **03.12.2007 PL 38394107**

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
08858195.4 / 2 217 858

(71) Applicant: **Kowalewski, Witold**
05-220 Zielonka (PL)

(72) Inventor: **Kowalewski, Witold**
05-220 Zielonka (PL)

(74) Representative: **Adamczyk, Piotr**
Kancelaria Patentowa
ul. Wilcza 70/8
00-670 Warszawa (PL)

Remarks:

This application was filed on 24-02-2012 as a divisional application to the application mentioned under INID code 62.

(54) **Stoker-fired boiler and a method of modernization of stoker-fired boiler**

(57) A boiler according to the invention contains an additional air channel (9) with an inbuilt fan (10) with adjustable output. The first end (9') of the additional air channel (9) is connected with the under-stoker space (11) located outside of the wind boxes (5) of the under-stoker

wind boxes system (4). The second end (9'') of the additional air channel (9) is connected with the atmosphere. Modernization of the existing boilers consists in installation in the described above method of an additional air channel (9) with an inbuilt fan (10).

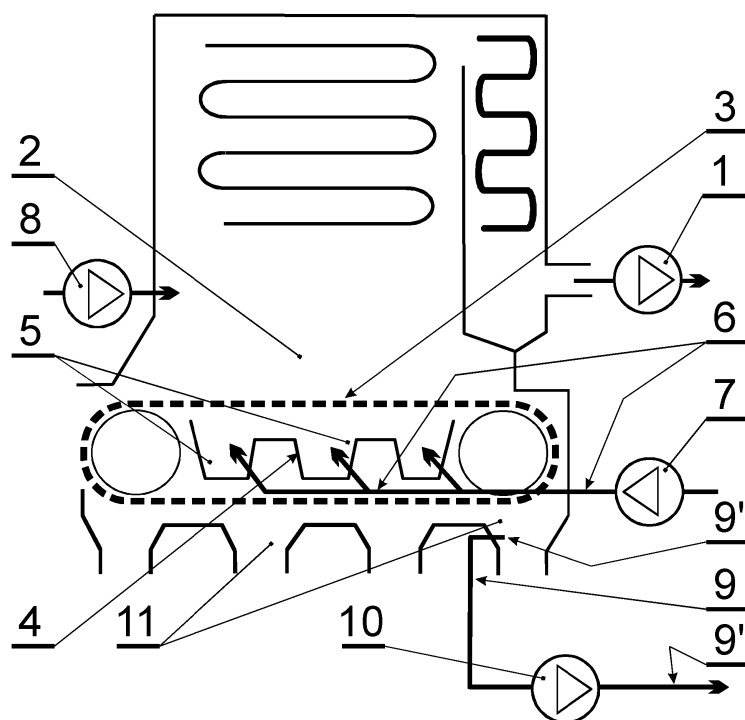


Fig.1

Description

Technical Field

[0001] The subject of the invention is a stoker-fired boiler containing in the combustion zone a movable stoker and an under-stoker wind boxes system, and a method of modernization of such a boiler.

Background Art

[0002] In the commercial power industry and heating industry, for generating heat stoker-fired boilers are commonly employed, in which the combustion of solid fuel, in particular of coal, takes place on a moving mechanical stoker. Above the stoker there is a combustion chamber with a secondary air channel, whereas under the stoker there is an under-stoker space containing the under-stoker wind boxes system with wind boxes, and a main channel supplying the air from the atmosphere to the inside of the wind boxes. Moreover the under-stoker space located outside of the wind boxes is provided with an additional air channel having an inbuilt fan with adjustable output. Such boiler is disclosed for example in US 4263857. Significant disadvantage of stoker-fired boilers with wind boxes are uncontrolled leakages of air. Exemplary solutions of eliminating such leakages are disclosed in GB 973244 and EP 0498014A.

Disclosure of Invention

[0003] The purpose of the invention was to reduce uncontrolled flows of air streams within a stoker-fired boiler, negatively affecting its performance.

[0004] A boiler according to the invention contains a combustion chamber with a secondary air channel, a movable mechanical stoker, an under-stoker space containing an under-stoker wind boxes system with wind boxes, as well as a main channel supplying the air from the atmosphere to the inside of the wind boxes. The boiler contains also an additional air channel with an inbuilt fan with adjustable output. First end of this additional air channel is connected with the under-stoker space located outside of the wind boxes of the under-stoker wind boxes system. Second end of the additional air channel is connected with the atmosphere.

[0005] In another embodiment of the boiler according to the invention, it contains temperature sensors in the space of the main channel and in the space of the additional air channel. These sensors are connected to controller of the inbuilt fan.

[0006] A method of modernization according to the invention consists in that in the aforementioned boiler second end of the additional air channel is connected with the atmosphere.

[0007] In another embodiment of the the method of modernization, in the space of the main channel and in the space of the additional air channel are located tem-

perature sensors. These sensors are connected to the controller of the inbuilt fan.

[0008] The invention reduces the amount of air coming through the gaps and combining with the combustion fumes, giving in consequence a reduced coefficient of excess air in the fumes. This results in a reduction of a physical loss in the fumes, which also means the increase of boiler performance, usually by about 2 to 5%, depending on its technical condition, changes of the load, quality of the combustion charge, and proper maintenance and operation. The application of the invention also reduces the consumption of electric power by the components of the boiler by approximately 10-20%. As a result of general reduction of the amount of fumes removed from the boiler, the load of the extractor fan is smaller, and the consumption of energy by the fan of the additional air channel is balanced by limited energy consumption by the wind boxes air fan. A beneficial feature of the invention is also a short time needed for the modernization of the boiler, and a low cost of such modernization that amounts to ca. 10% of the cost of replacement of the under-stoker wind boxes system.

[0009] It unexpectedly appeared that a basic advantage of the invention is significant reduction of dust emission (20-70%), which gives hope for the possibility of meeting the requirements of future emission standards without installation of expensive electrostatic dust removers (dedusters). It also unexpectedly appeared that in the operation of the boiler with the invention being employed, emission of carbon oxide (CO) is reduced by 40-80%. This makes it possible not to equip boilers with secondary air fans, and reduces consumption of electricity.

Brief Description of Drawings

[0010] The invention has been shown schematically in a drawing in which fig. 1 presents schematic vertical cross sections of a stoker-fired boiler according to the invention.

Mode for Carrying Out the Invention

[0011] A typical stoker-fired boiler has a fume zone with a fume extractor fan 1, and a burner zone. In the burner zone there is a combustion chamber 2, a movable mechanical stoker 3, an under-stoker wind boxes system 4 with wind boxes 5, and a channel 6 supplying the air from the atmosphere to the inside of the wind boxes 5 by means of a wind boxes air fan 7. The combustion chamber 2 has a secondary air channel powered by a fan 8. The boiler according to the invention has an additional air channel 9 with an inbuilt fan 10 with adjustable output. First end 9' of the additional air channel 9 is connected with the under-stoker space 11 located outside of the wind boxes 5 of the under-stoker wind boxes system 4. The second end 9" of the additional air channel 9 is connected with the atmosphere. Through controlling

the output of the fan 10, an appropriate amount of air deriving from uncontrolled leakages is removed from the under-stoker zone 11, and directed to a selected place via the additional air channel 9. Output of the fan 10 may be controlled manually, whereas it is beneficial to use for this purpose the knowledge of air temperature in the space of channel 6 supplying it from the atmosphere to the inside of the wind boxes 5, and temperature of the air in the space of the additional air channel 9. In order to do so, in these places at least one air temperature sensor (not shown in the drawings) should be placed. For typical stoker-powered boilers, the difference between the temperature of wind boxes air stream in the channel 6, and temperature of air stream in the additional air channel 9 not exceeding 5°C shows that through channel 9 flows only the air coming from uncontrolled leakages to the under-stoker space. The difference in temperatures amounting to 5 to 10°C constitutes information that in the additional air channel 9 there also is the air deriving from uncontrolled leakages taking place through the section of the stoker 3 on which the combustion process no longer takes place or takes place into a limited extent. In this case, uncontrolled leakages take place towards the bottom part of the combustion chamber 2, and their reception has positive effects on the physical loss in the fumes. The difference in temperature exceeding 10°C constitutes information that into the channel 9 additionally flow some of the fumes from the combustion chamber 2 without resulting in a physical loss in the fumes. These dependencies allow for automation of the adjustment of output of the fan 10, through connecting of the said temperature sensors to the fan controller, and the application of the difference between the temperatures measured by means of these sensors as a control parameter. It unexpectedly appeared that with small loads of the boiler, amounting to for instance 10-20% of the nominal load, the amount of air coming from the gaps is sufficient to conduct the process of combustion. In such a situation, when there is no possibility to isolate the channel 6 from the atmosphere, the wind boxes air fan 7 stops supplying air for the combustion process and only starts to block the out-flow of air from the boiler. Elimination of air coming through the gaps from the stream of fumes in most cases causes the situation that the natural pull of the chimney suffices to ensure the appropriate negative pressure in the combustion chamber 2, causing purposelessness of operation of the fumes extractor fan 1. However, according to the mandatory regulations, boiler operation without an extractor fan 1 is not permitted. A solution to this problem may be operation with lower pressure value (e.g. -50 to -80 Pa in the combustion chamber 2), and limitation of output of the extractor fan 1. Very important for proper utilization of the boiler appeared to be the point of connection of the space of the channel 6 supplying wind boxes air with the space of the additional air channel 9. Connection at the point which causes the situation that most of the air supplied by the fan 10 reaches the front wind boxes 5 is unbeneficial for functioning of the boiler, par-

ticularly with the aforesaid temperature difference exceeding 10°C, because this means that an additional stream of air is supplied with a lower oxygen content. The same stream of air directed to the last operating wind boxes 5 positively affects the parameters of boiler operation, also with the temperature difference exceeding 10°C. This is connected with low intensity of the combustion process in this part of the stoker, meaning at the same time lower demand for oxygen. It unexpectedly appeared that connecting of the under-stoker space 11 through an additional air channel 9 with the atmosphere does not require changes of the insofar applied operation of the boiler (manual or automated). With the under-stoker space 11 connected with the channel 6 or the secondary air channel of the combustion chamber 2, the mutual interaction of the streams of air, in particular with the temperature difference exceeding 5°C, changes the insofar existing course of the combustion process, causing the need for measuring the streams of air and changing the boiler control algorithms. However, economic and ecological benefits resulting from lower electricity consumption, and the use of heat of the stream of air from the gaps, justify additional outlays incurred on the implementation of this solution, instead of a simpler to control connection of the under-stoker space 11 with the atmosphere. It also unexpectedly appeared that the application of the invention gives additional operation benefits. Connecting of the first wind box separated from the stream of wind boxes air with the under-stoker space allows boiler operators to control the distance of the point of coal ignition on the stoker from the slide gate and the front part of the boiler structure. Similarly, connecting of the last non-operating wind boxes with the under-stoker space after prior separation from the stream of wind boxes air reduces uncontrolled leakages from the wind boxes space to the combustion chamber.

[0012] According to the invention, it is possible to build new boilers, as well as quickly, cheaply and effectively modernize the existing ones. For example, modernization of a popular boiler type WR-10 entails installation of an additional air channel 9 with a centrifugal fan type WWOax-50 (made by Owent Olkusz) equipped with a 5.5 kW motor, whose rotation speed is controlled by means of a frequency converter. With manual control of this fan, decrease of stream of air supplied to the boiler was obtained by 6000m³/h on average, with the boiler load within 30 to 80%. The application of both fans type WWOax-50 for modernization of a double-stoker boiler type WR-25 with the same manner of control of the fans caused a situation that within the load range of 40 to 80%, the excess air coefficient in the fumes dropped from the level of 2.0-2.5 to approximately 1.4-1.7. Temperature of combustion fumes after the boiler was reduced by 15 to 20°C, dust content in theses fumes stream was reduced by 20 to 70% and content of carbon oxide (CO) was reduced by 40-80%.

Claims

1. A stoker-fired boiler having a combustion chamber (2) with a secondary air channel, a movable mechanical stoker (3), an under-stoker space (11) containing an under-stoker wind boxes system (4) with wind boxes (5), as well as a main air channel (6) supplying the air from the atmosphere to the inside of the wind boxes (5) and an additional air channel (9) with an inbuilt fan (10) with adjustable output, wherein the first end (9') of the additional air channel (9) is connected with the under-stoker space (11) located outside of the wind boxes (5) of the under-stoker wind boxes system (4), **characterized in that** the second end (9'') of the additional air channel (9) is connected with the atmosphere.
2. The boiler according to claim 1, **characterized in that** it contains temperature sensors located in the space of the main air channel (6) and in the space of the additional air channel (9) which are connected to controller of the inbuilt fan (10).
3. A method of modernization of a stoker-fire boiler containing a combustion chamber (2) with a secondary air channel, a movable mechanical stoker (3), an under-stoker space (11) containing an under-stoker wind boxes system (4) with wind boxes (5), as well as a main air channel (6) supplying the air from the atmosphere to the inside of the wind boxes (5), wherein the under-stoker space (11) located outside of the wind boxes (5) of the under-stoker wind boxes system (4) is connected with the first end (9') of the additional air channel (9) having an inbuilt fan (10) with adjustable output, **characterized in that** the second end (9'') of the additional air channel (9) is connected with the atmosphere.
4. The method of modernization of a boiler according to claim 3, **characterized in that** in the space of the main air channel (6) and in the space of the additional air channel (9) are located temperature sensors which are connected to controller of the inbuilt fan (10).

45

50

55

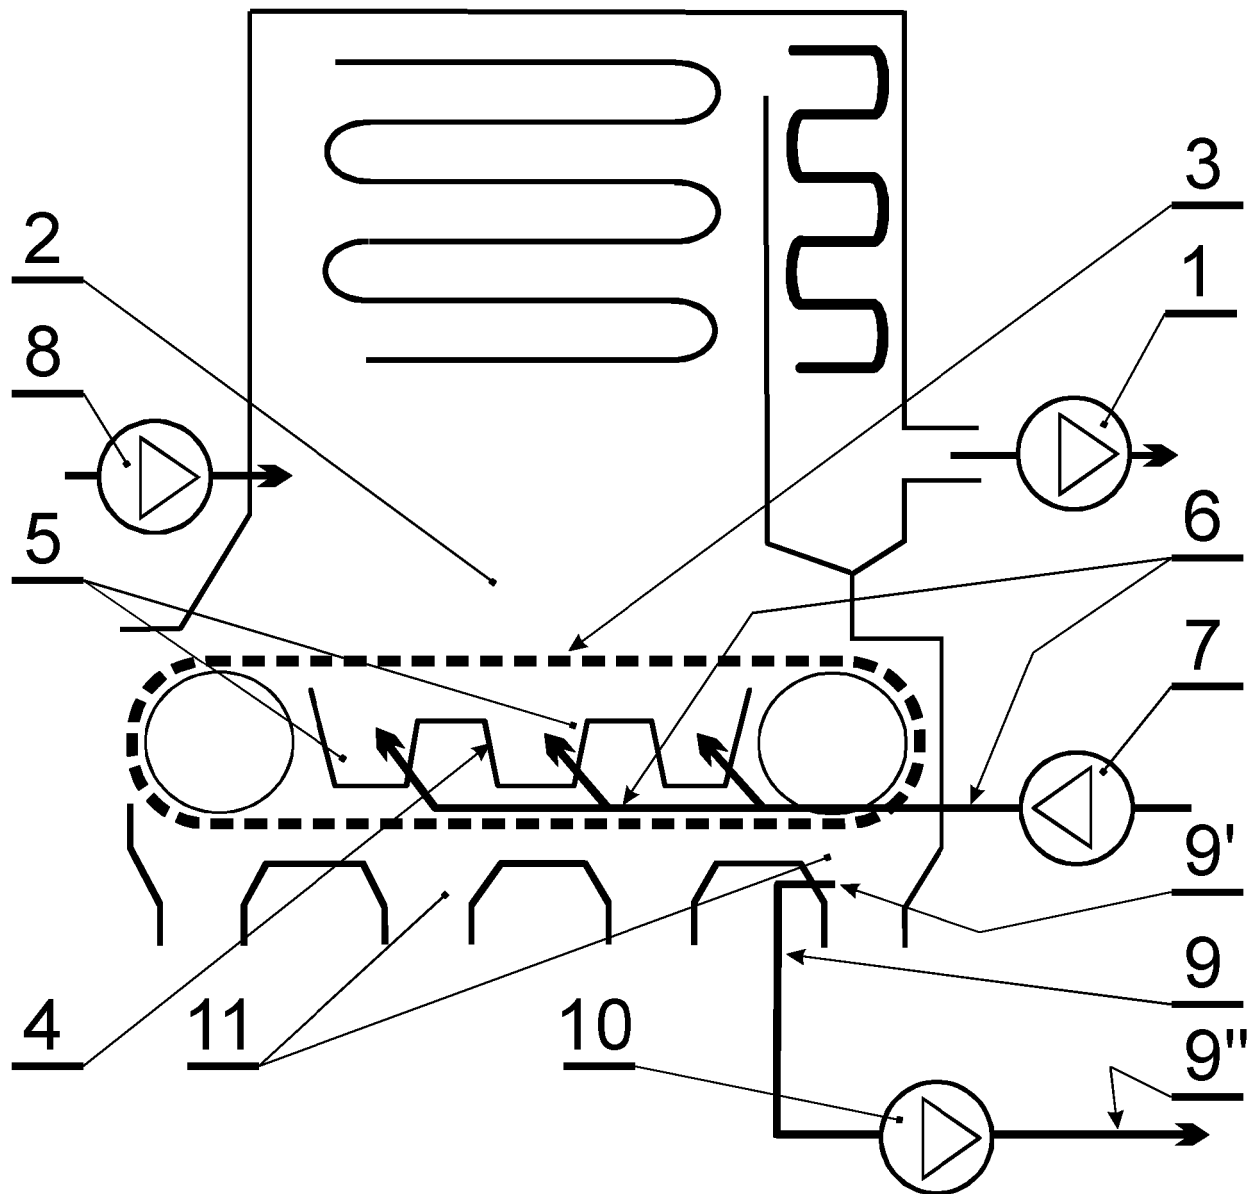


Fig.1

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 4263857 A [0002]
- GB 973244 A [0002]
- EP 0498014 A [0002]