



(11) **EP 2 462 252 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

- (15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see
Description Paragraph(s) 8, 52, 55
- (51) Int Cl.:
C22C 38/04^(2006.01) C21D 8/06^(2006.01)
- (86) International application number:
PCT/KR2010/005117
- (48) Corrigendum issued on:
04.05.2016 Bulletin 2016/18
- (87) International publication number:
WO 2011/016676 (10.02.2011 Gazette 2011/06)
- (45) Date of publication and mention of the grant of the patent:
06.01.2016 Bulletin 2016/01
- (21) Application number: **10806650.7**
- (22) Date of filing: **04.08.2010**

(54) **NON-HEAT TREATED ROLLED STEEL AND DRAWN WIRE ROD WITH EXCELLENT TOUGHNESS, AND METHOD FOR MANUFACTURING THE SAME**

NICHT WÄRMEBEHANDELTER GEWALZTER STAHL UND GEZOGENE DRAHTSTANGE VON HERVORRAGENDER FESTIGKEIT SOWIE HERSTELLUNGSVERFAHREN DAFÜR

ACIER LAMINÉ NON TRAITÉ THERMIQUEMENT ET TIGE DE FIL MÉTALLIQUE ÉTIRÉE D'UNE RÉSISTANCE EXCELLENTE, ET PROCÉDÉ DE FABRICATION DE CEUX-CI

- (84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK SM TR
- (30) Priority: **04.08.2009 KR 20090071586**
- (43) Date of publication of application:
13.06.2012 Bulletin 2012/24
- (73) Proprietor: **Posco**
Pohang
Kyungsangbook-do 790-300 (KR)
- (72) Inventors:
 - **LEE, You-Hwan**
Pohang
Kyungsangbook-do 790-360 (KR)
 - **KIM, Dong-Hyun**
Goyang-si
Gyeonggi-do (KR)
- **LEE, Sang-Yoon**
Pohang-si
Kyungsangbook-do (KR)
- **KIM, Ha-Ni**
Seongnam-si
Gyeonggi-do (KR)
- **PARK, Yong-Sik**
Pohang
Kyungsangbook-do 790-360 (KR)
- (74) Representative: **Zech, Stefan Markus et al**
Meissner, Bolte & Partner GbR
Postfach 86 06 24
81633 München (DE)
- (56) References cited:
EP-A1- 1 431 407 EP-A1- 1 932 934
WO-A1-2008/013323 WO-A1-2008/072873
JP-A- 10 195 530 JP-A- 2003 193 194
JP-A- 2004 137 542 JP-A- 2008 163 410
US-A1- 2007 107 819

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 462 252 B9

Description

[Technical Field]

5 **[0001]** The present invention relates to a rolled steel and a drawn wire rod to be used as structural steel, and more specifically, to a rolled steel and a drawn wire rod with excellent toughness, in which even if a heating step is omitted, a de-generated pearlite structure can be secured in the microstructure of the rolled steel and the drawn wire rod by controlling the content of Mn and the cooling conditions thereof. In addition, the present invention relates to a method for manufacturing the rolled steel and the drawn wire rod.

10

[Background Art]

15 **[0002]** Most structural steels are quenched and tempered steels that are realized by increasing toughness and strength through reheating, quenching, and tempering after hot working. On the contrary, a non-heat treated steel is a steel that does not undergo heat treatment after hot working, i.e., a steel having a similar toughness and strength to quality of the material to be heated (heat treated) can be obtained. The name of steel that can be used without heat treatment is a non-heat treated steel also known as micro-alloyed steel, in which the quality of the material is achieved by adding a very small alloy. Hereinafter, the steel having the properties as mentioned above will be known as a non-heat treated steel in the present invention.

20 **[0003]** Generally, a wire rod is produced as a final product by using the following steps. The final product of the wire rod can be produced in the order of Rolling Rod → Cold Drawing → Spheroidization Heat treatment → Cold Drawing → Cold Forging → Quenching and Tempering → Product. However, the non-heat treated steel is produced in order of Hot Rolling Rod → Cold Drawing → Cold Forging → Product. Therefore, the non-heat treated steel can be produced as an economical product without heat treatment process. At the same time, a final quenching and tempering steps are not performed. Therefore, the non-heat treated steel has been applied in many products due to the securing of linearity caused by not generating a heating deflection, i.e., a defect caused during the heating.

25

[0004] However, when the steps are processed, the strength of the product is further increased, while the toughness is continuously decreased, because the heat treatment process is omitted and cold working is continuously applied. Therefore, domestic and foreign manufacturers of a wire rod have been focused on the technology for manufacturing a non-heat treated steel with excellent toughness that has improved the toughness of non-heat treated steel. The methods for manufacturing the non-heat treated steel are methods for refining a steel grain by using a precipitate, a method for securing a composite microstructure by adding alloy elements, and the like.

30

[0005] Japanese Patent Laid-Open Publication No. 1995-054040 discloses a method for providing a non-heat treatment steel wire rod with 750~950 MPa of tension by hot rolling the alloy steel that is composed of C: 0.1~0.2 %, Si: 0.05~0.5 %, Mn: 1.0~2.0 %, Cr: 0.05~0.3 %, Mo: 0.1 % or less, V: 0.05~0.2 %, Nb: 0.005~0.03 %, and the remainder Fe, as a percentage by weight, cooling the alloy steel within 60 sec between 800~600 °C for a cooling step, and heating at 450~600 °C, or cooling the alloy steel after continuously maintaining it for at least 20 minutes at a temperature of between 600~450 °C, and then cold working. However, the product is hot-rolled through a process, known as controlled rolling, and expensive components such as Cr, Mo, V, and the like are added in the method as mentioned above, so that it is uneconomical in use.

40

[0006] In addition, Japanese Patent Laid-Open Publication No. 1998-008209 relates to non-heat treated steel with excellent strength after hot working, and excellent cold formability and a method for manufacturing the same, and a method for preparing a forging member by using a non-heat treated steel, and also relates to non-heat treated steel with excellent cold formability, in which a volume of a ferrite phase is at least 40 %, and a hardness is 90 HRB or less, for the steel having a controlled contents of C, Si, Mn, Cr, V, P, O, S, Te, Pb, Bi, and Ca. Specifically, the document relates to a method for continuously cooling to a temperature of A1 point or less at cooling rate of 120 °C or less per minute immediately after hot-rolling to be 800~950 °C during a final working temperature, a method for cooling a hot rolled steel material in the air after heating for at least 10 minutes at 800~950 °C, and also a method for preparing a structural member with 20~35 HRB of hardness by cold working or warm working at a temperature of 600 °C or less, preparing a preform, and cooling at the air after hot-forging the preform at 1000 °C~1250 °C. However, the technology is limited to specific steel containing elements that are usually not used, and is not applied to cold forging.

45

[0007] In addition, Japanese Patent Laid-Open Publication No. 2006-118014 provides a method for manufacturing case-hardened steel that is suitable for a bolt, and the like, which suppresses grain coarsening after heat treatment, even if cold formability is excellent and also the working with a high cut rate of expanded line is performed. The method as mentioned above uses the steel material that is composed of C: 0.10~0.25 %, Si: 0.5 % or less (except 0 %), Mn: 0.3~1.0 %, P: 0.03 % or less (except 0 %), S: 0.03 % or less (except 0 %), Cr: 0.3~1.5 %, Al: 0.02~0.1 %, N: 0.005~0.02 %, the remainder Fe, and other inevitable impurities, as a percentage by weight, and the method for manufacturing non-heat treated wire rod with excellent toughness is achieved by performing hot finish rolling or hot finish forging at 700~850

55

°C, then cooling by up to 600 °C at a cooling rate of 0.5 °C/sec or less, and suppressing below 20 % of cut rate of expanded line by cooling to room temperature. The technology as mentioned above is uneconomical due to the use of expensive Cr.

[0008] WO 2008/072 873 discloses a weathering steel which has a high strength and good formability.

[Disclosure]

[Technical Problem]

[0009] An aspect of the present invention provides a rolled steel, a drawn wire rod, and a method for manufacturing the same, and more specifically, a rolled steel with excellent toughness and a drawn wire rod with excellent toughness, and a method for manufacturing the same by securing a de-generated pearlite structure in the rolled steel through the suppression of carbon diffusion by controlling the content of Mn among components and the cooling conditions thereof, even if a heating step is omitted.

[Technical Solution]

[0010] According to an embodiment of the present invention, there is provided a non-heat treated steel with excellent toughness including C: 0.15~0.30 %, Si: 0.1~0.2 %, Mn: 1.8~3.0 %, P: 0.035 % or less, S: 0.040 % or less, the remainder Fe, and other inevitable impurities, as a percentage by weight, in which their microstructure is composed of a pearlite and ferrite.

[0011] The microstructure of the rolled steel is preferably composed of 40~60 % of the pearlite and the remainder ferrite.

[0012] The pearlite preferably includes a cementite with 150 nm or less of its thickness.

[0013] The aspect ratio (width:thickness) of the cementite included in the pearlite is preferably 30:1 or less.

[0014] The cementite included in the pearlite preferably has a discontinuous form.

[0015] The pearlite preferably is de-generated pearlite.

[0016] The rolled steel preferably has 650~750 MPa of a tensile strength and 60~70 % of a reduction in area (RA).

[0017] According to another embodiment of the present invention, there is provided a drawn wire rod that is cold-drawn from the rolled steel and has 800~900 MPa of tensile strength.

[0018] According to another embodiment of the present invention, there is provided a method for manufacturing a non-heat treated rolled steel with excellent toughness, including heating a billet that includes C: 0.15~0.30 %, Si: 0.1~0.2 %, Mn: 1.8~3.0 %, P: 0.035 % or less, S: 0.040 % or less, the remainder Fe, and other inevitable impurities, as a percentage by weight, to the range of $A_{e3}+150\text{ °C}$ ~ $A_{e3}+250\text{ °C}$; primarily cooling the heated billet to the range of $A_{e3}+50\text{ °C}$ ~ $A_{e3}+100\text{ °C}$; manufacturing a rolled steel by rolling the cooled billet at $A_{e3}+50\text{ °C}$ ~ $A_{e3}+100\text{ °C}$; and secondarily cooling the rolled steel up to a temperature of 600 °C or less.

[0019] The heating of the billet in the heating step is preferably performed for 30 minutes to 1 and a half hours.

[0020] The cooling rate in the primary cooling step preferably is in the range of 5~15 °C/s.

[0021] The cooling rate in the secondary cooling step preferably is in the range of 0.5~1.5 °C/s.

[0022] According to another embodiment of the present invention, there is provided a method for manufacturing a non-heat treated rolled steel with excellent toughness including cold drawing the rolled steel.

[Advantageous Effects]

[0023] As set forth above, according to exemplary embodiments of the present invention, the present invention can provide a non-heat treated rolled steel and a drawn wire rod that can secure excellent excellent toughness and cold forgeability, even if a heating step is omitted by preparing a de-generated pearlite in the microstructure of the rolled steel and a drawn wire rod by controlling a cooling rate and increasing the content of Mn without the addition of expensive alloy elements.

[Description of Drawings]

[0024]

FIG. 1 is a SEM photograph showing the microstructure of Inventive Example 1;

FIG. 2 is a SEM photograph showing the microstructure of general pearlite and ferrite;

FIG. 3 is a SEM photograph showing the microstructure of Comparative Example 9, in which a content of Mn exceeds the range that is limited in the present invention; and

FIG. 4 is a SEM photograph showing the microstructure of Comparative Example 1.

[Best Mode]

5 **[0025]** A non-heat treated rolled steel is economical because the method for manufacturing the non-heat treated rolled steel does not include a heat treatment process, such as spheroidization heat treatment, and quenching and tempering after manufacturing a hot rolled steel. Specifically, the present invention provides a method for securing excellent toughness by adding a low price Mn without expensive alloy elements, combined with a proper air-cooled step.

10 **[0026]** The present invention relates to the non-heat treated rolled steel, the drawn wire rod, and the method for manufacturing the same, and more specifically, the non-heat treated rolled steel, the drawn wire rod, and the method for manufacturing the same, in which Mn content in the present invention is greater than the Mn content in the existing non-heat treated steel, and a cooling rate is controlled to maximize the effect of C diffusion control according to the Mn content. The de-generated pearlite is different from the existing pearlite in the rolled steel due to the application of the method as mentioned above, so that the toughness (or impact toughness) of the product can be improved.

15 **[0027]** The rolled steel according to the present invention means a material after rolling billet, and the drawn wire rod means a material after cold drawing.

20 **[0028]** The de-generated pearlite does not have a lamellar structure, but a mixed phase of ferrite and cementite, different from general pearlite, and includes discontinuous and thin cementite. The impact toughness thereof can be increased by forming the de-generated lamellar cementite instead of a lamellar cementite, which is the cause of toughness degradation.

25 **[0029]** Generally, strength and impact toughness tend to be in inverse proportion to each other. For the rolled steel and the drawn wire rod according to the present invention, strength and impact toughness can be improved at the same time by the de-generated pearlite as mentioned above.

30 **[0030]** Hereinafter, the components and composition range of the rolled steel and the drawn wire rod according to the present invention will be described in greater detail.

35 C (Carbon): 0.15~0.30 wt%

40 **[0031]** C is an element improving the strength of the rolled steel. In the case that C content is below 0.15 wt%, the tensile strength of the rolled steel cannot be sufficiently secured after hot rolling. On the other hand, when C content exceeds 0.30 wt%, tendency of forming of ferrite and pearlite microstructure is also increased. Accordingly, more strength than is required is secured, thereby degrading the toughness. Therefore, the C content is limited to 0.15~0.30 wt%.

45 Si (silicon): 0.1~0.2 wt%

50 **[0032]** In the case that Si content is below 0.1 wt%, there is a problem that the strength level that is required for hot rolled steel and the final product cannot be reached. In the case that Si content exceeds 0.2 wt%, formability is deteriorated because of sharply increasing a work-hardening during cold drawing and forging. Therefore, the Si content is limited to 0.1~0.2 wt%.

55 Mn (Manganese): 1.8~3.0 wt%

60 **[0033]** Mn is an element for solid solution strengthening that forms substitutional solid solutions in a matrix. For this reason, Mn is a useful element as it is able to secure strength without any deterioration of toughness. The present invention is characterized by an increase of Mn content as compared to general non-heat treated steel. When Mn content is below 1.8 wt%, there is little effect on the segregation region due to the segregation of Mn, but it is hard to expect the effects of the strength securing and the toughness improving by solid solution strengthening. When Mn content exceeds 3.0 wt%, there is a harmful effect on product properties due to Mn segregation, rather than the effect of solid solution strengthening.

65 **[0034]** Macro-segregation and micro-segregation can easily occur according to segregation mechanism when solidifying steel. Mn segregation promotes a segregation region due to a relatively low diffusion coefficient as compared to other elements, thereby improving hardenability, which is a major cause of forming a core martensite. For this reason as listed above, the core martensite occurs. In this case, the tensile strength is very increased while toughness is sharply decreased.

70 P (phosphorus): 0.035 wt% or less

75 **[0035]** P is an inevitable element present when manufacturing the product. Since it is a major cause of toughness deterioration by segregating into grain boundaries, it is preferable to control the P content to be as low as possible. In theory, it is possible to limit the P content to 0 %, but P is only necessarily added when manufacturing the product. It is

important to control the upper limit, and the upper limit of P content is limited to 0.035 wt%.

S (sulfur): 0.040 wt% or less

5 **[0036]** S is an inevitable element present when manufacturing the product. Since there is a harmful effect on the properties of stress relaxation and delayed fracture resistance due to the formation of sulphide and decreasing the toughness by segregating into grain boundaries as a low melting point element, it is preferable to control S content to be as low as possible. In theory, it is possible to limit the S content to 0 %, but S is only necessarily added when manufacturing the product. It is important to control the situation, and the upper limit of S content is limited to 0.040 wt%.

10 **[0037]** The microstructure of the rolled steel of the present invention is pearlite and ferrite, and a phase fraction of pearlite is 40~60 % and the remainder is ferrite. The pearlite is the de-generated pearlite as mentioned above, and the de-generated pearlite is composed of cementite and ferrite, and is arranged between cementite and ferrite in parallel, but the cementite is discontinuously composed, different from a general pearlite. FIG. 1 is a SEM photograph showing the microstructure of Inventive Example 1 among the Examples of the present invention, and the discontinuous cementite form can be confirmed from FIG. 1.

15 **[0038]** Generally, pearlite may define the structure as an interlamella spacing, i.e., lamella spacing. Preferably, pearlite (de-generated pearlite) in the present invention has 150 nm or less of cementite thickness (interlamella spacing), and 30:1 or less of the mean aspect ratio (width:thickness) of cementite.

20 **[0039]** For the rolled steel with the components, the range of composition, and microstructure as mentioned above, preferably, the intended tensile strength of the rolled steel in the present invention is in the range of 650~750 MPa, and the reduction in area (RA) is 60~70 %. In addition, the drawn wire rod manufactured by cold drawing the rolled steel preferably has 800~900 MPa of tensile strength.

25 **[0040]** Hereinafter, the method for manufacturing the rolled steel and the drawn wire rod according to the present invention will be described in greater detail.

Heating of Billet: $A_{e3}+150\text{ }^{\circ}\text{C}\sim A_{e3}+250\text{ }^{\circ}\text{C}$

30 **[0041]** By heating billet within the temperature range mentioned above, austenite single phase can be maintained, austenite grain coarsening can be prevented, and a remained segregation, carbide, and inclusion can be effectively dissolved. When the heating temperature of the billet exceeds $A_{e3}+250\text{ }^{\circ}\text{C}$, the austenite grain is largely coarsened, so that the wire rod with a high strength and excellent toughness cannot be achieved because the final microstructure formed after cooling has a strong tendency to be coarsened. On the other hand, when a heating temperature of billet is below $A_{e3}+150\text{ }^{\circ}\text{C}$, the effect occurring heating cannot be achieved.

35 **[0042]** When the heating time is below 30 minutes, there is a problem that the overall temperature is not even; when the heating time exceeds 1 and a half hours, the austenite grain is coarsened, and productivity is significantly decreased.

Cooling (Primary): Cooling to $A_{e3}+50\text{ }^{\circ}\text{C}\sim A_{e3}+100\text{ }^{\circ}\text{C}$ at 5~15 $^{\circ}\text{C}/\text{s}$.

40 **[0043]** The cooling rate is limited with the object of minimizing the transformation of microstructure in the cooling step before hot rolling. When the cooling rate before hot rolling is below 5 $^{\circ}\text{C}/\text{s}$, the productivity thereof is reduced, and additional equipment is needed in order to maintain air-cooling. In addition, as in the case of maintaining the heating time for a long period, the strength and toughness of the rolled steel after completing hot rolling can be deteriorated. On the other hand, when the cooling rate exceeds 15 $^{\circ}\text{C}/\text{s}$, the possibility of new microstructures being formed during rolling is increased by increasing the driving force of the transformation of the billet before rolling, and serious problems can be caused, i.e., the rolling temperature should be reset to a lower temperature.

Rolling: $A_{e3}+50\text{ }^{\circ}\text{C}\sim A_{e3}+100\text{ }^{\circ}\text{C}$

50 **[0044]** When the rolling is performed within the range of $A_{e3}+50\text{ }^{\circ}\text{C}\sim A_{e3}+100\text{ }^{\circ}\text{C}$, the appearance of microstructures due to transformation during rolling is suppressed, re-crystallization does not occur, and only sizing rolling is possible. When the rolling temperature is below $A_{e3}+50\text{ }^{\circ}\text{C}$, the intended microstructures in the present invention are difficult to acquire because the rolling temperature is close to the dynamic re-crystallization temperature, and the possibility of securing a general soft ferrite is very high. On the other hand, when the rolling temperature exceeds $A_{e3}+100\text{ }^{\circ}\text{C}$, there is a problem that re-heating is needed after cooling.

55 Cooling (Secondary): Cooling to 600 $^{\circ}\text{C}$ or less at 0.5~1.5 $^{\circ}\text{C}/\text{s}$.

[0045] The cooling rate means a cooling rate that can very effectively produce the de-generated pearlite and prevent

EP 2 462 252 B9

C diffusion by adding Mn. When the cooling rate is below 0.5 °C/s, since the cooling rate is too slow, the lamella or de-generated pearlite cannot be produced, and cementite with a spheroidized form is produced, so that the strength thereof is sharply decreased. In this case, since the toughness becomes very high, it can be effectively applied to other products, but it is not intended for the present invention. However, when the cooling rate exceeds 1.5 °C/s, a low temperature structure, such as martensite/bainite can occur because ferrite/pearlite transformation is delayed due to the improvement of the hardenability by adding Mn.

[0046] After the cooling (Secondary), the drawn wire rod can be produced through general cold drawing.

[0047] Hereinafter, the present invention will be described in detail with reference to the following Examples.

(Example)

[0048] Rolled steels were produced with Steel Types 1 to 9 as described in the following Table 1, according to the manufacturing condition as described in the following Table 2. Steel Types 1-3, Steel Types 8 and 9 were not satisfied with the components and the composition range that were controlled according to the present invention, and Steel types 4-7 were satisfied with the components and the composition range that were controlled according to the present invention.

[0049] In addition, A_{e3} (°C) in each Steel Type were shown in Table 1, and the tensile strength and V-impact toughness of the rolled steel produced according to the manufacturing condition were measured, and then shown in the following Table 2.

[0050] And, SEM photographs of microstructures of Inventive Example 1, Comparative Example 1, and Comparative Example 7 were shown in figures.

[Table 1]

STEEL TYPE	C(WT%)	Si(WT%)	Mn(WT%)	P(WT%)	S(WT%)	A_{e3} (°C)
STEEL TYPE1	0.14	0.11	1.9	0.031	0.023	863
STEEL TYPE2	0.22	0.05	1.8	0.030	0.032	855
STEEL TYPE3	0.21	0.10	1.5	0.031	0.039	851
STEEL TYPE4	0.20	0.10	1.8	0.035	0.040	842
STEEL TYPE5	0.20	0.15	1.9	0.031	0.031	838
STEEL TYPE6	0.26	0.14	2.0	0.021	0.022	836
STEEL TYPE7	0.30	0.20	3.0	0.027	0.039	835
STEEL TYPE8	0.31	0.20	3.4	0.029	0.034	833
STEEL TYPE9	0.35	0.19	2.6	0.029	0.028	829

[Table 2]

		BILLET HEATING TEMPERATURE(°C)	HEATING TIME (MIN)	COOLING RATE(°C/s)	ROLLING TEMP.(°C)	COOLING RATE AFTER ROLLING(°C/s)	TENSILE STRENGTH OF ROLLED STEEL (MPa)	V-IMPACT TOUGHNESS OF ROLLED STEEL (J)
INVENTIVE EXAMPLE 1	STEEL TYPE4	1082	80	9.7	989	1.3	652	256
COMPARATIVE EXAMPLE 1	STEEL TYPE4	1090	62	13.2	956	0.2	531	326
INVENTIVE EXAMPLE 2	STEEL TYPE4	1015	71	11.9	978	0.5	653	261
INVENTIVE EXAMPLE 3	STEEL TYPE4	1065	65	10.2	988	0.9	676	235
INVENTIVE EXAMPLE 4	STEEL TYPE4	1011	88	9.6	990	1.5	681	221
COMPARATIVE EXAMPLE 2	STEEL TYPE4	1083	78	13.9	991	2.3	897	32
INVENTIVE EXAMPLE 5	STEEL TYPE5	1038	19	10.2	972	0.8	663	248
COMPARATIVE EXAMPLE 3	STEEL TYPE5	1082	82	11.7	965	0.3	546	365
INVENTIVE EXAMPLE 6	STEEL TYPE5	1053	82	12.4	978	0.6	659	223
INVENTIVE EXAMPLE 7	STEEL TYPE5	1065	89	10.2	981	1.1	675	232
COMPARATIVE EXAMPLE 4	STEEL TYPE5	1071	79	9.1	980	1.7	873	41
COMPARATIVE EXAMPLE 5	STEEL TYPE5	1069	80	14.2	968	1.9	901	15
COMPARATIVE EXAMPLE 6	STEEL TYPE1	1063	82	7.5	1005	0.6	520	340

5
10
15
20
25
30
35
40
45
50
55

(continued)

		BILLET HEATING TEMPERATURE(°C)	HEATING TIME (MIN)	COOLING RATE(°C/s)	ROLLING TEMP.(°C)	COOLING RATE AFTER ROLLING(°C/s)	TENSILE STRENGTH OF ROLLED STEEL (MPa)	V-IMPACT TOUGHNESS OF ROLLED STEEL (J)
COMPARATIVE EXAMPLE 7	STEEL TYPE2	1055	89	8	998	0.9	558	352
COMPARATIVE EXAMPLE 8	STEEL TYPE3	1051	75	9.3	965	1.2	589	312
INVENTIVE EXAMPLE 8	STEEL TYPE6	1036	88	10.6	976	0.7	678	252
INVENTIVE EXAMPLE 9	STEEL TYPE7	1035	71	9.5	962	1.1	102	234
COMPARATIVE EXAMPLE 9	STEEL TYPE8	1033	69	12.1	980	1.0	892	46
COMPARATIVE EXAMPLE 10	STEEL TYPE9	1029	68	11.5	968	0.9	920	13

[0051] In Comparative Examples 1 and 3, the de-generated pearlite could not be produced because the cooling rate after rolling was low, and cementite with a spheroidized form was produced, thereby decreasing strength. In addition, the photograph of the microstructure of the Comparative Example 1 was shown in FIG. 4, and the spheroidized cementite could be confirmed through FIG. 4. In Comparative Examples 2, 4 and 5, the cooling rate after rolling was high, so that the low temperature structure could occur, thereby deteriorating toughness.

[0052] In Comparative Example 6, the tensile strength after rolling could not be sufficiently secured because the C content was low. In Comparative Example 7, sufficient strength could not be secured because the Si content was low. In Comparative Example 8, the improvement of the strength by solid-solution strengthening was difficult because Mn content was low. It could be confirmed that the low temperature structure could occur due to a high Mn content, so that the toughness was sharply decreased in Comparative Example 9. The low temperature structure could be confirmed through FIG. 3. In Comparative Example 10, the C content was high, and the formation of a general ferrite and pearlite microstructure was strong, so that the strength was improved, but the toughness was reduced.

[0053] On the other hand, in Inventive Examples 1 to 9, the tensile strength of the rolled steel was in the range of 650~750 MPa, and V-impact toughness value, the impact toughness was 221-261J, and it could be confirmed that the tensile strength and toughness were excellent. For this reason, the proper tensile strength and excellent toughness could be secured by controlling the components, the composition range, and the manufacturing conditions.

Claims

1. A non-heat treated rolled steel with excellent toughness, comprising C: 0.15~0.30 %, Si: 0.1~0.2 %, Mn: 1.8~3.0 %, P: 0.035 % or less, S: 0.040 % or less, the remainder Fe, and other inevitable impurities, as a percentage of weight, wherein microstructures in the non-heat treated rolled steel are composed of pearlite and ferrite.
2. The non-heat treated rolled steel with excellent toughness of claim 1, wherein the microstructures of the rolled steel are composed of 40~60 % of pearlite and the remainder ferrite.
3. The non-heat treated rolled steel with excellent toughness of claim 1, wherein the pearlite includes cementite with 150 nm or less of thickness.
4. The non-heat treated rolled steel with excellent toughness of claim 1, wherein an aspect ratio (width:thickness) of the cementite included in the pearlite is 30:1 or less.
5. The non-heat treated rolled steel with excellent toughness of claim 1, wherein the cementite included in the pearlite has a discontinuous form.
6. The non-heat treated rolled steel with excellent toughness of claim 1, wherein the pearlite is a de-generated pearlite.
7. The non-heat treated rolled steel with excellent toughness of claim 1, wherein the rolled steel has 650~750 MPa of a tensile strength and 60~70 % of a reduction in area (RA).
8. A non-heat treated drawn wire rod with excellent toughness produced by cold drawing the rolled steel of any one of claims 1 to 7, wherein the drawn wire rod has 800~900 MPa of a tensile strength.
9. A method for manufacturing a non-heat treated rolled steel with excellent toughness, comprising:
 - heating a billet that includes C: 0.15~0.30 %, Si: 0.1~0.2 %, Mn: 1.8~3.0 %, P: 0.035 % or less, S: 0.040 % or less, the remainder Fe, and other inevitable impurities, as a percentage of weight, to the range of $A_{e3}+150$ °C~ $A_{e3}+250$ °C;
 - primarily cooling the heated billet to the range of $A_{e3}+50$ °C~ $A_{e3}+100$ °C ;
 - manufacturing the rolled steel by rolling the cooled billet at $A_{e3}+50$ °C~ $A_{e3}+100$ °C; and
 - secondarily cooling the rolled steel to a temperature of 600 °C or less.
10. The method for manufacturing a non-heat treated rolled steel with excellent toughness of claim 9, wherein the heating of the billet in the heating step is performed for 30 minutes to 1 and a half hours.
11. The method for manufacturing a non-heat treated rolled steel with excellent toughness of claim 9, wherein the cooling rate in the first cooling step is in the range of 5~15 °C/s.

12. The method for manufacturing a non-heat treated rolled steel with excellent toughness of claim 9, wherein the cooling rate in the secondary cooling step is in the range of 0.5~1.5 °C/s.
13. A method for manufacturing a non-heat treated drawn wire rod with excellent toughness, comprising: cold drawing the rolled steel of any one of claims 9 to 12.


Patentansprüche

1. Nicht wärmebehandelter Walzstahl mit ausgezeichneter Zähigkeit, der C: 0,15 ~ 0,30%, Si: 0,1 ~ 0,2%, Mn: 1,8 ~ 3,0%, P 0,035% oder weniger, S: 0,040% oder weniger, den Rest Fe und andere unvermeidbare Fremdstoffe als Gewichtsprozent umfasst, wobei sich Mikrostrukturen im nicht wärmebehandelten Walzstahl aus Perlit und Ferrit zusammensetzen.
2. Nicht wärmebehandelter Walzstahl mit ausgezeichneter Zähigkeit nach Anspruch 1, wobei sich die Mikrostrukturen des Walzstahls aus 40 ~ 60% Perlit zusammensetzen und der Rest Ferrit ist.
3. Nicht wärmebehandelter Walzstahl mit ausgezeichneter Zähigkeit nach Anspruch 1, wobei der Perlit Zementit mit einer Dicke von 150 nm oder weniger enthält.
4. Nicht wärmebehandelter Walzstahl mit ausgezeichneter Zähigkeit nach Anspruch 1, wobei ein Seitenverhältnis (Breite:Dicke) des im Perlit enthaltenen Zementits 30:1 oder weniger beträgt.
5. Nicht wärmebehandelter Walzstahl mit ausgezeichneter Zähigkeit nach Anspruch 1, wobei der im Perlit enthaltene Zementit eine diskontinuierliche Form hat.
6. Nicht wärmebehandelter Walzstahl mit ausgezeichneter Zähigkeit nach Anspruch 1, wobei es sich bei dem Perlit um einen degenerierten Perlit handelt.
7. Nicht wärmebehandelter Walzstahl mit ausgezeichneter Zähigkeit nach Anspruch 1, wobei der Walzstahl eine Zugfestigkeit von 650 ~ 750 MPa und eine Flächenreduktion (RA, *reduction in area*) von 60 ~ 70% hat.
8. Nicht wärmebehandelter, gezogener Walzdraht mit ausgezeichneter Zähigkeit, der durch Kaltziehen des Walzstahls nach einem der Ansprüche 1 bis 7 hergestellt ist, wobei der gezogene Walzdraht eine Zugfestigkeit von 800 ~ 900 MPa hat.
9. Verfahren zum Herstellen eines nicht wärmebehandelten Walzstahls mit ausgezeichneter Zähigkeit, Folgendes umfassend:
 Erhitzen eines Vorblocks, der C: 0,15 ~ 0,30%, Si: 0,1 ~ 0,2%, Mn: 1,8 ~ 3,0%, P 0,035% oder weniger, S: 0,040% oder weniger, den Rest Fe und andere unvermeidbare Fremdstoffe als Gewichtsprozent umfasst, auf einen Bereich von $A_{e3}+150^{\circ}\text{C} \sim A_{e3}+250^{\circ}\text{C}$;
 primäres Abkühlen des erhitzten Vorblocks auf einen Bereich von $A_{e3}+50^{\circ}\text{C} \sim A_{e3}+100^{\circ}\text{C}$;
 Herstellen des Walzstahls durch Walzen des abgekühlten Vorblocks bei $A_{e3}+50^{\circ}\text{C} \sim A_{e3}+100^{\circ}\text{C}$; und
 sekundäres Abkühlen des Walzstahls auf eine Temperatur von 600°C oder weniger.
10. Verfahren zum Herstellen eines nicht wärmebehandelten Walzstahls mit ausgezeichneter Zähigkeit nach Anspruch 9, wobei das Erhitzen des Vorblocks im Erhitzungsschritt 30 Minuten bis 1 1/2 Stunden lang erfolgt.
11. Verfahren zum Herstellen eines nicht wärmebehandelten Walzstahls mit ausgezeichneter Zähigkeit, nach Anspruch 9, wobei die Abkühlrate im ersten Abkühlschritt im Bereich von 5 ~ 15°C/s liegt.
12. Verfahren zum Herstellen eines nicht wärmebehandelten Walzstahls mit ausgezeichneter Zähigkeit, nach Anspruch 9, wobei die Abkühlrate im sekundären Abkühlschritt im Bereich von 0,5 ~ 1,5°C/s liegt.
13. Verfahren zum Herstellen eines nicht wärmebehandelten, gezogenen Walzdrahts mit ausgezeichneter Zähigkeit, Folgendes umfassend: Kaltziehen des Walzstahls nach einem der Ansprüche 9 bis 12.


Revendications

- 5 1. Acier laminé non traité thermiquement doté d'une excellente ténacité, comprenant du C : 0,15 ~ 0,30 %, du Si : 0,1 ~ 0,2 %, du Mn : 1,8 ~ 3,0 %, du P : 0,035 % ou moins, du S : 0,040 % ou moins, le reste de Fe, et d'autres impuretés inévitables, en pourcentage de poids, sachant que des microstructures dans l'acier laminé non traité thermiquement sont composées de perlite et de ferrite.
- 10 2. L'acier laminé non traité thermiquement doté d'une excellente ténacité de la revendication 1, dans lequel les microstructures de l'acier laminé sont composées de 40 ~ 60 % de perlite et le reste de ferrite.
- 15 3. L'acier laminé non traité thermiquement doté d'une excellente ténacité de la revendication 1, dans lequel la perlite comprend de la cémentite de 150 nm d'épaisseur ou moins.
- 20 4. L'acier laminé non traité thermiquement doté d'une excellente ténacité de la revendication 1, dans lequel un rapport d'aspect (largeur:épaisseur) de la cémentite comprise dans la perlite est de 30:1 ou moins.
- 25 5. L'acier laminé non traité thermiquement doté d'une excellente ténacité de la revendication 1, dans lequel la cémentite comprise dans la perlite a une forme discontinue.
- 30 6. L'acier laminé non traité thermiquement doté d'une excellente ténacité de la revendication 1, dans lequel la perlite est une perlite dégénérée.
- 35 7. L'acier laminé non traité thermiquement doté d'une excellente ténacité de la revendication 1, dans lequel l'acier laminé a 650 ~ 750 MPa de résistance à la traction et 60 ~ 70 % de réduction de surface (RA, *reduction in area*).
- 40 8. Fil machine étiré non traité thermiquement doté d'une excellente ténacité, produit par étirage à froid de l'acier laminé de l'une quelconque des revendications 1 à 7, dans lequel le fil machine étiré présente une résistance à la traction de 800 ~ 900 MPa.
- 45 9. Procédé de fabrication d'un acier laminé non traité thermiquement doté d'une excellente ténacité, comprenant :
 - le chauffage d'une billette comprenant du C : 0,15 ~ 0,30 %, du Si : 0,1 ~ 0,2 %, du Mn : 1,8 ~ 3,0 %, du P : 0,035 % ou moins, du S : 0,040 % ou moins, le reste de Fe, et d'autres impuretés inévitables, en pourcentage de poids, à la plage de $A_{e3}+150\text{ °C} \sim A_{e3}+250\text{ °C}$;
 - le refroidissement primaire de la billette chauffée à la plage de $A_{e3}+50\text{ °C} \sim A_{e3}+100\text{ °C}$;
 - la fabrication de l'acier laminé par laminage de la billette refroidie à $A_{e3}+50\text{ °C} \sim A_{e3}+100\text{ °C}$; et
 - le refroidissement secondaire de l'acier laminé à une température de 600 °C ou moins.
- 50 10. Le procédé de fabrication d'un acier laminé non traité thermiquement doté d'une excellente ténacité de la revendication 9, dans lequel le chauffage de la billette à l'étape de chauffage est effectué pendant une période de 30 minutes à 1 heure et demie.
- 55 11. Le procédé de fabrication d'un acier laminé non traité thermiquement doté d'une excellente ténacité de la revendication 9, dans lequel le taux de refroidissement à la première étape de refroidissement est situé dans la plage de 5~15 °C/s.
12. Le procédé de fabrication d'un acier laminé non traité thermiquement doté d'une excellente ténacité de la revendication 9, dans lequel le taux de refroidissement à l'étape de refroidissement secondaire est situé dans la plage de 0,5 ~ 1,5 °C/s.
13. Procédé de fabrication d'un fil machine étiré non traité thermiquement doté d'une excellente ténacité, comprenant : l'étirage à froid de l'acier laminé de l'une quelconque des revendications 9 à 12.


[Fig. 1]

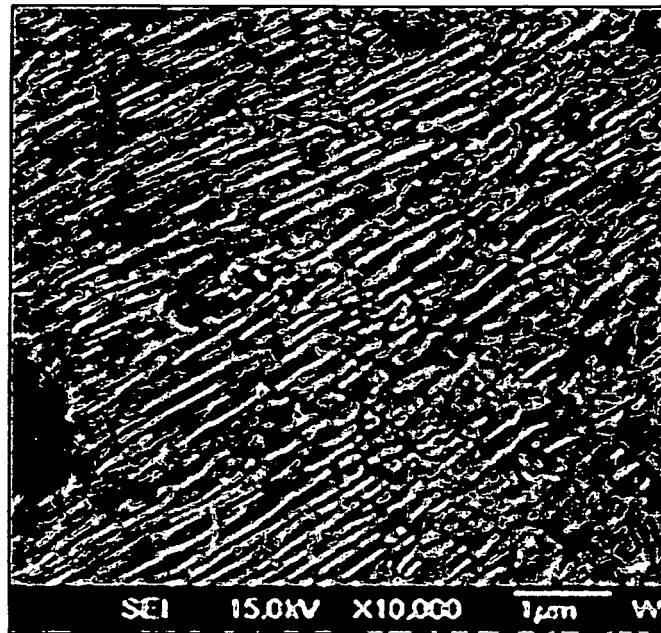


[Fig. 2]

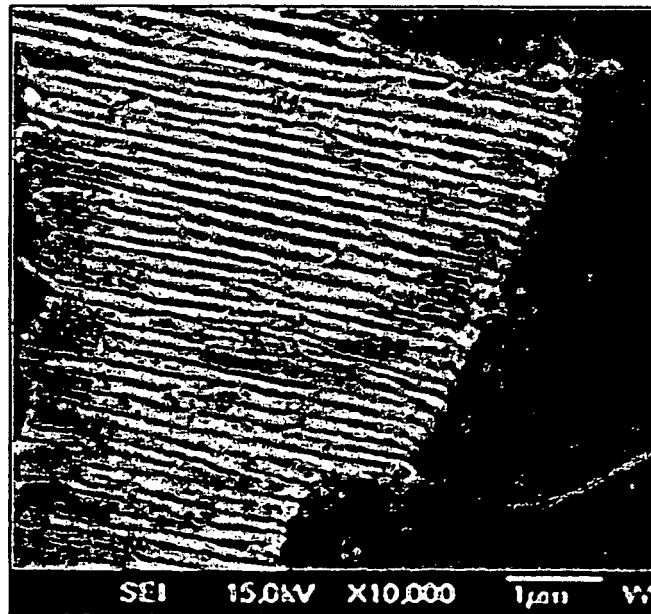

[Fig. 3]

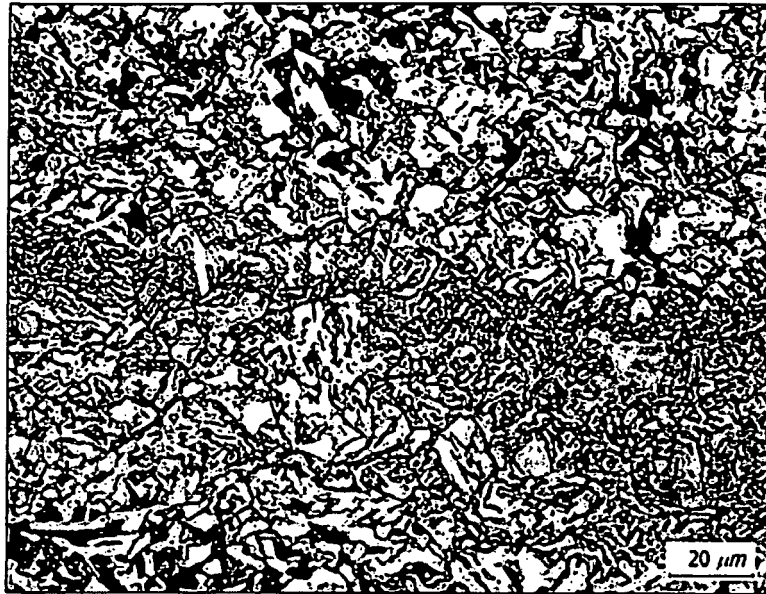

[Fig. 4]

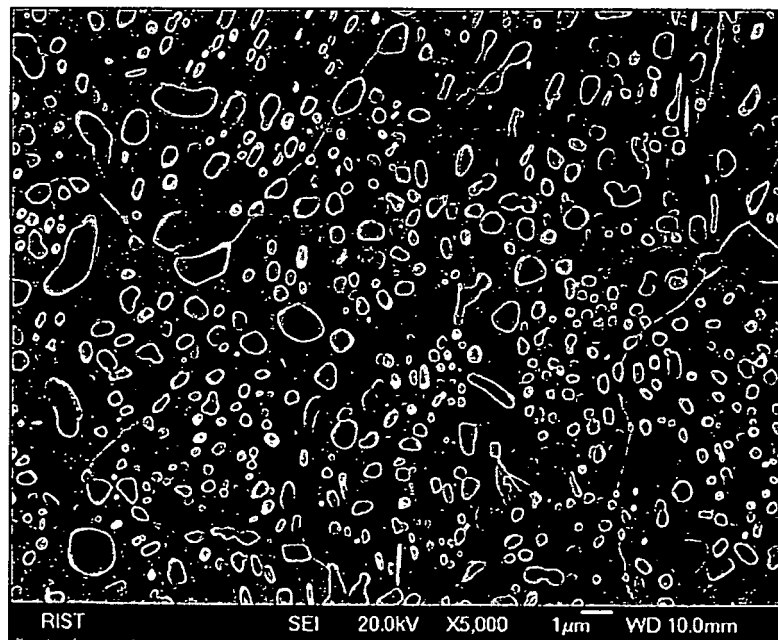

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 7054040 A [0005]
- JP 10008209 A [0006]
- JP 2006118014 A [0007]
- WO 2008072873 A [0008]