

(19)



(11)

EP 2 463 443 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
21.05.2014 Bulletin 2014/21

(51) Int Cl.:
E02D 3/12 (2006.01) E02D 5/46 (2006.01)

(21) Application number: **11193013.7**

(22) Date of filing: **12.12.2011**

(54) Injection head for injecting consolidating pressurized fluid mixtures into the ground

Einspritzkopf zum Einspritzen konsolidierender unter Druck stehender Flüssiggemische in den Boden

Tête d'injection pour l'injection de mélanges de fluide pressurisés de consolidation dans le sol

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **13.12.2010 IT TO20100988**

(43) Date of publication of application:
13.06.2012 Bulletin 2012/24

(73) Proprietor: **Soilmec S.p.A.
47522 Cesena (IT)**

(72) Inventor: **Biserna, Ezio
I-47020 BUDRIO DI LONGIANO (Forlì Cesena) (IT)**

(74) Representative: **Fioravanti, Corrado et al
Jacobacci & Partners S.p.A.
Corso Emilia 8
10152 Torino (IT)**

(56) References cited:
**EP-A1- 1 231 326 WO-A1-2009/136237
JP-A- 2002 121 987 US-A- 5 228 809**

EP 2 463 443 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a high-efficiency injection head for injecting consolidating pressurized fluid mixtures into the ground in order to form consolidated soil portions.

[0002] It is known, in jet grouting methods, that the injection head (commonly referred to as a "monitor") is fixed in the proximity of the lower end of a string of tubular rods which is rotated and withdrawn towards the surface. The monitor has radial nozzles of small dimensions, through which consolidating fluid mixtures are injected into the ground.

[0003] The consolidating mixtures are fed to the monitor through a relatively wide duct inside the rods. In the monitor, the fluid is diverted orthogonally from the vertical, axial direction to a transverse direction, generally a radial direction or a secant direction, in narrower ducts to the nozzles. An abrupt change in direction, associated with a simultaneous variation in the duct cross section, creates a highly turbulent motion in the flow. This brings about a high head loss, right in the proximity of the outlet from the nozzles, where the velocity of the flow is at a maximum. The high outlet turbulence prevents the flow from leaving the nozzles in an ordered manner, or rather with the velocity vector of the single particle of fluid oriented according to the main axis of each nozzle and with the maximum energy.

[0004] In the jet grouting sector, there is a need to minimize the head loss of the fluid within the monitor in order to maximize the kinetic energy of the fluid leaving the nozzles and therefore increase the radius of the column of consolidated soil.

[0005] Monitors have been proposed having inner ducts which are configured in different ways so as to divert the consolidating mixture from a vertical, upper duct, which communicates with the tubular rod directly above, to the side nozzles. Provision is generally made of one or more curved ducts which convey the fluid streams along a path having a gradual change in direction, thereby reducing turbulence. US-A-5228809 discloses a monitor with an inner duct of constant cross section and regular curvature, the median axis of which lies in a vertical plane and extends from an upper, eccentric or peripheral position with respect to the central, vertical axis of the monitor to an obliquely inclined side nozzle. EP-1396585-B1 provides a gradually tapered, variable curvature inner duct, the median axis of which lies in a vertical plane and extends from an upper, central position, aligned with the central, vertical axis of the monitor, to an obliquely inclined side nozzle. The monitor described in EP-1231326-B1 has one or more helical inner ducts of a regularly tapered variable cross section for conveying the flow from the area of the central axis of the monitor to one or more side nozzles.

[0006] Italian patent application TO2010A000613, not yet published on the filing/priority date of the present application, describes a monitor having helical inner ducts

which each connect the upper inlet of the monitor to a respective outlet side nozzle. Each helical duct is gradually tapered three-dimensionally towards the nozzle and has a central helical line of a constant radius; the pitch of the helix gradually decreases from the upper inlet to the outlet nozzle. Although this monitor has a high efficiency, it has a somewhat complex shape which requires expensive production processes inasmuch as the helical ducts have to respect precise geometrical demands; use is made of three-dimensional numerical control machines or production is carried out by fusion.

[0007] It is an object of the present invention to provide a monitor which is able to reconcile the need to achieve an excellent result in terms of high efficiency (thus avoiding abrupt variations in cross section and in direction of the flow within the monitor) with the need to simplify the design and reduce the costs for producing the monitor.

[0008] These and other objects and advantages, which will be understood more fully from the text which follows, are achieved according to the present invention by an injection head or monitor as defined in Claim 1. Preferred embodiments of the invention are defined in the dependent claims, the content of which should be regarded as an integral and complementary part of the present description.

[0009] A preferred but non-limiting embodiment of the invention will now be described with reference to the appended drawings, in which:

Figure 1 is a sectional view according to a vertical plane parallel to the central, longitudinal axis of a monitor according to a preferred embodiment of the invention;

Figure 2 is a view in axial section of the monitor shown in Figure 1;

Figure 3 is a partial perspective view of the monitor shown in section in Figure 2;

Figures 4 to 10 show the outer body of the monitor shown in Figures 1 to 3;

Figure 4 is a top view of the outer body of the monitor shown in Figures 1-3;

Figure 5 is a view in axial section along line A-A in Figure 4;

Figure 6 is a sectional view along line A1-A1 in Figure 4;

Figure 7 is a sectional view along line A2-A2 in Figure 4;

Figure 8 is a sectional view along line A3-A3 in Figure 4;

Figure 9 is a partial perspective view of the body shown in section along line B-B in Figure 4;

Figure 10 is a partial perspective view of the body shown in section along line A-A in Figure 4;

Figures 11 and 12 are perspective views, from different angles, of a subassembly which is inserted in the outer body shown in Figures 4-10; and

Figure 13 is an elevated view, partially in section according to a vertical plane parallel to the central,

vertical axis of the subassembly shown in Figures 11 and 12.

[0010] Before illustrating in detail an embodiment of the invention, it must be remembered that this is not limited, in terms of its application, to the details and to the configuration of the components mentioned in the description or shown in the drawings. The invention may be implemented in various ways. It must be understood that the phrases and terms which are used here purely for descriptive purposes must not be regarded as having a limiting effect. The use of terms and expressions such as "vertical", "transverse", "upstream" or "downstream" is interpreted in relation to the appended drawings or in relation to the direction of the flow of fluid mixture, or in relation to a generic condition of use in which the monitor produces a vertical column of consolidated soil.

[0011] With reference to the drawings, an injection head or monitor is denoted in its entirety by 10, said injection head or monitor serving to deliver a pressurized jet of a consolidating fluid mixture, usually a cement mixture, through one or more side nozzles 11 in order to break up the surrounding ground and consolidate it. The monitor comprises an externally cylindrical body 12, having an internal cavity which runs in the longitudinal direction and has a variable shape, as described hereinbelow.

[0012] The upper end of the monitor 10 can be connected, by means of an upper thread 16, to a string of tubular rods (not shown) in order to move the monitor in the vertical and rotate it about the central, longitudinal axis z for carrying out a jet grouting process.

[0013] The first upper section of the through cavity forms an inlet duct 13 with a large circular cross section, similar to the cross section of the tubular rods of the overlying string. Conveyed through the inlet duct 13 into the monitor are both the consolidating pressurized mixture to be delivered to the side injection nozzles and the drilling liquid which serves to lubricate a drilling tool or bit (not shown) mountable on the lower end of the monitor, where a downwardly open threaded chamber 15 is provided. The drilling liquid is conveyed through a central duct 14, coaxially inside the cylindrical body 12, from the upper inlet 13 to the lower threaded chamber 15, which is in fluid communication with the drilling tool. The top of the central duct 14 is associated with a valve (not shown), which is housed in the conical seat made in the top terminal section of the duct 14 and which serves to automatically obstruct said duct 14 when the consolidating mixture is injected.

[0014] Immediately downstream of the inlet duct 13, the cavity of the body 12 is subdivided into two duct sections 17a, 17b which are shaped as inverted half-cones, are side by side longitudinally and have respective straight or substantially straight axes. Each duct section 17a, 17b has a semicircular inlet section 18a, 18b (Figure 4) which tapers linearly downwards as far as a respective circular outlet section 19a, 19b, which is axially offset or near the periphery of the body 12 as far as possible.

[0015] In the embodiment shown, the ducts 17a, 17b are obtained from solid, in one piece with the body 12; according to an alternative embodiment (not shown), said ducts are made up of one or more metal inserts fitted in the cylindrical cavity of the body 12. In this example, said body 12 also forms a tubular portion 141 constituting the upper section of the central duct 14 for the drilling liquid. Two inner axial bulkheads 142, 143, formed in one piece with the body 12, connect the tubular portion 141 to the cylindrical outer wall of the body 12 in a stable manner and separate the tapered duct sections 17a, 17b.

[0016] The upper entrance of a respective rigid helical tube 20a, 20b which terminates in the nozzle 11 and imparts to the fluid running through it a helical motion around the longitudinal axis Z towards the nozzle engages next to each of the outlet sections 19a, 19b. Each helical tube is oriented vertically in the area in which it is connected to the respective duct 17a, 17b. In the area in which they are connected to the nozzles, the helical tubes are oriented horizontally in horizontal directions so as to form secants (i.e. in the direction of a chord) with respect to the circular transverse cross section of the cylindrical body 12. In this example, there are two nozzles for directing respective jets of consolidating mixture which are balanced with respect to the central axis and offset at an angle of 180 degrees.

[0017] As shown in Figures 11—13, in order to simplify the assembly and the precise hydraulic connection of the tubes 20 to the outlet sections 19 of the conical ducts 17, the upper ends of the helical tubes 20 are locked in an annular disc 21, which has a central through bore 22 for the central duct 14 and two diametrically opposite through bores 23a, 23b, in which the respective tubes 20a, 20b are locked. The tops of the tubes 20a, 20b are provided with outer sealing elements (O rings) which engage sealingly in respective widened cylindrical seats 24a, 24b, which are formed immediately downstream of the outlet sections 19a, 19b, in order to improve the tightness and the stability of the hydraulic connection.

[0018] The central tubular portion 141 terminates inferiorly at the level of the widened seats 24a, 24b, and therefore below this level the inner cavity of the body 12 forms a cylindrical chamber 26 which is delimited laterally by the cylindrical inner wall of the body 12.

[0019] At the bottom, the helical tubes 20a, 20b are connected to respective tubular inserts 27 which are made of a wear-resistant metal material and each of which is fixed in a secant through bore 28 of a bushing 29, the external diameter of which corresponds to the internal diameter of the chamber 26 and to the diameter of the annular disc 21.

[0020] Figures 11-13 independently show a rigid subassembly consisting of the tubes 20a, 20b locked at the top in the disc 21 and fixed inferiorly to the inserts 27 and to the bushing 29. Said subassembly is preassembled separately and then fitted from below as one piece in the chamber 26 of the body 12. The angular orientation assumed by the subassembly when the tubes 20a, 20b

engage in the widened seats 24a, 24b corresponds to the angular position of alignment of the axes of the tubular inserts 27 with the nozzle openings 11 made in the cylindrical outer wall of the body 12.

[0021] This is followed by the engagement of a central lower tube 144, which connects to the bottom of the tubular portion 141 and completes the central duct 14 for the drilling liquid. An annular lower disc 30, the diameter of which corresponds to that of the cylindrical inner chamber 26, hermetically closes the chamber 26 containing the subassembly formed by the bushing with the helical tubes and the upper disc. The lower disc is locked axially in the chamber 26 by means of a circlip 31, and thus constitutes an axial lower shoulder both for the above-mentioned subassembly and for the central lower tube 144. Finally, the lower threaded block 32 is fitted into the bottom of the body 12, said block having the threaded chamber 15 onto which the excavation tool (for example a triblade, a drilling bit or a tricone) is screwed.

[0022] The helical tubes 20a, 20b may advantageously be commercially available metal tubes which merely need to be twisted like a helix with a curvature such as to make them rest laterally against the inner surface of the cylindrical chamber. It will be seen that this configuration imparts to the helical tubes the maximum helical radius which can be contained in the cylindrical chamber 26, consequently minimizing the head losses.

[0023] Most of the monitors of the known type, as mentioned in the introduction, simultaneously impart to the fluid entering the monitor an acceleration and a variation in direction, simultaneously combining a gradual reduction in cross section and a diversion in accordance with a helical or else curved path. According to the present invention, however, the fluid is initially accelerated upstream without significantly diverting the flow. This is achieved by the conical duct sections having straight axes, which are relatively simple to design. The diversion from the vertical direction to the horizontal direction for leaving the nozzles is imparted more downstream, in an economical manner, by means of commercial cylindrical tubing of constant circular cross section. It is not necessary for the helical tubing to have a decreasing cross-sectional area, since the flows have already been accelerated in the ducts shaped like an inverted cone. It is important to note that the diversion of the flows takes place starting from (two) points which are as close as possible to the peripheral wall of the inner cavity of the monitor, i.e. at a long distance from the central axis. Proceeding from these eccentric positions, the radii of curvature of the ducts which convey the flows to the nozzles will become greater and, as a result, the ducts will produce smaller head losses compared to the monitors which draw the flow from the central area. It will be understood that the monitor of the present invention represents a compromise between design simplicity, limited costs and high performance.

[0024] The form, the dimensions and the design and operational details of the monitor can differ markedly from

the embodiment described and illustrated in the appended drawings. In particular, the number of nozzles and consequently the number of ducts inside the monitor into which the flow entering the monitor is distributed may differ from two.

Claims

1. An injection head (10) for injecting consolidating pressurized fluid mixtures into the ground in order to form consolidated soil portions, the head including:
 - a cylindrical outer body (12) defining a central, longitudinal axis (z) and having an internal, longitudinally extending through cavity;
 - an upper inlet (13) for receiving fluids from a string of tubular rods mountable above the head;
 - at least one outlet side nozzle (11) lying in a plane perpendicular to or slanting with respect to the longitudinal axis (z);
 - at least one helical duct (20a, 20b) terminating in the nozzle (11) and imparting to the fluid running through it a helical motion around the longitudinal axis (z) towards the nozzle (11);

characterized in that the head includes at least one gradually downwardly tapered duct section (17a, 17b) connecting the upper inlet (13) to the helical duct (20a, 20b), wherein the tapered duct (17a, 17b) has a substantially straight geometric axis and is connected to the helical duct at a location (19a, 19b) axially offset from the central, longitudinal axis (z) and near the periphery of the body (12).
2. An injection head according to claim 1, **characterized in that** the helical duct (20a, 20b) is formed by at least one tube of uniform cross section.
3. An injection head according to claim 1 or 2, comprising at least two of said outlet nozzles (11) and **characterized in that** the number of the helical ducts (20a, 20b) and the number of the tapered ducts (17a, 17b) correspond to the number of nozzles (11).
4. An injection head according to claim 2, **characterized in that** an upper portion of the or each helical tube (20a, 20b) is locked in a respective axially offset through bore (23a, 23b) formed in a disc (21) mounted in the cavity of the body (12), the disc having an outer edge in contact with a cylindrical surface of an inner chamber (26) of the body (12).
5. An injection head according to claim 2 or 4, **characterized in that** the top portion of the or each helical tube (20a, 20b) is sealingly engaged in a cylindrical seat (24a, 24b) constituting a widening of the lower section (19a, 19b) of the respective tapered duct

(17a, 17b).

6. An injection head according to any of the preceding claims, **characterized in that** the tapered ducts (17a, 17b) are integral with or secured to the outer body (12).
7. An injection head according to claim 6, **characterized in that** the tapered ducts (17a, 17b) are formed in one piece with the body (12).
8. An injection head according to claim 7, **characterized in that** the body (12) also forms a central, longitudinal tubular portion (141) forming at least an upper section of a duct (14) running coaxially to the center of the cylindrical body (12) from the upper inlet (13) to a bottom, downwardly open chamber (15).
9. An injection head according to claims 4, 7 and 8, **characterized in that** the disc (21) is an annular disc providing a central through bore (22) which accommodates a tube (144) or a tubular portion (141) being part of the outer body (12) and forming a section of the central duct (14).
10. An injection head according to claims 5 and 8, **characterized in that** the central tubular portion (141) has a lower end at the level of the widened cylindrical seats (24a, 24b) and below this level the body (12) forms a cylindrical chamber (26) which is delimited laterally by the cylindrical outer wall of the body (12).
11. An injection head according to any of the preceding claims as dependent on claim 2, **characterized in that** the helical tube or tubes (20a, 20b) are adjacent to the inner cylindrical surface of a cylindrical chamber (26) delimited laterally by the cylindrical outer wall of the body (12).
12. An injection head according to claims 2 and 11, **characterized in that** the helical tube or tubes (20a, 20b) have lower ends connected to a respective metal tubular insert (27) fixed in a through bore (28) of a bushing (29) the external diameter of which corresponds to the diameter of the chamber (26).
13. An injection head according to claims 2, 4 and 12, **characterized in that** the subassembly consisting of the helical tube or tubes (20a, 20b) connected inferiorly to the respective tubular insert (27), the bushing (29) and the annular disc (21) securing the upper parts of the helical tube or tubes constitutes a substantially rigid subassembly fitted into the chamber (26).
14. An injection head according to claim 1, **characterized in that** the tapered duct sections are shaped

as inverted cone sectors.

15. An injection head according to claim 2, **characterized in that** the duct (17a, 17b) is tapered to accelerate the fluid passing through it and the duct (20a, 20b) has a constant transversal cross section for conveying the accelerated fluid down to the nozzle (11).
16. An injection head according to any of the preceding claims, **characterized in that** the at least one tapered duct section (17a, 17b) is upstream, whereas the helical duct (20a, 20b) is downstream of the respective tapered duct section (17a, 17b).

Patentansprüche

1. Einspritzkopf (10) zum Einspritzen konsolidierender bzw. sich verfestigender unter Druck stehender Fluidgemische in den Boden, um verfestigte Bodenabschnitte zu bilden, wobei der Kopf umfasst:

- einen zylindrischen Außenkörper (12), der eine zentrale Längsachse (z) definiert und ein Inneres hat, das sich längs durch den Hohlraum erstreckt;
- einen oberen Einlass (13) zum Aufnehmen von Fluiden aus einem Rohrgestänge, das über dem Kopf montierbar ist,
- wenigstens eine auslassseitige Düse (11), die in einer Ebene senkrecht oder schräg stehend in Bezug auf die Längsachse (z) liegt;
- wenigstens ein spiralförmiger Kanal (20a, 20b), welcher in der Düse (11) endet und welcher dem durch ihn laufenden Fluid eine spiralförmige Bewegung um die Längsachse (z) in Richtung der Düse (11) verleiht;

dadurch gekennzeichnet, dass der Kopf wenigstens einen nach unten allmählich konisch zulaufenden Kanalabschnitt (17a, 17b) umfasst, der den oberen Einlass (13) mit dem spiralförmigen Kanal (20a, 20b) verbindet, wobei der konisch zulaufende Kanal (17a, 17b) eine im Wesentlichen gerade geometrische Achse hat und mit dem spiralförmigen Kanal an einer Stelle (19a, 19b) verbunden ist, die von der zentralen Längsachse (z) axial versetzt und nahe dem Umfang des Körpers (12) ist.

2. Einspritzkopf nach Anspruch 1, **dadurch gekennzeichnet, dass** der spiralförmige Kanal (20a, 20b) durch wenigstens ein Rohr mit gleichmäßigem Querschnitt ausgebildet ist.
3. Einspritzkopf nach Anspruch 1 oder 2, der wenigstens zwei der Auslassdüsen (11) umfasst und **dadurch gekennzeichnet ist, dass** die Anzahl spiral-

förmiger Kanäle (20a, 20b) und die Anzahl konisch zulaufender Kanäle (17a, 17b) der Anzahl von Düsen (11) entspricht.

4. Einspritzkopf nach Anspruch 2, **dadurch gekennzeichnet, dass** ein oberer Abschnitt des oder jedes spiralförmigen Rohrs (20a, 20b) in einer jeweiligen axial versetzten Durchgangsbohrung (23a, 23b), die in einer in dem Hohlraum des Körpers (12) montierten Scheibe (21) ausgebildet ist, verriegelt wird, wobei die Scheibe (12) einen Außenrand hat, der in Kontakt mit einer zylindrischen Oberfläche einer Innenkammer (26) des Körpers (12) ist. 5
5. Einspritzkopf nach Anspruch 2 oder 4, **dadurch gekennzeichnet, dass** der oberste Abschnitt des oder jedes spiralförmigen Rohrs (20a, 20b) abdichtend in ein zylindrisches Auflager (24a, 24b) eingreift, das eine Erweiterung des unteren Abschnitts (19a, 19b) des jeweiligen konisch zulaufenden Kanals (17a, 17b) bildet. 10
6. Einspritzkopf nach jedem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** die konisch zulaufenden Kanäle (17a, 17b) integral mit dem Außenkörper (12) oder daran befestigt sind. 15
7. Einspritzkopf nach Anspruch 6, **dadurch gekennzeichnet, dass** die konisch zulaufenden Kanäle (17a, 17b) in einem Stück mit dem Körper (12) ausgebildet sind. 20
8. Einspritzkopf nach Anspruch 7, **dadurch gekennzeichnet, dass** der Körper (12) auch einen zentralen rohrförmigen Längsabschnitt (141) bildet, der wenigstens einen oberen Abschnitt eines Kanals (14) bildet, der koaxial zu der Mitte des zylindrischen Körpers (12) von dem oberen Einlass (13) zu einer unteren nach unten offenen Kammer (15) verläuft. 25
9. Einspritzkopf nach den Ansprüchen 4, 7 und 8, **dadurch gekennzeichnet, dass** die Scheibe (21) eine ringförmige Scheibe ist, die eine zentrale Durchgangsbohrung (22) bereitstellt, die ein Rohr (144) oder einen rohrförmigen Abschnitt (141) aufnimmt, der ein Teil des Außenkörpers (12) ist und einen Abschnitt des zentralen Kanals (14) bildet. 30
10. Einspritzkopf nach den Ansprüchen 5 und 8, **dadurch gekennzeichnet, dass** der zentrale rohrförmige Abschnitt (141) ein unteres Ende auf der Höhe der erweiterten zylindrischen Auflager (24a, 24b) hat und der Körper (12) unterhalb dieser Höhe eine zylindrische Kammer (26) bildet, die seitlich durch die zylindrische Außenwand des Körpers (12) begrenzt ist. 35
11. Einspritzkopf nach einem der vorhergehenden An- 40

sprüche abhängig von Anspruch 2, **dadurch gekennzeichnet, dass** das spiralförmige Rohr oder die spiralförmigen Rohre (20a, 20b) benachbart zu der zylindrischen Innenoberfläche einer zylindrischen Kammer (26) sind, die seitlich durch die zylindrische Außenwand des Körpers (12) begrenzt wird.

12. Einspritzkopf nach den Ansprüchen 2 und 11, **dadurch gekennzeichnet, dass** das spiralförmige Rohr oder die spiralförmigen Rohre (20a, 20b) untere Enden haben, die mit einem jeweiligen Metallrohreinsetz (27) verbunden sind, der in einer Durchgangsbohrung (28) einer Hülse (29) befestigt ist, deren Außendurchmesser dem Durchmesser der Kammer (26) entspricht. 45
13. Einspritzkopf nach den Ansprüchen 2, 4 und 12, **dadurch gekennzeichnet, dass** die Teilanordnung, die aus dem spiralförmigen Rohr oder den spiralförmigen Rohren (20a, 20b), die unterhalb des jeweiligen rohrförmigen Einsatzes (27) verbunden sind, der Hülse (29) und der ringförmigen Scheibe (21), welche die oberen Teile des spiralförmigen Rohrs oder der spiralförmigen Rohre befestigt, besteht, eine im Wesentlichen starre Teilanordnung bildet, die in die Kammer (26) eingepasst ist. 50
14. Einspritzkopf nach Anspruch 1, **dadurch gekennzeichnet, dass** die konisch zulaufenden Kanalabschnitte als umgekehrte Kegelabschnitte geformt sind. 55
15. Einspritzkopf nach Anspruch 2, **dadurch gekennzeichnet, dass** der Kanal (17a, 17b) konisch zuläuft, um das Fluid, das ihn durchläuft, zu beschleunigen, und dass der Kanal (20a, 20b) einen konstanten transversalen Querschnitt hat, um das beschleunigte Fluid nach unten zu der Düse (11) zu befördern.
16. Einspritzkopf nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** der wenigstens eine konisch zulaufende Kanalabschnitt (17a, 17b) strömungsaufwärtig ist, während der spiralförmige Kanal (20a, 20b) von dem jeweiligen konisch zulaufenden Kanalabschnitt (17a, 17b) strömungsabwärtig ist.

Revendications

1. Tête d'injection (10) destinée à injecter des mélanges de fluide sous pression de consolidation dans le sol afin de former des parties de sol consolidées, la tête comprenant :

- un corps externe cylindrique (12) définissant un axe longitudinal central (z) et ayant une cavité

interne traversante s'étendant longitudinalement ;

- une entrée supérieure (13) destinée à recevoir des fluides provenant d'un train de tiges tubulaires pouvant être montées au-dessus de la tête ;

- au moins une buse du côté sortie (11) s'étendant dans un plan perpendiculaire à ou incliné par rapport à l'axe longitudinal (z) ;

- au moins un conduit hélicoïdal (20a, 20b) se terminant dans la buse (11) et donnant au fluide se déplaçant à travers un mouvement hélicoïdal autour de l'axe longitudinal (z) vers la buse (11) ;

caractérisée en ce que la tête comprend au moins une section de conduit progressivement conique vers le bas (17a, 17b) reliant l'entrée supérieure (13) au conduit hélicoïdal (20a, 20b), le conduit conique (17a, 17b) ayant un axe géométrique essentiellement droit et étant relié au conduit hélicoïdal dans un emplacement (19a, 19b) axialement décalé par rapport à l'axe longitudinal central (z) et près de la périphérie du corps (12).

2. Tête d'injection selon la revendication 1, **caractérisée en ce que** le conduit hélicoïdal (20a, 20b) est formé par au moins un tube de section transversale uniforme.

3. Tête d'injection selon la revendication 1 ou 2, comportant au moins deux desdites buses de sortie (11) et **caractérisée en ce que** le nombre de conduits hélicoïdaux (20a, 20b) et le nombre de conduits coniques (17a, 17b) correspondent au nombre de buses (11).

4. Tête d'injection selon la revendication 2, **caractérisée en ce qu'une** partie supérieure du ou de chaque tube hélicoïdal (20a, 20b) est verrouillée dans un alésage débouchant axialement décalé respectif (23a, 23b) formé dans un disque (21) monté dans la cavité du corps (12), le disque ayant un bord externe en contact avec une surface cylindrique d'une chambre intérieure (26) du corps (12).

5. Tête d'injection selon la revendication 2 ou 4, **caractérisée en ce que** la partie supérieure du ou de chaque tube hélicoïdal (20a, 20b) est engagée de manière étanche dans un siège cylindrique (24a, 24b) constituant un élargissement de la section inférieure (19a, 19b) du conduit conique respectif (17a, 17b).

6. Tête d'injection selon l'une quelconque des revendications précédentes, **caractérisée en ce que** les conduits coniques (17a, 17b) font partie intégrante de ou sont fixés sur le corps externe (12).

7. Tête d'injection selon la revendication 6, **caractéri-**

sée en ce que les conduits coniques (17a, 17b) sont formés d'une seule pièce avec le corps (12).

8. Tête d'injection selon la revendication 7, **caractérisée en ce que** le corps (12) forme également une partie tubulaire longitudinale centrale (141) formant au moins une section supérieure d'un conduit (14) s'étendant coaxialement au centre du corps cylindrique (12) depuis l'entrée supérieure (13) jusqu'à une chambre inférieure ouverte vers le bas (15).

9. Tête d'injection selon les revendications 4, 7 et 8, **caractérisée en ce que** le disque (21) est un disque annulaire procurant un alésage débouchant central (22) qui reçoit un tube (144) ou une partie tubulaire (141) qui fait partie du corps externe (12) et formant une section du conduit central (14).

10. Tête d'injection selon les revendications 5 et 8, **caractérisée en ce que** la partie tubulaire centrale (141) a une extrémité inférieure au niveau des sièges cylindriques élargis (24a, 24b), et au-dessous de ce niveau, le corps (12) forme une chambre cylindrique (26) qui est délimitée latéralement par la paroi externe cylindrique du corps (12).

11. Tête d'injection selon l'une quelconque des revendications précédentes lorsqu'elle est rattachée à la revendication 2, **caractérisée en ce que** le tube hélicoïdal ou les tubes hélicoïdaux (20a, 20b) sont adjacents à la surface cylindrique intérieure d'une chambre cylindrique (26) délimitée latéralement par la paroi externe cylindrique du corps (12).

12. Tête d'injection selon les revendications 2 et 11, **caractérisée en ce que** le tube hélicoïdal ou les tubes hélicoïdaux (20a, 20b) ont des extrémités inférieures reliées à un insert tubulaire métallique respectif (27) fixé dans un alésage débouchant (28) d'une bague (29) dont le diamètre externe correspond au diamètre de la chambre (26) .

13. Tête d'injection selon les revendications 2, 4 et 12, **caractérisée en ce que** le sous-ensemble se composant du tube hélicoïdal ou des tubes hélicoïdaux (20a, 20b) reliés à la partie inférieure à l'insert tubulaire respectif (27), de la bague (29) et du disque annulaire (21) fixant les parties supérieures du tube hélicoïdal ou des tubes hélicoïdaux constitue un sous-ensemble sensiblement rigide monté dans la chambre (26).

14. Tête d'injection selon la revendication 1, **caractérisée en ce que** les sections de conduit conique sont sous la forme de secteurs de cône inversés.

15. Tête d'injection selon la revendication 2, **caractérisée en ce que** le conduit (17a, 17b) est conique afin

d'accélérer le fluide passant à travers et le conduit (20a, 20b) a une section transversale constante afin de transporter le fluide accéléré vers le bas jusqu'à la buse (11).

5

16. Tête d'injection selon l'une quelconque des revendications précédentes, **caractérisée en ce que** la au moins une section de conduit conique (17a, 17b) est en amont, alors que le conduit hélicoïdal (20a, 20b) est en aval de la section de conduit conique respective (17a, 17b).

10

15

20

25

30




35

40

45

50

55

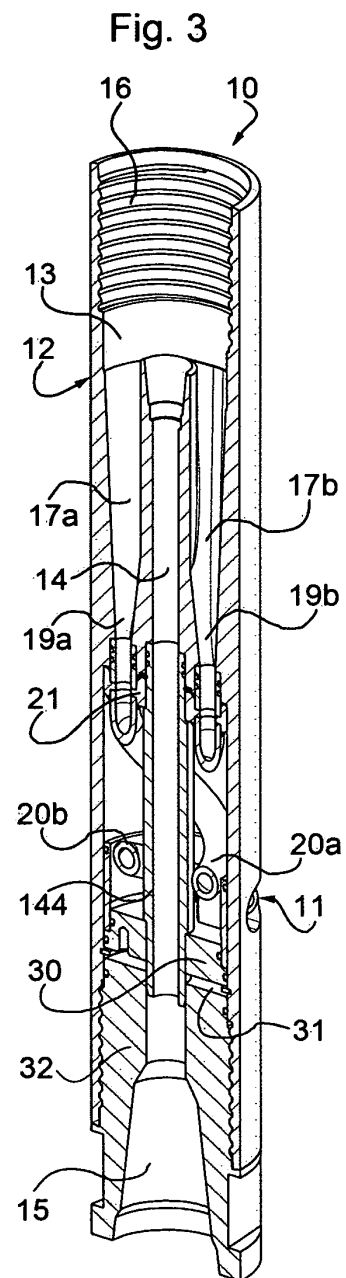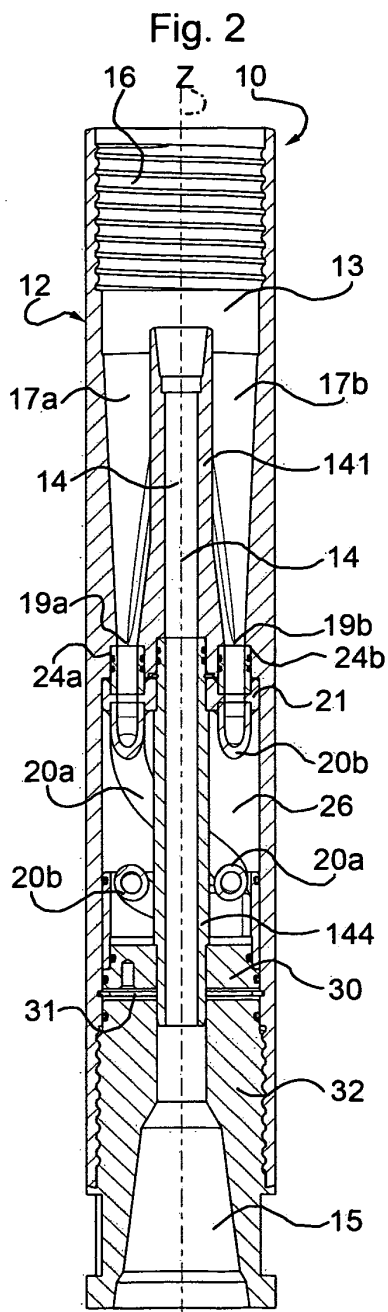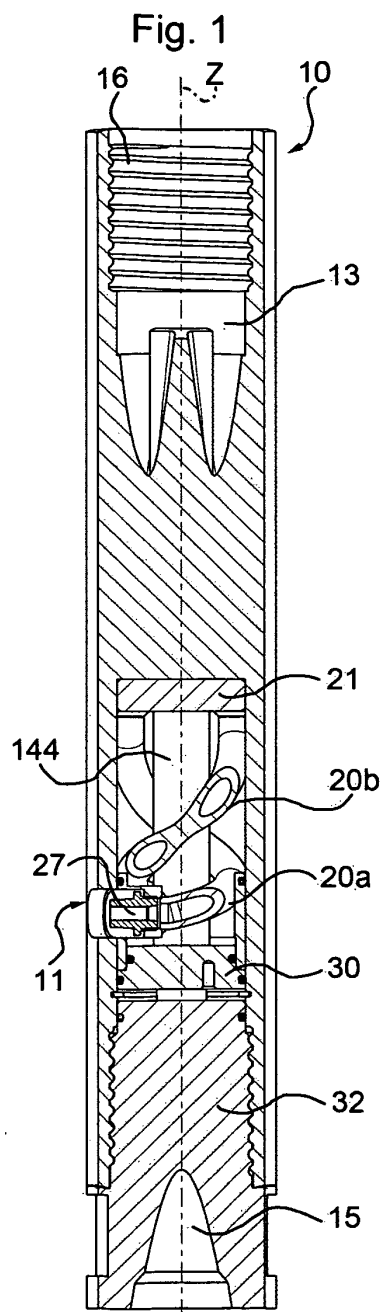

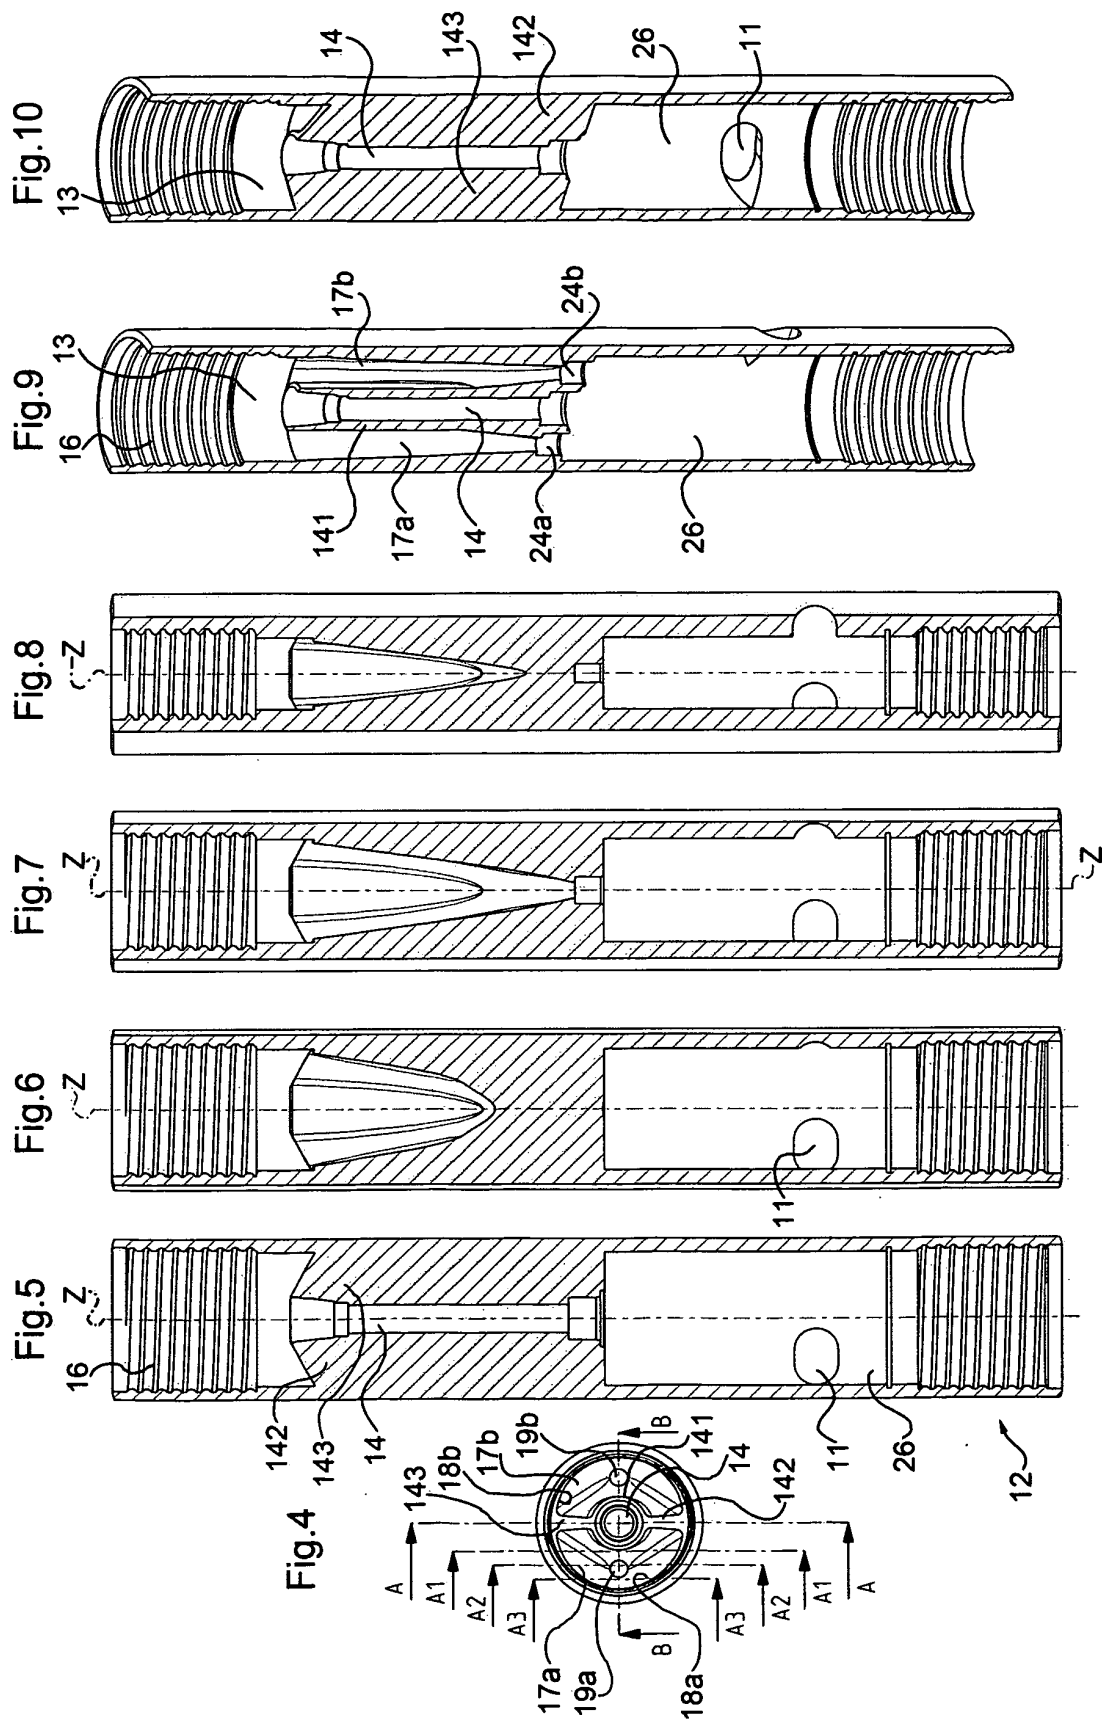


Fig.13

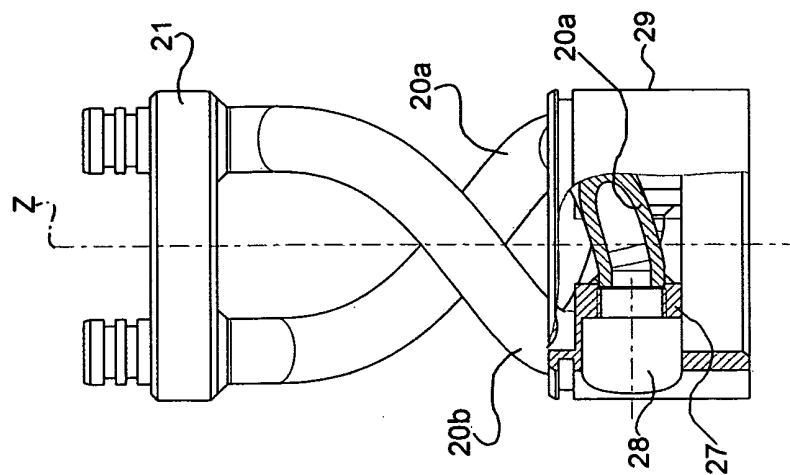


Fig.12


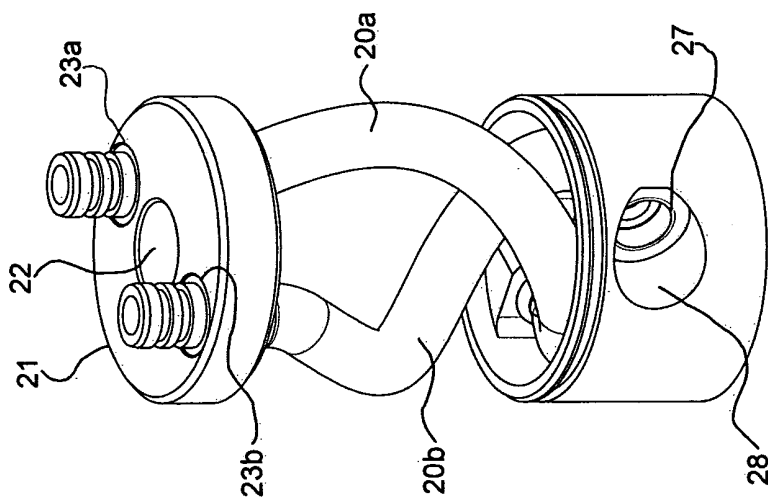


Fig.11

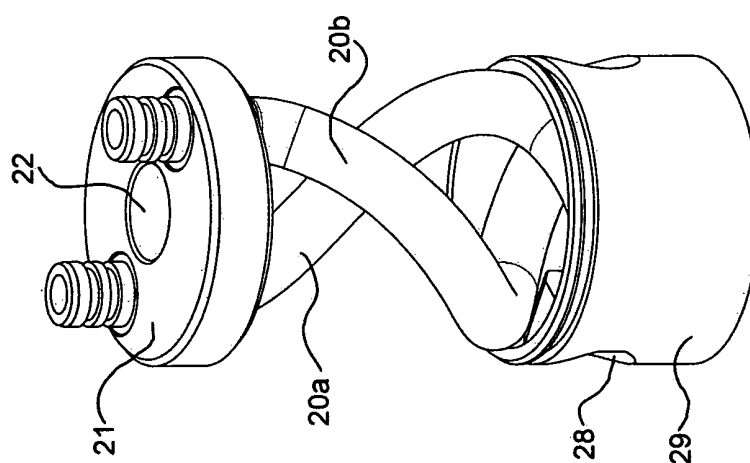

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5228809 A [0005]
- EP 1396585 B1 [0005]
- EP 1231326 B1 [0005]
- IT TO20100613 A [0006]