

(19)



(11)

EP 2 463 855 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
05.09.2018 Bulletin 2018/36

(51) Int Cl.:
G06F 17/30 ^(2006.01) **H04N 21/439** ^(2011.01)
H04N 21/454 ^(2011.01)

(21) Application number: **10194510.3**

(22) Date of filing: **10.12.2010**

(54) Content recognition and censorship

Inhaltserkennung und -zensur

Reconnaissance et censure de contenu

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:
13.06.2012 Bulletin 2012/24

(73) Proprietor: **EchoStar Technologies L.L.C.
Englewood, CO 80112 (US)**

(72) Inventor: **Mountain, Dale
Keighley, Yorkshire BD20 0DQ (GB)**

(74) Representative: **Sadler, Peter Frederick
Reddie & Grose LLP
The White Chapel Building
10 Whitechapel High Street
London E1 8QS (GB)**

(56) References cited:
**GB-A- 2 449 742 US-A1- 2008 184 284
US-A1- 2008 221 882 US-B1- 7 139 031**

EP 2 463 855 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] This invention relates to a system and method for controlling the output of content from a device, and particularly to the automatic recognition and censorship of media content such as audio.

Background of the Invention

[0002] Media content, such as television, film or radio often contain particular content that may be considered by some to be offensive. Although video and/or audio content may be provided with a suitable age rating this is not always sufficient to prevent offense. For example, certain language, whilst deemed suitable for a particular age range by a regulatory body, may not be considered suitable by a parent.

[0003] Often parents would allow their children to experience certain media content, such as films or television programmes, if any offensive language were filtered out.

[0004] Systems are known for performing word recognition on an audio stream, and altering the audio stream to remove undesired language. However, such systems are either not capable of doing so "on the fly" in real time, or would require large amounts of processing power to do so. This makes known systems expensive and not particularly suitable for media content that the user would generally like to experience without having to wait, such as media content provided by broadcast.

[0005] US patent 7139031 provides a method and apparatus for use in connection with television receivers whereby audio information is analysed and modified to compare words and phrases represented in the audio information with words and phrases stored in memory for elimination of undesirable words or phrases using closed caption data. US patent application 2008/0184284 describes a system to filter audio data including an analysis module to compare a textual representation of audio data to data identifying prohibited audio content. UK patent application 2449742 relates to screening of spoken audio data to detect threat words or phrases using a speech recogniser having a large vocabulary.

[0006] US patent 2008/0221882 A1 provides an apparatus and method for the preparation of a censored recording of an audio source according to a procedure whereby no tangible, durable version of the original audio data is created in the course of preparing the censored record. Further, a method is provided for identifying target speech elements in a primary speech text by iteratively using portions of already identified target elements to locate further target elements that contain identical portions. The target speech elements, once identified are removed from the primary speech text or rendered unintelligible to produce a censored record of the primary

speech text. Copies of such censored primary speech text elements may be transmitted and stored with reduced security portions.

Summary of the Invention

[0007] The invention is defined in the claims to which reference is now directed. Advantageous features are set forth in the dependent claims.

[0008] Embodiments of the invention provide a method for controlling the output of media content, particularly audio content, to a user in relation to an apparatus having an input, for receiving media content, and an output, for providing the media content to an output device such as a television or other display device. According to the method, media content is received at the input and then analysed using a media content recognition unit. The media content recognition unit undertakes the step of identifying portions of the received media content that contain undesired content, such as offensive language. The output of media content to a user is then controlled, based on any identified undesired content, to prevent the output of content when the identified undesired portions are to be output. Particularly, media content that has been sent to the output of the apparatus, for output to a user, may be prevented from reaching the user by controlling the output of the apparatus. By preventing the output of media content to a user, rather than, for example, altering the media content signal itself, a significant reduction in required processing power is achieved.

[0009] Preventing the output of media content to the user can be achieved in a number of ways. The display device may have a function for interrupting its own output of media content. The method would therefore involve controlling this function in the display device. Alternatively, the method could achieve the same result by impairing the output of the apparatus, which is providing a signal to the display device.

[0010] Media content is typically broadcast with accompanying time reference data. The time references can be used to identify the start time of media content containing the undesired material. The output of media content could then be prevented for a predetermined time to prevent all of the undesired material being output, or a sufficient portion to make the undesired material incomprehensible to a user. Alternatively, the time reference could be used to identify the start and end times of the undesired media content portions. The output of media content can then be prevented during the times identified by the apparatus referring to the time reference and the identified times.

[0011] The method may be implemented in a set-top-box for receiving and decoding broadcast media content for output to a display device. Such set-top-boxes typically include a media decoder, or main processor, for this purpose, to allow users to view content. An additional processor, preferably a digital signal processor (DSP) may also be provided for a specific purpose, such as

formatting media content data so that it can be played on different display devices. The method may further include the step of using the additional processor as part of the media content recognition unit to identify undesired content. This serves to further reduce the processing burden on the main processor.

[0012] The media content recognition unit performs certain steps to identify undesired content. Predetermined undesired content is specified by descriptors, or associated data, which may be specified by populating a list in a memory unit. The media content recognition unit compares received media content with the predetermined content specified by the descriptors. In particular, where the media content being checked is audio content, the media content recognition unit executes speech recognition software for detecting the undesired audio.

[0013] The method finds particular utility with television signals broadcast to a set-top-box for viewing, the method being used to identify and censor words found in the audio signal. The recognition unit identifies undesired content using the descriptors preferably by processing received media data to identify words within the content by comparing it with the descriptors, the descriptors being a list of undesired words or data representative thereof.

[0014] The act of identifying words within content may be limited to a comparatively small set of words. The number of words may be selected so that the recognition unit can identify those words within a specified time period, such as the time period required by a decoder, such as an AV decoder of a set-top-box, to decode a portion of media data. The number of words to be identified may be less than 100, less than 60, less than 40 or less than 20. Comparison with a small set of words requires less processing power and can be performed quickly, allowing the censoring to be performed "on the fly" as the user accesses content.

[0015] Embodiments of the invention also include a corresponding apparatus comprising an input for receiving media content and an output for providing the media content to a display device for display to a user. The apparatus further comprises a media content recognition unit, for identifying one or more portions of received media content that contain undesired content, and a control unit to control the output of content to a user, preferably simultaneously, when identified portions of media content are to be output by the apparatus.

[0016] The control unit performs the task of controlling the function on a display device to interrupt the output of media content from the display device, or impairing the output of the apparatus itself to the display device, when the identified undesired portions of media content are to be output.

[0017] The apparatus preferably comprises a memory for storing the descriptors. The amount of memory required is reduced by only using a comparatively small set of descriptors.

[0018] The apparatus preferably comprises a first processor for decoding received media content to be dis-

played to a user, and also a second additional processor which is preferably a DSP. The second processor is used in the media content recognition unit to identify undesired content.

[0019] The apparatus may be implemented in a set-top-box of the type used to receive television broadcasts.

[0020] A computer program may be provided for undertaking any of the method steps outlined above, preferably on a set-top-box or similar device, such as the apparatus described above.

Brief Description of the Drawings

[0021] Examples of the invention will now be described in more detail, with reference to the drawings in which:

Figure 1 is a diagram of a set-top-box in which embodiments of the invention may be implemented; and

Figure 2 is a diagram of a set-top-box according to an embodiment of the invention.

Detailed Description of the Preferred Embodiments

[0022] A first example of the invention may be implemented with a set-top-box of the sort shown in figure 1. The set-top-box 101 comprises a receiver for receiving broadcast signals including encoded media content, such as video and audio content. The media content is provided to a processor for decoding and outputting the content. In the example of Figure 1, a tuner 102 is included that tunes to and amplifies a particular analogue broadcast frequency, although a digital arrangement could be used for receiving digital broadcasts. A demodulator 103 converts the signal from the tuner into a digital signal that may be processed by the processor. The set-top-box may be equipped to receive and process multiple broadcasts, for example by having tuner/demodulator packages that can each display/record a television channel simultaneously with the other channel.

[0023] The tuner/demodulator is connected to a processor chip 104, comprising a CPU 105, by a bus 106. The main processor 104 of the set-top-box runs the set-top-box software and controls and coordinates the other set-top-box components. The AV decoder 107 is responsible for decoding the audio and video data and may be provided on the same physical chip as the CPU. The AV decoder receives and decodes the signal provided by the demodulator. The decoded audio/video signals are provided to the AV output, or AV control, 108, which provides an audio and video signal that can be connected to an output device or display device such as a television. During normal operation the processor chip will commonly be running at 80%-90% of maximum capacity. It is uneconomical to have excess processing power in such a device intended for mass production. The RAM 109 can be used by both the processor and the decoders. The hard disk 110 is optionally provided for storing re-

corded content for presentation at a later time. The hard disk can also be used to store metadata and tables containing descriptors of the type described below, or a flash memory could alternatively, or in addition, be provided for this purpose.

[0024] In addition to the components shown in Figure 1, the set-top-box also includes another processor, a digital signal processor (DSP), which may be provided for a task such as converting media content or manipulating its format for compatibility with another display device such as a personal computer or mobile device.

[0025] An incoming broadcast signal is decoded to produce decoded media content. The audio content is provided to the additional DSP, which is used as a media content recognition unit. The media content recognition unit executes speech recognition software for detecting undesired speech. This operates by comparing specific words from the incoming audio stream with pre-stored data identifying undesired words. The data, which may be referred to as descriptors since they are related to, or describe, the undesired words, may be a list of words stored in memory. If a match is found between an incoming word and a pre-stored word the set-top-box is arranged to take action to prevent this word being output to the user.

[0026] The action to prevent a word being output to the user is taken by an output control unit. When an undesired word is detected the output control unit is alerted and instructs the muting of the audio output of the set-top-box during the period that the undesired word occurs in the audio signal. The output control unit may be comprised of the main processor, and preferably comprises the main CPU and the AV control unit.

[0027] Figure 2 shows a more detailed diagram of the set-top-box components for implementing an example of the invention. The set-top-box comprises a tuner 202, for receiving broadcast media content via an input 217 such as from an aerial, satellite or cable. The media content will typically be broadcast in an encoded form, such as according to any of the MPEG standards, and so at least one decode block 211 is provided for decoding received content. A plurality of decode blocks may be provided for decoding different portions of the media content; in the example of Figure 2, two decode blocks, 211 and 212, are provided. The tuner 202 is coupled to at least one of the decode blocks. A DSP 214 is provided and is coupled to at least one of the decode blocks, preferably a decode block that is also coupled to the tuner, for receiving media content. The DSP 214 is also coupled to a CPU 205. An AV control unit 216 is coupled to the CPU, at least one of the decode blocks and at least one output display device 215, via an output 218, for displaying or outputting media content. The AV control unit outputs AV in any desired format compatible with the output device including component signal, composite signal, L+R audio, S/PDIF digital audio and/or HDMI. A hard disk drive (HDD) 210 is preferably provided, being coupled to the decode blocks for exchanging data.

[0028] In the example of Figure 2, broadcast audio and video content, such as MPEG encoded AV content, is received by a tuner 202 and passed to the first decode control block 211. Audio is decoded using the first decode block, and the decoded audio is then sent to the DSP. The first decode block also passes the encoded AV, containing both the audio and video content, to the HDD 210 for storage.

[0029] The DSP determines the times at which undesired audio occurs in the AV stream. The position within an audio stream at which an undesired word occurs can be identified using the associated timing data that accompanies the media content as is common in broadcasts. There are many sorts of timing information that can be used, the important point being that the timing information allows a specific portion of the audio stream of a film or television programme to be identified and referenced by the system, preferably by referencing the received timing data to the on-board clock of the set-top-box. One example would be to use the presentation time stamp (PTS), which is a metadata field in an MPEG program stream that is used to synchronise the separate streams of a program, such as the video and audio streams, when the program is output for display to a user. The PTS is provided in units related to a programme's overall clock reference such as a programme clock reference (PCR) or system clock reference (SCR) which would also be transmitted in the metadata of an MPEG program stream. The PCR or SCR could also be used to identify the locations of undesired language in an audio stream. Whatever method of identification used for the time, at least the start timestamp, and preferably also the stop timestamp, of undesired audio is identified by the DSP and referenced to the system time. The timestamps are then sent to the main processing core 204.

[0030] The determination of timestamps for undesired audio is performed by the DSP while the encoded AV is stored on the HDD 210. In effect, the AV media content is buffered while the DSP performs the necessary processing to identify the undesired audio content. The buffered and encoded AV is then sent back from the HDD 210 to the second decode block 212, which decodes the AV in the normal manner performed by set-top-boxes. The amount of buffering depends upon the amount of time required by the DSP to identify the timestamps of undesired audio. Typically this will be a relatively short period of time, such as between 5 and 30 seconds. The buffering time could be a predetermined period based on average processing time. Alternatively the buffering time could be dependent upon receiving a signal from the DSP indicating that it has finished scanning a predetermined portion of media content.

[0031] In some examples it may not be necessary to buffer the encoded AV on a HDD, with the full AV stream being presented to the user following a delay in which the audio is inspected for undesired words as described above. Typically, set-top-boxes take several seconds, such as less than 10 seconds, less than 5 seconds, less

than 3 seconds or between 2 or 3 seconds to decode the audio and video streams for presentation/display to a user depending upon factors such as the model of set-top-box and the encoding format for the content. The DSP can be arranged to perform the necessary voice recognition in a similar time, for example by providing a DSP with sufficient processing speed, and/or programming the DSP to identify a small predetermined group of undesirable words. Therefore, the DSP can perform identification of undesired media content simultaneously with the decoding of the AV content for display to the user.

[0032] The act of identifying words within content may be limited to a comparatively small set of words. The number of words contained within the set is preferably the number of offensive words contained in a particular language, although this could be expanded to more than one language. The user may be able to select the language, or more than one language, and the set-top-box will automatically populate the relevant memory portion with data for identifying relevant words which have been pre-determined, based on data in the set-top-box or received over a communication channel. The user may alternatively, or in addition, be able to specify undesired words themselves by selecting the words from a list, or manually entering the word into the system via a user input. The list may be updatable, with the memory that stores the relevant content data, or descriptors, being able to receive commands to include additional words, and to remove old words. In practice, the list of words will be relatively small, and can be maintained as such by updating the word memory.

[0033] The device may be arranged to be able to search for a maximum number of words. The maximum number of words may be selected based on the time taken for a decoder to decode a portion of media data. In particular, the number of words may be selected such that the recognition unit can identify those words within a specified time period, such as the time period required by a decoder, such as an AV decoder of a set-top-box, to decode a portion of media data. Alternatively, the maximum number of words may be a predetermined number, for example based on the number of offensive words in a particular language. The number of words to be identified may be, for example, less than 100, less than 60, less than 40 or less than 20. Comparison with such a small set of words requires less processing power and can be performed quickly, since fewer comparison acts need to be performed by the recognition unit. Searching for only a small number of words therefore allows embodiments of the invention to operate and censor content "on the fly", or close to real time, as the user accesses content, such that the user does not notice a delay when viewing the checked content.

[0034] Once any undesired words are detected in the decoded audio stream the timestamp for the start of the word is identified from the program metadata as described above. The system could then mute the audio for a predetermined period of time from this time stamp,

the period being sufficient to prevent display/output of all or part of the word to the user. Alternatively, the end point or timestamp of the undesired word could also be identified by the DSP and the audio output could be muted for the period between the start and end of the word.

[0035] The timestamp data relating to the undesired audio are passed to the main processing core. The CPU 205, upon receipt of timestamp data from the DSP issues a mute command to the AV control unit 216 containing an instruction to mute and the relevant timestamps at which to begin, and preferably end, muting of the output audio. The AV control unit, in response to instructions from the CPU, therefore mutes and un-mutes audio as appropriate, preventing the audio from reaching the display device. As an alternative, the AV control unit or the CPU may have direct control over a mute function in the display device, and the muting is put into effect at this point rather than at the AV output of the set-top-box.

[0036] In the example of Figure 2 the DSP may be intended to form part of what is known as a "SLING" system or similar device. The DSP runs software programmed to encode video/audio according to a particular format such that it may be transmitted to other playback or display devices for viewing by a user in another location. For example, the DSP may encode a programme so that it can be then be transmitted over the internet to a personal computer, mobile phone, PDA or internet connected television for remote viewing. To implement the example of the invention, the DSP is reprogrammed, by providing alternative software in the memory used by the DSP. This may be a flash memory, hard drive or any other memory coupled to the DSP. The DSP is therefore used for a purpose other than that for which it was originally intended.

[0037] The alternative software used includes voice recognition software preferably programmed to recognise a small set of words identified by a table of descriptors stored in memory. Voice recognition programs are well known and will not be described further.

[0038] It will be appreciated that viewers may be capable of lip reading and therefore offensive words may still be displayed through the video signal, rather than from the audio output device such as television speakers. A further example of the invention may therefore also have the capability to obscure faces, or parts of faces, of the actors or people featured in the video stream.

[0039] When undesired words are detected in the manner outlined above the time stamps of the relevant audio are recorded, for example in a table in memory, for muting when the audio is output. Facial recognition software is executed on the video stream at the identified time stamp to identify faces. The video stream can then be manipulated or altered to obscure the face or a portion of it such as the lips, for a period of time, so that the undesired word cannot be determined by visual inspection by the user.

[0040] It will be appreciated that facial recognition software can be rather processor intensive. This is mitigated

in examples of the present invention in several ways. Firstly, the facial recognition software is only executed at those time stamps at which undesired words are found by the audio recognition software. This means that the facial recognition software is not continually operating, and only operates at times at which undesired words are determined to have occurred. Secondly, the facial recognition software may only be required to recognise a face, and not a particular person, so that any face being displayed at the same time stamp of the undesired word is obscured rather than identifying the particular person on screen who spoke the word. Thirdly, the facial recognition software can be executed on the separate DSP as mentioned above, or on a further separate purpose built DSP.

[0041] The facial recognition software could be programmed to recognise movement in a person's lips and blur the entire face, or lips, based on this. Since the facial software would only be looking for movement features in a person's lips, the system could blur or obscure the lips of the person talking, rather than all faces on screen, when the undesired words occur. It would be possible to base the search for undesired content on video media data, for example by using video recognition software, or facial recognition software. This may be achieved, for example, by looking for predetermined movements of a persons lips that correspond to undesired content based on stored data relating to the predetermined movements in the same manner as described for audio, and obscuring the relevant portions of the video output and preferably also the audio output when the undesired content is being output. However, the audio method is preferred.

[0042] Embodiments of the invention have been described in relation to set-top-boxes for receiving and descrambling broadcast video and accompanying audio data, particularly over the air. It will be appreciated that this is not a limitation of the invention, which may equally be applied to any device for receiving and outputting media content. This would include televisions with inbuilt set-top-boxes, computers connected to the Internet or other network, mobile phones or similar mobile devices able to output media content, PDAs and so forth. The invention could also be applied to audio only devices such as radios, including digital radios.

[0043] It would also be possible to produce a stand-alone device dedicated to the task of identifying undesired content and preventing its output to a user. The device could be positioned between a media content output and a display device, such as between the output of a set-top-box and the input of a television.

[0044] The invention has been described in the context of receiving audio, or audio and video, by broadcast. The term "broadcasting" should also be taken to encapsulate delivery of data by any form such as over the air, via the Internet, cable or satellite or any other type of transmission. It will also be appreciated that the present invention could be utilised in any device with an input for media content and an output for a display device. This would

include DVD players or similar devices for playing pre-stored content including hard disk drive recorders, as well as other media devices such as video game consoles, and any other device that can be appropriately configured.

Claims

1. A method for controlling the output of audio content to a user, for an apparatus comprising an input for receiving media content comprising audio content and an output for providing the media content to an output device, the method comprising the steps of:

- receiving media content at the input;
- analysing the audio content of the media content using a media content recognition unit to identify one or more portions that contain undesired content by performing speech recognition; and
- controlling the output of the apparatus to prevent the output of audio content to a user when the identified portions of audio content are to be output **characterised in that**
- the step of analysing the audio content comprises comparing words from the received audio content with data representative of a maximum number of undesired words, the number of undesired words being selected such that the recognition unit can identify the undesired words within the time period required by a decoder to decode a portion of media data.

2. A method according to claim 1 wherein the output of media content to the user is prevented by impairing the output of the apparatus, such as by muting it.

3. A method according to any preceding claim wherein the media content has an associated time reference, the method further comprising the steps of:

- identifying, using the associated time reference, the beginning of each audio content portion containing undesired content; and
- preventing the output of audio content to a user for a period of time starting at or near the time identified using the associated time reference so as to prevent the output of all or some of the undesired content.

4. A method according to any preceding claim wherein the apparatus is a set-top-box for receiving and outputting media content, the set-top-box including a media decoder to decode media content for display and an additional processor, such as a digital signal processor, the method further comprising using the additional processor, in the media content recogni-

tion unit, to identify one or more portions of audio content that contain undesired content.

5. A method according to any preceding claim wherein the media content is a television signal, or an audio stream, received by broadcast.
6. A method according to claim 1 wherein the apparatus includes a display device and the output of audio content to the user is prevented by controlling a function on the display device to interrupt the output of media content from the display device, such as a mute function.
7. A method according to any of claims 1 to 6 in which the media content includes a video stream the method further comprising the steps of:

- analysing the video stream to identify faces and altering the video stream to obscure at least a portion of one or more faces when output of media content to a user is being prevented.

8. An apparatus for outputting media content for display to a user, the apparatus comprising:

- an input (217) for receiving media content comprising audio content;
- a decoder (212) for decoding received media content;
- an output (218) for providing the media content to a display device for display to a user;
- a memory for storing data identifying undesired audio content;
- a media content recognition unit (214) for identifying one or more portions of received audio content that contain undesired content by performing speech recognition and comparing words from the received audio content with the data stored on the memory; and
- an output control unit (216) arranged to control the output of the apparatus to prevent the output of media content to a user when identified portions of audio content are to be output;

characterised in that

- the apparatus is configured to store on the memory data identifying a predetermined number of undesired words, the number of undesired words being selected such that the recognition unit can identify the number of undesired words within the time period required by the decoder to decode a portion of media data.

9. An apparatus according to claim 8 wherein the control unit is arranged to impair the output of the apparatus when the identified portions of media content

are to be output.

10. An apparatus according to claim 8 further comprising a display device, wherein the control unit is arranged to control a function on a display device to interrupt the output of media content from the display device.
11. An apparatus according to any of claims 8 to 10 wherein the memory stores data identifying a list of 40 or fewer words.
12. An apparatus according to any of claims 8 to 11 wherein the apparatus comprises a first processor for decoding received media content to be displayed to the user and a second processor, the media content recognition unit comprising the second processor.
13. An apparatus according to any of claims 8 to 12 wherein the media recognition unit is further arranged to receive a time reference associated with received media content, and to identify the beginning and end time of each audio content portion containing undesired content; and wherein the control unit is arranged to prevent the output of audio content to a user synchronously with the identified times by using the associated time reference.
14. A set-top-box including an apparatus according to any of claims 8 to 13.
15. A computer program which when executed on an apparatus according to any of claims 8 to 14 causes the apparatus to carry out the method of any of claims 1 to 7.

Patentansprüche

1. Verfahren zum Steuern des Ausgangs von Audioinhalt an einen Benutzer für eine Einrichtung, Folgendes umfassend: einen Eingang zum Empfangen von Medieninhalt, der Audioinhalt umfasst, und einen Ausgang zum Bereitstellen des Medieninhalts an ein Ausgabegerät, wobei das Verfahren die folgenden Schritte umfasst:

- Empfangen von Medieninhalt am Eingang;
- Analysieren des Audioinhalts des Medieninhalts unter Verwendung einer Medieninhaltserkennungseinheit zum Identifizieren eines oder mehrerer Teile, die unerwünschten Inhalt enthalten, durch Durchführen von Spracherkennung; und
- Steuern des Ausgangs der Einrichtung zum Verhindern des Ausgebens von Audioinhalt an einen Benutzer, wenn die identifizierten Teile von Audioinhalt auszugeben sind,

dadurch gekennzeichnet, dass

- der Schritt zum Analysieren des Audioinhalts das Vergleichen von Wörtern von dem empfangenen Audioinhalt mit Daten, die eine maximale Anzahl von unerwünschten Wörtern darstellen, umfasst, wobei die Anzahl von unerwünschten Wörtern derart ausgewählt ist, dass die Erkennungseinheit die unerwünschten Wörter innerhalb des Zeitraums identifizieren kann, der für einen Decoder erforderlich ist, um einen Teil von Mediendaten zu entschlüsseln. 5
- 2. Verfahren nach Anspruch 1, wobei das Ausgeben von Medieninhalt an den Benutzer durch Beeinträchtigen des Ausgangs der Einrichtung verhindert wird, wie etwa dadurch, dass er stummgeschaltet wird. 10
- 3. Verfahren nach einem der vorhergehenden Ansprüche, wobei der Medieninhalt einen verknüpften Zeitbezug aufweist, wobei das Verfahren ferner die folgenden Schritte umfasst: 20
 - Identifizieren des Beginns jedes Audioinhalts- teils, der unerwünschten Inhalt enthält, unter Verwendung des verknüpften Zeitbezugs; und 25
 - Verhindern des Ausgebens von Audioinhalt an einen Benutzer eine Zeit lang, die zu oder nahe der Zeit beginnt, die unter Verwendung des verknüpften Zeitbezugs identifiziert wurde, um das Ausgeben des gesamten oder eines Teils des unerwünschten Inhalts zu verhindern. 30
- 4. Verfahren nach einem der vorhergehenden Ansprüche, wobei die Einrichtung eine Set-Top-Box zum Empfangen und Ausgeben von Medieninhalt ist, wobei die Set-Top-Box einen Mediendecoder zum Entschlüsseln von Medieninhalt zum Anzeigen und einen zusätzlichen Prozessor, wie etwa einen digitalen Signalprozessor, enthält, wobei das Verfahren ferner das Verwenden des zusätzlichen Prozessors in der Medieninhaltserkennungseinheit umfasst, um einen oder mehrere Teile von Audioinhalt, der unerwünschten Inhalt enthält, zu identifizieren. 35
- 5. Verfahren nach einem der vorhergehenden Ansprüche, wobei der Medieninhalt ein Fernsehsignal oder ein Audiodatenstrom ist, das/der durch Ausstrahlung empfangen wurde. 40
- 6. Verfahren nach Anspruch 1, wobei die Einrichtung eine Anzeigevorrichtung enthält und das Ausgeben von Audioinhalt an den Benutzer durch Steuern einer Funktion auf der Anzeigevorrichtung verhindert wird, um das Ausgeben von Medieninhalt von der Anzeigevorrichtung, wie etwa durch eine Stummschaltfunktion, zu unterbrechen. 45

- 7. Verfahren nach einem der Ansprüche 1 bis 6, wobei der Medieninhalt einen Videodatenstrom enthält, wobei das Verfahren ferner die folgenden Schritte umfasst: 5

- Analysieren des Videodatenstroms zum Identifizieren von Gesichtern und Verändern des Videodatenstroms zum Verschleiern wenigstens eines Teils von einem oder mehreren Gesichtern, wenn ein Ausgeben von Medieninhalt an einen Benutzer verhindert wird. 10

- 8. Einrichtung zum Ausgeben von Medieninhalt zum Anzeigen an einen Benutzer, wobei die Einrichtung Folgendes umfasst: 15

- einen Eingang (217) zum Empfangen von Medieninhalt, der Audioinhalt umfasst;
- einen Decoder (212) zum Entschlüsseln von empfangenem Medieninhalt;
- einen Ausgang (218) zum Bereitstellen des Medieninhalts an eine Anzeigevorrichtung zum Anzeigen an einen Benutzer;
- einen Speicher zum Speichern von Daten, die unerwünschten Audioinhalt identifizieren;
- eine Medieninhaltserkennungseinheit (214) zum Identifizieren eines oder mehrerer Teile von empfangenem Audioinhalt, der unerwünschten Inhalt enthält, durch Durchführen von Spracherkennung und Vergleichen von Wörtern von dem empfangenen Audioinhalt mit den auf dem Speicher gespeicherten Daten; und
- eine Ausgangssteuereinheit (216), die angeordnet ist, den Ausgang der Einrichtung zu steuern, um das Ausgeben von Medieninhalt an einen Benutzer zu verhindern, wenn identifizierte Teile von Audioinhalt auszugeben sind; 20

dadurch gekennzeichnet, dass

- die Einrichtung konfiguriert ist, Daten, die eine vorgegebene Anzahl von unerwünschten Wörtern identifizieren, auf dem Speicher zu speichern, wobei die Anzahl von unerwünschten Wörtern derart ausgewählt ist, dass die Erkennungseinheit die Anzahl von unerwünschten Wörtern innerhalb des Zeitraums identifizieren kann, der für den Decoder erforderlich ist, um einen Teil von Mediendaten zu entschlüsseln. 25

- 9. Einrichtung nach Anspruch 8, wobei die Steuereinheit angeordnet ist, den Ausgang der Einrichtung zu beeinträchtigen, wenn die identifizierten Teile von Medieninhalt auszugeben sind. 30

- 10. Einrichtung nach Anspruch 8, ferner eine Anzeigevorrichtung umfassend, wobei die Steuereinheit angeordnet ist, eine Funktion auf einer Anzeigevorrich- 35

tion zu steuern, um das Ausgeben von Medieninhalt von der Anzeigevorrichtung zu unterbrechen.

11. Einrichtung nach einem der Ansprüche 8 bis 10, wobei die Speicher Daten speichert, die eine Liste von höchstens 40 Wörtern identifizieren. 5
12. Einrichtung nach einem der Ansprüche 8 bis 11, wobei die Einrichtung einen ersten Prozessor zum Entschlüsseln von empfangenem Medieninhalt, der dem Benutzer anzuzeigen ist, und einen zweiten Prozessor umfasst, wobei die Medieninhaltserkennungseinheit den zweiten Prozessor umfasst. 10
13. Einrichtung nach einem der Ansprüche 8 bis 12, wobei die Medienerkennungseinheit ferner angeordnet ist, einen mit empfangenem Medieninhalt verknüpften Zeitbezug zu empfangen und die Anfangs- und Endzeit jedes Audioinhalts, der unerwünschten Inhalt enthält, zu identifizieren; und wobei die Steuereinheit angeordnet ist, den Ausgang von Audioinhalten an einen Benutzer synchron mit den identifizierten Zeiten unter Verwendung des verknüpften Zeitbezugs zu verhindern. 20 25
14. Set-Top-Box, die eine Einrichtung nach einem der Ansprüche 8 bis 13 enthält.
15. Computerprogramm, das, wenn es auf einer Einrichtung nach einem der Ansprüche 8 bis 14 ausgeführt wird, bewirkt, dass die Einrichtung das Verfahren nach einem der Ansprüche 1 bis 7 durchführt. 30

Revendications

1. Procédé permettant de commander la fourniture en sortie d'un contenu audio à un utilisateur, pour un appareil comprenant une entrée permettant de recevoir un contenu multimédia comprenant un contenu audio et une sortie permettant de fournir le contenu multimédia à un dispositif de sortie, le procédé comprenant les étapes suivantes : 35 40
 - la réception d'un contenu multimédia au niveau de l'entrée ; 45
 - l'analyse du contenu audio du contenu multimédia à l'aide d'une unité de reconnaissance de contenu multimédia pour identifier une ou plusieurs portions qui contiennent un contenu indésirable en réalisant une reconnaissance vocale ; et 50
 - la commande de la sortie de l'appareil pour empêcher la fourniture en sortie d'un contenu audio à un utilisateur lorsque les portions identifiées d'un contenu audio doivent être fournies en sortie 55

caractérisé en ce que

- l'étape d'analyse du contenu audio comprend la comparaison de mots issus du contenu audio reçu avec des données représentatives d'un nombre maximal de mots indésirables, le nombre de mots indésirables étant choisi de sorte que l'unité de reconnaissance puisse identifier les mots indésirables dans la période de temps requise par un décodeur pour décoder une portion de données multimédia.
2. Procédé selon la revendication 1, dans lequel la fourniture en sortie d'un contenu multimédia à l'utilisateur est empêchée en affaiblissant la sortie de l'appareil, tel qu'en désactivant le son de celui-ci.
 3. Procédé selon l'une quelconque des revendications précédentes, dans lequel le contenu multimédia a une référence de temps associée, le procédé comprenant en outre les étapes suivantes :
 - l'identification, à l'aide de la référence de temps associée, du début de chaque portion de contenu audio contenant un contenu indésirable ; et
 - le fait d'empêcher la fourniture en sortie d'un contenu audio à un utilisateur pendant une période de temps démarrant au temps ou près du temps identifié à l'aide de la référence de temps associée de façon à empêcher la fourniture en sortie de tout ou partie du contenu indésirable.
 4. Procédé selon l'une quelconque des revendications précédentes, dans lequel l'appareil est un boîtier décodeur permettant de recevoir et de fournir en sortie un contenu multimédia, le boîtier décodeur comportant un décodeur multimédia pour décoder un contenu multimédia à des fins d'affichage et un processeur supplémentaire, tel qu'un processeur de signal numérique, le procédé comprenant en outre l'utilisation du processeur supplémentaire, dans l'unité de reconnaissance de contenu multimédia, pour identifier une ou plusieurs portions d'un contenu audio qui contiennent un contenu indésirable.
 5. Procédé selon l'une quelconque des revendications précédentes, dans lequel le contenu multimédia est un signal de télévision, ou un flux audio, reçu par radiodiffusion.
 6. Procédé selon la revendication 1, dans lequel l'appareil comporte un dispositif d'affichage et la fourniture en sortie d'un contenu audio à l'utilisateur est empêchée en commandant une fonction sur le dispositif d'affichage pour interrompre la fourniture en sortie d'un contenu multimédia provenant du dispositif d'affichage, telle qu'une fonction de désactivation de son.

7. Procédé selon l'une quelconque des revendications 1 à 6, dans lequel le contenu multimédia comporte un flux vidéo, le procédé comprenant en outre les étapes suivantes :

- l'analyse du flux vidéo pour identifier des visages et la modification du flux vidéo pour dissimuler au moins une portion d'un ou de plusieurs visages lorsqu'une fourniture en sortie d'un contenu multimédia à un utilisateur est empêchée.

8. Appareil permettant de fournir en sortie un contenu multimédia à des fins d'affichage à un utilisateur, l'appareil comprenant :

- une entrée (217) permettant de recevoir un contenu multimédia comprenant un contenu audio ;
- un décodeur (212) permettant de décoder un contenu multimédia reçu ;
- une sortie (218) permettant de fournir le contenu multimédia à un dispositif d'affichage à des fins d'affichage à un utilisateur ;
- une mémoire permettant de stocker des données identifiant un contenu audio indésirable ;
- une unité de reconnaissance de contenu multimédia (214) permettant d'identifier une ou plusieurs portions d'un contenu audio reçu qui contiennent un contenu indésirable en réalisant une reconnaissance vocale et en comparant des mots issus du contenu audio reçu avec les données stockées sur la mémoire ; et
- une unité de commande de sortie (216) agencée pour commander la sortie de l'appareil pour empêcher la fourniture en sortie d'un contenu multimédia à un utilisateur lorsque des portions identifiées d'un contenu audio doivent être fournies en sortie ;

caractérisé en ce que

- l'appareil est configuré pour stocker sur la mémoire des données identifiant un nombre prédéterminé de mots indésirables, le nombre de mots indésirables étant choisi de sorte que l'unité de reconnaissance puisse identifier le nombre de mots indésirables dans la période de temps requise par le décodeur pour décoder une portion de données multimédia.

9. Appareil selon la revendication 8, dans lequel l'unité de commande est agencée pour affaiblir la sortie de l'appareil lorsque les portions identifiées d'un contenu multimédia doivent être fournies en sortie.

10. Appareil selon la revendication 8, comprenant en outre un dispositif d'affichage, dans lequel l'unité de commande est agencée pour commander une fonc-

tion sur un dispositif d'affichage pour interrompre la fourniture en sortie d'un contenu multimédia provenant du dispositif d'affichage.

11. Appareil selon l'une quelconque des revendications 8 à 10, dans lequel la mémoire stocke des données identifiant une liste de 40 mots ou moins.

12. Appareil selon l'une quelconque des revendications 8 à 11, dans lequel l'appareil comprend un premier processeur permettant de décoder un contenu multimédia reçu à afficher à l'utilisateur et un second processeur, l'unité de reconnaissance de contenu multimédia comprenant le second processeur.

13. Appareil selon l'une quelconque des revendications 8 à 12, dans lequel l'unité de reconnaissance multimédia est en outre agencée pour recevoir une référence de temps associée à un contenu multimédia reçu, et pour identifier le temps de début et de fin de chaque portion de contenu audio contenant un contenu indésirable ; et dans lequel l'unité de commande est agencée pour empêcher la fourniture en sortie d'un contenu audio à un utilisateur de façon synchrone aux temps identifiés à l'aide de la référence de temps associée.

14. Boîtier décodeur comportant un appareil selon l'une quelconque des revendications 8 à 13.

15. Programme d'ordinateur qui, lorsqu'il est exécuté sur un appareil selon l'une quelconque des revendications 8 à 14, amène l'appareil à réaliser le procédé selon l'une quelconque des revendications 1 à 7.

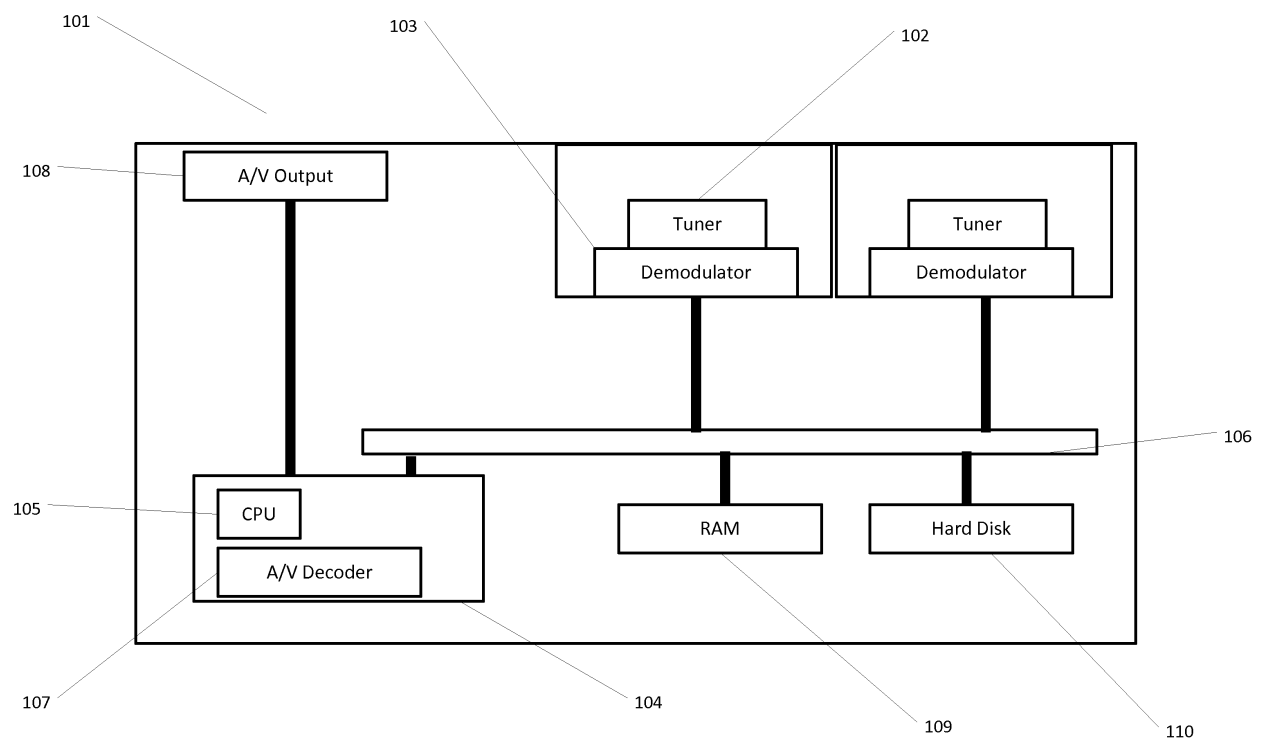


FIG 1

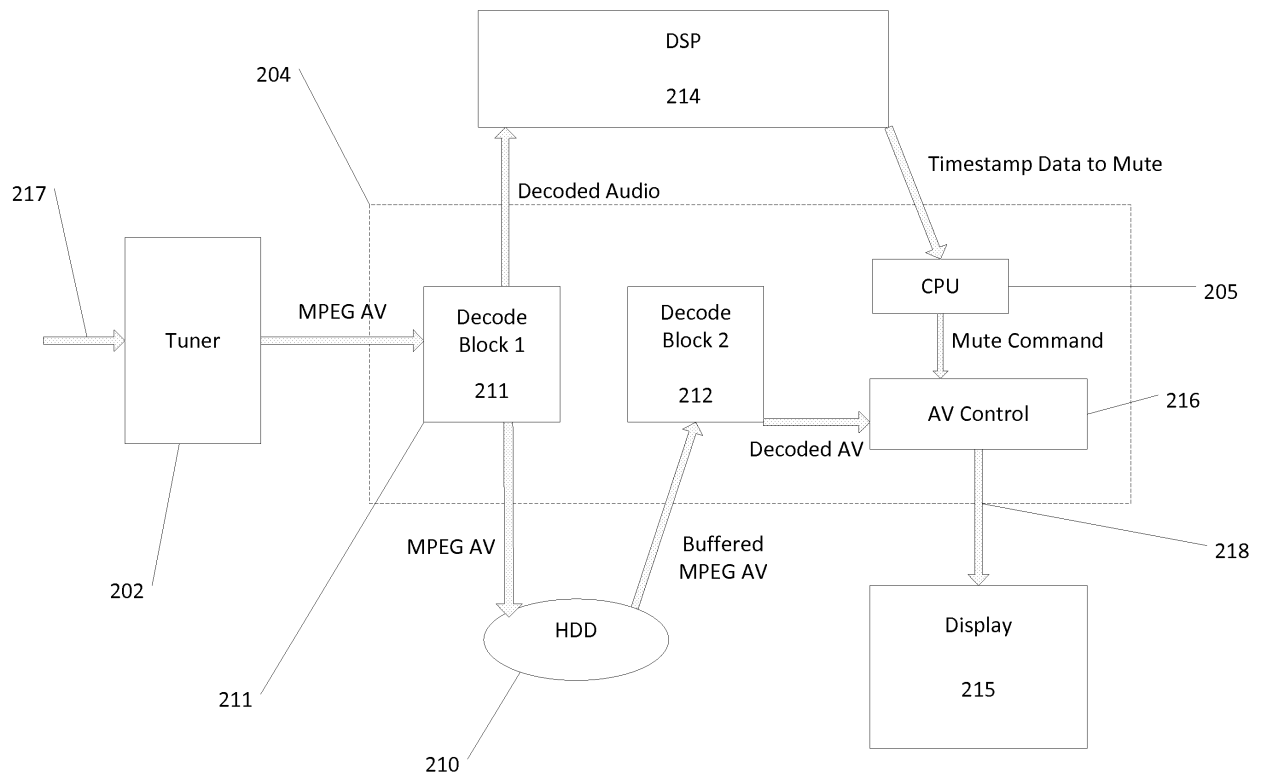


FIG 2

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 7139031 B [0005]
- US 20080184284 A [0005]
- GB 2449742 A [0005]
- US 20080221882 A1 [0006]