



(11) **EP 2 464 441 B9**

(12) **CORRECTED NEW EUROPEAN PATENT SPECIFICATION**

(15) Correction information:
Corrected version no 1 (W1 B2)
Corrections, see
Drawings
Drawing(s) replaced or added

(51) Int Cl.:
B01D 39/08 (2006.01) B01D 39/16 (2006.01)

(86) International application number:
PCT/BE2010/000053

(48) Corrigendum issued on:
12.12.2018 Bulletin 2018/50

(87) International publication number:
WO 2011/017782 (17.02.2011 Gazette 2011/07)

(45) Date of publication and mention
of the opposition decision:
03.01.2018 Bulletin 2018/01

(45) Mention of the grant of the patent:
04.09.2013 Bulletin 2013/36

(21) Application number: **10757554.0**

(22) Date of filing: **29.07.2010**

(54) **METHOD FOR DRYING COMPRESSED GAS AND COMPRESSOR INSTALLATION PROVIDED WITH A DRYER**

VERFAHREN ZUR TROCKNUNG VON DRUCKGAS UND KOMPRESSORANLAGE MIT EINEM TROCKNER

PROCÉDÉ POUR SÉCHER DU GAZ COMPRIMÉ, ET INSTALLATION DE COMPRESSEUR ÉQUIPÉE D UN SÉCHOIR

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO SE SI SK SM TR**

(74) Representative: **V.O.**
P.O. Box 87930
2508 DH Den Haag (NL)

(30) Priority: **11.08.2009 BE 200900484**

(56) References cited:
EP-A1- 0 566 180 EP-B1- 1 809 406
WO-A1-00/74819 WO-A1-01/87463
WO-A1-2005/070518 WO-A1-2006/012711
WO-A2-01/78872 DE-A1- 3 814 175
DE-A1- 3 902 977 DE-A1-102006 022 293
JP-A- 5 115 736 JP-A- 6 343 818
JP-A- 10 085 546 JP-A- H06 343 819
JP-A- H10 305 208 JP-A- 2001 179 036
JP-A- 2001 179 036 US-A- 4 729 774
US-A- 6 165 254 US-B1- 6 375 722

(43) Date of publication of application:
20.06.2012 Bulletin 2012/25

(73) Proprietor: **Atlas Copco Airpower, Naamloze
Vennootschap**
2610 Wilrijk (BE)

(72) Inventor: **VERMEER, Constantijn Friso**
2100 Antwerpen (BE)

EP 2 464 441 B9

Description

[0001] The present invention relates to a method for drying a compressed gas and a compressor installation provided with a dryer.

[0002] Specifically, the invention relates to a dryer provided with a rotating drum with therein a regenerable drying agent, which drying agent, as a consequence of the rotation of the drum, is alternately brought through two zones of the dryer, whereby in one zone, in particular, a drying zone, said drying agent is used for drying a compressed gas, and in the other zone, more specifically, a regeneration zone, said drying agent is regenerated by bringing this drying agent into contact with a hot gas.

[0003] As a result of the rotation of the drum, regenerated drying agent will end up in the drying zone. In order to improve the performances of the dryer, it is suitable and common to provide a third zone, indicated as cooling zone, in the drum, which cooling zone allows to cool the drying agent such that said drying agent can adsorb substantially more moisture.

[0004] When such a dryer is used for drying a compressed gas coming from a compressor, a portion of said compressed gas is cooled to be guided subsequently through the drying zone of the dryer, whereby the drying agent in this drying zone extracts moisture from said gas, which consequently results in a dry gas with a low pressure dew point.

[0005] The remaining fraction of the compressed gas coming from the compressor and still being hot due to the compression, is guided through the regeneration zone of the dryer, whereby said hot gas desorbs the moisture present in the drying agent, whereby the drying agent is regenerated to allow subsequently, in a new cycle, to be used again in the drying zone to dry the compressed gas.

[0006] A disadvantage is that the compressed gas used for regeneration has a relatively high humidity, as a result of which the drying efficiency is not optimal.

[0007] The above has the unfavourable result that, when the drying agent is subsequently brought into the drying zone, this drying agent can only absorb a rather limited amount of moisture from the gas being guided through said drying zone.

[0008] The heat of the compressed gas is used to regenerate the drying agent in the regeneration zone, whereby it should be noted that, as the temperature of the compressed gas rises, the drying process improves and the efficiency of the installation increases accordingly.

[0009] The temperature of the compressed gas used for regeneration, can be raised by installing a heating element or the like, before guiding this gas through the regeneration zone.

[0010] A disadvantage thereof is that the heating of the gas flow, used for regeneration, is quite expensive in view of the continuously increasing energy prices.

[0011] The invention aims to overcome one or more of

said and/or other disadvantages.

[0012] To that end, the invention relates to a compressor installation according to claim 4 and to a method according to claim 1. An advantage of a compressor installation according to the invention is that the drying agent in the second subzone comes into contact with a gas flow of which the moisture content is considerably lower compared to the gas flow flowing through the first subzone for regenerating the drying agent in the conventional way.

[0013] Consequently, during the regeneration phase, even more moisture can be removed from the drying agent than in the conventional way, in other words, in this way a further drying occurs, which can be referred to as deep drying, causing the drying agent to adsorb more moisture from the gas to be dried in a further drying phase. A dryer according to the invention therefore has a better performance.

[0014] According to the invention, a heat exchanger is provided in said connection conduit.

[0015] An advantage thereof is that the second regeneration gas flow, before being guided through the second subzone, can be heated by means of said heat exchanger, as a result of which said gas flow can remove more moisture from the drying agent.

[0016] As the temperature of the gas used for regeneration rises, the drying process will improve and the efficiency of the dryer will increase accordingly.

[0017] Another advantage is that it is not necessary to heat the complete gas flow through the regeneration zone, but solely the second regeneration gas flow directed through the second subzone.

[0018] This brings along a number of advantages since a relatively small heat exchanger can be used, which results in an energy-saving and compact installation.

[0019] In order to better explain the characteristics of the present invention, a number of preferred embodiments of a dryer and compressor installation according to the invention, as well as a method for drying a compressed gas, are described byway of example, without being limitative in any way, with reference to the accompanying drawings, whereby:

figure 1 represents schematically and in perspective view a part of a dryer of a compressor installation according to the invention;

figure 2 represents schematically a compressor installation provided with a dryer according to the invention;

figure 3 represents schematically the layout of a part of a dryer of a compressor installation according to the invention.

[0020] Figure 1 shows a part of a dryer of a compressor installation according to the invention, for compressed gas. The part 1 of the dryer is provided with a housing 2 with therein a drying zone 3, a cooling zone 4 and a regeneration zone 5 which, according to the specific characteristic of the invention, comprises two subzones, a

first subzone 6 and a second subzone 7 respectively.

[0021] Preferably, said first subzone 6 connects to the end of drying zone 3, while the second subzone 7 connects to the first subzone 6 and is followed by the cooling zone 4 which in its turn connects to the beginning of the drying zone 3.

[0022] Therefore, the first subzone 6 is situated at the beginning of the regeneration zone 5, or in other words, at the part of the drying zone 3 via which, during operation of the dryer, the moist drying agent 8 enters the regeneration zone, while the second subzone 7 is situated at the end of the regeneration zone 5, or, in other words, at the part of the regeneration zone via which the regenerated drying agent 8 exits the regeneration zone 5 and enters the cooling zone 4.

[0023] By "the end of the drying zone 3" is meant, the part of the drying zone 3 via which the humid drying agent 8 exits the drying zone 3 during rotation of the drum 9, whereas by "the beginning of the drying zone 3" is meant, the part of the drying zone 3 in which fresh regenerated drying agent 8 enters.

[0024] A rotating drum 9 is mounted in the housing 2 in which drum 9 is provided a drying agent 8, or so-called desiccant.

[0025] The dryer 1 is also provided with driving means, not represented in the figures, for example in the shape of a motor, for enabling the rotation of the drum 9 such that the drying agent 8 is moved successively through the drying zone 3, the regeneration zone 5 and the cooling zone 4.

[0026] Figure 2 shows a compressor installation according to the invention which comprises, besides said part 1, a pressure conduit 10 making a connection between the outlet of a compressor 11 and an inlet of the drying zone 3. The compressor 11 also forms part of the compressor installation.

[0027] To said pressure conduit 10, between the outlet of the compressor 11 and the inlet of the drying zone 3, a branch 12 connects, which is connected to a first inlet of said first subzone 6.

[0028] Furthermore, a return conduit 13 is provided for the gas flows, used for regeneration and cooling, which return conduit 13 connects the common outlet, of the first and second subzones 6 and 7 of the regeneration zone 5 and of the cooling zone 4, to the pressure conduit 10 and ends up therein nearby a venturi 14 provided in the pressure conduit 10. A cooler 15 is provided in this return conduit 13.

[0029] At the drying zone 3 is provided, on the one hand, a take-off point 16 along which the dried gas can be discharged for further use and, on the other hand, with a connection conduit 17 which guides a fraction of the dried gas through the secondary side of a heat exchanger 18, and subsequently guides this fraction through the second subzone 7 of the regeneration zone 5.

[0030] In the pressure conduit 10 an aftercooler 19 is provided between the compressor 11 and the venturi 14.

[0031] The method according to the invention for dry-

ing a compressed gas, is very simple, and as follows.

[0032] The flow directions are indicated in the figures. Arrow A shows the flow direction of the main flow through the drying zone 3 of the dryer. The flow direction of the remaining gas flows through the regeneration- and cooling zone, is, in the example as shown, directed opposite with respect to the flow direction A of the main flow, as illustrated by arrows B, D and E. Arrow C indicates the sense of rotation of the drum 9 in the housing 2 of the dryer.

[0033] The gas to be dried, coming from the compressor 11 or at least a substantial portion thereof, flows, in the form of a main flow, after passage through the aftercooler 19, through the drying agent 8 in the drying zone 3 towards the outlet of the drying zone 3, whereby, by making contact with the drying agent 8, the moisture is adsorbed by said drying agent 8. The gas dried in that way, is discharged via a take-off point 16 towards a consumers network situated downstream.

[0034] The drum 9 transfers the moisture-laden drying agent 8 to the first subzone 6 of the regeneration zone 5, where the moisture in the drying agent 8 is desorbed by contacting this drying agent 8 with a first regeneration gas flow in the form of a hot, compressed gas that, via branch 12, is supplied from the outlet of the compressor 11, to accomplish as such a first regeneration of the drying agent 8, making use of the heat of compression present in said first regeneration flow.

[0035] According to the specific characteristic of the invention, at the ending of the movement of the drying agent 8 through the regeneration zone, this drying agent is dried further in the second subzone 7 of the regeneration zone 5, than was possible until now, by bringing the drying agent 8 into contact with a second regeneration gas flow of which the relative humidity is lower than that of the first regeneration gas flow.

[0036] To this aim, the second regeneration gas flow in this case consists of gas that is branched off from the dried gas that exits the drying zone 3 and that, before being supplied to the regeneration zone 5 via the inlet of the second subzone 7, is guided through the secondary side of the heat exchanger 18, in which said gas flow is heated, in order to lower the partial pressure of the water present in this gas.

[0037] It is clear that in this way the moisture content of the drying agent 8 during regeneration can be reduced considerably due to the fact that the drying agent 8 is after-dried in the second subzone 7 of the regeneration zone 5 by making use of a hot, dry gas having low relative humidity. This is the most important advantage of the dryer and method according to the invention.

[0038] As the drum 9 rotates further, more moisture is being withdrawn from the drying agent 8, until the drying agent 8 reaches the drying zone 3, after first being cooled in the cooling zone, disposed of the adsorbed moisture, such that the drying agent 8 regenerated as such can be used during a subsequent cycle of drying in the drying zone 3.

[0039] As such, the drying agent 8 is guided alternately through the drying zone 3 and subsequently through the regeneration zone 5, in a continuous or discontinuous movement of revolution.

[0040] According to the invention, it is appropriate that a fraction of the dried main gas flow is used for cooling the hot regenerated drying agent 8 at the transition between the regeneration zone 5 and the drying zone 3 in the cooling zone 4, before said drying agent 8 comes into contact with the main flow in the drying zone 3.

[0041] The presence of such a cooling zone 4 is after all advantageous in that the main flow is not coming into contact with hot drying agent 8 that is not able to adsorb liquid and that would cause the humid gas to leak through the dryer 1. Consequently, in this manner the drying is optimised.

[0042] Thanks to the venturi 14 a local pressure drop is generated in a known way, which results in that the outlet of the regeneration zone 5 remains under a lower pressure than at the outlet of the drying zone 3 situated at the opposite side of the drum 9, as a result of which a fraction of the cool main gas flow from the outlet of the drying zone 3 flows towards the outlet of the regeneration zone 5, through the cooling zone 4 situated between drying zone 3 and regeneration zone 5.

[0043] By guiding this flow through the cooling zone 4, the hot regenerated drying agent 8 will be cooled with advantageous effect, before said drying agent 8 is used to dry the main gas flow.

[0044] The lower pressure described above further causes the gas coming from the drying zone 3, to flow through the heat exchanger 18, towards the second subzone 7. Said flow is in particular made possible by taking off dry gas at the correct position, namely at a position where the dynamic pressure is the lowest. Thus, no blowers are required for this system.

[0045] The gas used for regeneration and cooling of the drying agent 8 is, after flowing through the respective zones, collected and cooled by means of a cooler 15, after which this gas is added to the main gas flow, that, subsequently, in its turn, is guided through the drying zone 3.

[0046] Figure 3 shows an example of a schematic layout of a part of a dryer according to the invention, whereby the different sectors or zones are made visible.

[0047] This figure shows in particular how the regeneration zone 5 is divided into two subzones 6 and 7, whereby in this case the regeneration zone 5 extends over a circumferential angle of almost 90 degrees.

[0048] In this case, the first subzone 6 extends over an angle of 75 degrees, while in this example the second subzone 7 extends over an angle in a range from 5 degrees to 30 degrees, and in this case over an angle of almost 15 degrees.

[0049] In this example, the drying zone 3 comprises a circle sector of 255 degrees, while the remaining part of 15 degrees, between the second subzone 7 and the drying zone 3, forms the cooling zone 4 in the cylindrical

housing 2 of the dryer.

[0050] It is clear from the figure in which sense the different zones in the drum 9 are preferably being passed through.

[0051] It is clear that the second regeneration gas flow can be heated as well by guiding said flow through a heating element or the like, not represented in the figures.

[0052] The gas which is guided through the second subzone 7 should not necessarily come from the dryer itself, however, it can originate from an external source of dried gas as well.

Claims

1. Method for drying a compressed gas coming from an outlet of a compressor, whereby use is made of a dryer provided with a housing (2) having a drying zone (3) and a regeneration zone (5), and a drum (9) rotating in the housing (2), containing a regenerable drying agent (8), whereby the drying agent (8) is transferred successively through the drying zone (3) and through the regeneration zone (5), and whereby the compressed gas to be dried is guided through the drying zone (3) while a regeneration gas is guided through the regeneration zone (5), **characterised in that** said regeneration zone is divided into:

- a first subzone through which a first regeneration gas flow, in the form of a hot, compressed gas coming via a branch (12) from the outlet of the compressor, is directed, wherein the branch (12) is connected to a pressure conduit (10), that guides compressed gas coming from the outlet of the compressor to the drying zone (3), between the outlet of the compressor and an inlet of the drying zone, and
- a second subzone through which a second regeneration gas flow is directed; and that the second regeneration gas flow has a lower relative humidity than the first regeneration gas flow; and **in that** the second regeneration gas flow is composed of a fraction of the compressed gas that exits an outlet of the drying zone (3), and **in that** the second regeneration gas flow is heated before being guided through the second subzone (7).

2. Method according to claim 1, **characterised in that** the second regeneration gas flow is heated by guiding said flow through a heat exchanger (18) and/or an external heating element or the like.

3. Method according to any one of claims 1 to 2, **characterised in that** the first and the second regeneration gas flows are collected at a common outlet of the first subzone (6) and the second subzone (7) and

are guided subsequently, through a return conduit (13) to an inlet of the drying zone (3), via a cooler (15).

4. Compressor installation which is provided with a compressor (11) having an outlet, and with a dryer which is provided with a housing (2) having therein a drying zone (3) and a regeneration zone (5), and a drum (9), which is rotatable in the housing (2) with therein a regenerable drying agent (8) and driving means for the rotation of the drum (9), such that the drying agent (8) is moved successively through the drying zone (3) and through the regeneration zone (5), **characterised in that** the outlet of the compressor (11) connects through a pressure conduit (10) to an inlet of the drying zone; **in that** said regeneration zone (5) comprises at least two subzones, namely, a first subzone (6) having a first inlet for the supply of a first regeneration gas flow, and a second subzone (7) having a second inlet for the supply of a second regeneration gas flow; **in that** a branch (12) connects to said pressure conduit (10), between the compressor (11) and the inlet of the drying zone (3), which branch (12) connects to said first inlet of the first subzone (6); and **in that** an outlet of said drying zone (3) connects to the second inlet of the second subzone (7) via a connection conduit (17), such that the relative humidity is lower than that of the first regeneration gas flow, wherein the compressor installation includes a heat exchanger (18) and/or an external heating element which is provided in said connection conduit (17) and through which the second regeneration gas flow is guided to be heated before being guided through the second subzone (7).
5. Compressor installation according to claim 4, **characterised in that** the first subzone (6) and the second subzone (7) have a common outlet.

Patentansprüche

1. Verfahren zum Trocknen eines Druckgases, kommend von einem Auslass eines Kompressors, wobei ein Trockner, versehen mit einem Gehäuse (2) mit einer Trocknungszone (3) und einer Regenerierungszone (5) und einer sich in dem Gehäuse (2) drehenden Trommel (9), die ein regenerierbares Trocknungsmittel (8) enthält, verwendet wird, wobei das Trocknungsmittel (8) nacheinander durch die Trocknungszone (3) und durch die Regenerierungszone (5) übertragen wird, und wobei das zu trocknende Druckgas durch die Trocknungszone (3) geleitet wird, während ein Regenerierungsgas durch die Regenerierungszone (5) geleitet wird, **dadurch gekennzeichnet, dass** die Regenerierungszone unterteilt ist in:

- eine erste Teilzone, durch die ein erster Rege-

nerierungsgasstrom in Form eines heißen Druckgases, kommend über einen Zweig (12) von dem Auslass des Kompressors, geleitet wird, wobei der Zweig (12) zwischen dem Auslass des Kompressors und einem Einlass der Trocknungszone mit einer Druckleitung (10) verbunden ist, die Druckgas, kommend von dem Auslass des Kompressors, zu der Trocknungszone (3) leitet, und

- eine zweiten Teilzone, durch die ein zweiter Regenerierungsgasstrom geleitet wird; und dass der zweite Regenerierungsgasstrom eine niedrigere relative Luftfeuchtigkeit hat als der erste Regenerierungsgasstrom; und dass der zweite Regenerierungsgasstrom aus einem Bruchteil des Druckgases, das einen Auslass der Trocknungszone (3) verlässt, zusammengesetzt ist, und dass der zweite Regenerierungsgasstrom erwärmt wird, bevor er durch die zweite Teilzone (7) geleitet wird.

2. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, dass** der zweite Regenerierungsgasstrom erwärmt wird, indem der Strom durch einen Wärmetauscher (18) und/oder ein externes Heizelement oder dergleichen geleitet wird.
3. Verfahren nach einem der Ansprüche 1 bis 2, **dadurch gekennzeichnet, dass** die ersten und zweiten Regenerierungsgasströme an einem gemeinsamen Auslass der ersten Teilzone (6) und der zweiten Teilzone (7) gesammelt werden und nacheinander durch eine Rückführleitung (13) über einen Kühler (15) zu einem Einlass der Trocknungszone (3) geleitet werden.
4. Kompressoranlage, versehen mit einem Kompressor (11), der einen Auslass hat, und mit einem Trockner, der mit einem Gehäuse (2) versehen ist, mit darin einer Trocknungszone (3) und einer Regenerierungszone (5) und einer Trommel (9), die in dem Gehäuse (2) drehbar ist, mit darin einem regenerierbaren Trocknungsmittel (8) und Antriebsmitteln zum Drehen der Trommel (9), sodass das Trocknungsmittel (8) nacheinander durch die Trocknungszone (3) und durch die Regenerierungszone (5) bewegt wird, **dadurch gekennzeichnet, dass** der Auslass des Kompressors (11) durch eine Druckleitung (10) mit einem Einlass der Trocknungszone verbunden ist; dass die Regenerierungszone (5) mindestens zwei Teilzonen umfasst, nämlich eine erste Teilzone (6) mit einem ersten Einlass zum Zuführen eines ersten Regenerierungsgasstroms und eine zweite Teilzone (7) mit einem zweiten Einlass zum Zuführen eines zweiten Regenerierungsgasstroms; dass ein Zweig (12) mit der Druckleitung (10) zwischen dem Kompressor (11) und dem Einlass der Trocknungszone (3) verbunden ist, welcher Zweig (12) mit dem

ersten Einlass der ersten Teilzone (6) verbunden ist; und dass ein Auslass der Trocknungszone (3) mit dem zweiten Einlass der zweiten Teilzone (7) über eine Verbindungsleitung (17) verbunden ist, sodass die relative Feuchtigkeit niedriger ist als die des ersten Regenerierungsgasstroms, wobei die Kompressoranlage einen Wärmetauscher (18) und/oder ein externes Heizelement umfasst, das in der Verbindungsleitung (17) bereitgestellt ist und durch das der zweite Regenerierungsgasstrom geleitet wird, um erwärmt zu werden, bevor er durch die zweite Teilzone (7) geleitet wird.

5. Kompressoranlage nach Anspruch 4, **dadurch gekennzeichnet, dass** die erste Teilzone (6) und die zweite Teilzone (7) einen gemeinsamen Auslass haben.

Revendications

1. Procédé de séchage d'un gaz comprimé provenant d'une sortie d'un compresseur, utilisant un séchoir doté d'un boîtier (2) ayant une zone de séchage (3) et une zone de régénération (5), et un tambour (9) pivotant dans le boîtier (2), contenant un agent de séchage (8) régénérable, l'agent de séchage (8) étant transféré successivement à travers la zone de séchage (3) et à travers la zone de régénération (5), et le gaz comprimé à sécher étant guidé à travers la zone de séchage (3) tandis qu'un gaz de régénération est guidé à travers la zone de régénération (5), **caractérisé en ce que** ladite zone de régénération est divisée en :

- une première sous-zone à travers laquelle un premier flux de gaz de régénération, sous la forme d'un gaz comprimé chaud provenant d'une branche (12) de la sortie du compresseur, est dirigé, la branche (12) étant reliée à une conduite de pression (10) qui guide l'air comprimé provenant de la sortie du compresseur vers la zone de séchage (3), entre la sortie du compresseur et une entrée de la zone de séchage, et
- une seconde sous-zone à travers laquelle un second flux de gaz de régénération est dirigé ; et **en ce que** le second flux de gaz de régénération a une humidité relative inférieure au premier flux de gaz de régénération ; et **en ce que** le second flux de gaz de régénération se compose d'une fraction du gaz comprimé qui sort d'une sortie de la zone de séchage (3) et **en ce que** le second flux de gaz de régénération est chauffé avant d'être guidé à travers la seconde sous-zone (7).

2. Procédé selon la revendication 1, **caractérisé en ce que** le second flux de gaz de régénération est chauffé

fé par guidage dudit flux à travers un échangeur de chaleur (18) et/ou un élément de chauffage externe ou analogue.

3. Procédé selon l'une quelconque des revendications 1 à 2, **caractérisé en ce que** le premier et le second flux de gaz de régénération sont recueillis au niveau d'une sortie commune de la première sous-zone (6) et de la seconde sous-zone (7) et sont guidés ensuite à travers une conduite de retour (13) vers une entrée de la zone de séchage (3) par le biais d'un refroidisseur (15).

4. Installation de compresseur qui est dotée d'un compresseur (11) ayant une sortie, et d'un séchoir qui est doté d'un boîtier (2) ayant en son sein une zone de séchage (3) et une zone de régénération (5), et un tambour (9) qui peut pivoter dans le boîtier (2) avec en son sein un agent de séchage (8) régénérable et un moyen de commande pour faire pivoter le tambour (9), de telle sorte que l'agent de séchage (8) est déplacé successivement à travers la zone de séchage (3) et à travers la zone de régénération (5), **caractérisée en ce que** la sortie du compresseur (11) est reliée par le biais d'une conduite de pression (10) à une entrée de la zone de séchage ; **en ce que** ladite zone de régénération (5) comprend au moins deux sous-zones, à savoir une première sous-zone (6) ayant une première entrée pour l'alimentation d'un premier flux de gaz de régénération et une seconde sous-zone (7) ayant une seconde entrée pour l'alimentation d'un second flux de gaz de régénération ; **en ce qu'une** branche (12) est reliée à ladite conduite de pression (10) entre le compresseur (11) et l'entrée de la zone de séchage (3), laquelle branche (12) est reliée à ladite première entrée de la première sous-zone (6) ; et **en ce qu'une** sortie de ladite zone de séchage (3) est reliée à la seconde entrée de la seconde sous-zone (7) par le biais d'une conduite de raccordement (17), de sorte que l'humidité relative est inférieure à celle du premier flux de gaz de régénération, l'installation de compresseur comprenant un échangeur de chaleur (18) et/ou un élément de chauffage externe qui est fourni dans ladite conduite de raccordement (17) et au travers duquel le second flux de gaz de régénération est guidé pour être chauffé avant d'être guidé à travers la seconde sous-zone (7).

5. Installation de compresseur selon la revendication 4, **caractérisée en ce que** la première sous-zone (6) et la seconde sous-zone (7) ont une sortie commune.

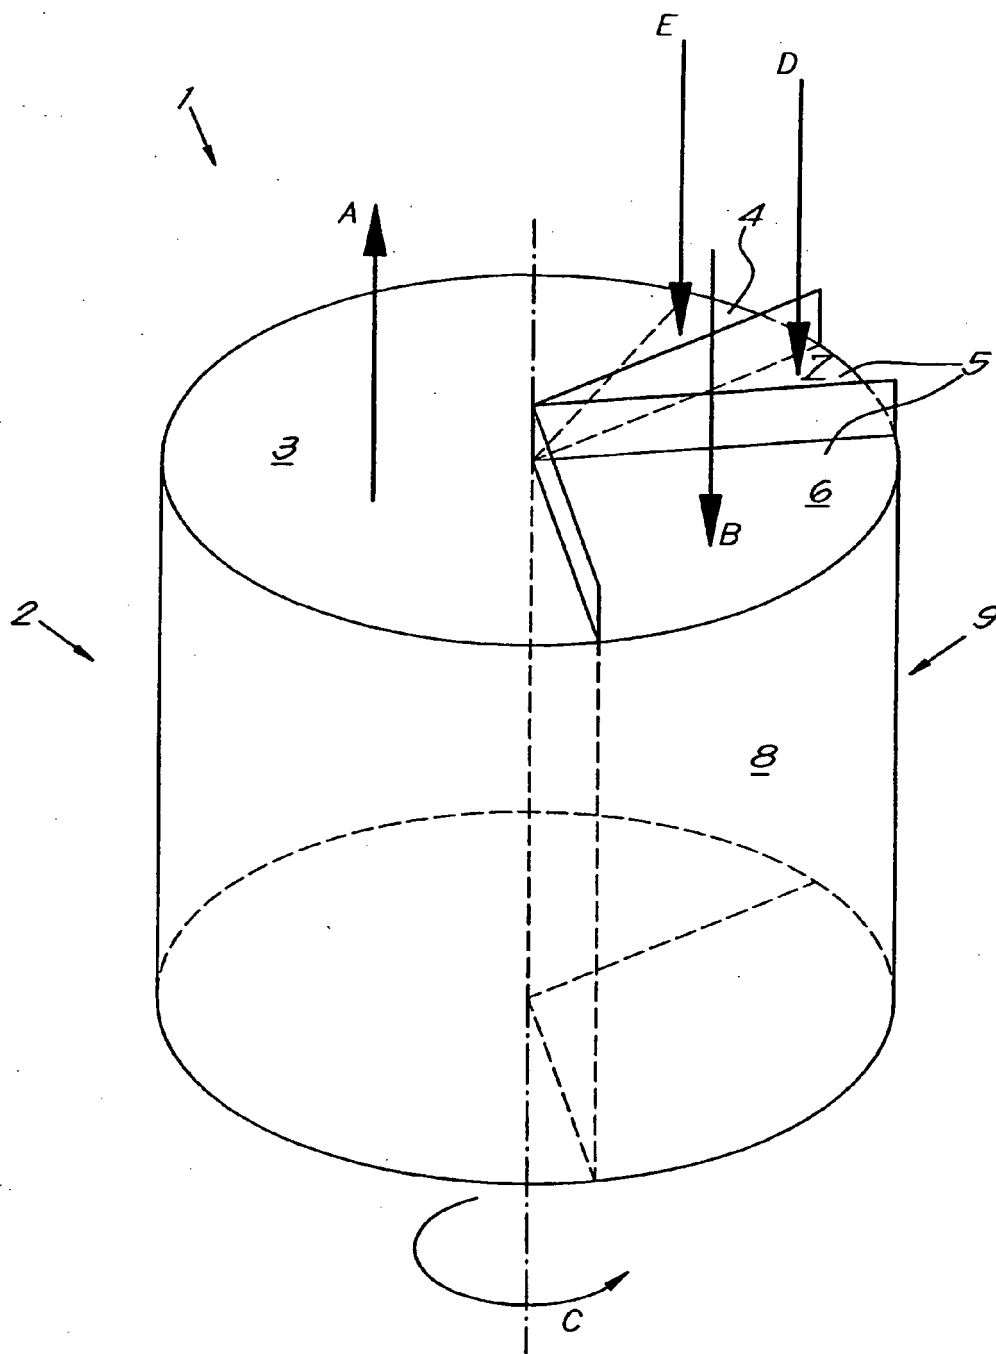


Fig.1

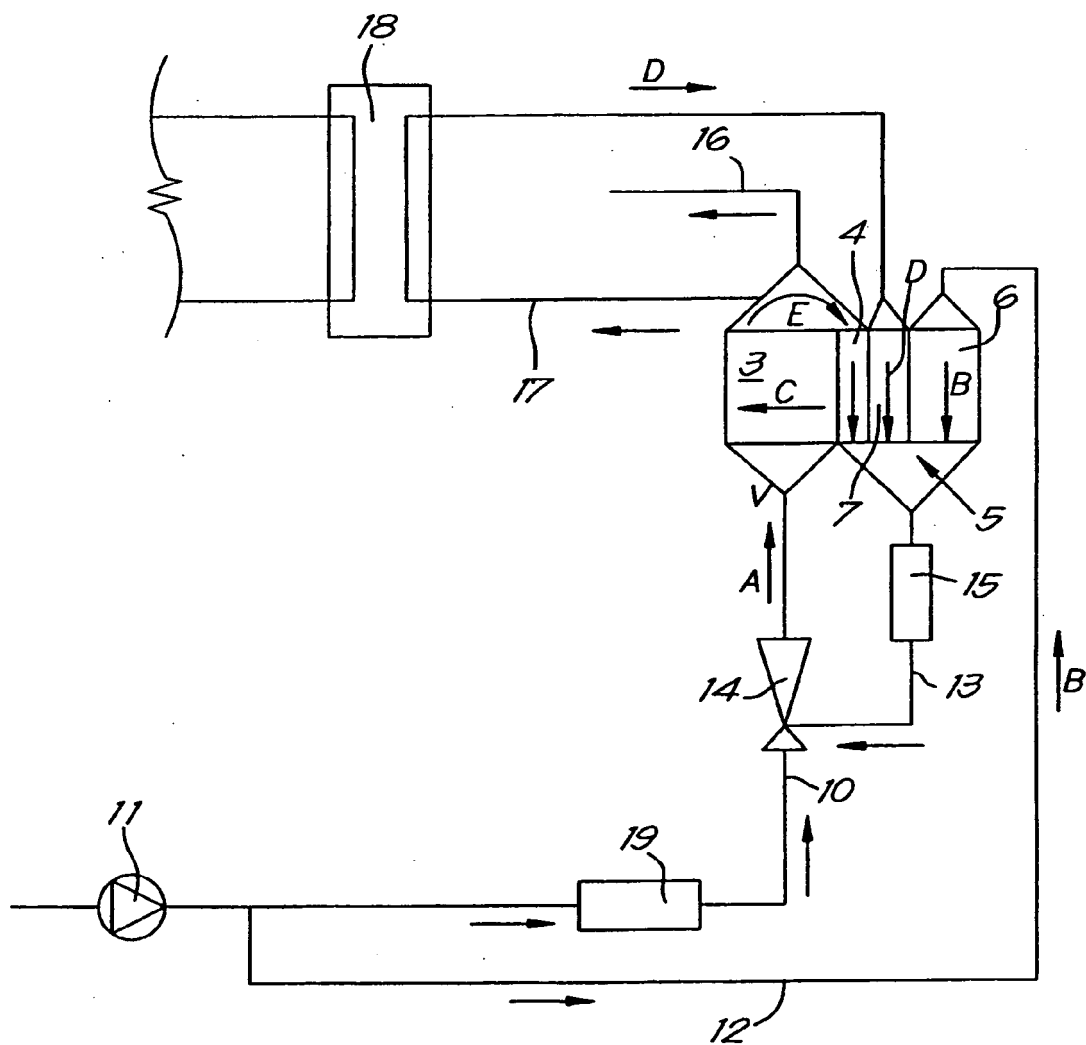


Fig. 2

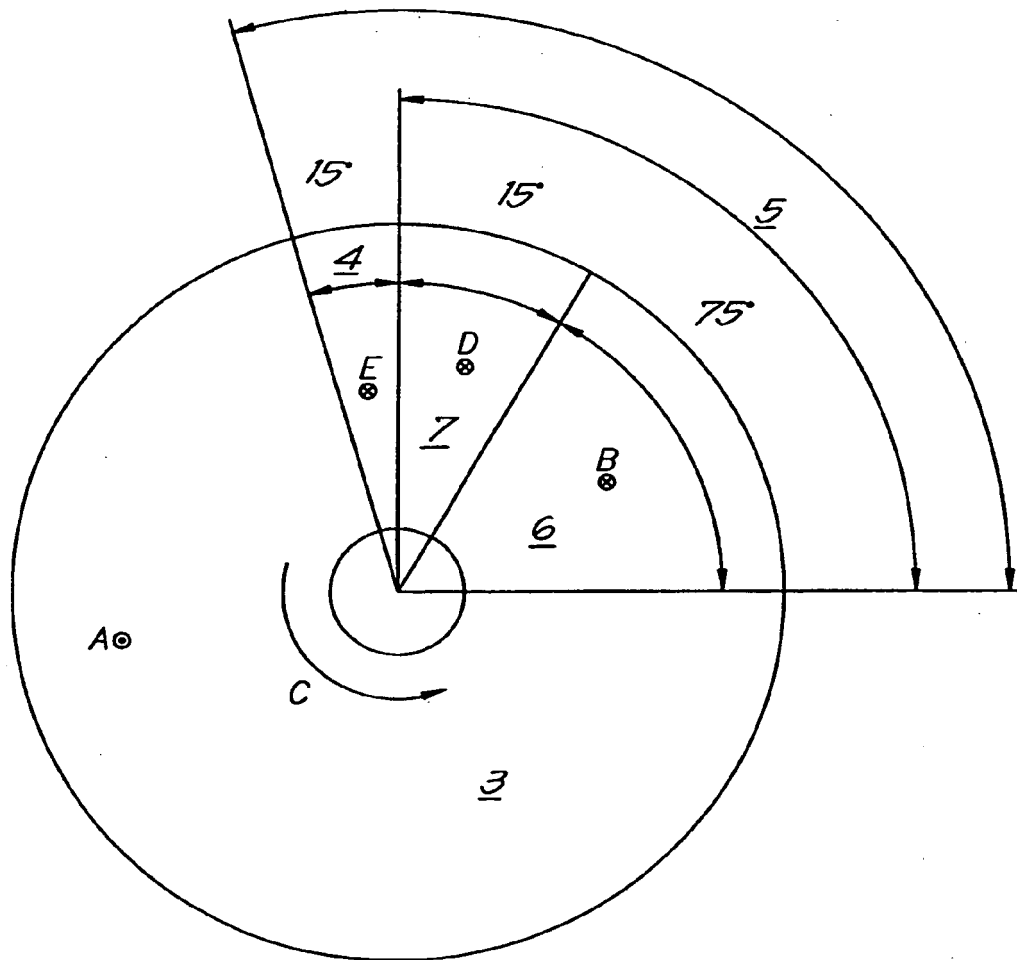


Fig.3