



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
20.06.2012 Bulletin 2012/25

(51) Int Cl.:
H05B 6/76 (2006.01)

(21) Application number: **12159564.9**

(22) Date of filing: **14.08.2009**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK SM TR

• **Hofmann, Arnd**
91541 Rothenburg ob der Tauber (DE)

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
09010482.9 / 2 285 181

(74) Representative: **Röder, Richard**
Electrolux Dienstleistungs GmbH
Group Intellectual Property
90327 Nürnberg (DE)

(71) Applicant: **Electrolux Home Products Corporation N.V.**
1130 Brussels (BE)

Remarks:
This application was filed on 15-03-2012 as a divisional application to the application mentioned under INID code 62.


(72) Inventors:
• **Zbat, Abdel-Ilah**
91541 Rothenburg ob der Tauber (DE)

(54) **A wave choke system for a microwave oven**

(57) The present invention relates to a wave choke system for a microwave oven. Said wave choke system comprises at least one elongate channel (10) bordered by side walls (18, 20, 22, 24, 26) made of conductive material and by at least one gap (28). The channel (10) is provided for extending at least partially along the door frame (34) and/or along the cavity frame (36). The chan-

nel (10) comprises at least two recesses (12, 14) each provided for a $\lambda/4$ transformation and a step (16) between said recesses (12, 14), wherein preferably an edge of the step (16) extends parallel to the longitudinal axis of the channel (10). Further, the present invention relates to a microwave oven with at least one above wave choke system.

FIG 1

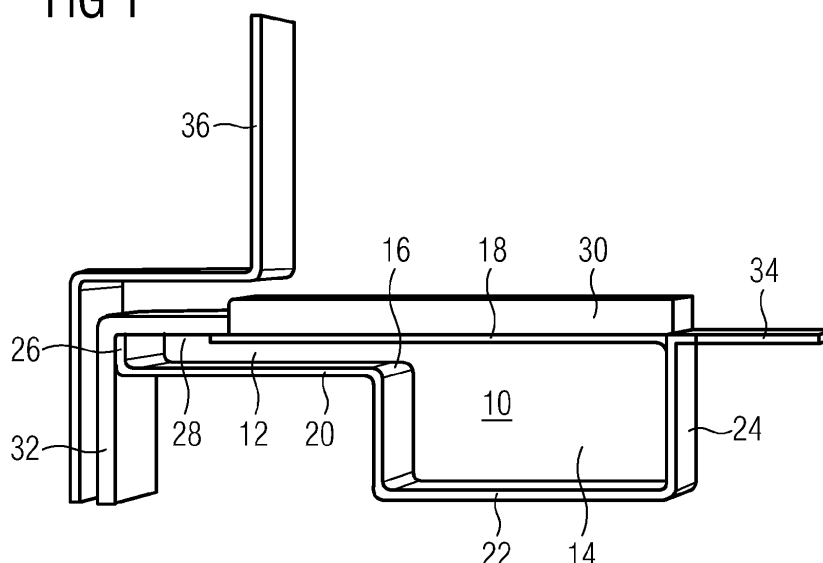

Description

[0001] The present invention relates to a wave choke system for a microwave oven and to a microwave oven.

[0002] Microwave ovens generate electromagnetic fields in order to heat food stuff and beverages. The strong electromagnetic fields generated by microwave ovens are a potential threat to the health of the operator, if said electromagnetic fields or parts of them leave the cavity. The door of the microwave oven is a critical part. In particular, microwaves may leave the cavity through the gap between the door and the frame of the cavity.

[0003] Typically, the gap between the door and the cavity is sealed with respect to microwaves by integrating wave chokes into the door and/or the frame of the cavity. Said wave chokes base on a $\lambda/4$ transformation or an LC oscillator. However, mechanical tolerances of the cavity frame and the frame of the oven door can evoke local areas of an increased leakage.

[0004] US 3,678,238 discloses a wave choke system for a microwave oven, wherein said wave choke system comprises an elongate channel bordered by side walls made of a conductive material. The channel extends along the door frame or the cavity frame. The channel includes one recess for a $\lambda/4$ transformation. A gap with a length of $\lambda/4$ is formed between the door frame and the cavity frame.

[0005] It is an object of the present invention to provide an improved wave choke system for a microwave oven.

[0006] This object is achieved by the wave choke system according to claim 1.

[0007] According to the present invention a wave choke system for a microwave oven is suggested, which wave choke system comprises at least one elongate channel bordered by side walls made of one or more conductive materials and by at least one gap, wherein the channel is provided for extending at least partially along the door frame and/or along the cavity frame. Furthermore, the channel comprises at least two recesses for a $\lambda/4$ transformation and a step between said recesses.

[0008] The main idea of the present invention is the arrangement of the both recesses for the $\lambda/4$ transformation within the channel and their formation by the step between them. The step allows two successive recesses for the $\lambda/4$ transformation. Each of the recesses is, therefore, provided for a $\lambda/4$ transformation or acting as a $\lambda/4$ wave trap. The structure of the inventive wave choke system allows a low complexity. Thus, the wave choke system according to the present invention may be realized by low costs.

[0009] In a preferred and advantageous embodiment the channel includes an outer circumferential side wall, a first inner circumferential side wall, a second inner circumferential side wall and an outer side wall, wherein the first inner circumferential side wall corresponds with the first recess and forms an inner circumferential side wall of the first recess and the second inner circumfer-

ential side wall corresponds with the second recess and forms an inner circumferential side wall of the second recess.

[0010] In a first variant of this embodiment the channel includes further an inner side wall and the outer circumferential side wall comprises the gap of the channel besides the inner side wall, wherein except for said gap, the channel is completely enclosed by electrically conductive side walls.

[0011] In a second alternative variant of said embodiment the gap of the channel is arranged between the outer circumferential side wall and the first inner circumferential side wall and, except for said gap, the channel is completely enclosed by electrically conductive side walls.

[0012] In a further embodiment the channel encloses circumferentially the oven door completely or at least partially and/or in a closed state of the oven door the channel extends along the cavity frame.

[0013] Preferably an edge of the step extends substantially or at least approximately parallel to the longitudinal axis of the channel.

[0014] According to a preferred embodiment of the present invention the channel is an integrated part or an appendix of the door frame. The assembly within or at the door frame can be realized by simple means.

[0015] Alternatively or additionally the channel is an integrated part or an appendix of the cavity frame. Also this embodiment can be easily produced.

[0016] Preferably, the channel has an L-shaped cross section. Said L-shaped cross section minimizes the costs of materials. For example, the both legs of the L-shaped cross section form the recesses of the channel.

[0017] Further, the gap may be arranged besides or within the interspace of the door frame and the cavity frame. This position of the gap allows an optimal choking of the microwaves.

[0018] According to a preferred embodiment of the present invention the gap is covered by an element made of at least one non-conductive material. For example, said element is formed as an L-shaped profile section and covers the gap as well as a side wall beside. The cover element may be arranged in front of the cavity frame. The cover element prevents the infiltration of undesirable particles into the channel.

[0019] Additionally, at least one transparent element may be arranged on at least one outer side at the side wall of the channel. In particular, the transparent element is made of at least one non-conductive material. For example, the transparent element is made of glass.

[0020] Preferably, the transparent element is provided for allowing an insight into the cavity.

[0021] At last, the present invention relates to a microwave oven comprising at least one wave choke system as described above.

[0022] The novel and inventive features believed to be the characteristic of the present invention are set forth in the appended claims.

[0023] The invention will be described in further detail with reference to the drawing, in which

FIG 1 illustrates a perspective view of a section of a wave choke system for microwave oven according to a first embodiment of the present invention, and

FIG 2 illustrates a perspective view of a section of a wave choke system for microwave oven according to a second embodiment of the present invention.

[0024] FIG 1 illustrates a perspective view of a section of a wave choke system for microwave oven according to a first embodiment of the present invention. The cross section of the illustrated section corresponds with the cross section of the whole wave choke system.

[0025] The wave choke system comprises an elongate channel 10 with an L-shaped cross section. The channel 10 is arranged within a door frame of the microwave oven. It is provided, that the channel 10 encloses circumferentially the oven door completely or at least partially. The channel 10 forms a part or an appendix of a door frame 34. In a closed state of the oven door the channel 10 extends along a cavity frame 36.

[0026] The channel 10 of the wave choke system comprises a first recess 12 and a second recess 14. Each of the recesses 12 and 14 is provided for a $\lambda/4$ transformation. The recesses 12 and 14 are separated by a step 16. The edge of said step 16 extends along the longitudinal axis of the channel 10. The first recess 12 and the second recess 14 form the both legs of the L-shaped cross section of the channel 10. Thus, the channel 10 includes two portions acting as $\lambda/4$ wave traps.

[0027] The channel 10 includes an outer circumferential side wall 18, a first inner circumferential side wall 20, a second inner circumferential side wall 22, an outer side wall 24 and an inner side wall 26. The side walls 18, 20, 22, 24 and 26 of the channel 10 are made of an electrically conductive material, in particular of metal. The first inner circumferential side wall 20 corresponds with the first recess 12 and forms an inner circumferential side wall of the first recess 12. In a similar way, the second inner circumferential side wall 22 corresponds with the second recess 14 and forms an inner circumferential side wall of the second recess 14.

[0028] In this embodiment, the outer circumferential side wall 18 comprises a gap 28 besides the inner side wall 26. Except said gap 28, the channel 10 is completely enclosed by electrically conductive side walls 18, 20, 22, 24 and 26.

[0029] Further, the wave choke system comprises a transparent element 30 and a cover element 32. The transparent element 30 is arranged at the outer side of the outer circumferential side wall 18. The transparent element 30 is made of a non-conductive and transparent material. In this embodiment, the transparent element 30

is made of glass. The transparent element 30 allows an insight into the cavity. The cover element 32 is formed as an L-shaped profile section and covers the gap 28 as well as the inner side wall 26. The cover element 32 is made of a non-conductive material. Further, the cover element 32 is arranged in front of the cavity frame 36. The cover element 32 prevents the infiltration of undesirable particles into the channel 10.

[0030] FIG 2 illustrates a perspective view of a section of a wave choke system for microwave oven according to a second embodiment of the present invention. Identical, corresponding and similar elements of the wave choke system have the same reference numerals as in FIG 1. The cross section of the illustrated section corresponds with the cross section of the whole wave choke system.

[0031] The wave choke system of the second embodiment comprises also the elongate channel 10 with the L-shaped cross section. The channel 10 is arranged within the door frame of the microwave oven. It is provided, that the channel 10 completely or at least partially encloses circumferentially the oven door. The channel 10 is a part or the appendix of the door frame 34. In a closed state of the oven door the channel 10 extends along the cavity frame 36.

[0032] The channel 10 of the wave choke system according to the second embodiment comprises also the first recess 12 and the second recess 14. The recesses 12 and 14 are provided for $\lambda/4$ transformations. The recesses 12 and 14 are separated by the step 16. The edge of said step 16 extends along the longitudinal axis of the channel 10. The first recess 12 and the second recess 14 form the both legs of the L-shaped cross section of the channel 10. The channel 10 of the second embodiment includes also two portions acting as $\lambda/4$ wave traps.

[0033] The channel 10 includes the outer circumferential side wall 18, the first inner circumferential side wall 20, the second inner circumferential side wall 22 and the outer side wall 24. The side walls 18, 20, 22 and 24 of the channel 10 are made of an electrically conductive material, in particular of metal. The first inner circumferential side wall 20 corresponds with the first recess 12 and forms an inner circumferential side wall of the first recess 12. In the same way, the second inner circumferential side wall 22 corresponds with the second recess 14 and forms an inner circumferential side wall of the second recess 14.

[0034] In this embodiment, the gap 28 is arranged between the outer circumferential side wall 18 and the first inner circumferential side wall 20. Except said gap 28, the channel 10 is completely enclosed by electrically conductive side walls 18, 20, 22 and 24. Thus, the difference between the first embodiment in FIG 1 and the second embodiment in FIG 2 is the position of the gap 28. In the first embodiment the gap 28 is arranged at the outer circumferential side wall 18. In the second embodiment the gap 28 is provided instead of the inner side wall 26 in FIG 1. Thus, the inner side wall 26 is lacking in the second

embodiment according to FIG 2.

[0035] Further, the wave choke system according to the second embodiment comprises the transparent element 30 and a cover element 32. The transparent element 30 is arranged at the outer side of the outer circumferential side wall 18. The transparent element 30 is made of a non-conductive and transparent material. Also in this embodiment, the transparent element 30 is made of glass. The transparent element 30 allows an insight into the cavity. The cover element 32 is formed as an L-shaped profile section and covers the gap 28 and an inner portion of the outer circumferential side wall 18. The cover element 32 is made of a non-conductive material. Further, the cover element 32 is arranged in front of the cavity frame 36. The cover element 32 prevents the infiltration of undesirable particles into the channel 10.

[0036] Further embodiments of the wave choke system according to the present invention may be realized. For example, the orientation of the channel 10 in relation to the oven door and the cavity frame can be varied. The substantial features of the wave choke system according to the present invention are the both recesses 12 and 14 for the $\lambda/4$ transformation and the step 16 between them.

[0037] The wave choke system according to the present invention with the both recesses 12 and 14 beside the step 16 allows an improved sealing of microwaves. The leakage between the oven door and the cavity frame is reduced. The inventive wave choke system has a higher bandwidth. The functionality of the wave choke system according to the present invention is more robust against mechanical tolerances of the cavity walls and frame. At last, the inventive wave choke system can be produced in an easy way.

[0038] Although illustrative embodiments of the present invention have been described herein with reference to the accompanying drawing, it is to be understood that the present invention is not limited to those precise embodiments and that various other changes and modifications may be affected therein by one skilled in the art without departing from the scope or spirit of the invention. All such changes and modifications are intended to be included within the scope of the invention as defined by the appended claims.

List of reference numerals

[0039]

- 10 channel
- 12 first recess
- 14 second recess
- 16 step
- 18 outer circumferential side wall

- 20 first inner circumferential side wall
- 22 second inner circumferential side wall
- 24 outer side wall
- 26 inner side wall
- 28 gap
- 30 transparent element
- 32 cover element
- 34 door frame
- 36 cavity frame

Claims

1. A wave choke system for a microwave oven, wherein said wave choke system comprises at least one elongate channel (10) bordered by side walls (18, 20, 22, 24, 26) made of one or more conductive materials and by at least one gap (28), wherein the channel (10) is provided for extending at least partially along the door frame (34) and/or along the cavity frame (36), wherein the channel (10) comprises at least two successive recesses (12, 14) and a step (16) between said recesses (12, 14), wherein each of the recesses (12, 14) is provided for a $\lambda/4$ transformation or acting as a $\lambda/4$ wave trap.
2. The wave choke system according to claim 1, wherein the channel (10) includes an outer circumferential side wall (18), a first inner circumferential side wall (20), a second inner circumferential side wall (22) and an outer side wall (24), wherein the first inner circumferential side wall (20) corresponds with the first recess (12) and forms an inner circumferential side wall of the first recess (12) and the second inner circumferential side wall (22) corresponds with the second recess (14) and forms an inner circumferential side wall of the second recess (14).
3. The wave choke system according to claim 2, wherein the channel (10) includes further an inner side wall (26) and the outer circumferential side wall (18) comprises the gap (28) of the channel (10) besides the inner side wall (26), wherein except for said gap (28), the channel (10) is completely enclosed by electrically conductive side walls (18, 20, 22, 24 and 26).
4. The wave choke system according to claim 2, wherein the gap (28) of the channel (10) is arranged between the outer circumferential side wall (18) and

the first inner circumferential side wall (20) and wherein except for said gap (28), the channel (10) is completely enclosed by electrically conductive side walls (18, 20, 22 and 24).

a cavity frame (36) and an oven door having a door frame (34) and at least one wave choke system according to any one of the claims 1 to 12.

- 5
5. The wave choke system according to any of the preceding claims, wherein the channel (10) encloses circumferentially the oven door completely or at least partially and/or in a closed state of the oven door the channel (10) extends along the cavity frame (36). 10
6. The wave choke system according to any of the preceding claims, wherein the two recesses (12 and 14) are separated by the step (16) and the both recesses (12, 14) are arranged beside the step (16). 15
7. The wave choke system according to any of the preceding claims, wherein the channel (10) is an integrated part or an appendix of either the door frame (34) or the cavity frame (36). 20
8. The wave choke system according to any one of the preceding claims, wherein the channel (10) has an L-shaped cross section, wherein preferably the both legs of the L-shaped cross section form the recesses (12, 14) of the channel. 25
9. The wave choke system according to any one of the preceding claims, wherein the gap (28) is arranged besides or within the interspace of the door frame (34) and the cavity frame (36). 30
10. The wave choke system according to any one of the preceding claims, wherein the gap (28) is covered by a cover element (26) made of at least one non-conductive material, wherein preferably the cover element (32) is formed as an L-shaped profile section and/or covers the gap (28) as well as the inner side wall (26) and/or is arranged in front of the cavity frame (36) and/or prevents the infiltration of undesirable particles into the channel (10). 35
40
11. The wave choke system according to any one of the preceding claims, wherein at least one transparent element (30) is arranged on at least one outer side at the side wall (18) of the channel (10), in particular at the outer side of the outer circumferential side wall (18), wherein the transparent element (30) is made of at least one non-conductive material and/or of glass and/or is provided for allowing an insight into the cavity. 45
50
12. The wave choke system according to any one of the preceding claims, wherein an edge of the step (16) extends at least approximately parallel to the longitudinal axis of the channel (10). 55
13. A microwave oven comprising an oven cavity having

FIG 1


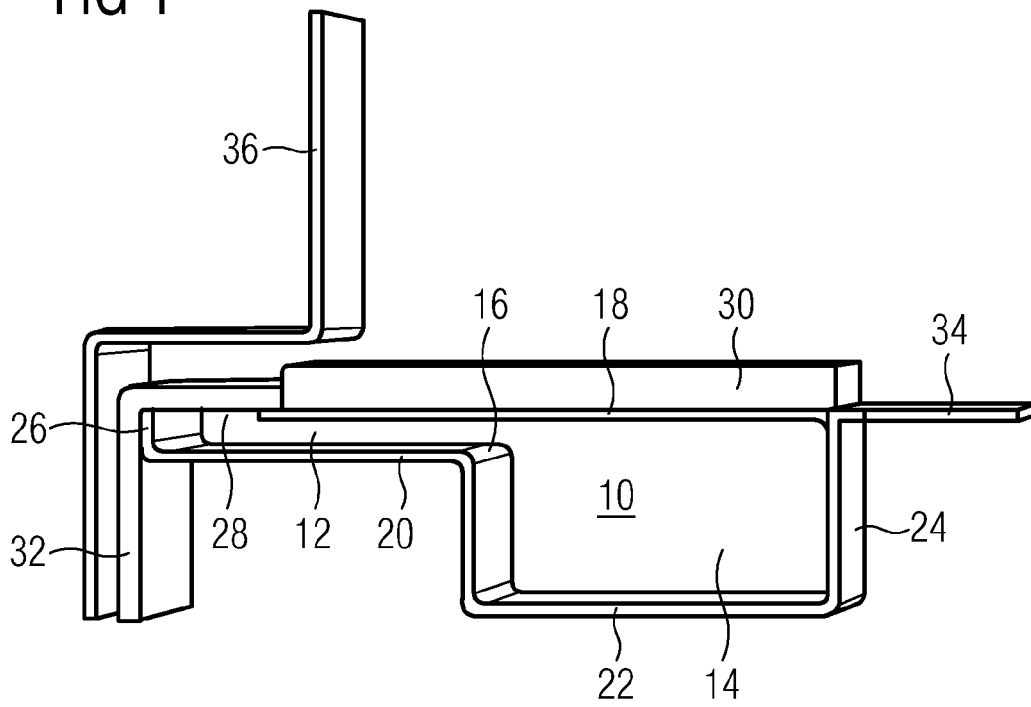


FIG 2



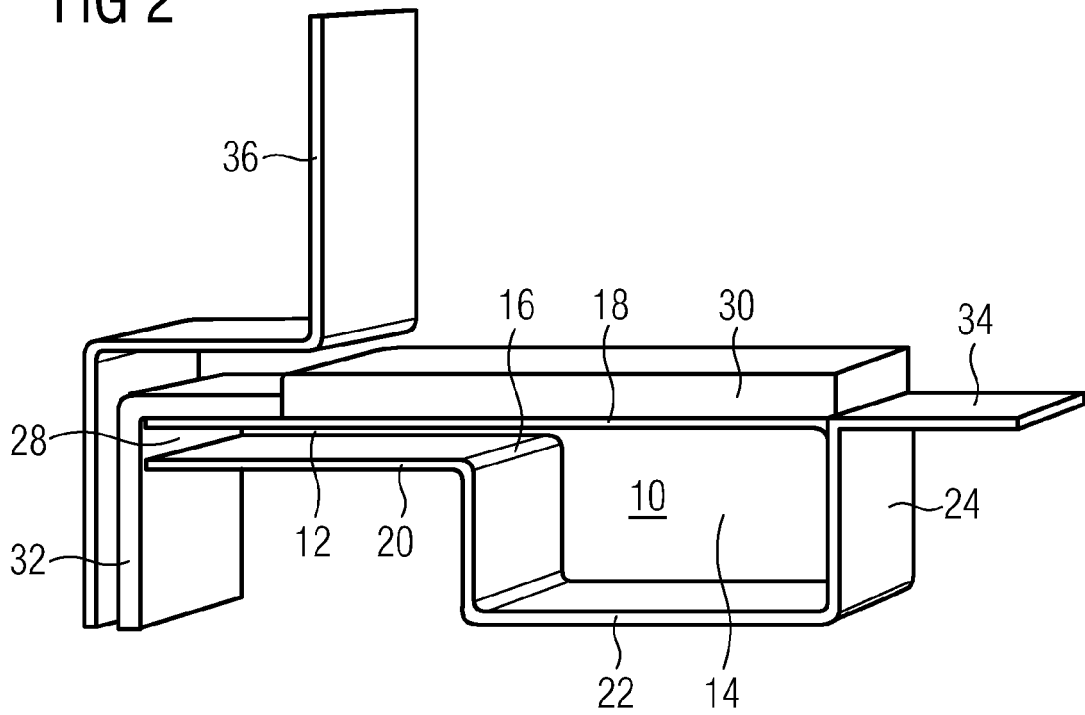

EUROPEAN SEARCH REPORT

Application Number
EP 12 15 9564

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 3 678 238 A (YASUOKA YOSHIO ET AL) 18 July 1972 (1972-07-18) * the whole document *	1-13	INV. H05B6/76
X	EP 0 116 648 A1 (MATSUSHITA ELECTRIC IND CO LTD [JP]) 29 August 1984 (1984-08-29) * abstract * * figure 3 *	1	
A	GB 2 058 529 A (BOSCH SIEMENS HAUSGERAETE) 8 April 1981 (1981-04-08) * abstract *	1	
A	GB 2 106 360 A (HITACHI HEATING APPL [JP]) 7 April 1983 (1983-04-07) * abstract *	1	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
			H05B
Place of search		Date of completion of the search	Examiner
Munich		20 April 2012	Garcia, Jesus
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 2
EPO FORM 1503 03.92 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 12 15 9564

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-04-2012

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3678238 A	18-07-1972	JP 49039571 B US 3678238 A	26-10-1974 18-07-1972
EP 0116648 A1	29-08-1984	AU 1886883 A CA 1213001 A1 DE 3380869 D1 EP 0116648 A1 US RE33657 E US 4584447 A WO 8401083 A1	29-03-1984 21-10-1986 21-12-1989 29-08-1984 06-08-1991 22-04-1986 15-03-1984
GB 2058529 A	08-04-1981	AU 519577 B2 AU 5923980 A CA 1145412 A1 DE 3029648 A1 FR 2465392 A1 GB 2058529 A JP 1272635 C JP 56041691 A JP 59048517 B NL 8004878 A US 4347420 A	10-12-1981 26-03-1981 26-04-1983 26-03-1981 20-03-1981 08-04-1981 11-07-1985 18-04-1981 27-11-1984 13-03-1981 31-08-1982
GB 2106360 A	07-04-1983	CA 1184616 A1 GB 2106360 A US 4475023 A	26-03-1985 07-04-1983 02-10-1984

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 3678238 A [0004]