



(11) **EP 2 479 357 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
02.10.2013 Bulletin 2013/40

(51) Int Cl.:
E06B 1/02 (2006.01) E04F 11/18 (2006.01)

(21) Application number: **11152022.7**

(22) Date of filing: **25.01.2011**

(54) **A device for holding a rigid sheet and the use of the device**

Vorrichtung zum Halten eines starren Blattmaterials und Verwendung der Vorrichtung

Dispositif de support pour feuille rigide et l'utilisation du dispositif

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:
25.07.2012 Bulletin 2012/30

(73) Proprietor: **Maene Nv**
8200 Brugge (BE)

(72) Inventors:
• **Maene, Geert**
8200, Brugge (BE)

• **Merlin, Dimitri**
8200, Brugge (BE)

(74) Representative: **BiiP cvba**
Culliganlaan 1B
1831 Diegem (Bruxelles) (BE)

(56) References cited:
EP-A2- 1 541 796 DE-A1-102006 028 766
DE-A1-102009 008 307 FR-A1- 2 367 178
US-A- 4 920 717 US-A1- 2006 070 318

EP 2 479 357 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD OF THE INVENTION

[0001] The present invention relates to a device and a rigid sheet, the device for holding the rigid sheet, in particular for holding a glass pane. Further, the present invention relates to the use of such device for constructing balustrades, railings, parapets, safety rails, banisters, stairs, head posts, or balconies.

BACKGROUND OF THE INVENTION

[0002] Devices for holding a rigid sheet are used in a number of applications. A first example is in balustrade and railing equipment where such device holds a rigid sheet made of glass, plastics, steel, stone etc. in vertical position forming a balustrade to prevent people falling off terraces or stairs. Such a device is known from DEA-102006 028 766 and discloses a device according to the preamble of claim 1.

[0003] A second application is in decoration or storing equipment where the device holds a rigid sheet made of glass, plastics, steel, stone etc. in horizontal position forming a tablet or a table without legs for showing decorative articles or storing goods.

[0004] A general problem with those devices is that it is very difficult to keep the rigid sheet in desired position during mounting. For example, a table as describe above should by held substantially horizontal while mounting in order to get it fixed in that position. It is obvious that it is not easy to keep for example a heavy stone tablet in horizontal position while mounting. The same applies in case of a balustrade where mostly big size panels have to be kept substantially vertical while mounting.

[0005] Moreover, since adjacent rigid sheets can suffer from different planarity, as is often the case with hardened glass panels, it is important to have the ability to align an installed rigid sheet with adjacent ones.

[0006] There have been many attempts to solve the above problem. For example, DE 103 38 816 describes a balustrade wherein the panes of glass are inserted in a carrier rail and secured therein by means of an adhesive and spacers. The carrier rail is held by a U-shaped hook formed at the outside of the carrier rail hooking onto a first projection provided on a supporting profile fixed to the wall or floor, and by a set screw mechanism fixed to a second projection also provided on the supporting profile. After hooking the carrier rail carrying the glass panes onto the first projection such that it hinges, the set screws can be turned thereby adjusting inclination of the carrier rail with respect to the supporting profile.

[0007] A first problem with the above device is that, since the projections allowing the inclination adjustment are provided at the outside of the supporting profile and since not only vertical forces due to the weight of the balustrade load but also horizontal forces due to wind expose the supporting profile to extreme load, the part

of the supporting profile on which the projecting are provided has to be strengthened either by using a triangular profile, either by fixing it directly in the wall or the floor. Obviously, the manufacturing cost of such triangular profile with projections is high due to its design.

[0008] Additionally, but not less important in balustrade design, such triangular profile is also esthetically less attractive.

[0009] Another problem with the above device is that the set screws can not easily be reached since they are provided underneath and outside the balustrade, forcing technical people in dangerous situations upon installing and adjusting the inclination between the carrier rail and the supporting profile.

[0010] Still another problem of the above device is that, since the glass panes are secured by adhesives, these adhesives have to be cut or grinded to replace damaged panes, which makes reparation of the balustrade a difficult, time consuming and labor-intensive to job.

[0011] Further, projections as used in the above device are very sensitive to corrosion increasing the risk of causing dangerous situations or even accidents, especially under continuous wind load.

[0012] Another example of a prior art device is described in EP 1 647 663 wherein a U-profile is used for holding a tablet. A system for adapting the inclination of the tablet with respect to the U-profile is provided comprising a set screw for regulation after mounting the tablet.

[0013] An important problem with this device is that the side parts of the U-profile needs to be completely hidden in and supported by the wall in order to withstand the vertical forces on the system for adapting the inclination, in particular upon using it for storing heavy-weight articles. If the side parts of the U-profile would not be strengthened and supported by the wall, the U-profile would unfold and release the tablet. Obviously, although this device is esthetically beneficial, preparing a recess in the wall along the length of the table is a difficult, time consuming and labor-intensive job.

[0014] Considering the drawbacks of the above devices, it is an object of the present invention to provide a device for holding a rigid sheet, wherein the risk of unfolding the supporting profile is decreased, even upon exposing the device to extreme horizontal forces from wind load in case of balustrades or exposing to extreme vertical forces from storing heavy-weight articles.

[0015] It is another object of the present invention to provide a device for holding a rigid sheet wherein supporting profiles with lower manufacturing costs can be used, while keeping sufficient resistance against extreme load on the rigid sheet and while still providing means for adjusting the inclination and/or the height of the rigid sheet with respect to the supporting profile after mounting the rigid sheet.

[0016] It is also an object of the present invention to provide a device for holding a rigid sheet wherein the height regulation and the inclination regulation of the rigid

sheet with respect to the supporting profile are cooperating in such a way that the contribution of the inclination regulation to the height regulation can be estimated and compensated, resulting in less time consuming and easier regulation.

[0017] Further, it is an object of the present invention to provide a device for holding a rigid sheet wherein the inclination and/or height of the rigid sheet can be adapted without forcing technical people into dangerous positions.

[0018] Another object of the present is to provide a device for holding a rigid sheet wherein replacing damaged balustrade panes is less time consuming and less labor-intensive.

[0019] Still another object of the present invention is to provide a device for holding a rigid sheet which is less sensitive to corrosion resulting in decreased risk of causing dangerous situations or accidents.

[0020] The present invention meets the above objects by providing a device for holding a rigid sheet comprising a means for adapting the carrier rail's position, said means being fixed on the base part of an U-profile and holding the carrier rail.

SUMMARY OF THE INVENTION

[0021] The present invention is directed to a device and a rigid sheet, the device for holding the rigid sheet according to claim 1.

[0022] Further, the present invention is directed to the use of such device for constructing balustrades, railings, parapets, safety rails, banisters, stairs, head posts, or balconies, according to claim 9.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023]

FIG 1 is a cross-section of a device for holding a rigid sheet having a height regulator.

FIG 2 is a cross-section of an embodiment of a device for holding a rigid sheet having a tilting regulator

FIG 3 is a cross-section of another embodiment of a device for holding a rigid sheet having a tilting regulator.

FIG 4 illustrates a regulator plate as used in a preferred embodiment of a device for holding a rigid sheet according to the present invention.

FIG 5 illustrates a carrier rail and a means for amending the carrier rail's position as used in a preferred embodiment of a device for holding a rigid sheet according to the present invention.

[0024] Fig. 1-3 are considered to be examples and not

as part of the invention.

DESCRIPTION OF THE INVENTION

[0025] In the context of the present invention, a rigid sheet as understood as a panel, a pane, a board, a plate, a tablet, and the like, made of a rigid material such as metal, stone, glass, or plastics. In particular, the rigid sheet may be a pane of glass.

[0026] According to a first example, a device for holding a rigid sheet is provided comprising:

- a U-profile (15) having a base part to be fixed to a wall or floor
- a carrier rail (29) inside the U-profile for holding the rigid sheet (1), said carrier rail supported by the U-profile;
- a means for adapting the carrier rail's position (24, 26, 27, 28, 30) with respect to the U-profile;

wherein the means for adapting the carrier rail's position is fixed on the base part of the U-profile and holds the carrier rail.

[0027] Because the means for adapting the carrier rail's position is fixed on the base part of the U-profile and holds the carrier rail, the risk of unfolding the U-profile may be decreased, even upon exposing the device to extreme horizontal forces from wind load in case of balustrades or exposing to extreme vertical forces from storing heavy-weight articles. Forces working on the rigid sheet are conducted via the carrier rail and the means for adapting the carrier rail's position to the base part of the U-profile. By doing so, the side parts of the U-profile, being weaker than the base part, are not loaded by these forces.

[0028] Another advantage is that, because the carrier rail is supported inside the U-profile by the means for adapting the carrier rail's position fixed on the base part of the U-profile, straightforward supporting profiles, i.e. U-profiles, with lower manufacturing costs may be used, while keeping sufficient resistance against extreme load on the rigid sheet.

[0029] Still another advantage of the fact that the carrier rail is supported inside the U-profile on the latter's base part, is that projections at the outside are not required, making the profile less sensitive to corrosion and resulting in decreased risk of causing dangerous situations or accidents.

[0030] In an example, a device for holding a rigid sheet is provided, wherein the means for adapting the carrier rail's position may comprise a height regulator for lifting the rigid sheet with respect to the U-profile.

[0031] The advantage of having such height regulator is that the carrier rail holding the rigid sheet can be first fixed inside the U-profile substantially at the required position, followed by fine-tuning the carrier rail's height with respect to the U-profile by manipulating the height regulator. This makes installation of the rigid sheet and fine-

tuning of its position less time consuming and less labor-intensive.

[0032] In accordance with FIG 1, such height regulator may comprise a regulator plate (26) fixed to the base part of the U-profile and a lifting set screw (24) engaging on the regulator plate for lifting the carrier rail (29) and the rigid sheet (1) with respect to the U-profile (15).

[0033] The advantage of using a height set screw engaging on a regulator plate that is fixed on the base part of the U-profile is that the set screw is positioned inside the U-profile and therefore can be easily reached such that the height of the rigid sheet can be adapted without forcing technical people into dangerous positions.

[0034] Another advantage is that the regulator plate where the set screw is engaging on, is supported by the base part of the U-profile, making the height regulator sufficiently robust.

[0035] Further, by using a regulator plate and a set screw, the rigid sheet's position may be regulated steplessly variable, such that its height can be perfectly aligned with adjacent rigid sheets.

[0036] In an example, a device for holding a rigid sheet is provided, wherein the means for adapting the carrier rail's position may comprise a tilting regulator for tilting the rigid sheet with respect to the U-profile perpendicular to the plane of the rigid sheet.

[0037] The advantage of having such tilting regulator is that the carrier rail holding the rigid sheet can be first fixed inside the U-profile substantially at the required position, followed by fine-tuning the rigid sheet's inclination with respect to the U-profile by manipulating the tilting regulator.

[0038] In accordance with FIG 2 and FIG 3, such tilting regulator may comprise a wedge (25) fixed on the regulator plate (26) or fixed to the base part of the U-profile and a tapered set screw (30) engaging on the wedge for tilting the rigid sheet with respect to the U-profile. If on the one hand the wedge is positioned such that its inclined side (i.e. the side where the tapered screw is engaging on) faces the plane of the rigid sheet (as is the case in FIG 2), the carrier rail will be pushed away from the wedge upon turning the tapered screw in its engaging direction. If, on the other hand, the wedge is positioned such that its inclined side (i.e. the side where the tapered screw is engaging on) faces the opposite of the plane of the rigid sheet (as is the case in FIG 3), the carrier rail will be pulled towards the wedge upon turning the tapered screw in its engaging direction. By pulling or pushing the carrier rail in a certain direction, the rigid sheet may tilt with respect to the U-profile.

[0039] In an example the means for adapting the carrier rail's position may comprise a first tilting regulator and a second tilting regulator for tilting the rigid sheet with respect to the U-profile in respective opposite directions perpendicular to the plane of the rigid sheet.

[0040] In accordance with the present invention and as illustrated in FIG 4, the first tilting regulator and the second tilting regulator may comprise respectively a first

and a second wedge (25) positioned such that its inclined sides are opposite to each other, and a respective first and second tapered set screw.

[0041] The advantage of a wedge fixed on the regulator plate or on the base part of the U-profile is that the tapered set screw is positioned inside the U-profile and therefore can be easily reached such that the inclination of the rigid sheet can be adapted without forcing technical people into dangerous positions.

[0042] Further, by using a wedge and a tapered set screw, the rigid sheet's position may be regulated steplessly variable, such that its inclination can be perfectly aligned with adjacent rigid sheets.

[0043] Another advantage is that the wedge is supported by the base part of the U-profile or by the regulator plate that on its turn is also fixed to the base part (e.g. by means of countersunk screws (28)), making the tilting regulator sufficiently robust.

[0044] Additionally, the means for adapting the carrier rail's position may comprise a locking screw (27) for locking the carrier rail's position after regulating it's position by the height regulator and/or the tilting regulator (s). Such locking screw may also engage on the regulator plate or on the base part of the U-profile.

[0045] Preferably, the height set screw and/or the tapered set screw (s) are positioned such that its axes are parallel to the plane of the rigid sheet, such that technical people installing the rigid sheet or the carrier rail holding the rigid sheet can easily manipulate these set screws.

[0046] Further, in case of balconies or stairs, the regulator plate, the height set screw, the wedge (s) and the tapered set screw (s) may be preferably positioned at the inside of the balcony or stairs, such that technical people can easily manipulate the set screws from the inside of the balustrade, additionally improving safety, obviously improving safety during installing and adapting the carrier rail's position.

[0047] In an embodiment in accordance with the present invention and as illustrated in FIG 5, a device for holding a rigid sheet is provided, wherein the means for adapting the carrier rail's position may comprise both a height regulator and a first and second tilting regulator. Preferably, the regulator plate (26) comprising two wedges (25) is mounted on the base part of the U-profile (15) inside the U-profile, and the height set screw (24) and the tapered set screws (30) are positioned such that its axes are parallel to the plane of the rigid sheet and that all set screws engage in substantially the same direction on the regulator plate and on the wedges. Such device allows the height regulation and the inclination regulation of the rigid sheet with respect to the supporting profile being cooperative in such a way that the contribution of the inclination regulation to the height regulation can be estimated and compensated, resulting in less time consuming and easier regulation and less time consuming and easier replacement of rigid sheets.

[0048] In general, a device in accordance with the present invention allows technicians installing the U-pro-

file to a wall or floor of a balcony or stairs while standing on the balcony floor or the stairs. Subsequently, the means for adapting the carrier rail's position, the carrier rail, and the rigid sheet, can be mounted in the U-profile, likewise standing on the balcony floor or the stairs. Finally, they can adapt the rigid sheet's position, likewise standing on the balcony floor.

[0049] The U-profile, the carrier rail and the means for holding the carrier rail's position may be made of any kind of material having suitable characteristics with respect to tensile strength, compressive strength, corrosion resistance, etc. as required by the application where the device is used.

[0050] The U-profile and the carrier rail may be for example made of structural steel (e.g. S235), preferably aluminum, and most preferably anodized or coated aluminum.

[0051] In a preferred embodiment according to the present invention, at least part of the means for adapting the carrier rail's position, preferably the regulator plate, the wedge(s) and the tapered set screw(s), may be made of high corrosion resistant stainless steel.

[0052] Such high corrosion resistant stainless steel may have a hardness of at least 32 Rockwell hardness (HRC), tensile strength of at least 1100 MPa, compressive strength of at least 900MPa, good weldability, and corrosion resistance superior to that of AISI 420 and WNr. 1.2083 stainless steel.

[0053] Preferably, such high corrosion resistant stainless steel may be Ramax® (as specified in <http://www.bucorp.com/files/ramax.pdf>), or Ramax® LH (as specified in <http://www.bucorp.com/files/UDDEHOLM RAMAXLH.pdf>), or most preferably Corrax® (as specified in <http://www.bucorp.com/files/UDDEHOLM CORRAX.pdf>).

[0054] In an embodiment in accordance with the present invention, the device for holding a rigid sheet may comprise a hinge system fixed to a side part of the U-profile for supporting the rigid sheet in a direction substantially perpendicular to the plane of the rigid sheet. Such hinge system may comprise two rubber or plastic elements (19, 31), e.g. gaskets, each at one side of the rigid sheet. At least one (19) of the plastic or rubber elements is pushed against the rigid sheet by a clamp (18, 20, 21) mounted on one of the side parts of the U-profile. By doing so, the plastic or rubber elements function as a hinge allowing tilting the rigid sheet, while supporting and more or less clamping the latter.

[0055] According to the present invention, the device for holding a rigid sheet may further comprise a bracket for fixing the U-profile to the wall or floor. The U-profile may be mounted, either by fixing its base part on the bracket, either by fixing one or both of its side parts on the bracket, or by a combination of both.

[0056] The carrier rail may have any length suitable for carrying the rigid sheet. Such device for holding a rigid sheet may comprise one or preferably several short carrier rails, each held by a separate means for amending

that carrier rail's position with respect to the U-profile. FIG 5 shows such short carrier rail (29) held inside the U-profile by the regulator plate (26) comprising two wedges (25) and being mounted on the base part of the U-profile (15) inside the U-profile. The height set screw (24) and the tapered set screws (30) can be regulated before locking the carrier rail's position by the locking screw (27).

[0057] A device for holding a rigid sheet as described in the above embodiment may be used in constructions, more particular constructing balustrades, railings, parapets, safety rails, banisters, stairs, head posts, or balconies.

15 Claims

1. A device and a rigid sheet (1), the device for holding the rigid sheet comprising:

- AU-profile (15) having a base part to be fixed to a wall or floor
- A carrier rail (29) inside the U-profile for holding the rigid sheet (1), said carrier rail supported by the U-profile;
- A means (24, 26, 27, 28, 30) for adapting the carrier rail's position with respect to the U-profile;

wherein the means for adapting the carrier rail's position is fixed on the base part of the U-profile and holds the carrier rail, **characterized in that** the means for adapting the carrier rail's position comprises:

- a height regulator (24, 26) for lifting the rigid sheet (1) with respect to the U-profile; and
- a tilting regulator (25, 30) for tilting the rigid sheet with respect to the U-profile perpendicular to the plane of the rigid sheet.

2. A device and a rigid sheet (1), the device for holding the rigid sheet according to claim 1, wherein the height regulator (24, 26) comprises a regulator plate (26) fixed to the base part of the U-profile and a lifting set screw (24) engaging on the regulator plate (26) for lifting the rigid sheet with respect to the U-profile.

3. A device and a rigid sheet (1), the device for holding the rigid sheet according to claim 1, wherein the means for adapting the carrier rail's position comprises the tilting regulator (25) and a second tilting regulator (25) for tilting the rigid sheet with respect to the U-profile in respective opposite directions perpendicular to the plane of the rigid sheet.

4. A device and a rigid sheet (1), the device for holding the rigid sheet according to claims 1 or 3, wherein such tilting regulator comprises a wedge (25) fixed to the regulator plate and a tapered set screw (30)

engaging on the wedge for tilting the rigid sheet with respect to the U-profile.

5. A device and a rigid sheet, the device for holding the rigid sheet according to any of the above claims, wherein at least part of the means for adapting the carrier rail's position is made of high corrosion resistant stainless steel. 5
6. A device and a rigid sheet, the device for holding the rigid sheet according to any of the above claims, wherein a hinge system is fixed to a side part of the U-profile for supporting the rigid sheet in a direction substantially perpendicular to the plane of the rigid sheet. 10
7. A device and a rigid sheet, the device for holding the rigid sheet according to any of the above claims, wherein the rigid sheet is a pane of glass. 15
8. A device and a rigid sheet, the device for holding the rigid sheet according to any of the above claims, further comprising a bracket for fixing the U-profile to the wall or floor. 20
9. Use of a device and a rigid sheet (1) according to any of the above claims for constructing balustrades, railings, parapets, safety rails, banisters, stairs, head posts, or balconies. 25

Patentansprüche

1. Vorrichtung und starres Blatt (1), wobei die Vorrichtung zum Halten des starren Blatts Folgendes umfasst: 35

- ein U-Profil (15) mit einem Basisteil, um an eine Wand oder an einen Boden befestigt zu werden
- eine Trägerschiene (29) im U-Profil zum Halten des starren Blatts (1), wobei die Trägerschiene vom U-Profil gestützt wird, 40
- ein Mittel (24, 26, 27, 28, 30), um die Position der Trägerschiene mit Bezug auf das U-Profil anzupassen; 45

wobei das Mittel, um die Position der Trägerschiene anzupassen, auf dem Basisteil des U-Profils befestigt ist und die Trägerschiene hält, **dadurch gekennzeichnet, dass** das Mittel, um die Position der Trägerschiene anzupassen, Folgendes umfasst: 50

- einen Höhenregler (24, 26), um das starre Blatt (1) mit Bezug auf das U-Profil anzuheben; und
- einen Kippregler (25, 30), um das starre Blatt mit Bezug auf das U-Profil senkrecht zur Ebene des starren Blatts zu kippen. 55

2. Vorrichtung und starres Blatt (1), Vorrichtung zum Halten des starren Blatts nach Anspruch 1, wobei der Höhenregler (24, 26) eine Reglerplatte (26) umfasst, die an den Basisteil des U-Profils befestigt ist, und eine Hebestellschraube (24), die auf der Reglerplatte (26) eingreift, um das starre Blatt mit Bezug auf das U-Profil zu heben.
3. Vorrichtung und starres Blatt (1), Vorrichtung zum Halten des starren Blatts nach Anspruch 1, wobei das Mittel, um die Position der Trägerschiene anzupassen, den Kippregler (25) und einen zweiten Kippregler (25) umfasst, um das starre Blatt mit Bezug auf das U-Profil in entsprechende einander gegenüber liegende Richtungen senkrecht zur Ebene des starren Blatts zu kippen.
4. Vorrichtung und starres Blatt (1), Vorrichtung zum Halten des starren Blatts nach Anspruch 1 oder 3, wobei ein derartiger Kippregler einen Keil (25) umfasst, der an die Reglerplatte befestigt ist, und eine sich verjüngende Einstellschraube (30), die auf dem Keil eingreift, um das starre Blatt mit Bezug auf das U-Profil zu kippen.
5. Vorrichtung und starres Blatt (1), Vorrichtung zum Halten des starren Blatts nach einem der oben angegebenen Ansprüche, wobei mindestens ein Teil des Mittels, um die Position der Trägerschiene anzupassen, aus hoch korrosionsbeständigem rostfreiem Stahl hergestellt ist.
6. Vorrichtung und starres Blatt (1), Vorrichtung zum Halten des starren Blatts nach einem der oben angegebenen Ansprüche, wobei ein Gelenksystem an einen Seitenteil des U-Profils befestigt ist, um das starre Blatt in einer Richtung zu stützen, die im Wesentlichen senkrecht zur Ebene des starren Blatts ist.
7. Vorrichtung und starres Blatt (1), Vorrichtung zum Halten des starren Blatts nach einem der oben angegebenen Ansprüche, wobei das starre Blatt eine Glasscheibe ist.
8. Vorrichtung und starres Blatt (1), Vorrichtung zum Halten des starren Blatts nach einem der oben angegebenen Ansprüche, weiter umfassend eine Klammer, um das U-Profil an die Wand oder an den Boden zu befestigen.
9. Verwendung einer Vorrichtung und eines starren Blatts (1) nach einem der oben angegebenen Ansprüche, um Balustraden, Geländer, Brüstungen, Sicherheitsschienen, Treppengeländer, Treppen, Kopfpfosten oder Balkone zu bauen.

Revendications

1. Dispositif et feuille rigide (1), le dispositif étant destiné à maintenir la feuille rigide comprenant :

- un profilé en U (15) avec une partie de base à fixer sur une paroi ou un plancher ;
- un rail porteur (29) à l'intérieur du profilé en U pour maintenir la feuille rigide (1), ledit rail porteur étant soutenu par le profilé en U ;
- des moyens (24, 26, 27, 28, 30) pour adapter la position du rail porteur par rapport au profilé en U ;

dans lesquels les moyens pour adapter la position du rail porteur sont fixés sur la partie de base du profilé en U et maintiennent le rail porteur, **caractérisés en ce que** les moyens pour adapter la position du rail porteur comprennent :

- un régulateur de hauteur (24, 26) pour lever la feuille rigide (1) par rapport au profilé en U ; et
- un régulateur d'inclinaison (25, 30) pour incliner la feuille rigide par rapport au profilé en U perpendiculairement au plan de la feuille rigide.

2. Dispositif et feuille rigide (1), le dispositif étant destiné à maintenir la feuille rigide selon la revendication 1, dans lesquels le régulateur de hauteur (24, 26) comprend une plaque de régulateur (26) fixée à la partie de base du profilé en U et une vis sans tête de levage (24) s'engageant sur la plaque de régulateur (26) pour lever la feuille rigide par rapport au profilé en U.

3. Dispositif et feuille rigide (1), le dispositif étant destiné à maintenir la feuille rigide selon la revendication 1, dans lesquels les moyens pour adapter la position du rail porteur comprennent le régulateur d'inclinaison (25) et un second régulateur d'inclinaison (25) pour incliner la feuille rigide par rapport au profilé en U dans des directions opposées respectives perpendiculairement au plan de la feuille rigide.

4. Dispositif et feuille rigide (1), le dispositif étant destiné à maintenir la feuille rigide selon la revendication 1 ou 3, dans lesquels un tel régulateur d'inclinaison comprend un coin (25) fixé à la plaque de régulateur et une vis sans tête conique (30) s'engageant sur le coin pour incliner la feuille rigide par rapport au profilé en U.

5. Dispositif et feuille rigide (1), le dispositif étant destiné à maintenir la feuille rigide selon l'une quelconque des revendications précédentes, dans lesquels au moins une partie des moyens pour adapter la position du rail porteur est fabriquée en un acier inoxydable hautement résistant à la corrosion.

6. Dispositif et feuille rigide (1), le dispositif étant destiné à maintenir la feuille rigide selon l'une quelconque des revendications précédentes, dans lesquels un système d'articulation est fixé à une partie latérale du profilé en U pour supporter la feuille rigide dans une direction sensiblement perpendiculaire au plan de la feuille rigide.

7. Dispositif et feuille rigide (1), le dispositif étant destiné à maintenir la feuille rigide selon l'une quelconque des revendications précédentes, dans lesquels la feuille rigide est un panneau de verre.

8. Dispositif et feuille rigide (1), le dispositif étant destiné à maintenir la feuille rigide selon l'une quelconque des revendications précédentes, comprenant en outre un support pour fixer le profilé en U à la paroi ou au plancher.

9. Utilisation d'un dispositif et d'une feuille rigide (1) selon l'une quelconque des revendications précédentes pour la construction de balustrades, de rambarde, de parapets, de rails de sécurité, de mains-courantes, d'escaliers, de poteaux corniers ou de balcons.

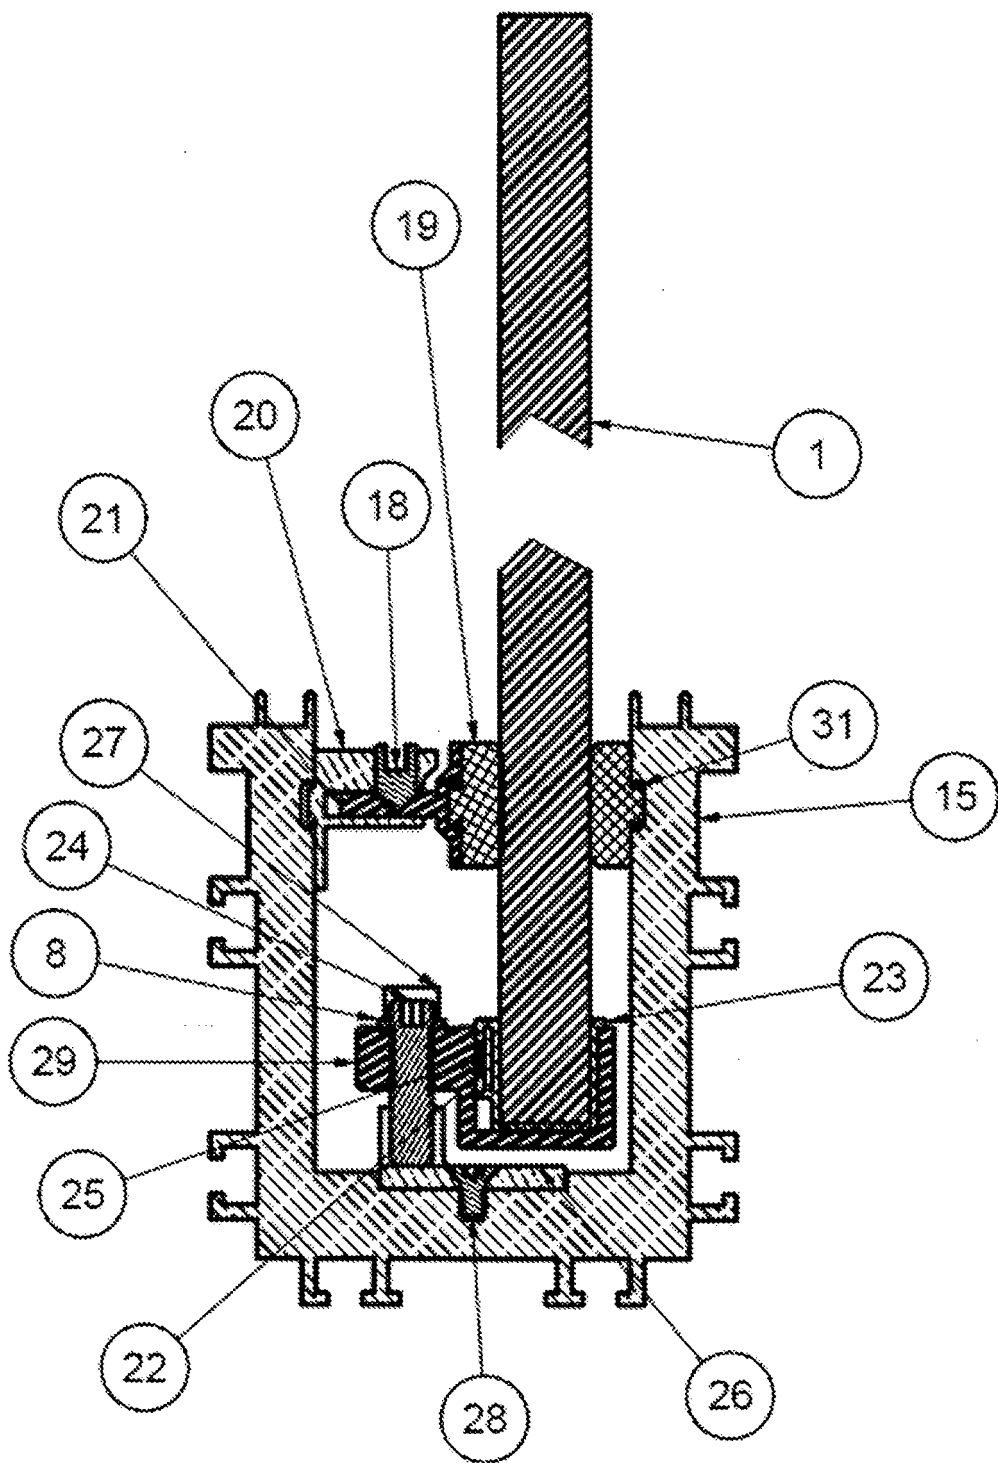


FIG 1

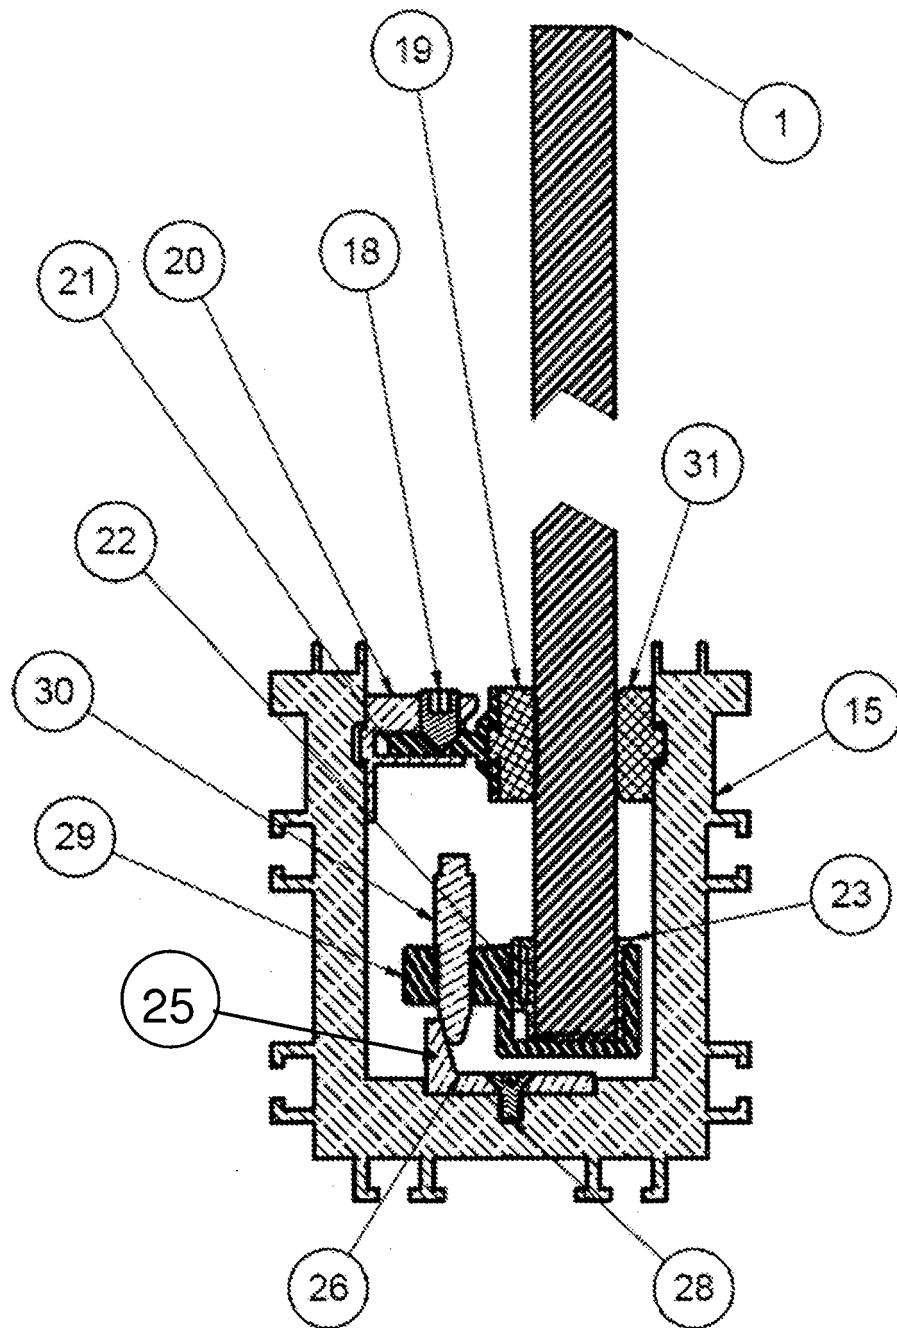


FIG 2

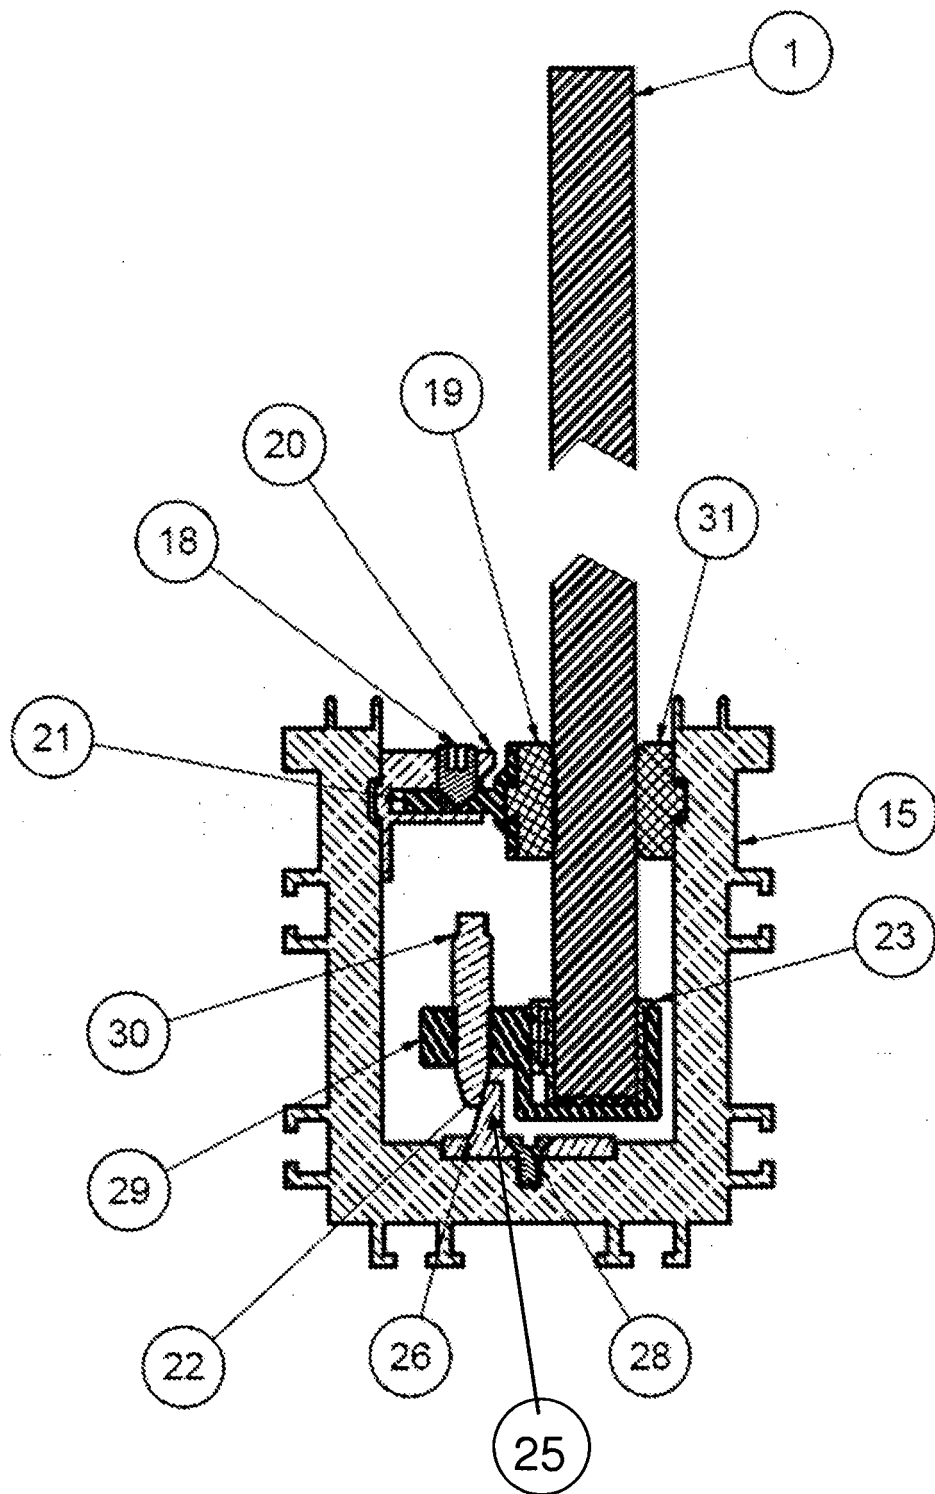


FIG 3

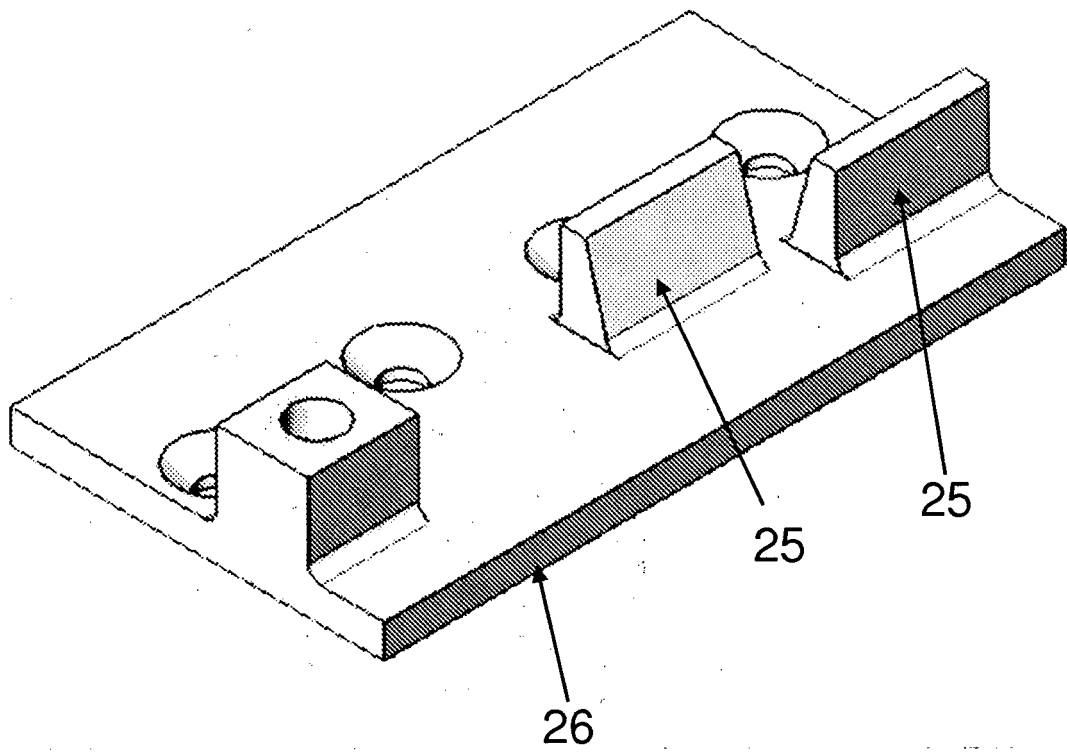


FIG 4

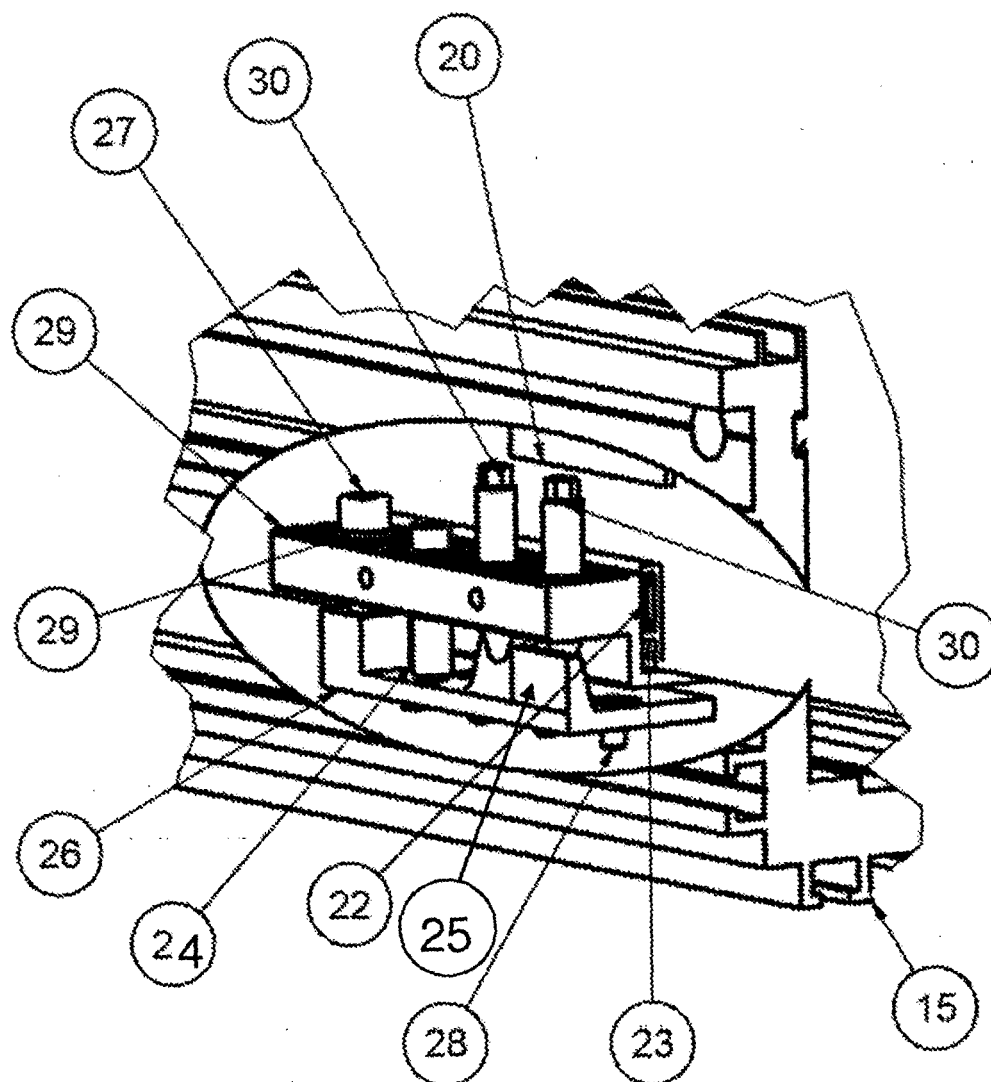


FIG 5

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 10338816 [0006]
- EP 1647663 A [0012]