

(19)



(11)

EP 2 482 012 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
06.05.2020 Bulletin 2020/19

(51) Int Cl.:
F25B 49/02 (2006.01)

(21) Application number: **11195836.9**

(22) Date of filing: **27.12.2011**

(54) Compressor motor preheat control

Vorheizsteuerung für Kompressormotoren

Contrôle de préchauffage de moteur de compresseur

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **26.01.2011 US 201113014173**

(43) Date of publication of application:
01.08.2012 Bulletin 2012/31

(73) Proprietor: **Hamilton Sundstrand Corporation
Charlotte, NC 28217 (US)**

(72) Inventors:
• **Giunta, Joseph A.
Windsor, CT Connecticut 06095 (US)**

• **Deroy, Robert M.
Tolland, CT Connecticut 06084 (US)**
• **Rusich, Richard
Ellington, CT Connecticut 06029 (US)**

(74) Representative: **Dehns
St. Bride's House
10 Salisbury Square
London EC4Y 8JD (GB)**

(56) References cited:
**JP-A- H10 141 739 US-A- 4 638 643
US-A- 5 195 327 US-A1- 2007 056 300**

EP 2 482 012 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND

[0001] The present invention relates to vapor cycle systems having a compressor, and more particularly to vapor cycle systems and methods of operating the same to reduce flooded compressor startup conditions and/or lubrication accumulation in the idle compressors of multi-compressor systems.

[0002] Vapor cycle systems (VCSs) are known for providing cooling in a variety of contexts. In general, a refrigerant is compressed and expanded in a cyclical manner to transfer thermal energy and help cool a given air-space or fluid. Some VCSs have a dual compressor configuration, with two compressors operable within the same overall refrigerant circuit. The document US 2007/056300 A1 discloses a vapor cycle system with a first and second compressor in parallel and the associated control thereof.

[0003] It is desired to reduce fluid migration issues in dual compressor VCSs, and to provide a cold-start procedure for VCSs with any number of compressors.

SUMMARY

[0004] A method of controlling a vapor cycle system having first and second compressors according to claim 1 is disclosed.

[0005] Viewed from a second aspect, the present invention provides a vapor cycle system according to claim 9.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006]

FIG. 1 is a block diagram schematically illustrating a dual compressor vapor cycle system (VCS) according to the present invention.

FIG. 2 is a flow chart illustrating an embodiment of a method of controlling a VCS according to the present invention.

FIG. 3 is a flow chart illustrating an alternative embodiment of a method of controlling a VCS according to the present invention.

DETAILED DESCRIPTION

[0007] In general, one embodiment the present invention relates to multi-compressor vapor cycle system (VCS) and associated control logic. The present inventors have discovered a problem with dual compressor VCSs when one compressor is idle, that is not operating to compress refrigerant, whereby liquid state refrigerant and/or lubricant can migrate to the idle compressor. Migrating fluid can undesirably starve the active compressor of lubricant and negatively impact system perform-

ance, resulting in reduced cooling effectiveness as well as potential failure of the operating compressor. Furthermore, the idle compressor flooded with liquid refrigerant and/or lubricant can experience difficulties at startup when requested to operate (called a "flooded start"), which can lead to reliability issues. In one embodiment of a multi-compressor VCS according to the present invention, the compressors are connected in parallel, which allows fluid to pass between the compressors and into the idle compressor. Each compressor can be selectively activated based on desired cooling capacity, such that both compressors or only one of them are operating simultaneously to compress refrigerant. When only a single compressor is active, the control logic provides heating to an idle compressor to reduce or eliminate migration of refrigerant and/or lubricant in a liquid state into the idle compressor. The idle compressor has an electric motor that can be used to generate heat that reduces migration of liquids and tends to drive out or evaporate any liquids that may be present. By default, a pre-heat mode of the idle compressor generates heat with windings of the idle compressor motor to a given motor temperature range (e.g., 48.9°C (120°F) to 54.4°C (130°F)), controlled by sensing the motor temperature with a suitable sensor, such as a thermistor. The system can further optionally provide a failsafe timer mechanism to prevent overheating in the event of a failure of the temperature sensor. The preheating mode of the idle compressor is cycled on (i.e., operated) for a given time period (e.g., 14 minutes), and can then be cycled off for a given delay period (e.g., 30 minutes) before the preheating time period is reactivated, thereby providing the optional failsafe time functionality. By heating the idle compressor according to the present invention, an active (non-idle) compressor is not starved of refrigerant during operation due to migration of fluid to the idle compressor. Furthermore, the preheat mode helps reduce a risk of a flooded start when the idle compressor is activated to begin compressing refrigerant. In another embodiment of the present invention, a preheating mode is provided that is controlled based on sensed motor temperature, such as using sensed resistance through a thermistor, and can be implemented in single or multi-compressor VCSs. Other features and benefits of the present invention will be appreciated in view of the discussion that follows.

[0008] FIG. 1 is a block diagram schematically illustrating one embodiment of a dual compressor VCS 10 that includes a vapor cycle circuit 12, a compressor 14, a compressor 16, and a control module 18.

[0009] Each compressor 14 and 16 includes an electric motor 14-1 and 16-1, respectively, and can be of any suitable type (e.g., scroll, reciprocating, etc.). The electric motors 14-1 and 16-1 can include suitable windings, etc., and can have a conventional configuration. The compressors 14 and 16 can each be connected to a common suction port manifold 20 and a common discharge port manifold 26, with each manifold 20 and 26 connected in

fluid communication with the vapor cycle circuit 12. In the illustrated embodiment, the compressors 14 and 16 are connected to the vapor cycle circuit 12 in parallel. Common discharge and suction manifolds can be omitted in alternative embodiments, with separate discharge and suction ports for each compressor 14 and 16. A temperature sensor 28 and 30 is provided for each compressor 14 and 16, respectively, to sense a motor temperature of the compressor 14 or 16. In one embodiment, the sensors 28 and 30 are thermistors that allow temperature sensing by changing resistance as a function of temperature. A motor controller 32 and 34 is provided from each compressor 14 and 16, respectively. The motor controllers 32 and 34 each accept power, send operational commands to the motors 14-1 and 16-1 of the compressors 14 and 16, and receive temperature signals from the sensors 28 and 30. Signals sent between the motor controllers 32 and 34 and the compressors 14 and 16 can all be analog. The sensors 28 and 30 and the motor controllers 32 and 34 can be part of a common assembly with the compressors 14 and 16, respectively, in some embodiments.

[0010] The control module 18 is operatively connected to each motor controller 32 and 34, and communication between the motor controllers 32 and 34 and the control module 18 can be in the form of digital signals. The control module 18 includes a data transfer interface 36 and control logic 38, which can be implemented through suitable circuitry and/or software (e.g., suitable processor(s), computer-readable memory, etc.). The data transfer interface 36 facilitates communication between all of the motor controllers 32 and 34 and the control logic 38 of the control module 18. The control logic 38 provides high level decision making for the VCS 10, while the motor controllers 32 and 34 handle lower-level tasks such and providing operational commands to the motors 14-1 and 16-1 of the compressors 14 and 16.

[0011] A refrigerant 40 (e.g., R134A refrigerant) and a lubricant 42 are present within the VCS 10. In the illustrated embodiment, which shows the compressor 14 in an active state and the compressor 16 in an idle state, portions of the refrigerant 40 and the lubricant 42 in liquid phases are present in the compressor 16. Vapor phase portions of the refrigerant 40 and the lubricant 42 are also present in the vapor cycle circuit 12 and the compressors 14 and 16.

[0012] During operation, the VCS 10 can activate one or both of the compressors 14 and 16 to move and compress fluid (e.g., the refrigerant 40). Cooling can be provided by the VCS 10 in a conventional manner. The basic operation of VCSs to provide cooling is well-known, and will be understood by those of ordinary skill in the art. Further discussion here is unnecessary. Depending upon cooling demand, both compressors 14 and 16 can be operated simultaneously to provide relatively high levels of cooling, or only one of the compressors 14 or 16 can be operated while the other compressor 14 or 16 remains idle (i.e., not moving or compressing fluid) to provide a

lower level of cooling. Operation of only a single one of the compressors 14 and 16 can alternate between the two, to provide relatively even usage of each compressor 14 and 16 over time.

[0013] FIG. 2 is a flow chart illustrating one embodiment of a method of controlling the VCS 10. Initially, the VCS 10 is operated in a mode with only one compressor 14 or 16 active to move or compress fluid (step 100). As discussed above, the VCS 10 can also operate both compressors 14 and 16 active simultaneously, and, further, in single compressor operation the particular compressor 14 or 16 that is active can alternate. By default, a motor temperature of the motor 14-1 or 16-1 of the idle compressor 14 or 16 is sensed using the corresponding sensor 28 or 30 (step 102). The temperature of fluid in the idle compressor 14 or 16 need not be sensed directly, only the temperature of motor windings of the motor 14-1 or 16-1 of the idle compressor 14 or 16. Temperature of the motor windings can be sensed by delivering a current and measuring resistance through a thermistor, or using other methods as desired. The sensed temperature is communicated to the control logic 38 of the control module 18. The control logic 38 analyzes the sensed data and determines if the motor temperature of the idle compressor 14 or 16 is above a lower threshold (also called a lower temperature threshold) (step 104). In the illustrated embodiment the lower threshold is approximately 48.9°C (120°F), though other temperatures can be selected for the lower threshold in alternative embodiments. For instance, the lower threshold can be selected to be sufficiently high to ensure that the refrigerant 40 is vaporized. If the motor temperature is above the lower threshold, then it is okay to start (i.e., activate) the idle compressor motor if desired (step 106). If the sensed motor temperature is below the lower threshold, then a preheating mode can be activated (step 108). The preheating mode can generate thermal energy by delivering power from the motor controller 32 or 34 to windings of the motor 14-1 or 16-1 of the idle compressor 14 or 16, thereby using the idle motor windings as a heater, without activating the motor 14-1 or 16-1 of the idle compressor 14 or 16 to generate a motive force to move or compress fluid. Thermal energy created by motor windings can vaporize liquid, such as the refrigerant 40 and/or the lubricant 42, that may be present in the idle compressor 14 or 16, and can help drive out refrigerant 40 or other liquid from the idle compressor 14 or 16 to help prevent migration of fluid from the active compressor 14 or 16 through the vapor cycle circuit 12 that may starve the active compressor 14 or 16 of such fluid used for operation.

[0014] It is desirable to maintain the motor temperature of the idle compressor 14 or 16 within a given range between the lower threshold and an upper threshold (also called an upper temperature threshold). After the preheating mode has been activated at step 108, it is determined whether the sensed motor temperature of the idle compressor 14 or 16 is above the upper threshold (step 110). The upper threshold can be approximately 54.4°C

(130°F), or other temperatures in alternative embodiments. If the motor temperature is above the upper threshold, then the preheating mode of the idle compressor 14 or 16 can be turned off (step 112), and then it is okay to start the motor of the idle compressor 14 or 16 at step 106. In this way, sensed motor temperature controls the preheat mode by default, and turns on or off preheating of the idle compressor 14 or 16 as a function of sensed motor temperature. If the motor temperature of the idle compressor 14 or 16 is below the upper threshold, it is determined whether the motor temperature is above the lower threshold and there is a command to turn the idle compressor 14 or 16 on (i.e., activate the idle compressor 14 or 16) (step 114). If the motor temperature is above the lower threshold and the idle compressor 14 or 16 is commanded on, then the preheat mode is turned off at step 112 and it is okay to start the motor 14-1 or 16-1 of the idle compressor 14 or 16 at step 106.

[0015] If the motor temperature of the idle compressor 14 or 16 is either below the lower threshold or the motor 14-1 or 16-1 of the idle compressor 14 or 16 is not commanded on, then the preheat mode is maintained on for a preheat time period (step 116). The preheat time period can be 14 minutes, or another time period in alternative embodiments. After the preheat time period, the preheat mode is turned off (step 118) and thermal energy is no longer generated by the motor of the idle compressor 14 or 16. The preheat time period thus provides a failsafe to limit the maximum duration of the preheating and the amount of time that heat is generated with the motor of the idle compressor 14 or 16, which helps prevent a risk of overheating in the event of a failure of the sensor 28 or 30. After the preheat time period has expired and the preheat mode is turned off at step 118, then a determination is made as whether the idle compressor 14 or 16 has been commanded on (step 120). If there is a command to turn on the idle compressor after step 118, then it is okay to start the motor at step 106. If the preheat time period has lapsed, in effect overriding the default sensed temperature control of the preheating mode, then the motor 14-1 or 16-1 of the idle compressor 14 or 16 can be started regardless of the actual motor temperature. The preheat time period can be selected to help promote a suitable motor temperature of the idle compressor 14 or 16 even without the benefit of temperature sensing. If the preheat time period has lapsed at step 118 but there is no command to turn on the idle compressor 14 or 16, then a delay period is triggered (step 122). In one embodiment the delay period can be 30 minutes, or other periods in alternative embodiments. During the delay period the preheat mode of the idle compressor 14 or 16 is maintained in an off condition. The delay period helps prevent overheating and provides further failsafe protection. After expiration of the delay period, the preheat mode of the idle compressor 14 or 16 can be reactivated at step 116.

[0016] At any time it is determined it is okay to start the

motor 14-1 or 16-1 of the idle compressor 14 or 16 at step 106, the idle compressor 14 or 16 can be started (i.e., activated) to move or compress fluid. After step 106, a determination can be made as to whether single compressor mode is desired (step 124). At this point, the single compressor mode using the same active compressor 14 or 16 can be maintained or the active and idle compressors 14 and 16 can alternate roles. If single compressor mode is desired, then the method can proceed to step 100 and begin again. If single compressor mode is not desired and all compressors 14 and 16 are activated, then the method is finished because preheating is not needed when all compressors 14 and 16 are active.

[0017] FIG. 3 is a flow chart illustrating an alternative embodiment of a method of controlling a VCS to provide a "cold start" routine. In the embodiment illustrated in FIG. 3, a time fail-safe procedure, as provided in the embodiment illustrated in FIG. 2, is omitted. It should be appreciated that the method illustrated in FIG. 3 can readily be applied to single-compressor VCSs, or to multi-compressor systems such as VCS 10 shown in FIG. 1.

[0018] Initially, a motor temperature of the motor 14-1 or 16-1 of an idle compressor 14 or 16 is sensed using a corresponding sensor 28 or 30 (step 202). The temperature of fluid in the idle compressor 14 or 16 need not be sensed directly, only the temperature of the motor windings of the motor 14-1 or 16-1 of the idle compressor 14 or 16. Temperature of the motor windings can be sensed by delivering a current and measuring resistance through a thermistor, or using other methods as desired. The sensed temperature is communicated to the control logic 38 of the control module 18. The control logic 38 analyzes the sensed data and determines if the motor temperature of the idle compressor 14 or 16 is above a lower threshold (also called a lower temperature threshold) (step 204). In the illustrated embodiment the lower threshold is approximately 29.4°C (85°F), though other temperatures can be selected for the lower threshold in alternative embodiments. For instance, the lower threshold can be selected to be sufficiently high to ensure that the refrigerant 40 is vaporized. If the motor temperature is above the lower threshold, then it is okay to start (i.e., activate) the idle compressor motor 14-1 or 16-1 if desired (step 206). If the sensed motor temperature is below the lower threshold, then a preheating mode can be activated (step 208). The preheating mode can generate thermal energy by delivering power from the motor controller 32 or 34 to windings of the motor 14-1 or 16-1 of the idle compressor 14 or 16, thereby using the idle motor windings as a heater, without activating the motor 14-1 or 16-1 of the idle compressor 14 or 16 to generate a motive force to move or compress fluid. Thermal energy created by motor windings can vaporize liquid, such as the refrigerant 40 and/or the lubricant 42, that may be present in the idle compressor 14 or 16, and can help drive out refrigerant 40 or other liquid from the idle compressor 14 or 16.

[0019] It is desirable to maintain the motor temperature of the idle compressor 14 or 16 within a given range be-

tween the lower threshold and an upper threshold (also called an upper temperature threshold). After the preheating mode has been activated at step 208, it is determined whether the sensed motor temperature of the idle compressor 14 or 16 is above the upper threshold (step 210). The upper threshold can be approximately 32.2°C (90°F), or other temperatures in alternative embodiments. If the motor temperature is above the upper threshold, then the preheating mode of the idle compressor 14 or 16 can be turned off (step 212), and then it is okay to start the motor 14-1 or 16-1 of the idle compressor 14 or 16 at step 206. In this way, sensed motor temperature controls the preheat mode by default, and turns on or off preheating of the idle compressor 14 or 16 as a function of sensed motor temperature. If the motor temperature of the idle compressor 14 or 16 is below the upper threshold, then it is determined if there has been a motor temperature sensor failure (step 215). This can be accomplished through built-in-testing processes, or any other suitable method. If the sensor is operating normally, preheating can continue at step 208. If the sensor has failed, preheating is turned on for a time period (e.g., 18 minutes) (step 216), then preheating is turned off (step 218). At this point it is determined if the idle compressor 14 or 16 is commanded on (step 220). If the idle compressor 14 or 16 is commanded on, then it is okay to start the motor 14-1 or 16-1 at step 206. If there is no on command, then a delay period (e.g., 30 minutes) is begun (step 222). During the delay period, it is determined if there is an on command (step 224). If there is an on command any time during the delay period, then it is okay to start the motor 14-1 or 16-1 at step 206. If there is no on command after the expiration of the delay period, then a preheating period can be cycled on for a new time period (e.g., 14 minutes) (step 226), which returns to step 218 to continue the method.

[0020] At any time it is determined it is okay to start the motor 14-1 or 16-1 of the idle compressor 14 or 16 at step 206, the idle compressor 14 or 16 can be started (i.e., activated) to move or compress fluid.

[0021] It should be noted that the method illustrated in FIG. 3 can be limited only to use in relatively cold environments or climates. For instance, use of the method shown in FIG. 3 can be used only when a sensed ambient temperature is below a suitable temperature threshold.

Claims

1. A method of controlling a vapor cycle system (10) having first and second compressors (14, 16), wherein each of the first and second compressors has an electric motor, the method comprising:

operating the first compressor (14) to compress refrigerant while the second compressor (16) is idle;
operating the second compressor (16) by:

sensing a motor temperature of the second compressor when the second compressor is idle;
determining if the motor temperature is below a lower temperature threshold;
activating a preheat mode when the motor temperature is below the lower temperature threshold by supplying current to the electric motor to generate heat while the second compressor remains idle; and
turning off the preheat mode when the sensed motor temperature is above an upper temperature threshold; and

limiting the maximum duration of the preheating mode to a preheating time period, such that the preheating mode is turned off after being activated for the preheating time period.

2. The method of claim 1 and further comprising: activating the second compressor when the motor temperature is above the lower temperature threshold and after turning off the preheat mode.
3. The method of claim 1 or 2, wherein the lower temperature threshold is approximately 29.4°C (85°F), and wherein the upper temperature threshold is approximately 32.2°C (90°F).
4. The method of claim 1, 2 or 3, wherein the motor temperature is sensed by sensing a resistance with a thermistor (28, 30).
5. The method of claim 1, wherein the preheating time period is approximately 14 minutes.
6. The method of any preceding claim and further comprising:
 - maintaining the second compressor preheat mode in an off condition for a delay period; and
 - reactivating the preheating mode for the second compressor for the preheating time period following the delay period.
7. The method of claim 6 wherein the delay period is approximately 30 minutes.
8. The method of any preceding claim and further comprising: starting the second compressor to compress refrigerant after the preheat mode is turned off.
9. A vapor cycle system (10) comprising:
 - a first compressor (14) having an electric motor (14-1), a motor temperature sensor (28), and a motor controller (32);

- a second compressor (16) having an electric motor (16-1), a motor temperature sensor (30), and a motor controller (34);
 a refrigerant circuit, wherein the first compressor and the second compressor are connected in fluid communication with the refrigerant circuit in parallel; and
 a control module (18) operatively connected to the motor controller of each of the first and second compressors, wherein the control module is configured to command the motor controllers of each of the first and second compressors to operate only one of the first and second compressors to compress refrigerant and to operate the other, idle one of the first and second compressors in a preheat mode, wherein the preheat mode is activated to generate heat with the motor of the idle one of the first and second compressors to a preheat temperature range, and wherein the control module is further configured to limit a duration of the preheat mode to a preheating time period.
10. The vapor cycle system of claim 9, wherein the preheat temperature range is approximately 48.9°C (120°F) to approximately 54.4°C (130°F).
11. The vapor cycle system of claim 9 or 10, wherein the motor temperature sensors of each of the first and second compressors is a thermistor.
12. The vapor cycle system of claim 9, 10 or 11, wherein the control module is further configured to maintain the preheat mode of the idle one of the first and second compressors in an off condition for a delay period and then reactivate the preheating mode for the idle one of the first and second compressors for the preheating time period following the delay period.
13. The vapor cycle system of claim 12, wherein the preheating time period is approximately 14 minutes, and wherein the delay period is approximately 30 minutes.
- Patentansprüche**
1. Verfahren zum Steuern eines Dampfzyklussystems (10), das einen ersten und zweiten Kompressor (14, 16) aufweist, wobei jeder des ersten und zweiten Kompressors einen Elektromotor aufweist, wobei das Verfahren Folgendes umfasst:
- Betreiben des ersten Kompressors (14), damit er Kühlmittel komprimiert, während sich der zweite Kompressor (16) im Leerlauf befindet;
 Betreiben des zweiten Kompressors (16) durch Folgendes:
- Erfassen einer Motortemperatur des zweiten Kompressors, wenn sich der zweite Kompressor im Leerlauf befindet;
 Bestimmen, ob die Motortemperatur unterhalb einer unteren Temperaturschwelle liegt;
 Aktivieren eines Vorheizmodus, wenn die Motortemperatur unterhalb der unteren Temperaturschwelle liegt, indem dem Elektromotor Strom zugeführt wird, um Wärme zu erzeugen, während der zweite Kompressor im Leerlauf bleibt; und
 Abschalten des Vorheizmodus, wenn die erfasste Motortemperatur oberhalb einer oberen Temperaturschwelle liegt; und
- Begrenzen der maximalen Dauer des Vorheizmodus auf einen Vorheizzeitraum, sodass der Vorheizmodus abgeschaltet wird, nachdem er für den Vorheizzeitraum aktiviert war.
2. Verfahren nach Anspruch 1 und ferner umfassend: Aktivieren des zweiten Kompressors, wenn die Motortemperatur oberhalb der unteren Temperaturschwelle liegt und nachdem der Vorheizmodus abgeschaltet wurde.
3. Verfahren nach Anspruch 1 oder 2, wobei die untere Temperaturschwelle etwa 29,4 °C (85 °F) entspricht, und wobei die obere Temperaturschwelle etwa 32,2 °C (90 °F) entspricht.
4. Verfahren nach Anspruch 1, 2 oder 3, wobei die Motortemperatur durch das Erfassen eines Widerstands mit einem Thermistor (28, 30) erfasst wird.
5. Verfahren nach Anspruch 1, wobei der Vorheizzeitraum etwa 14 Minuten entspricht.
6. Verfahren nach einem der vorhergehenden Ansprüche und ferner umfassend:
- Halten des zweiten Kompressorvorheizmodus in einem abgeschalteten Zustand für einen Verzögerungszeitraum; und
 Reaktivieren des Vorheizmodus für den zweiten Kompressor für den Vorheizzeitraum im Anschluss an den Verzögerungszeitraum.
7. Verfahren nach Anspruch 6, wobei der Verzögerungszeitraum etwa 30 Minuten entspricht.
8. Verfahren nach einem der vorhergehenden Ansprüche und ferner umfassend: Starten des zweiten Kompressors zum Komprimieren von Kühlmittel, nachdem der Vorheizmodus abgeschaltet wurde.

9. Dampfkylsystem (10), umfassend:

einen ersten Kompressor (14), der einen Elektromotor (14-1), einen Motortemperatursensor (28) und eine Motorsteuerung (32) aufweist; 5
einen zweiten Kompressor (16), der einen Elektromotor (16-1), einen Motortemperatursensor (30) und eine Motorsteuerung (34) aufweist; 10
einen K hlmitteleislauf, wobei der erste Kompressor und der zweite Kompressor in Fluidkommunikation mit dem K hlmitteleislauf parallelgeschaltet sind; und
ein Steuermodul (18), das mit der Motorsteuerung von jedem des ersten und zweiten Kompressors wirkverbunden ist, wobei das Steuermodul konfiguriert ist, um den Motorsteuerungen von jedem des ersten und zweiten Kompressors zu befehlen, lediglich einen des ersten und zweiten Kompressors zu betreiben, um K hlmittele zu komprimieren und den anderen, im Leerlauf befindlichen des ersten und zweiten Kompressors in einem Vorheizmodus zu betreiben, wobei der Vorheizmodus aktiviert wird, um mit dem Motor des im Leerlauf befindlichen des ersten und zweiten Kompressors W rme zu einem Vorheiztemperaturbereich zu erzeugen, und wobei das Steuermodul ferner konfiguriert ist, um eine Dauer des Vorheizmodus auf einen Vorheizzeitraum zu begrenzen. 30

10. Dampfkylsystem nach Anspruch 9, wobei der Vorheiztemperaturbereich etwa 48,9  C (120  F) bis etwa 54,4  C (130  F) entspricht.

11. Dampfkylsystem nach Anspruch 9 oder 10, wobei die Motortemperatursensoren von jedem des ersten und zweiten Kompressors einem Thermistor entsprechen. 35

12. Dampfkylsystem nach Anspruch 9, 10 oder 11, wobei das Steuermodul ferner konfiguriert ist, um den Vorheizmodus des im Leerlauf befindlichen des ersten und zweiten Kompressors f r einen Verz gerungszeitraum in einem abgeschalteten Zustand zu halten und dann den Vorheizmodus f r den im Leerlauf befindlichen des ersten und zweiten Kompressors f r den Vorheizzeitraum im Anschluss an den Verz gerungszeitraum zu reaktivieren. 45

13. Dampfkylsystem nach Anspruch 12, wobei der Vorheizzeitraum etwa 14 Minuten entspricht, und wobei der Verz gerungszeitraum etwa 30 Minuten entspricht. 50

Revendications

1. Proc d  de contr le d'un syst me de cycle de va-

peur (10) ayant des premier et second compresseurs (14, 16), dans lequel chacun des premier et second compresseurs a un moteur  lectrique, le proc d  comprenant :

le fonctionnement du premier compresseur (14) pour comprimer un fluide r frig rant tandis que le second compresseur (16) est inactif ;
le fonctionnement du second compresseur (16) :

en d tectant une temp rature de moteur du second compresseur lorsque le second compresseur est inactif ;
en d terminant si la temp rature de moteur est en dessous d'un seuil de temp rature inf rieur ;
en activant un mode de pr chauffage lorsque la temp rature de moteur est en dessous du seuil de temp rature inf rieur en fournissant du courant au moteur  lectrique pour g n rer de la chaleur tandis que le second compresseur reste inactif ; et
en d sactivant le mode de pr chauffage lorsque la temp rature de moteur d tect e est au-dessus d'un seuil de temp rature sup rieur ; et
en limitant la dur e maximale du mode de pr chauffage   une p riode de pr chauffage, de sorte que le mode de pr chauffage est d sactiv  apr s avoir  t  activ  pendant la p riode de pr chauffage.

2. Proc d  selon la revendication 1, et comprenant en outre :

l'activation du second compresseur lorsque la temp rature de moteur est au-dessus du seuil de temp rature inf rieur et apr s la d sactivation du mode de pr chauffage.

3. Proc d  selon la revendication 1 ou 2, dans lequel le seuil de temp rature inf rieur est d'environ 29,4  C (85  F) et dans lequel le seuil de temp rature sup rieur est d'environ 32,2  C (90  F).

4. Proc d  selon la revendication 1, 2 ou 3, dans lequel la temp rature de moteur est d tect e par la d tection d'une r sistance avec une thermistance (28, 30).

5. Proc d  selon la revendication 1, dans lequel la p riode de de pr chauffage est d'environ 14 minutes.

6. Proc d  selon une quelconque revendication pr c dente et comprenant en outre :

le maintien du mode de pr chauffage du second compresseur dans une condition d'arr t pendant une p riode d'attente ; et

55

- la réactivation du mode de préchauffage pour le second compresseur pendant la période de préchauffage suivant la période d'attente.
7. Procédé selon la revendication 6, dans lequel la période d'attente est d'environ 30 minutes. 5
 8. Procédé selon une quelconque revendication précédente et comprenant en outre :
le démarrage du second compresseur pour comprimer un fluide réfrigérant après la désactivation du mode de préchauffage. 10
 9. Système de cycle de vapeur (10) comprenant : 15
 - un premier compresseur (14) ayant un moteur électrique (14-1), un capteur de température de moteur (28) et un dispositif de commande de moteur (32) ;
 - un second compresseur (16) ayant un moteur électrique (16-1), un capteur de température de moteur (30) et un dispositif de commande de moteur (34) ; 20
 - un circuit réfrigérant, dans lequel le premier compresseur et le second compresseur sont reliés en communication fluide avec le circuit réfrigérant en parallèle ; et 25
 - un module de contrôle (18) relié de manière opérationnelle au dispositif de commande de moteur de chacun des premier et second compresseurs, dans lequel le module de contrôle est configuré pour ordonner aux dispositifs de commande de moteur de chacun des premier et second compresseurs de faire fonctionner uniquement l'un des premier et second compresseurs pour comprimer un fluide réfrigérant et de faire fonctionner l'autre compresseur, le compresseur inactif des premier et second compresseurs dans un mode de préchauffage, dans lequel le mode de préchauffage est activé pour générer de la chaleur avec le moteur du compresseur inactif des premier et second compresseurs dans une plage de température de préchauffage, et dans lequel le module de contrôle est en outre configuré pour limiter une durée du mode de préchauffage à une période de préchauffage. 30 35 40 45
 10. Système de cycle de vapeur selon la revendication 9, dans lequel la plage de température de préchauffage est comprise entre environ 48,9 °C (120 °F) et environ 54,4 °C (130 °F). 50
 11. Système de cycle de vapeur selon la revendication 9 ou 10, dans lequel les capteurs de température de moteur de chacun des premier et second compresseurs sont une thermistance. 55
 12. Système de cycle de vapeur selon la revendication 9, 10 ou 11, dans lequel le module de contrôle est en outre configuré pour maintenir le mode de préchauffage du compresseur inactif des premier et second compresseurs dans un état d'arrêt pendant une période d'attente, puis réactiver le mode de préchauffage pour le compresseur inactif des premier et second compresseurs pendant la période de préchauffage suivant la période d'attente.
 13. Système de cycle de vapeur selon la revendication 12, dans lequel la période de préchauffage est d'environ 14 minutes, et dans lequel la période d'attente est d'environ 30 minutes.

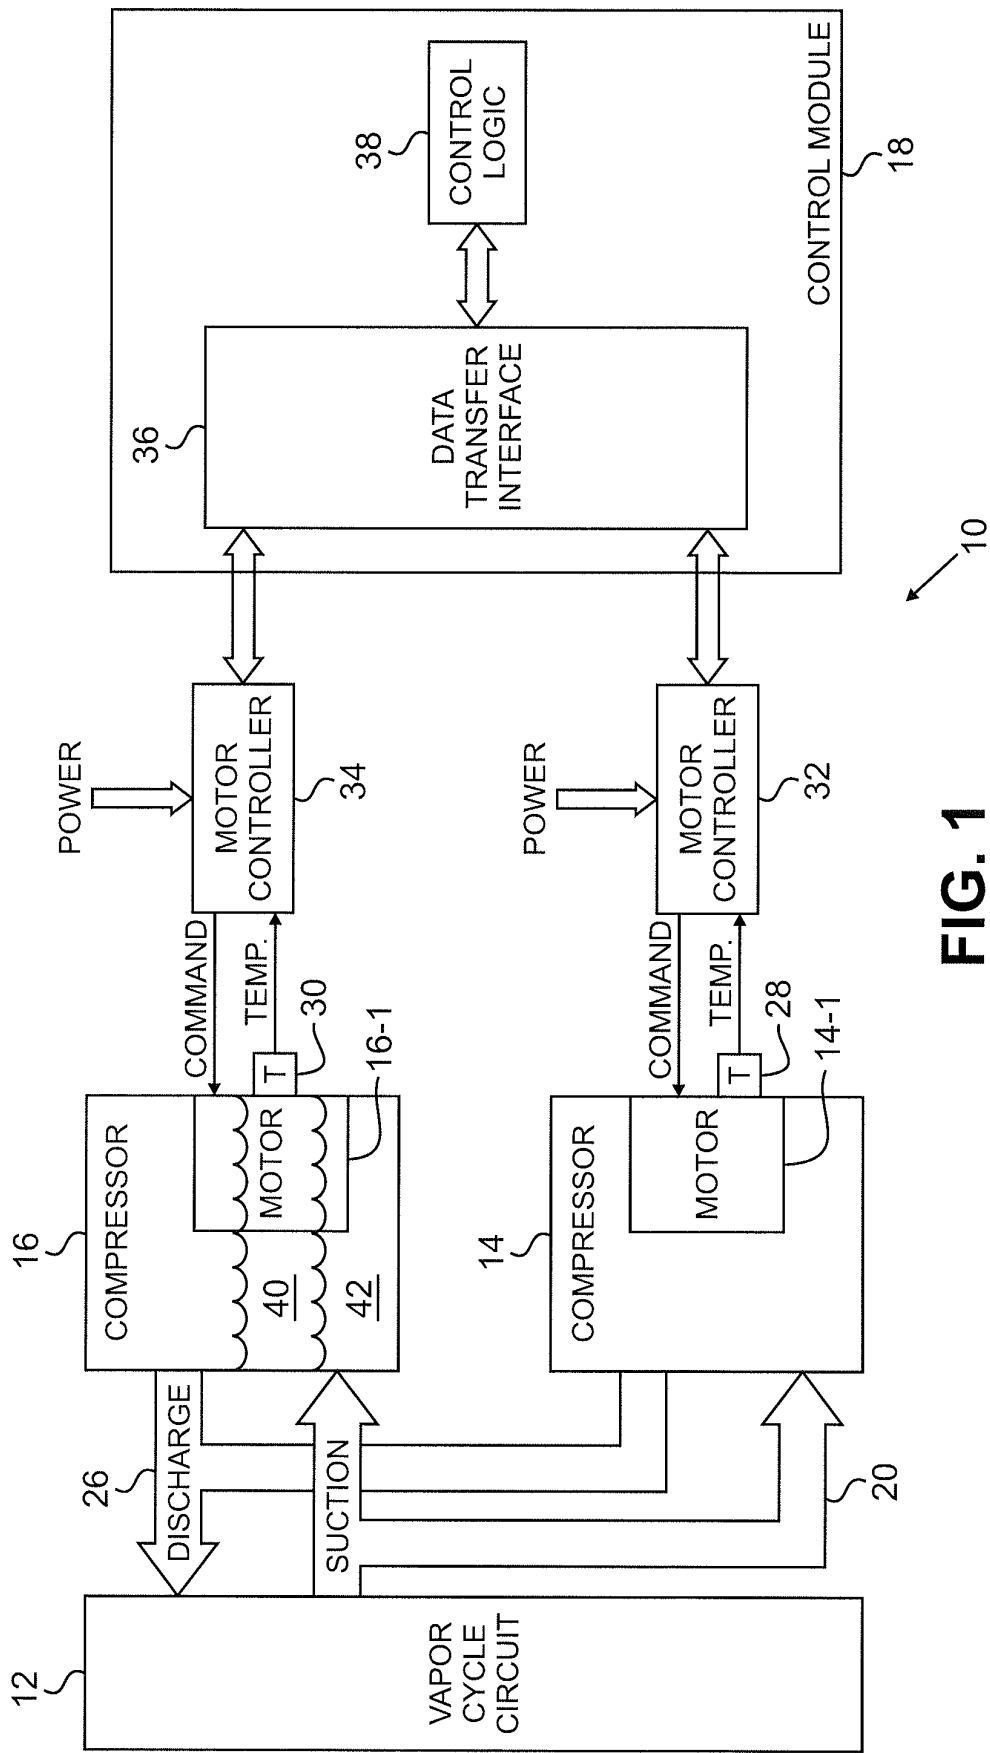


FIG. 1

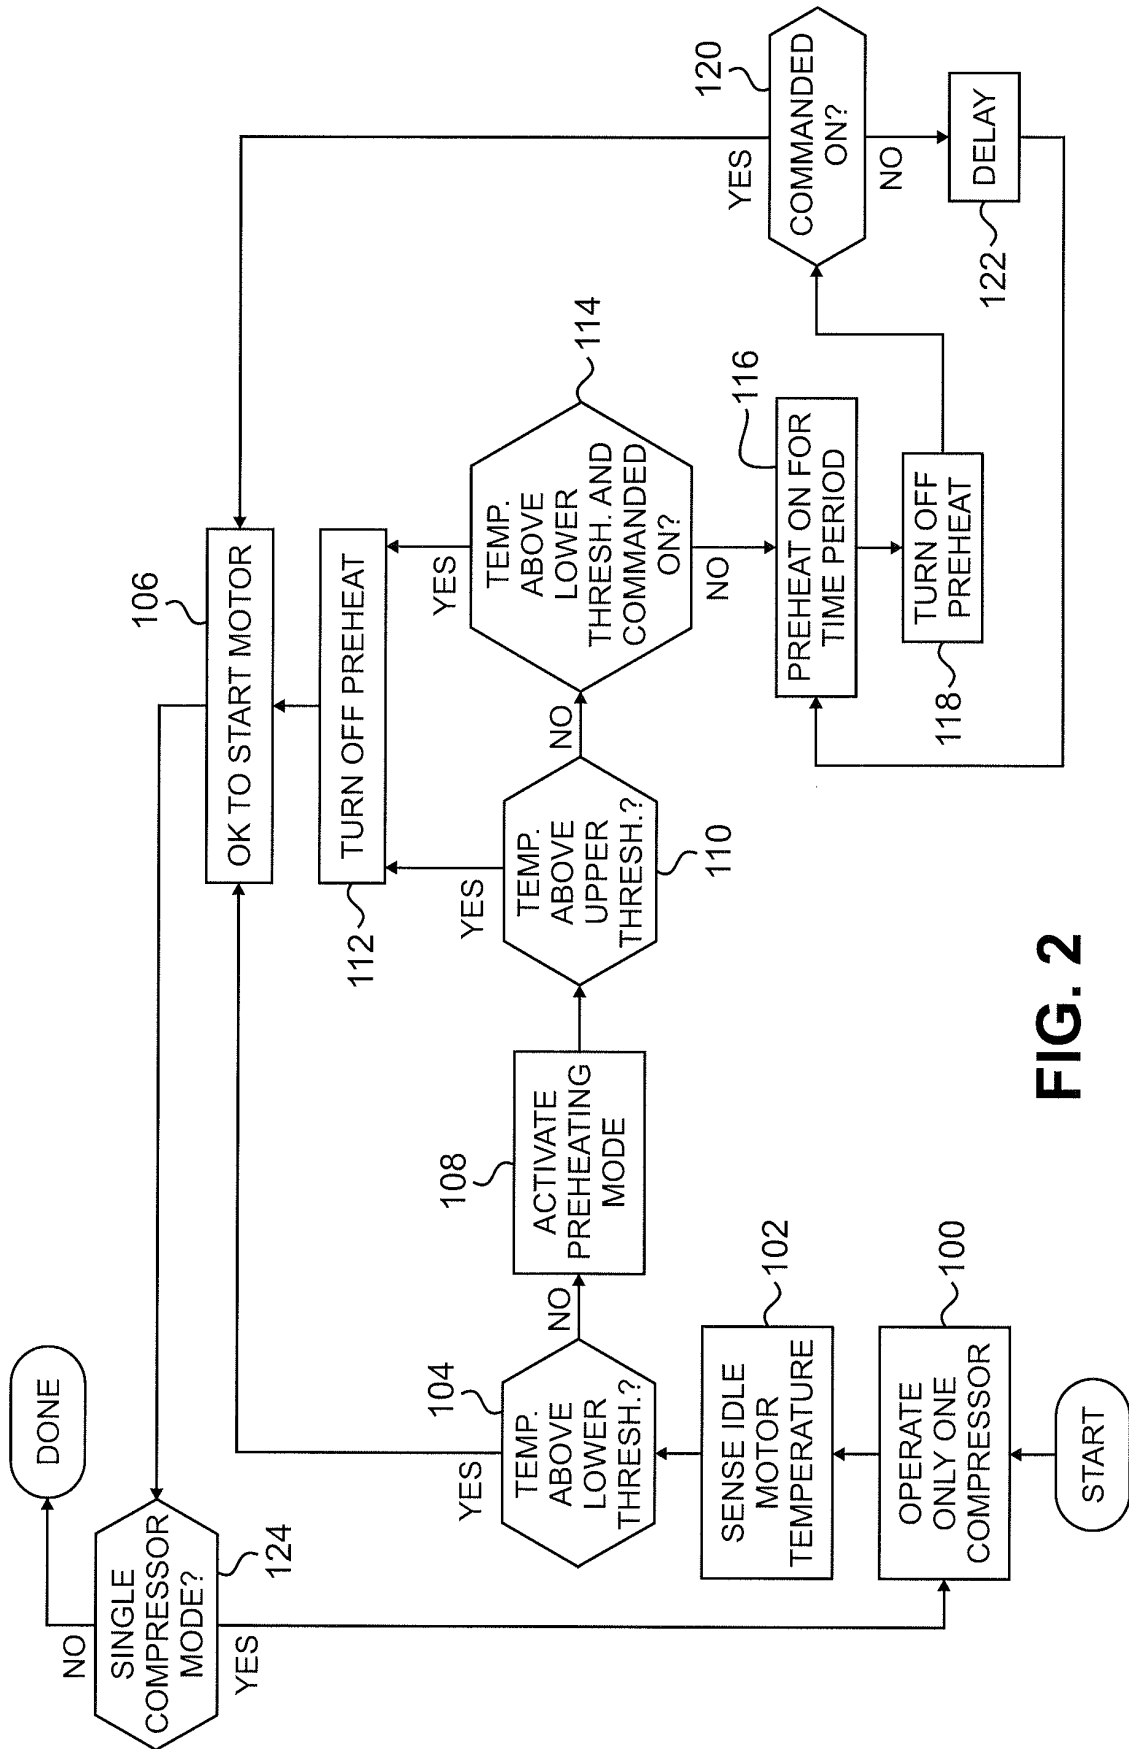
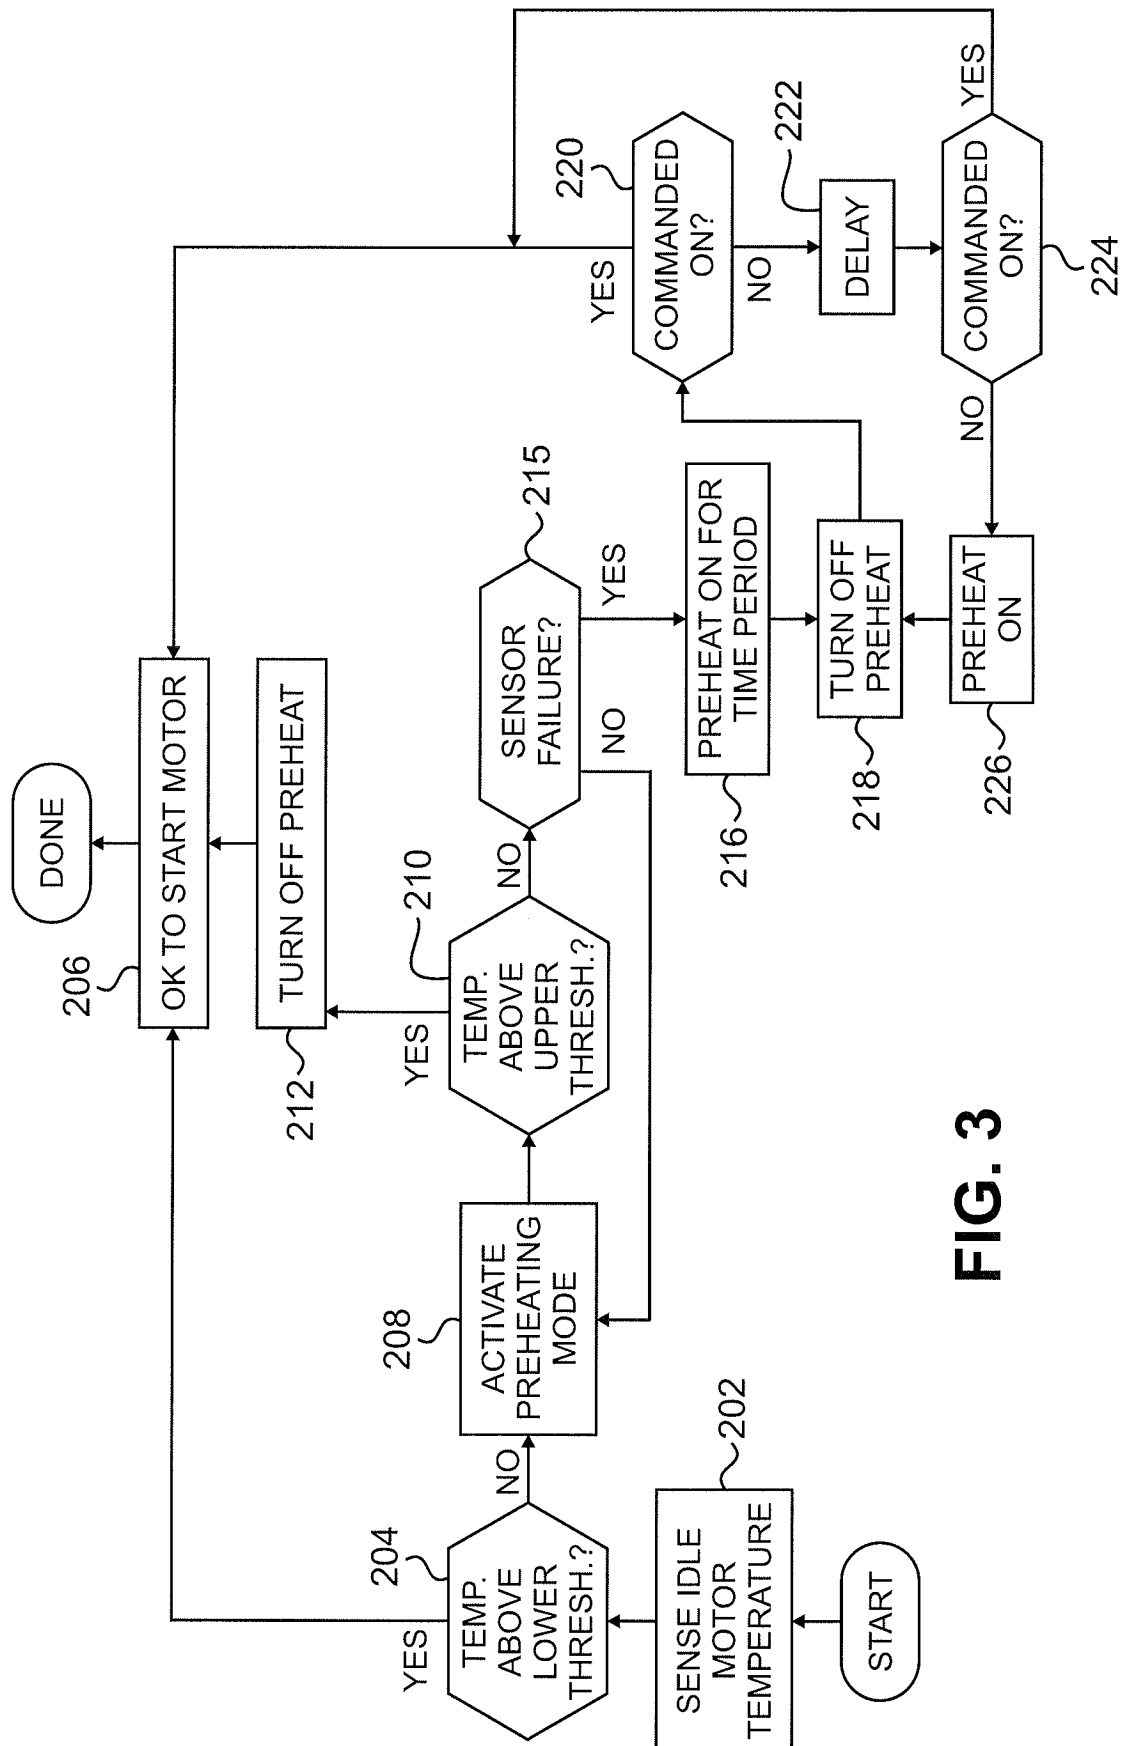


FIG. 2

**FIG. 3**

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2007056300 A1 [0002]