

(19)



(11)

EP 2 486 958 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
13.07.2016 Bulletin 2016/28

(51) Int Cl.:
A62B 7/14 (2006.01)

(21) Application number: **11153950.8**

(22) Date of filing: **10.02.2011**

(54) PASSENGER CABIN EMERGENCY OXYGEN DEVICE

NOTFALLSAUERSTOFFGERÄT FÜR EINE PASSAGIERKABINE

DISPOSITIF D'OXYGÈNE D'URGENCE DE CABINE DE PASSAGER

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:
15.08.2012 Bulletin 2012/33

(73) Proprietor: **Zodiac Aerotechnics**
78370 Plaisir (FR)

(72) Inventors:
• **Rittner, Wolfgang**
23623, Ahrensböck (DE)

- **Meckes, Rüdiger**
23919, Berkenthin (DE)
- **Boomgaarden, Günter**
23684, Scharbeutz (DE)
- **Weinmann, Hasso**
23564, Lübeck (DE)

(74) Representative: **Eisenführ Speiser**
Patentanwälte Rechtsanwälte PartGmbB
Johannes-Brahms-Platz 1
20355 Hamburg (DE)

(56) References cited:
EP-A1- 2 090 335 EP-A1- 2 168 635
WO-A1-84/02279 US-A- 4 718 572

EP 2 486 958 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The invention relates to a passenger cabin emergency oxygen device for an aircraft, in particular for providing oxygen to passenger or crew of an aircraft. The invention further relates to a method for activating a passenger cabin emergency oxygen device for an aircraft in case of emergency. A further aspect of the invention is a method for operating a passenger cabin emergency oxygen device for an aircraft. Furthermore the invention relates to an aircraft comprising a plurality of emergency oxygen devices.

[0002] Arrangements of such emergency oxygen devices of the aforementioned type, see for example EP2090335 A1, on which the preamble of claim 1 is based, are used for a number of purposes where temporary or permanent supply of oxygen to a human person is necessary. A particular field of application of such emergency oxygen devices is the field of aircraft, wherein a pressure drop within an aircraft flying at high altitudes may make it necessary to supply the passengers and the crew members with oxygen. Usually, an emergency oxygen device is provided for each crew member and each passenger or a group thereof and is usually arranged above the passenger. In case of an emergency, such emergency oxygen device is activated, for example automatically by a cabin pressure monitoring system or manually by a crew member, whereafter an oxygen mask connected via a hose to an oxygen source falls from above the passenger downwards and can be used by the passenger. The flow of oxygen may be started automatically, by activation of the system by the crew member or may be activated by a particular action undertaken by the passenger, e.g. by pulling the mask downwards himself to thus activate the device by a pulling force transferred via a hose guiding the oxygen flow or an additional lanyard coupled to the oxygen mask.

[0003] Emergency oxygen devices of the aforementioned type known from the state of the art are connected to the aircraft energy system and receive the energy needed to activate the emergency oxygen device from this aircraft energy system. In many emergency cases cabin pressure drop goes together with other defects on the aircraft, e.g. damage of a turbine or other damages. In such an emergency case it is essential to save as much energy as possible. The activation of a plurality of emergency oxygen devices in a passenger cabin of an aircraft may cause an undesirable high peak of energy consumption, which may cause a total breakdown of the aircraft energy system.

[0004] The invention aims to provide a passenger cabin emergency oxygen device for an aircraft which overcomes at least some of the aforementioned drawbacks and provides better safety to a person supplied by the emergency oxygen device, in particular in case of a severe emergency situation.

[0005] According to a first aspect of the invention, this object is achieved by providing a passenger cabin emer-

gency oxygen device for an aircraft as described beforehand, comprising at least one electrically driven activation device for activating the emergency oxygen device and at least one emergency storage device for storing electrical energy and supplying said electric energy to the at least one activation device and at least one controller adapted for receiving and processing a signal to activate the emergency oxygen device and a source of electrical energy, wherein said source of electrical energy and said energy storage device are coupled together for substantially constant energy transmission from the source of electrical energy to the energy storage device at a first energy level, wherein said activation device and said controller are coupled together for signal transmission from the controller to the activation device, wherein said activation device and said energy storage device are coupled together for energy transmission from the energy storage device to the activation device at a second energy level which is higher than the first energy level, wherein said activation device said energy storage device and said controller build one single unit adapted to be inserted into a roof element of an aircraft cabin interior.

[0006] According to this aspect of the invention, an emergency oxygen device is provided which omits high-peak energy transmission from the aircraft energy system to the emergency oxygen device in an emergency case. This allows simultaneous activation of multiple emergency oxygen devices in an aircraft without the risk of overload-induced breakdown of the energy system of the aircraft. Instead of receiving one high second level energy peak during an emergency case, the energy storage device receives a substantially constant low first level energy transmission from the source of electrical energy to store this energy. In an emergency case an emergency signal is sent to the controller, which upon receipt of such signal connects the electrically driven activation device with the energy storage device, so that the activation device may receive the required amount of energy from the energy storage device. The source of electrical energy herein is an interface adapted to connect the emergency oxygen device with an energy network of the aircraft and/or an energy harvesting element or the like integral within the emergency oxygen device. It is to be understood, that first level energy transmission herein has a lower energy level than second level energy transmission. Preferably first level energy transmission is lower than the energy transmission required by the activation device for activating the emergency oxygen device. In particular the ratio between first and second level is in the range of 1 to 60 according to the invention, no high-peak second level energy transmission from the aircraft energy system to the emergency oxygen device in case of emergency is required, which leads to a better safety of the aircraft, in particular in two cases: In case of an emergency sufficient energy from the energy storage device to the electrically driven activation device will be supplied so that all emergency oxygen devices may be ac-

tivated. When no high-peak second level energy transmission from the aircraft energy system is required, the so saved energy may be supplied to other devices, like cockpit safety devices or the like.

[0007] As a surprising further advantage the invention serves the desire to provide an overall lightweight construction of the aircraft to reduce fuel consumption of the aircraft which is a general problem associated with modern aircrafts. Especially a reduction of weight of cabin interior elements is achieved. By supplying a substantially constant low first level energy transmission from an aircraft energy system to the energy storage device no extensive wiring adapted for high-peak second level energy transmission from the aircraft energy system to the electrically driven activation device is required, hence leading to an increase of the security of the aircraft.

[0008] A further surprising advantage is the reduction of manufacturing and overhauling costs. In a modern aircraft a high variety of interior design is desired. This results in the need for cabin interior elements like emergency oxygen devices or passenger units which are adapted to be implemented into the aircraft at different locations and in different numbers. Surprisingly according to this invention the aircraft, especially the cabin interior including the PSU, may be overhauled and modified later without substantial constructive work in case that the interior design is changed. In contrast, prior art emergency oxygen devices require extensive preparation or design work, isolating and installation in a course of the initial manufacturing as well as later overhaul and modification of an aircraft.

[0009] According to a first preferred embodiment said emergency oxygen device is adapted to receive and process an emergency signal, in particular an aircraft cabin decompression signal to set the activation device and the energy storage device into electrical connection. According to this embodiment, the controller is adapted to receive and process an emergency signal, while the energy storage device is adapted to receive and store a substantially constant low first level energy transmission from the source of electrical energy. When receiving the emergency signal, the controller sets the activation device and the energy storage device into communication so that electrical energy may flow from the energy storage device to the activation device enabling the emergency oxygen device to be activated. The activation device in this embodiment may comprise an electric motor, an electrically actuated switch, a solenoid switch or latch or an electrically actuated latch or the like. The controller in this embodiment may comprise a transistor or an electromagnet or the like adapted to set the energy storage device and the electrically driven activation device into electric communication. Cabin decompression herein refers to the ambient pressure inside an aircraft cabin. An aircraft may comprise a sensor which is adapted to measure the ambient pressure, which is the pressure inside the cabin of an aircraft. In case of a cabin pressure drop, the pressure difference between the cabin ambient pres-

sure and the ambient pressure outside the aircraft lowers. However, preferably the cabin decompression signal is sent in case the cabin ambient pressure falls under a predetermined level.

[0010] According to a first aspect of the invention said controller is adapted to receive said signal via a signal wire from a sender. While connecting the controller to a signal wire and coupling the activation device via the controller to the energy storage device, the signal wire may be designed with a small diameter. This leads to a reduction in weight of the aircraft. The signal wire is connected to a sensor which may comprise a sensor inside the aircraft, which supplies cabin decompression signal to the controller via the signal wire. The aircraft may comprise more than one of these sensors, e.g. four sensors distributed over the aircraft. This leads to a further reduction of wiring, since it is not necessary to lead the wire through the whole airplane.

[0011] According to a first aspect of the invention said source of electrical energy and said energy storage device are coupled together by means of said signal wire for an energy transmission at said first energy level. According to this embodiment a substantially constant low energy is transmitted via the signal wire from the source of electrical energy to the energy storage device and preferably also to the controller. This energy transmission may be of very low energy level so that the cross-section of the signal wire may be kept small. The energy storage device may accumulate the energy transmitted and supply this energy in case of an emergency to the activation device for activating the emergency oxygen device.

[0012] According to a further preferred embodiment of the emergency oxygen device, said controller is adapted to receive and process at least two different signals comprising an emergency signal for activating said activation device in an emergency case, and a test signal for activating said activation device in a test case. Emergency oxygen devices are an essential and life saving part of modern aircrafts. Thus it is essential to test, whether one emergency oxygen device is defect or not. According to this embodiment the controller may receive an emergency signal for activating said activation device in an emergency case. In this case the activation device is set into electrical communication with the energy storage device to activate the emergency oxygen device. The controller is also adapted to receive a test signal for activating said activation device in a test case. Such a test case may be a test case which is performed while maintaining the aircraft on ground. In such case the controller may set the activation device and the energy storage device into electrical communication to activate the emergency oxygen device. In one embodiment the controller is adapted to set the activation device and the energy storage device for short-time period into communication. In one alternative embodiment the controller comprises a signaling means, such as a light or a speaker, and in case the controller receiving the test signals, the controller is adapted to set the energy storage device into communi-

cation with the signaling means.

[0013] According to a further preferred embodiment of the emergency oxygen device said signal is characterized in a change of voltage and/or a change of frequency of an electrical current of said signal wire and preferably the change of voltage and/or the change of frequency signaling the emergency signal is different to the change of voltage and/or the change of frequency signaling the test signal. According to this embodiment the signal wire may be connected to the energy storage device for a substantially constant energy transmission from a source of electrical energy to the energy storage device at a first energy level. This transmission may be with a low first level voltage or a specific frequency of the current. In case of an emergency, like a cabin pressure drop, the sender may change the voltage for a short period and sending a second level voltage signal which is somewhat higher than the first level. The controller is adapted to recognize this short voltage peak as the desired signal to set the energy storage device into electrical connection with the activation device to activate the emergency oxygen device. The second level voltage peak signaling an emergency case may be different from a second level voltage peak signaling a test case, in particular higher than such test voltage. In an alternative embodiment the sender is the source of electrical energy and is adapted to transmit substantially constant energy from a source of electrical energy to the energy storage device at a first energy level using a specific first frequency of the level. For signaling a test case or an emergency case said first frequency may change, wherein a second frequency level signaling a test case may be different from a third frequency level signaling an emergency case, and the controller is adapted to recognize these differences. In a further alternative embodiment a test case may be signaled by a second level voltage peak and an emergency case may be signaled by a change in frequency level supplied, or vice versa. In a further alternative embodiment a test case is signaled by an increase of the voltage and an emergency case is signaled by a reduction of the voltage of the energy transmitted from the sender to the controller and/or the energy storage device. In a further alternative embodiment the substantially constant first level energy transmission is formed by an AC current and an emergency signal and/or a test signal is signaled by a change to a DC current, or vice versa.

[0014] According to a further preferred embodiment of the emergency oxygen device said controller comprises a receiver adapted to receive said signal(s) wireless from a sender and wherein the controller is coupled to a source of electrical energy or an energy storage device integrated into the emergency oxygen device. According to this embodiment the use of signal wiring inside the aircraft cabin is omitted. This leads to a further reduction in the overall weight of the aircraft. The wireless receiver may be integral within the controller or may be a separate device. To operate the receiver, the receiver may be connected to a source of electrical energy, such as the air-

craft energy system. In case of an emergency, the receiver may receive an emergency signal and direct this signal to the controller, wherein the controller is adapted to set the energy storage device into electrical contact with the activation device to activate the emergency oxygen device. In an alternative embodiment the receiver may be connected to the same source of electrical energy as the energy storage device is connected. In a further alternative embodiment the receiver is connected to the energy storage device. In a further alternative embodiment the receiver comprises an additional energy storage device which is connected to a source of electrical energy. In another further alternative embodiment the receiver comprises an energy storage device which is connected to the same source of electrical energy or the same energy supply as the first energy storage device is connected. In a further alternative embodiment the receiver is adapted to receive at least two different wireless signals, comprising an emergency signal for activating said activation device in an emergency case and a test signal for activating said activation device in a test case. By designing the receiver as a wireless receiver, the overall flexibility in designing an aircraft is enhanced. Wiring inside the aircraft cabin for the use of an emergency oxygen device is most widely omitted. Furthermore it may be desired to switch off specific emergency oxygen devices, e.g. in a case only half of the seats of an aircraft is taken by passengers. Furthermore in some cases it may be desired to have additional emergency oxygen devices, like portable emergency oxygen devices, which may also comprise a receiver for receiving and/or processing a wireless emergency signal in case of emergency.

[0015] According to a further preferred embodiment of the emergency oxygen device, said controller comprises a sensor adapted to detect a cabin decompression and to provide a cabin decompression signal to said controller and wherein the controller is preferably coupled to a source of electrical energy or to an energy storage device integrated into the emergency oxygen device. The sensor herein is adapted to measure the ambient pressure, which is the pressure inside the cabin of an aircraft. In case of a cabin pressure drop, the pressure difference between the cabin ambient pressure and the ambient pressure outside the aircraft lowers. However, preferably the sensor is adapted to send a cabin decompression signal in case of measuring a specific cabin ambient pressure. According to this embodiment signal transmission means inside the aircraft connecting components at a distance from each other are as far as possible omitted. Furthermore no wireless receiver is needed both leading to a further reduction in the overall weight of an aircraft. The sensor may be integral within the controller, and adapted to recognize an aircraft altitude switch, and to generate a signal providing the signal to the controller. The sensor and/or the controller may be connected to a source of electrical energy, like the aircraft energy system. In alternative embodiments a controller and/or the

sensor are connected to the same source of electrical energy which the energy storage device is connected. In a further alternative embodiment the controller and/or the sensor are connected to an energy storage device, which may be the same energy storage device adapted to supply energy to the activation device.

[0016] According to a further preferred embodiment of the emergency oxygen device said source of electrical energy is an interface for energy transmission or an energy harvesting element. According to this embodiment an interface for energy transmission may be an interface connected to the aircraft energy system to transmit a substantially constant first level energy to the energy storage device. It may be also in an alternative embodiment an interface connected to other energy systems like the system for the cabin light or speakers in the cabin or the like. Further according to this embodiment an energy harvesting element connected to the energy storage device may be a Peltier element which is in thermal contact to a heat source, to produce electrical energy from the temperature gradient across this Peltier element. This temperature gradient may be a gradient from the temperature of the inside of the cabin to the outside of the cabin, or any other temperature gradients from heat source to another object. In an alternative embodiment the energy harvesting element may be an element adapted to convert oscillatory motion into electrical energy. Such oscillatory motion may be exerted by the passenger or crew member who is supplied with oxygen by the emergency oxygen device. Further, such harvesting elements may comprise a crank, a push button, a handle to apply the shaking force or the like. Further, it is known that during flight or ground transfer, in particular during starting and landing maneuvers of an aircraft significant vibrations are induced within the whole aircraft and induce significant oscillatory motion of any devices installed within the aircraft. According to this embodiment, such oscillatory motion may preferably be used to provide energy to the energy storage device. According to another alternative embodiment wherein a controller comprises a receiver, adapted to receive a wireless signal, the energy harvesting element is adapted to convert the radiation energy emitted by the wireless sender, into electrical energy, supplied to the energy storage device.

[0017] According to a further embodiment of the invention said energy storage device comprises at least one capacitor and/or at least one rechargeable battery. The capacitor may be a super capacitor or an ultra capacitor or the like which has preferably a high energy density and a high power density. It may also comprise additionally or alternatively a rechargeable battery like a thin film battery. In an alternative embodiment the energy storage device comprises a plurality of capacitors and/or batteries. Due to the high energy density and power density, these elements are preferred for light weight construction. Additionally they may be recharged in many circles without defects, so that a supply of energy from the energy storage device to the activation device in case of an

emergency is secured.

[0018] According to a further preferred embodiment, the object is achieved by providing a passenger cabin emergency oxygen device for an aircraft comprising one electrically driven activation device for activating the emergency oxygen device, at least one controller adapted for receiving and processing a signal to activate the emergency oxygen device. wherein said activation device comprises a multi-mode-latch adapted to activate the emergency oxygen device by releasing a bottom lid in at least two different modes, comprising a test-case-mode, wherein the bottom lid is released from a closed position to a restrained position and an emergency-case-mode, wherein the bottom lid is released from said closed or said restrained position to a fully open position. According to this aspect of the invention, said multi-mode-latch is associated with an activation device, adapted to activate the emergency oxygen device in at least two different modes. Such a multi-mode-latch may be driven by an electromotor, an electromagnet, a solenoid element, a piezoelectric element or the like. In the test case mode the bottom lid is only released to a limited extent.

[0019] According to this embodiment the emergency oxygen device may further comprise oxygen masks held in place by a bottom lid or a hatch or the like, wherein the bottom lid is held by the activation device and in case of activation of the emergency oxygen device the lid is opened and the oxygen masks may fall downward through a bottom opening. In such an embodiment, the test case mode would refer to a mode in which the bottom lid is retained in a restrained position, so that the oxygen masks do not fall out of a casing comprising the oxygen device and thus are not supplied to a passenger cabin of an aircraft. In contrary, in an emergency case mode, the bottom lid would be fully opened to supply a passenger cabin with oxygen masks. In an alternative embodiment the test-case-mode refers to a mode wherein the emergency oxygen device is activated, so that no oxygen would be supplied, and the emergency-case-mode would refer to a mode where the emergency oxygen device is activated so that oxygen is supplied to passengers and/or the crew of an aircraft. It is to be understood that different kinds of activation are included herewith. By applying this simple executable test on the emergency oxygen devices the security of the emergency oxygen device and also an aircraft comprising such an emergency oxygen device is enhanced.

[0020] As a further surprising advantage adapting one multi-mode-latch to comprise two different modes, in particular a test case mode and an emergency mode, reduces the maintenance costs, especially in cases when the aircraft is on ground. This serves for testing whether the bottom lid is mounted correct and without undue constraints or tensions / compressions into the airplane. Such testing is to be done in frequent times to ensure function of the emergency oxygen system as a whole. However, it is not desired to completely release the bottom lid in the course of such testing because in such case

the oxygen masks are released and fall out and thus have to be packed and stored again behind the bottom lid after the test. Further, remounting the bottom lid after total release may result in improper function due to wrong assembly. These drawbacks are overcome by the multimode latch according to invention. The multimode latch restrains the release of the bottom lid in a test situation and allows easy pushing pack of the lid in to the fully closed position after such test. By this, the risk of wrong assembly after such test is significantly reduced. After running a test case mode the aircraft may be easily put into the state of normal flight conditions.

[0021] According to a further improved embodiment, an actuation device is provided which is adapted to pull the bottom lid from the position after running a test case mode into the fully closed position. This actuator may be integrated into the multi mode latch or may be a separate device. The actuator allows for easy and safe reconfiguration of all bottom lids after a functionality test and thus minimizes the risk of failure after such test.

[0022] According to a preferred embodiment of the device, said multi-mode-latch comprises a first and a second hook, wherein the first hook is adapted to retain the bottom lid in said closed position and said second hook is adapted to retain the bottom lid in said restrained position. According to this embodiment, the first hook is coupled to the activation device and the second hook is coupled to a release element which may be a plate or a panel. The activation device may be adapted to activate the device in one mode or in two different modes, e.g. a test-case-mode and an emergency-case-mode. According to the first alternative where the activation device is adapted to activate the device in one mode, the first hook is released by the activation device. The second hook then comprises two different positions, a test-position to hold the bottom lid in a restrained position and an emergency-position to release the bottom lid into a fully open position. The second hook may be brought into the two positions by pushing or pulling the release element. Alternatively it may be brought into the two positions automatically.

[0023] According to another embodiment of the device, the multi-mode-latch comprises a hook comprising a first and a second recess, wherein the first recess is adapted to retain the bottom lid in said closed position and said second recess is adapted to retain the bottom lid in said restrained position. According to this embodiment the activation device is adapted to activate the emergency oxygen device in two different modes, e.g. a test-case-mode and an emergency-case-mode. According to the test-case-mode the hook is released in a way that the bottom lid which is held in a closed position by means of the first recess opens to a restrained position where it is held by means of the second recess. According to this embodiment only one hook is required and the activation of the emergency oxygen device requires no acting of a passenger.

[0024] According to a further preferred embodiment an

indicator is integrated into the device said indicator being adapted to indicate whether the bottom lid has been released in a test case mode or not. Such indicator may be a mechanical element which is released in case that the bottom lid is released and may protrude from the bottom lid or any other surface of the device to indicate such release. The indicator may automatically be retracted if the bottom lid is set back into the fully closed position or may require manual individual setting back after closing of the lid.

[0025] In another preferred embodiment of the invention the passenger cabin emergency oxygen device for an aircraft according to claims 1 to 7 comprises the features of the characterizing part of claim 8 to 10.

[0026] In this case not only the advantages of increased safety and weight reduction by having an emergency oxygen device, comprising at least one electrically driven activation device for activating the emergency oxygen device according to claim 1, but also having the advantages of increased safety and reduced maintenance time due to an emergency oxygen device according to claim 8 is achieved. By this combination the object of the invention is solved in a preferable way. According to a further embodiment the object is achieved by providing an aircraft, comprising a plurality of emergency oxygen devices, wherein it comprises at least one arrangement for at least one emergency oxygen device of said plurality of emergency oxygen devices according to any of the features of the claims 1 to 10. Such aircraft will be lightweight and have overall reduced maintenance and mounting costs.

[0027] According to another aspect of the invention, this object is achieved by a method for activating a passenger cabin emergency oxygen device for an aircraft in a case of emergency, comprising receiving a signal to activate the emergency oxygen device by a controller, setting an electrically driven activation device into electrical connection with an energy storage device and using energy from the energy storage device to activate the emergency oxygen device. According to this method, second level high-peak energy transmission from the aircraft energy system to the emergency oxygen device is omitted in an emergency case. Instead of receiving one second level high energy peak during an emergency case, the energy storage device receives a substantially constant energy transmission from the source of electrical energy at a first energy level to store this energy. In an emergency case an emergency signal is sent to the controller, which then connects the electrically driven activation device with the energy storage device. The activation device receives the required amount of energy from the energy storage device to activate the emergency oxygen device. The source of electrical energy may be an interface connected to the aircraft energy system and/or an energy harvesting element. By supplying a substantially constant low first level energy transmission from the aircraft energy system to the energy storage device no extensive wiring adapted for high-peak energy

transmission from the aircraft energy system to the electrically driven activation device is required, hence leading to a reduction of overall weight of the aircraft. In case of an emergency the saved energy from the aircraft energy system may be used for other security relevant devices in the aircraft, hence leading to an enhanced overall security of the aircraft, and the danger of breakdown of the aircraft energy system in the course of simultaneous activation of the emergency oxygen devices is significantly reduced

[0028] According to another aspect of the invention this object is achieved by a method for operating a passenger cabin emergency oxygen device for an aircraft, comprising transmitting substantially constant energy at a first energy level from a source of electrical energy to at least one energy storage device in such a way, that in the energy storage device sufficient energy is stored to temporary supply energy at a second energy level which is higher than said first level to an electrically driven activation device. According to this aspect of the invention the substantially constant energy transmission at a first energy level is used to energize the energy storage device. The energy storage device preferably has such a capacity, so that in case of an emergency in the energy storage device sufficient energy is stored to activate the emergency oxygen device. When this capacity is reached, meaning when enough energy is stored, the substantially constant energy transmission at a first energy level is used as a maintenance transmission, to prevent the energy storage device of lacking energy. According to this aspect of the invention, the safety of an aircraft is improved, since the emergency oxygen device may be activated even if the aircraft energy system broke down.

[0029] Preferred embodiments of the invention are described with reference to the figures, wherein

- Fig. 1 is a schematic view of an emergency oxygen device according to a first embodiment of the invention,
- Fig. 2 is a schematic view of an emergency oxygen device according to a second embodiment of the invention,
- Fig. 3 is a schematic view of an emergency oxygen device according to a third embodiment of the invention,
- Fig. 4 is a schematic view of an emergency oxygen device according to a fourth embodiment of the invention,
- Fig. 5 is a schematic partial view of a frame with a latch for an emergency oxygen device in a closed position,
- Fig. 6 is a schematic partial view of a frame with a

latch for an emergency oxygen device in a restrained position,

- Fig. 7 is a schematic partial view of a frame with a latch for an emergency oxygen device in a fully opened position,
- Fig. 8 is a cross-sectional view of a frame with a latch for an emergency oxygen device in a closed position,
- Fig. 9 is a cross-sectional view of a frame with a latch for an emergency oxygen device in a restrained position, and
- Fig. 10 is a cross-sectional view of a frame with a latch for an emergency oxygen device in a fully opened position.

[0030] Referring to fig. 1, an emergency oxygen device 1 according to a first embodiment of the invention comprises an activation device 11 for activating the emergency oxygen device, a controller 5 and an energy storage device 9. These devices are encased within a housing 2 which is closed by a bottom lid 4 on its bottom side. The bottom lid 4 is attached on one side via a hinge 21 to the housing 2 on the right hand side of fig. 1. On the opposite side, the bottom lid 4 is secured to the housing by a latch 12 attached to the activation device 11. The controller 5 is coupled to the activation device 11 and the energy storage device 9 is coupled to the controller 9 via a cable 17. Furthermore, the energy storage device 9 is coupled to a source of electrical energy 7, which in this embodiment is placed outside the housing, via an electric cable 15. The source of electrical energy 7 is adapted for substantially constant energy transmission to the energy storage device 9 at a first level. Thus, the cable 15 may be designed with a small diameter, since no high energy transmission via the cable 15 is necessary. The controller 5 is coupled to a sender 3 which is adapted to send an emergency signal or a test signal. Normally a signal is not send with a high energy, so that the signal cable 13 may also be designed with a small diameter..

[0031] In this and the following embodiments the energy storage device 9, 109, 209, 309 may be formed as a rechargeable battery or a capacitor. A rechargeable battery like a thin film battery is preferred, since it is able to store energy for a longer period than a capacitor. On the other hand a capacitor like a supercapacitor may be preferred because of its good power density. This leads to a weight reduction of the aircraft. Both, the battery and the capacitor, may comprise a housing with specific ports for the connection of the cables 15, 17, 115, 117, 215, 217, 314, 317.

[0032] In case, the sender 3 is sending an emergency signal via the cable 13 to the controller 5, the controller sets the energy storage device 9 into communication with the activation device 11 via the cables 17, 19 to activate

the emergency oxygen device 1. The activation device will release the latch 12, and the bottom lid 4 opens following gravity force. For releasing and/or activating the latch 12, the activation device 11 may comprise an electric motor or a piezo-activator. Also an electromagnetic switch or the like could be implemented. Oxygen masks (not shown) may be stored directly above the lid 4, so that in case the lid 4 opens, the oxygen masks are supplied to passengers inside the aircraft. In this embodiment the sender 3 may be a cabin pressure sensor adapted to measure the cabin pressure or may also be a manual sender activated by the cabin crew. The source of electrical energy 7 in this embodiment may be an interface to the aircraft energy system or any other source of electrical energy.

[0033] In a second embodiment of the emergency oxygen device 101 shown in fig. 2, the energy storage device 109 is coupled via a cable 114 to the sender 103. Furthermore in this embodiment the controller 105 is coupled to the sender 103 and the activation device 111 is coupled to the controller. By connecting the energy storage device 109 to the sender 103, the energy storage device 109 receives the electrical energy to be stored from the sender 103. The sender 103 is adapted for a substantially constant voltage and low current amplitude transmission at a first energy level. The energy storage device 109 stores this electrical energy until a specific amount of energy is stored. The constant energy transmission is then used as a maintenance voltage for the energy storage device 109. In case of an emergency, the sender 103 will send a short high peak voltage signal. The controller 105 recognizes this difference voltage and sets as a result the energy storage device 109 into electrical communication with the activation device 111.

[0034] In fig. 2 no housing of the emergency oxygen device 101 is shown. However, preferably the emergency oxygen device 101 or at least parts of it are encased in housing. In an alternative embodiment the activation device 111 may also be arranged outside a housing and coupled to a latch to activate the emergency oxygen device by releasing a bottom lid of a housing as shown in fig. 1.

[0035] Referring to fig. 3 a third embodiment comprises a wireless receiver 203, a first energy storage device 209 and a second energy storage device 225. The first energy storage device 209 is coupled to the controller 205 via a cable 217. The second energy storage device 225 is coupled to the wireless receiver 203 via a cable 227. In an alternative embodiment it may also be integral with the wireless receiver 203. Both energy storage devices 229, 225 are coupled to a source of electrical energy 207. This source of electrical energy 207 may be the aircraft energy system or any other source of electrical energy. Preferably the source of electrical energy 207 is an energy harvesting element. Such an energy harvesting element 207 may be attached to a housing of the emergency oxygen device 211 and adapted to convert mechanical energy acting onto such a housing from vibrations, accelerations

or the like into electrical energy. The energy harvesting element 207 may comprise an inductive coil with a moveable magnetic core arranged within the coil and biased via a mechanical spring to thus allow induction of electrical energy within the coil in case that the housing and the energy harvesting element 207 is exposed to an oscillatory motion effecting movement of the core in the relation to the coil.

[0036] The electrical energy generated within the energy harvesting element 207 is supplied via a cable 215 to the first and second energy storage device 209, 255. Thus, the wireless receiver is supplied with energy from the second energy storage device 227 and the activation device is supplied with energy from the first energy storage device 209 in case of an emergency.

[0037] It is preferred to implement two separate energy storage devices 209, 225 since in case of an emergency, it is crucial that inside the first energy storage device 209 sufficient energy is stored for an activation of the activation device 211. However in an alternative embodiment the wireless receiver 203 and the controller 205 are coupled to the same energy storage device. In such an embodiment it is necessary to secure, that to any time the amount of stored energy is sufficient to run the activation device 211.

[0038] The wireless signal 223 is sent to the wireless receiver 203 from a sender inside the aircraft. The sender may be coupled to a sensor and/or adapted for manual activation, e.g. by the cabin crew. In an alternative embodiment the wireless receiver 203 is integral with the controller. Thus, the frame size of the emergency oxygen device may be kept small.

[0039] Referring to fig. 4 a fourth embodiment the emergency oxygen device 301 comprises a controller 305 with an integrated sensor. In this embodiment, the energy storage device 309 is coupled with the controller 305 via a cable 317 and to a source of an electrical energy 307, which may be the aircraft energy system or a harvesting element as described above. In case the integrated sensor within the controller 305 measures a low cabin altitude pressure, which makes it necessary to supply the passengers with oxygen, the controller 305 sets the energy storage device 309 into electrical connection with the activation device 311 to activate the emergency oxygen device 301. All these elements may be incased in one housing, which is preferred. This leads to a reduction in production costs since the complexity of assembling the emergency oxygen device 1, 101, 201, 301 into an aircraft is reduced.

[0040] In case of a sudden pressure drop within a cabin of an aircraft, the emergency oxygen device 1, 101, 201, 301 according to the invention will work as follows. After having received an emergency signal via a signal cable 13, 113, a wireless signal way 223 or by the sensor integral within the controller 305, the controller 5, 105, 205, 305 sets the energy storage device 9, 109, 209, 309 into electrical contact with the activation device 11, 111, 211, 311. Thus electrical energy flows via the cables 17, 19,

117, 119, 217, 219, 317, 319 from the energy storage device to the activation device. Parallel to this, the controller sends a signal to the activation device, to fully activate the emergency oxygen device 1, 101, 201, 301. A full activation herein refers to activation, where a bottom lid 4 of a housing 2 is opened, so that oxygen masks are provided to passengers and also a flow of oxygen to the masks is supplied. A not fully activation hence refers to an activation, wherein such a bottom lid 4 is retained in a restrained position.

[0041] In case a test on the emergency oxygen device 1, 101, 201, 301 should be taken out, the workflow follows the same steps as explained above, but with the difference, that the sender 3, 103 sends a test signal to the controller 5, 105, 205, 305 or the wireless receiver 203. The controller 5, 105, 205, 305 then sets the energy storage device 9, 109, 209, 309 into electrical contact with the activation device 11, 111, 211, 311 and also sends a signal to not fully activate the emergency oxygen device 1, 101, 201, 301. Hence the emergency oxygen device 1, 101, 201, 301 is not fully activated by the activation device 11, 111, 211, 311. An incomplete activation herein refers to an activation where the bottom lid 4 is retained in a restrained position, so that the oxygen masks stay inside the device and are not supplied to passengers. In this test case no oxygen flows to the masks. In an alternative embodiment the emergency oxygen device 1, 101, 201, 301 comprises a lamp or other signaling means, which are activated to signal that the emergency oxygen device 1, 101, 201, 301 is working correctly.

[0042] Referring to figures 5 to 10, a frame 400 for an emergency oxygen device 1, 101, 201, 301, which may be part of the emergency oxygen device, is shown in detail. The frame 400 comprises a bottom panel 404 with an opening 402 which is encircled by a rim 406. On one side of the bottom panel 404 holding means 408 are mounted. On the opposite side, a bottom lid 4 is pivotally fixed by a hinge 21 on one end of the bottom panel. In a closed position (fig. 5, 8) the bottom lid locks the opening 402. Above the bottom lid oxygen masks (not shown) may be stored, which may fall through the opening 402 upon release of the bottom lid 4 (Fig. 7, 10).

[0043] Furthermore the frame 400 comprises a latch 12. The latch 12 in this embodiment comprises a first hook 418 and a second hook 422. The first hook 418 works together with an eye 420. Both are substantially oriented perpendicular to the bottom panel 404. The eye 420 is fixed to the bottom lid 4 and extends through an opening 414 in the bottom panel 404 when the bottom lid 4 is in a closed position. The first hook 418 is connected to a lever 426 wherein both are pivotally mounted by means of a bar 410 relative to the holding means 408. The lever 426 is pivotally mounted to the activation device 411, which in this embodiment is carried out as an electromagnetic element. The activation device 411 is fixed to the holding means 408 and connected to a source of electrical energy or a controller (both not shown) by means of a cable 419 for high energy transmission.

[0044] The latch 12 or latching mechanism 12 comprises a second hook 422. As seen best in figures 8 to 10, the second hook 422 is pivotally mounted to the bottom lid 4 by means of a pivot 428. On one end of the second hook 422 a release panel 430 is arranged. In a closed position of the bottom lid 4, the release panel 422 is substantially flush-mount to the surface of the bottom lid 4. The second hook 422 is hold in this position by means of a guidance spring 424, which is fixed to the bottom lid 4. In a closed position of the bottom lid 4 the guidance spring 424 acts against the bar 410. Both, the second hook 422 and the guidance spring 424 extend through an opening 416 in the bottom panel 404.

[0045] In case the first hook 418 is released the bottom lid 4 is forced to open by means of the guidance spring 424. Upon the relaxation of the spring 424, the second hook 422 may tilt around its pivot 428. A curved end 432 of the second hook 422 is adapted to engage with the bar 410, hence the bottom lid 4 is retained in a restrained position (fig. 6, 9). Since the second hook 422 is pivoted the release panel 430 is no longer flush-mount to the surface of the bottom lid 4. By pushing the release panel 430, the curved end 432 of the second hook 422 is disengaged of the bar 410 and hence the bottom lid 4 may open fully (fig. 7, 10).

Claims

1. A passenger cabin emergency oxygen device for an aircraft, comprising:

- at least one electrically driven activation device (11) for activating the emergency oxygen device;
- at least one energy storage device (9) for storing electrical energy and supplying said electrical energy to the at least one activation device;
- at least one controller (5) adapted for receiving a signal to activate the emergency oxygen device,
- a source of electrical energy (7),

wherein said source of electrical energy and said energy storage device are coupled together for substantially constant energy transmission from the source of electrical energy to the energy storage device at a first energy level,

wherein said activation device and said controller are coupled together for signal transmission from the controller to the activation device,

wherein said activation device and said energy storage device are coupled together for energy transmission from the energy storage device to the activation device at a second energy level which is higher than the first energy level,

wherein said activation device, said energy storage device and said controller build one single unit (2)

adapted to be inserted into a roof element of an aircraft cabin interior,
 wherein said controller is adapted to receive said signal via a signal-wire (13) from a sender (3),
characterized in that said source of electrical energy and said energy storage device are coupled together by means of said signal-wire for an energy transmission at said first energy level.

2. The device according to any of the preceding claims, wherein said controller is adapted to

- receive and process an emergency signal, in particular a cabin decompression signal;
- set the activation device and the energy storage device into electrical connection, preferably by activating a switch..

3. The device according to any of the preceding claims, wherein said controller is adapted to receive and process at least two different signals comprising:

- an emergency signal for activating said activation device in an emergency case;
- a test signal for activating said activation device in a test case.

4. The device according to any of the claims 1-3, **characterized in that** said signal is **characterized in** a change of voltage and/or a change of frequency of an electrical current of said signal-wire and preferably that the change of voltage and/or the change of frequency signalling the emergency signal is different to the change of voltage and/or the change of frequency signalling the test signal.

5. The device according to any of the preceding claims, wherein said controller comprises a receiver adapted to receive said signal(s) wireless from a sender and wherein the controller is coupled to a source of electrical energy or to an energy storage device integrated into the emergency oxygen device.

6. The passenger cabin emergency oxygen device of an aircraft according to any of the preceding claims, wherein said controller comprises a sensor adapted to detect a cabin decompression and to provide a cabin decompression signal to said controller and wherein the controller is coupled to a source of electrical energy or to an energy storage device integrated into the emergency oxygen device.

7. The device according to any of the preceding claims, wherein said energy storage device comprises at least one capacitor or at least one rechargeable battery.

8. A passenger cabin emergency oxygen device ac-

ording to any of the preceding claims, further comprising:

- one electrically driven activation device for activating the emergency oxygen device;
- at least one controller adapted for receiving and processing a signal to activate the emergency oxygen device;

characterized in that said activation device comprises a multi-mode-latch adapted to activate the emergency oxygen device by releasing a bottom lid in at least two different modes, comprising:

- a test-case-mode, wherein the bottom lid is released from a closed position to a restrained position;
- an emergency-case-mode, wherein the bottom lid is released from said closed or said restrained position to a fully open position.

9. The device according to claim 8, **characterized in that** said multi-mode-latch comprises a first and a second hook, wherein the first hook is adapted to retain the bottom lid in said closed position and said second hook is adapted to retain the bottom lid in said restrained position.

10. The device according to claim 8, **characterized in that** said multi-mode-latch comprises a hook comprising a first and a second recess, wherein the first recess is adapted to retain the bottom lid in said closed position and said second recess is adapted to retain the bottom lid in said restrained position.

11. An aircraft, comprising a plurality of emergency oxygen devices, **characterized in that** at least one emergency oxygen device, preferably a plurality of said plurality of emergency oxygen devices is designed according to any of the features of the claims 1 to 10.

12. A method for activating a passenger cabin emergency oxygen device for an aircraft in a case of emergency, comprising:

- receiving a signal via a signal-wire to activate the emergency oxygen device by a controller;
- setting an electrically driven activation device into electrical connection with an energy storage device;
- using energy from the energy storage device to activate the emergency oxygen device.
- comprising transmitting substantially constant energy at a first energy level from a source of electrical energy to via said signal-wire to at an

at least one energy storage device in such a way, that in the energy storage device sufficient energy is stored to temporary supply energy at a second energy level to an electrically driven activation device.

5

Patentansprüche

1. Passagierkabine-Notfallsauerstoffvorrichtung für ein Luftfahrzeug, umfassend:

10

- mindestens eine elektrisch angetriebene Aktivierungsvorrichtung (11) um die Notfallsauerstoffvorrichtung zu aktivieren;
- mindestens eine Energiespeichervorrichtung (9) um elektrische Energie zu speichern und die elektrische Energie an die mindestens eine Aktivierungsvorrichtung bereitzustellen;
- mindestens ein Steuerungselement (5), das ausgebildet ist, ein Signal zu empfangen, um die Notfallsauerstoffvorrichtung zu aktivieren;
- eine Quelle von elektrischer Energie (7),

15

wobei die Quelle von elektrischer Energie und die Energiespeichervorrichtung für im Wesentlichen konstante Energieübertragung von der Quelle von elektrischer Energie zu der Energiespeichervorrichtung auf einem ersten Energieniveau zusammengekoppelt sind,

25

wobei die Aktivierungsvorrichtung und das Steuerungselement für Signalübertragung von dem Steuerungselement zu der Aktivierungsvorrichtung zusammengekoppelt sind,

30

wobei die Aktivierungsvorrichtung und die Energiespeichervorrichtung für Energieübertragung von der Energiespeichervorrichtung zu der Aktivierungsvorrichtung auf einem zweiten Energieniveau, das höher ist, als das erste Energieniveau, zusammengekoppelt sind,

35

wobei die Aktivierungsvorrichtung, die Energiespeichervorrichtung und das Steuerungselement eine einzelne Einheit (2) bilden, die ausgebildet ist, in ein Dachelement eines Luftfahrzeug-Kabineninneren eingesetzt zu werden,

40

wobei das Steuerungselement ausgebildet ist, das Signal über einen Signaldraht (13) von einem Sendeelement (3) zu empfangen,

45

dadurch gekennzeichnet, dass

die Quelle von elektrischer Energie und die Energiespeichervorrichtung durch Mittel des Signaldrahtes für eine Energieübertragung auf dem ersten Energieniveau zusammengekoppelt sind.

50

2. Vorrichtung nach dem vorhergehenden Anspruch, wobei das Steuerungselement ausgebildet ist

55

- ein Notfallsignal, insbesondere ein Kabinen-

druckabnahmesignal, zu empfangen und zu verarbeiten;

- die Aktivierungsvorrichtung und die Energiespeichervorrichtung in elektrische Verbindung zu setzen, vorzugsweise zur Aktivierung eines Schalters.

3. Vorrichtung nach einem der vorhergehenden Ansprüche, wobei das Steuerungselement ausgebildet ist, mindestens zwei unterschiedliche Signale zu empfangen und zu verarbeiten, umfassend:

- ein Notfallsignal zur Aktivierung der Aktivierungsvorrichtung in einem Notfall;
- ein Testsignal zur Aktivierung der Aktivierungsvorrichtung in einem Testfall.

4. Vorrichtung nach einem der Ansprüche 1-3, **dadurch gekennzeichnet, dass** das Signal durch eine Veränderung der Spannung und/oder eine Veränderung der Frequenz eines elektrischen Stroms des Signaldrahts gekennzeichnet ist und vorzugsweise, dass die Veränderung der Spannung und/oder die Veränderung der Frequenz, die das Notfallsignal signalisiert, von der Änderung der Spannung und/oder der Änderung der Frequenz, die das Testsignal signalisiert, verschieden ist.

5. Vorrichtung nach einem der vorhergehenden Ansprüche, wobei das Steuerungselement ein Empfängerselement umfasst, das ausgebildet ist, das/die Signal(e) drahtlos von einem Sendeelement zu empfangen und wobei das Steuerungselement mit einer Quelle von elektrischer Energie oder einer Energiespeichervorrichtung, die in die Notfallsauerstoffvorrichtung integriert ist, gekoppelt ist.

6. Passagierkabine-Notfallsauerstoffvorrichtung eines Luftfahrzeugs nach einem der vorhergehenden Ansprüche, wobei die Steuerungsvorrichtung einen Sensor umfasst, der ausgebildet ist, eine Kabinendruckabnahme zu ermitteln und ein Kabinendruckabnahmesignal an das Steuerungselement bereitzustellen und wobei das Steuerungselement mit einer Quelle von elektrischer Energie oder einer Energiespeichervorrichtung, die in die Notfallsauerstoffvorrichtung integriert ist, gekoppelt ist.

7. Vorrichtung nach einem der vorhergehenden Ansprüche, wobei die Energiespeichervorrichtung mindestens einen Kondensator oder mindestens eine wiederaufladbare Batterie umfasst.

8. Passagierkabine-Notfallsauerstoffvorrichtung nach einem der vorhergehenden Ansprüche, weiter umfassend:

- eine elektrisch angetriebene Aktivierungsvor-

richtung zur Aktivierung der Notfallsauerstoffvorrichtung;

- mindestens ein Steuerungselement, das ausgebildet ist, ein Signal zu empfangen und zu verarbeiten, um die Notfallsauerstoffvorrichtung zu aktivieren;

dadurch gekennzeichnet, dass die Aktivierungsvorrichtung einen Multimodus-Verschluss umfasst, der ausgebildet ist, die Notfallsauerstoffvorrichtung durch lösen eines Bodendeckels in mindestens zwei unterschiedlichen Modi zu aktivieren, umfassend:

- einen Testfallmodus, wobei der Bodendeckel von einer geschlossenen Position in eine zurückgehaltene Position gelöst wird;
- einen Notfallmodus, wobei der Bodendeckel von der geschlossenen Position oder der zurückgehaltenen Position in eine vollständig geöffnete Position gelöst wird.

9. Vorrichtung nach Anspruch 8, **dadurch gekennzeichnet, dass** der Multimodus-Verschluss einen ersten und einen zweiten Haken umfasst, wobei der erste Haken ausgebildet ist, den Bodendeckel in der geschlossenen Position zu halten und der zweiten Haken ausgebildet ist, den Bodendeckel in der zurückgehaltenen Position zu halten.

10. Vorrichtung nach Anspruch 8, **dadurch gekennzeichnet, dass** der Multimodus-Verschluss einen Haken umfasst, der eine erste und eine zweite Aufnahme umfasst, wobei die erste Aufnahme ausgebildet ist, den Bodendeckel in der geschlossenen Position zu halten und die zweite Aufnahme ausgebildet ist, den Bodendeckel in der zurückgehaltenen Position zu halten.

11. Luftfahrzeug, umfassend eine Mehrzahl von Notfallsauerstoffvorrichtungen, **dadurch gekennzeichnet, dass** mindestens eine Notfallsauerstoffvorrichtung, vorzugsweise eine Mehrzahl von der Mehrzahl von Notfallsauerstoffvorrichtungen, nach einem der Merkmale der Ansprüche 1 bis 10 ausgebildet ist.

12. Verfahren zur Aktivierung einer Passagierkabine-Notfallsauerstoffvorrichtung für ein Luftfahrzeug in einem Notfall, umfassend:

- Empfangen eines Signals durch einen Signaldraht um die Notfallsauerstoffvorrichtung durch ein Steuerungselement zu aktivieren;
- Setzen einer elektrisch angetriebenen Aktivierungsvorrichtung in elektrische Verbindung mit einer Energiespeichervorrichtung;
- Verwenden von Energie von der Energiespei-

cherungsvorrichtung um die Notfallsauerstoffvorrichtung zu aktivieren.

- umfassend Übertragen von im Wesentlichen konstanter Energie auf einem ersten Energieniveau von einer Quelle von elektrischer Energie durch den Signaldraht an mindestens eine Energiespeichervorrichtung, derart, dass in der Energiespeichervorrichtung ausreichend Energie gespeichert ist, um zeitweise eine elektrisch angetriebene Aktivierungsvorrichtung mit Energie auf einem zweiten Energieniveau zu versorgen.

15 Revendications

1. Dispositif d'oxygène d'urgence de cabine de passager pour un avion, comprenant :

- au moins un dispositif d'activation électrique (11) pour activer le dispositif d'oxygène d'urgence ;
- au moins un dispositif d'emmagasinement d'énergie (9) pour emmagasiner l'énergie électrique et pour apporter ladite énergie électrique à l'au moins un dispositif d'activation ;
- au moins un dispositif de commande (5) adapté pour recevoir un signal afin d'activer le dispositif d'oxygène d'urgence ;
- une source d'énergie électrique (7),

dans lequel ladite source d'énergie électrique et ledit dispositif d'emmagasinement d'énergie sont couplés ensemble pour une transmission d'énergie sensiblement constante depuis la source d'énergie électrique vers le dispositif d'emmagasinement d'énergie à un premier niveau d'énergie, dans lequel ledit dispositif d'activation et ledit dispositif de commande sont couplés ensemble pour une transmission de signal depuis le dispositif de commande vers le dispositif d'activation, dans lequel ledit dispositif d'activation et ledit dispositif d'emmagasinement d'énergie sont couplés ensemble pour une transmission d'énergie depuis le dispositif d'emmagasinement d'énergie vers le dispositif d'activation à un deuxième niveau d'énergie qui est supérieur au premier niveau d'énergie, dans lequel ledit dispositif d'activation, ledit dispositif d'emmagasinement d'énergie et ledit dispositif de commande construisent une seule et même unité (2) adaptée pour être insérée dans un élément de toit d'un intérieur de cabine d'avion, dans lequel ledit dispositif de commande est adapté pour recevoir ledit signal par l'intermédiaire d'un fil de signal (13) depuis un expéditeur (3), **caractérisé en ce que** ladite source d'énergie électrique et ledit dispositif d'emmagasinement d'énergie sont couplés ensemble à l'aide dudit fil de signal pour

une transmission d'énergie audit premier niveau d'énergie.

2. Dispositif selon l'une quelconque des revendications précédentes, dans lequel ledit dispositif de commande est adapté pour

- recevoir et traiter un signal d'urgence, en particulier un signal de décompression de la cabine ;
- mettre le dispositif d'activation et le dispositif d'emmagasinement d'énergie en connexion électrique, de préférence en activant un commutateur.

3. Dispositif selon l'une quelconque des revendications précédentes, dans lequel ledit dispositif de commande est adapté pour recevoir et traiter au moins deux signaux différents comprenant :

- un signal d'urgence pour activer ledit dispositif d'activation dans un cas d'urgence ;
- un signal de test pour activer ledit dispositif d'activation dans un cas de test.

4. Dispositif selon l'une quelconque des revendications 1-3, **caractérisé en ce que** ledit signal est **caractérisé par** un changement de tension et/ou un changement de fréquence d'un courant électrique dudit fil de signal et de préférence en ce que le changement de tension et/ou le changement de fréquence signalant le signal d'urgence est et/ou sont différent(s) du changement de tension et/ou du changement de fréquence signalant le signal de test.

5. Dispositif selon l'une quelconque des revendications précédentes, dans lequel ledit dispositif de commande comprend un récepteur adapté pour recevoir le(s)dit(s) signal(aux) sans fil depuis un expéditeur et dans lequel le dispositif de commande est couplé à une source d'énergie électrique ou à un dispositif d'emmagasinement d'énergie intégré dans le dispositif d'oxygène d'urgence.

6. Dispositif d'oxygène d'urgence de cabine de passager d'un avion selon l'une quelconque des revendications précédentes, dans lequel ledit dispositif de commande comprend un capteur adapté pour détecter une décompression de la cabine et pour fournir un signal de décompression de cabine audit dispositif de commande et dans lequel le dispositif de commande est couplé à une source d'énergie électrique ou à un dispositif d'emmagasinement d'énergie intégré dans le dispositif d'oxygène d'urgence.

7. Dispositif selon l'une quelconque des revendications précédentes, dans lequel ledit dispositif d'emmagasinement d'énergie comprend au moins un condensa-

teur ou au moins une batterie rechargeable.

8. Dispositif d'oxygène d'urgence de cabine de passager selon l'une quelconque des revendications précédentes, comprenant en outre :

- un dispositif d'activation électrique pour activer le dispositif d'oxygène d'urgence ;
- au moins un dispositif de commande adapté pour recevoir et traiter un signal afin d'activer le dispositif d'oxygène d'urgence ;

caractérisé en ce que ledit dispositif d'activation comprend un verrou à modes multiples adapté pour activer le dispositif d'oxygène d'urgence en relâchant un couvercle inférieur dans au moins deux modes différents, comprenant :

- un mode cas de test, dans lequel le couvercle inférieur est relâché depuis une position fermée vers une position retenue ;
- un mode cas d'urgence, dans lequel le couvercle inférieur est relâché depuis ladite position fermée ou position retenue vers une position totalement ouverte.

9. Dispositif selon la revendication 8, **caractérisé en ce que** ledit verrou à modes multiples comprend un premier et un second crochet, dans lequel le premier crochet est adapté pour retenir le couvercle inférieur dans ladite position fermée et ledit second crochet est adapté pour retenir le couvercle inférieur dans ladite position retenue.

10. Dispositif selon la revendication 8, **caractérisé en ce que** ledit verrou à modes multiples comprend un crochet comprenant un premier et un second évidement, dans lequel le premier évidement est adapté pour retenir le couvercle inférieur dans ladite position fermée et ledit second évidement est adapté pour retenir le couvercle inférieur dans ladite position retenue.

11. Avion, comprenant une pluralité de dispositifs d'oxygène d'urgence, **caractérisé en ce qu'**au moins un dispositif d'oxygène d'urgence, de préférence une pluralité de ladite pluralité de dispositifs d'oxygène d'urgence est conçue selon l'une quelconque des caractéristiques des revendications 1 à 10.

12. Procédé pour activer un dispositif d'oxygène d'urgence de cabine de passager pour un avion dans un cas d'urgence, comprenant :

- la réception d'un signal par l'intermédiaire d'un fil de signal afin d'activer le dispositif d'oxygène

d'urgence par un dispositif de commande ;
- la mise en connexion électrique du dispositif
d'activation électrique avec un dispositif d'em-
magasinage d'énergie ;
- l'utilisation d'énergie provenant du dispositif 5
d'emmagasinage d'énergie afin d'activer le dis-
positif d'oxygène d'urgence,
- comprenant la transmission d'une énergie sen-
siblement constante à un premier niveau d'éner- 10
gie depuis une source d'énergie électrique, par
l'intermédiaire dudit fil de signal, vers au moins
un dispositif d'emmagasinage d'énergie d'une
manière telle que, dans le dispositif d'emmag-
sinage d'énergie, suffisamment d'énergie est 15
emmagasinée pour l'alimentation temporaire en
énergie d'un dispositif d'activation électrique à
un deuxième niveau d'énergie.

20

25

30

35

40

45

50

55

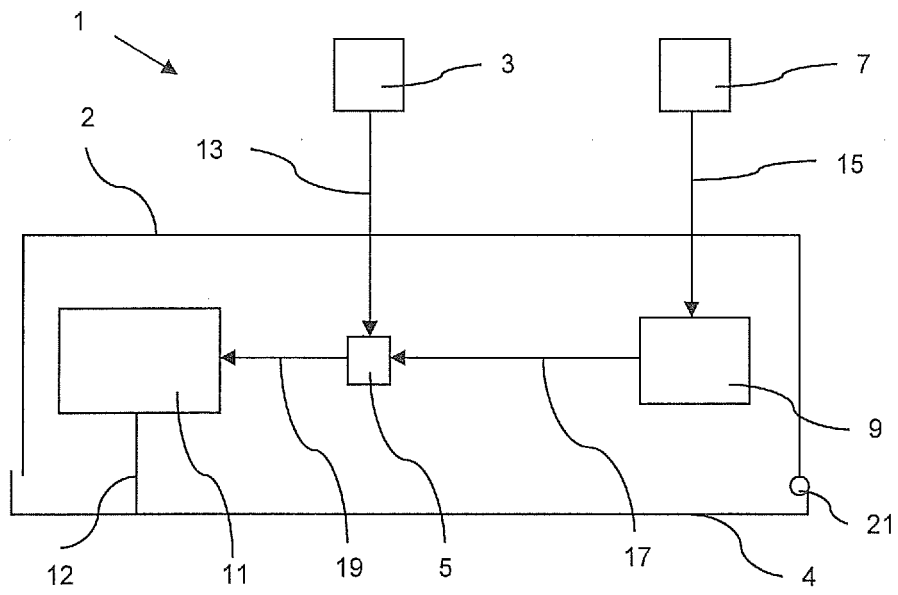


Fig. 1

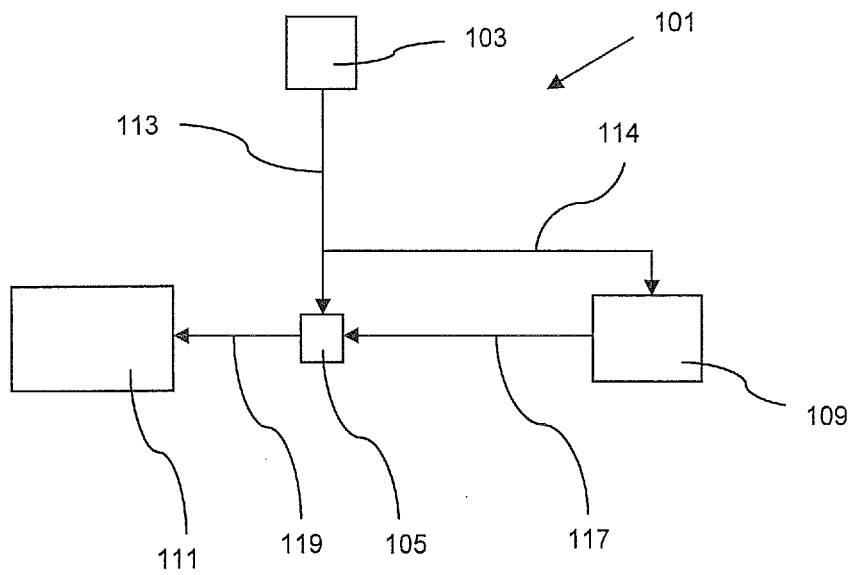


Fig. 2

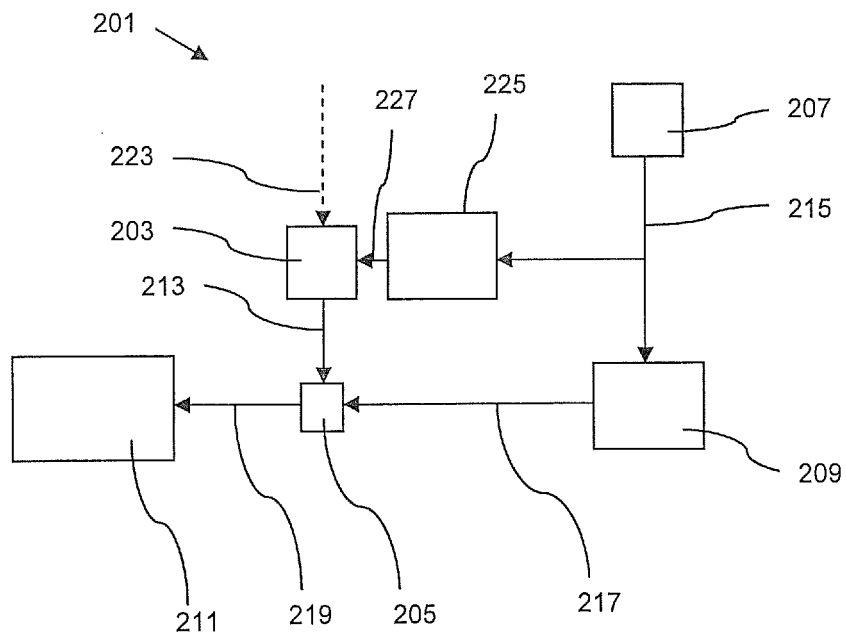


Fig. 3

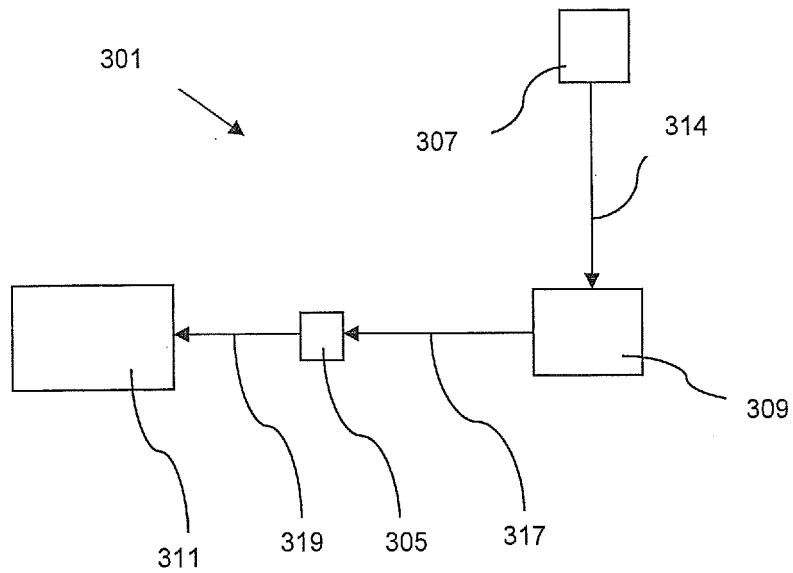
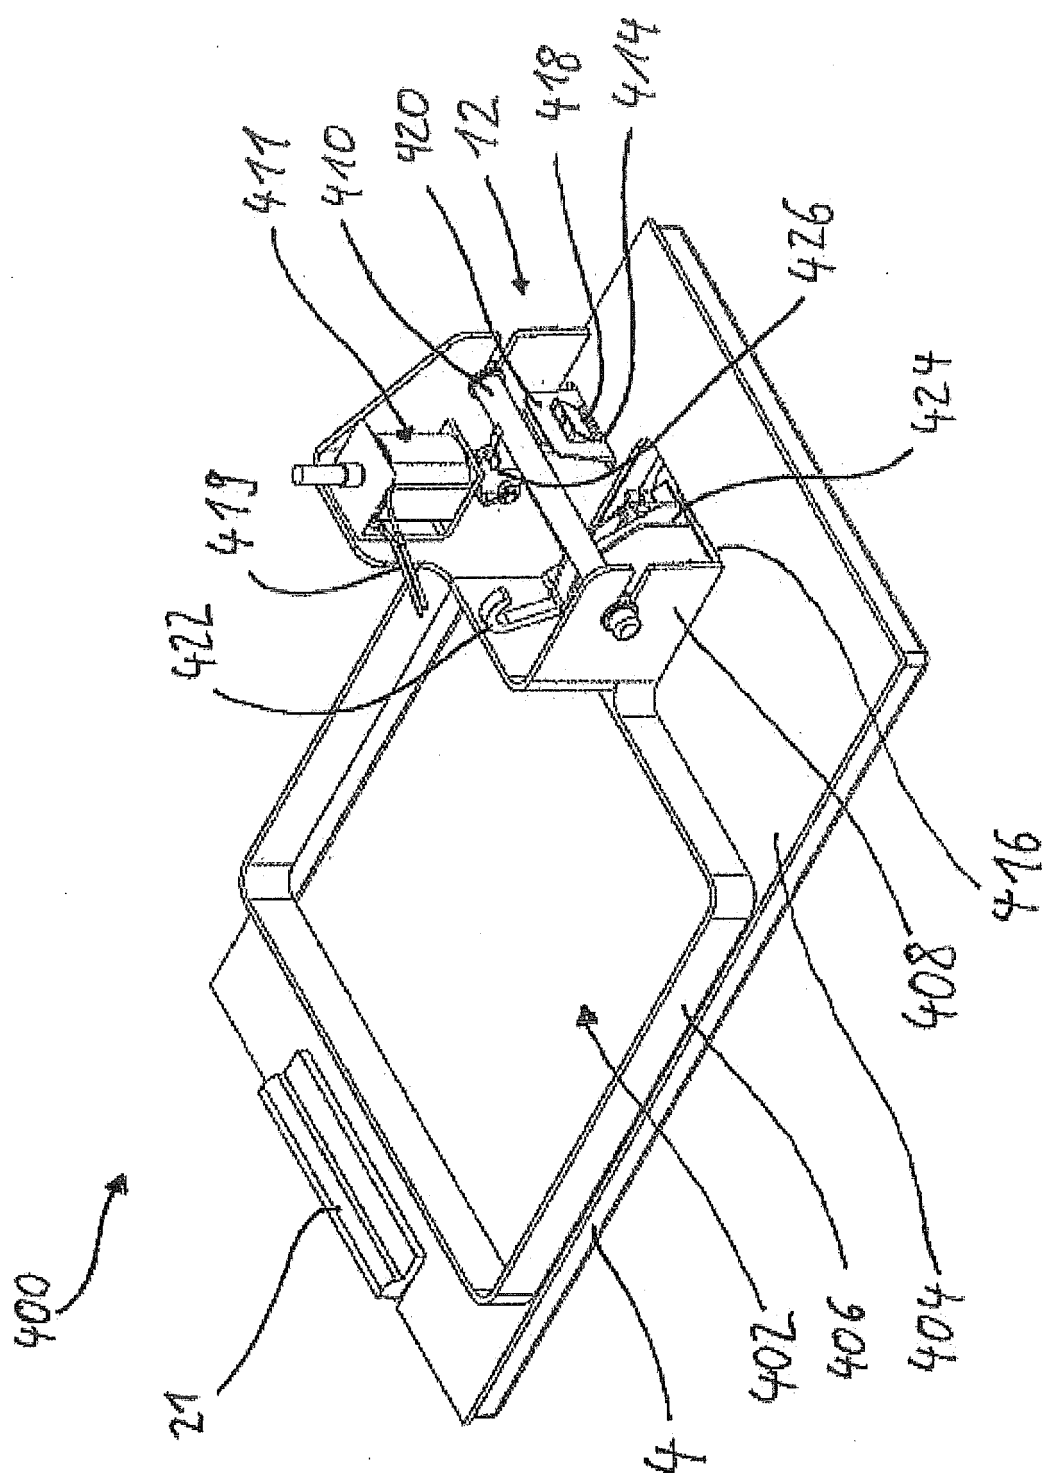


Fig. 4



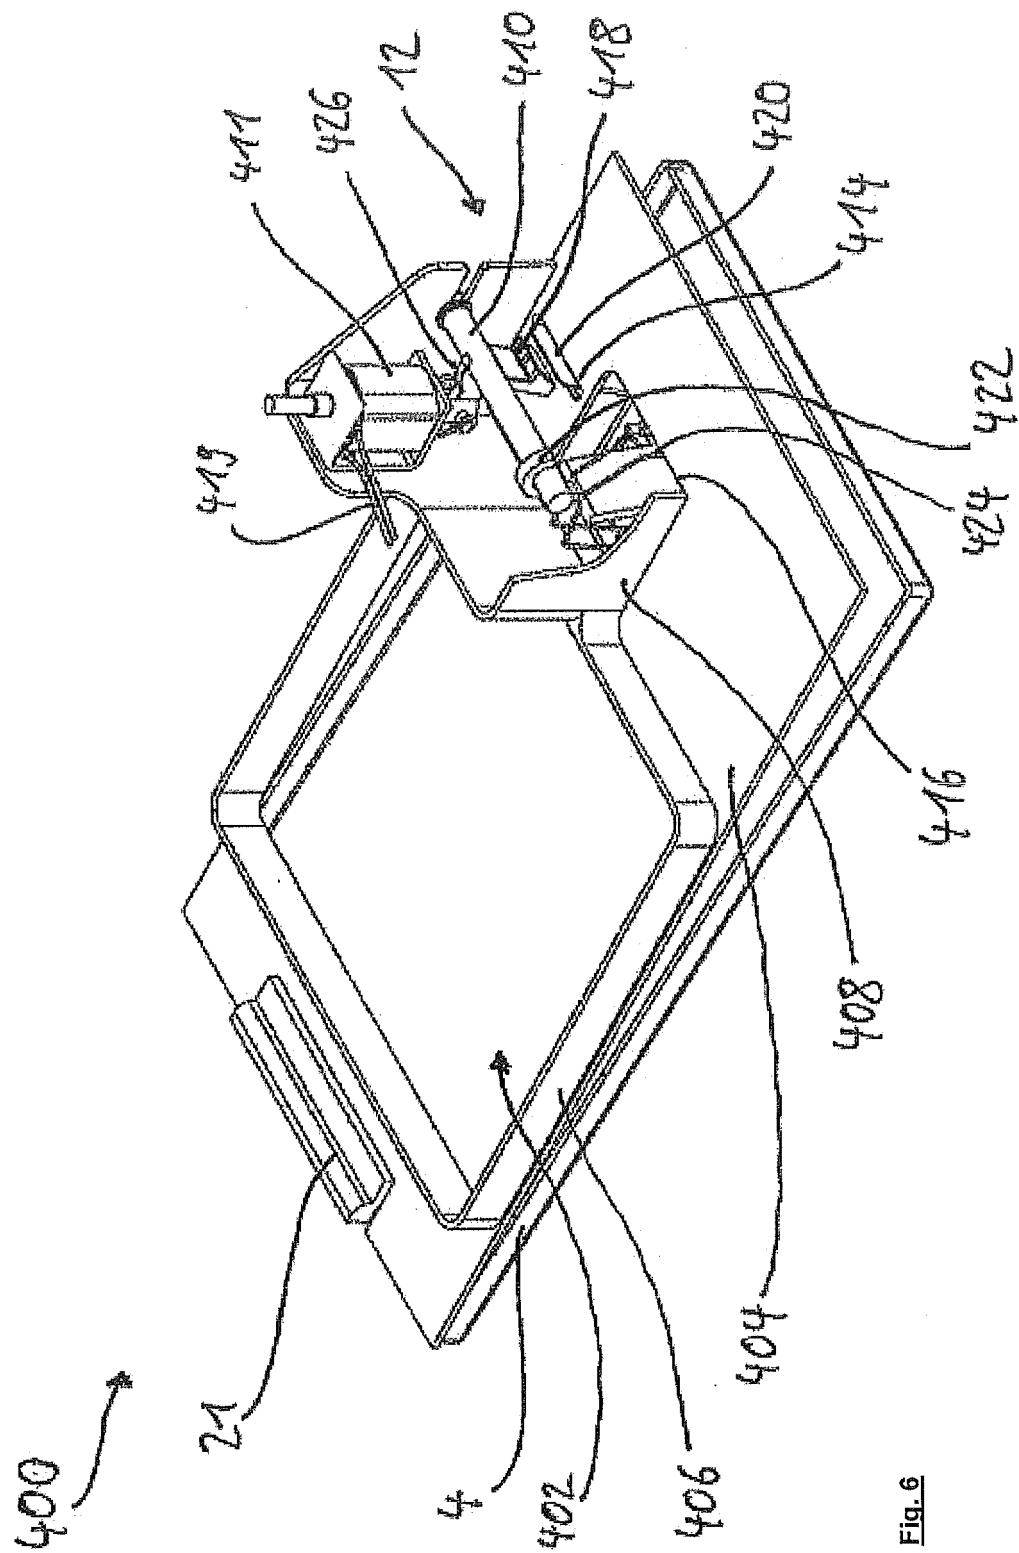


Fig. 6

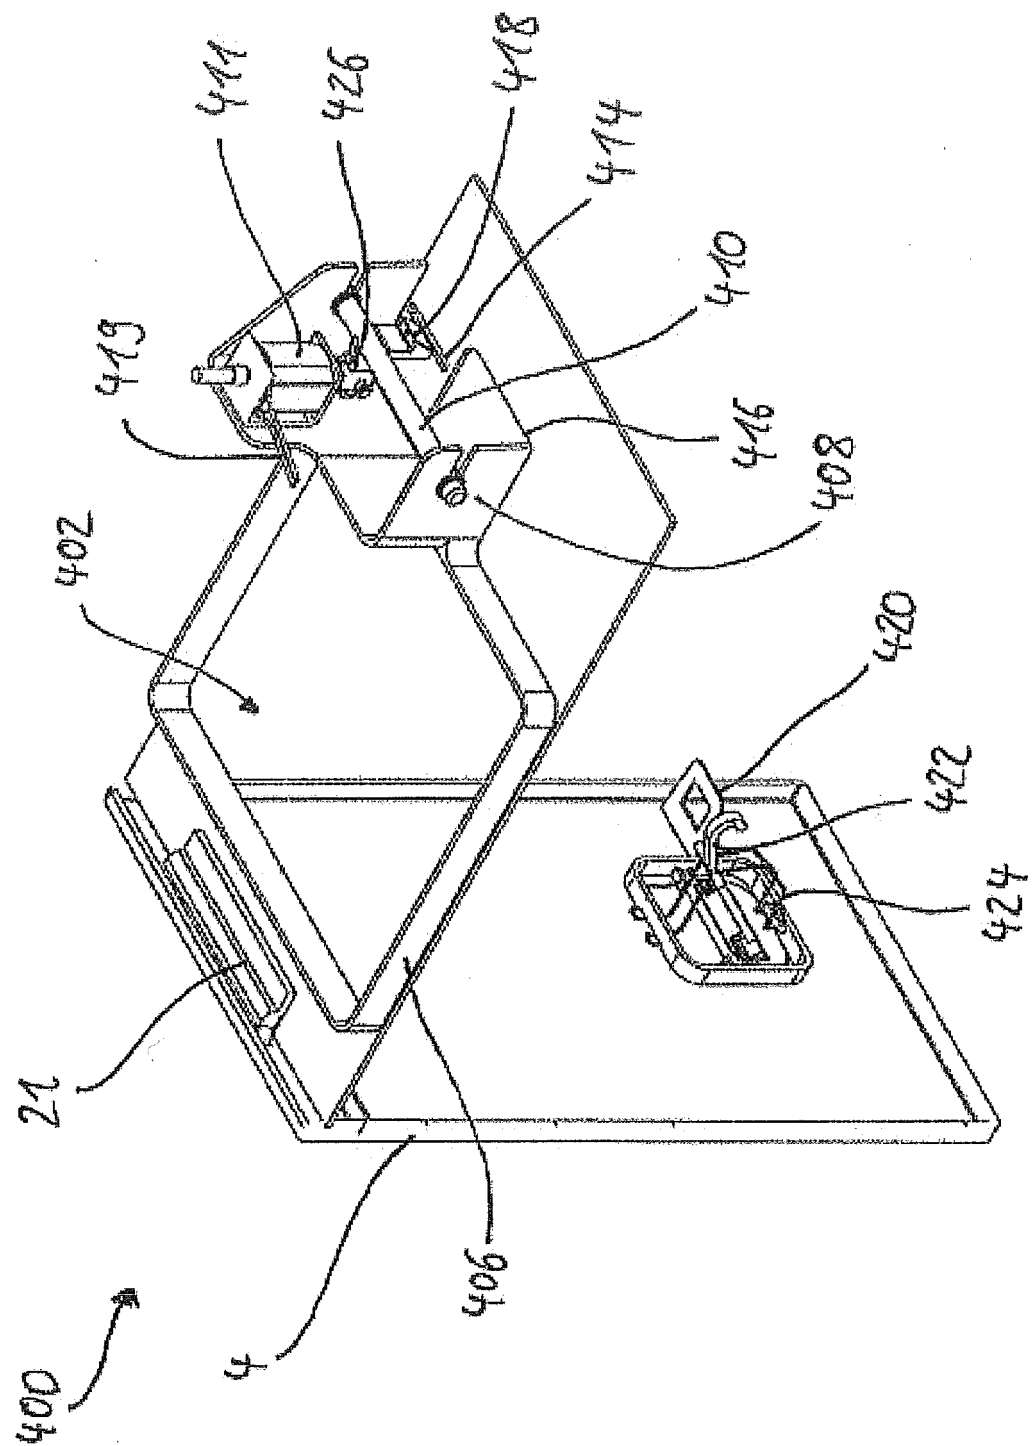


Fig. 7

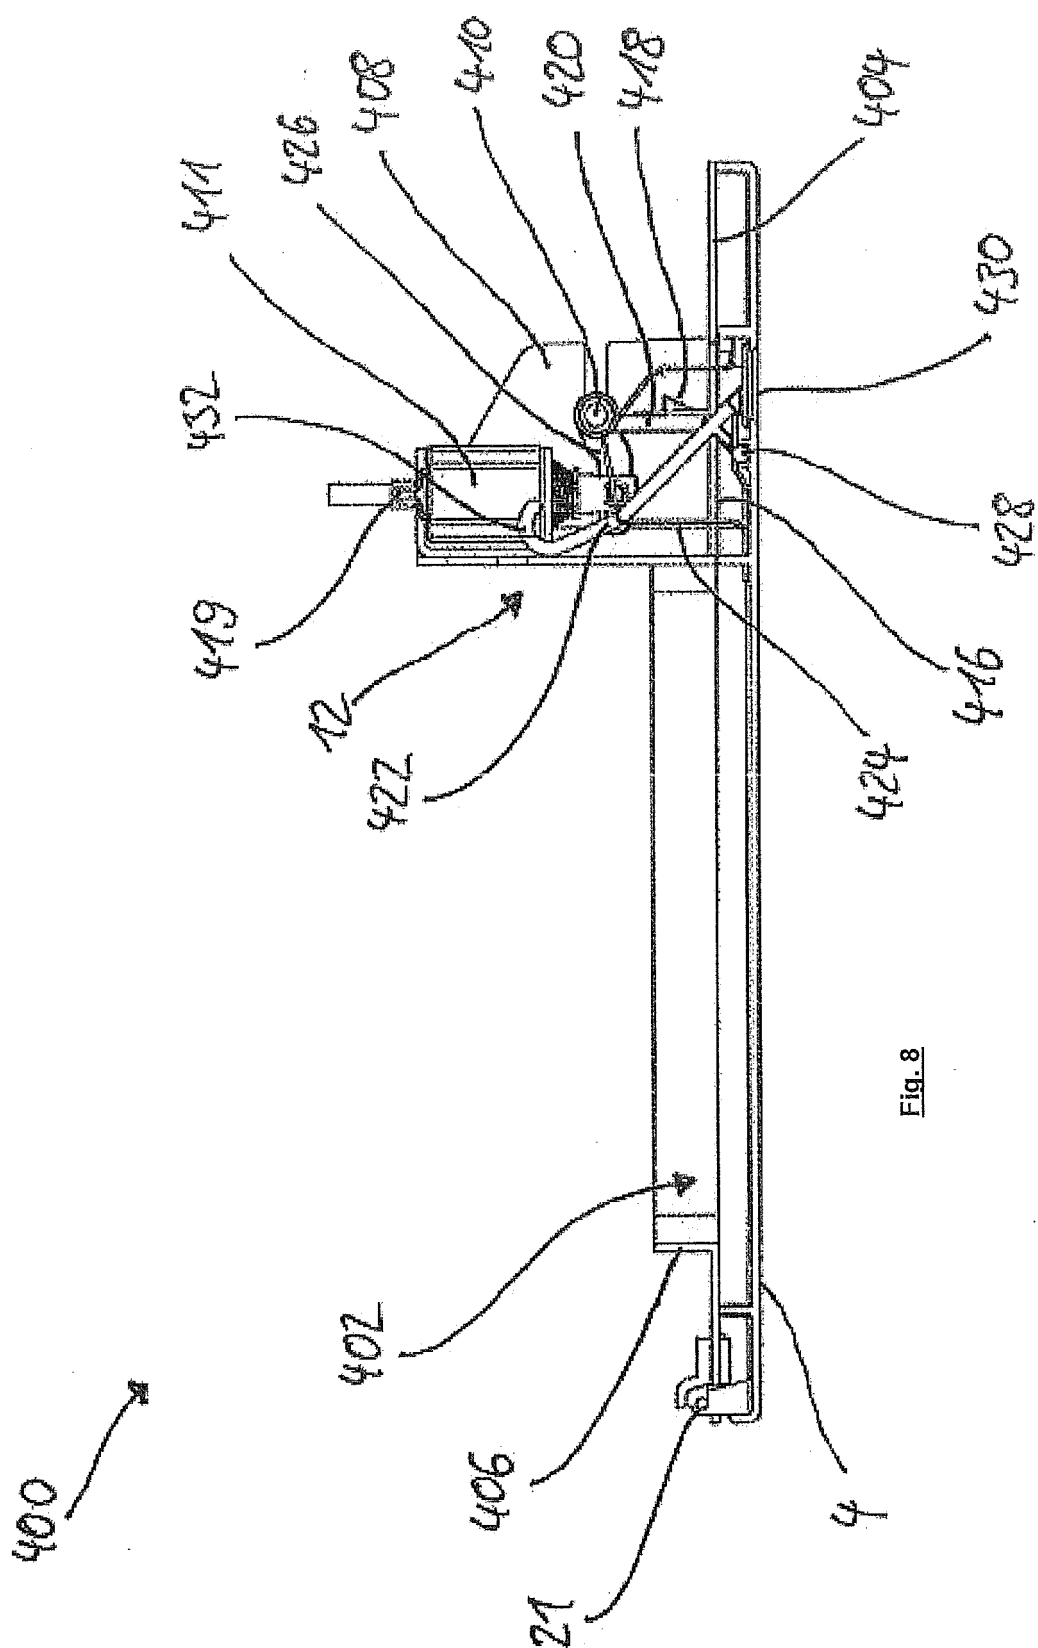


Fig. 8

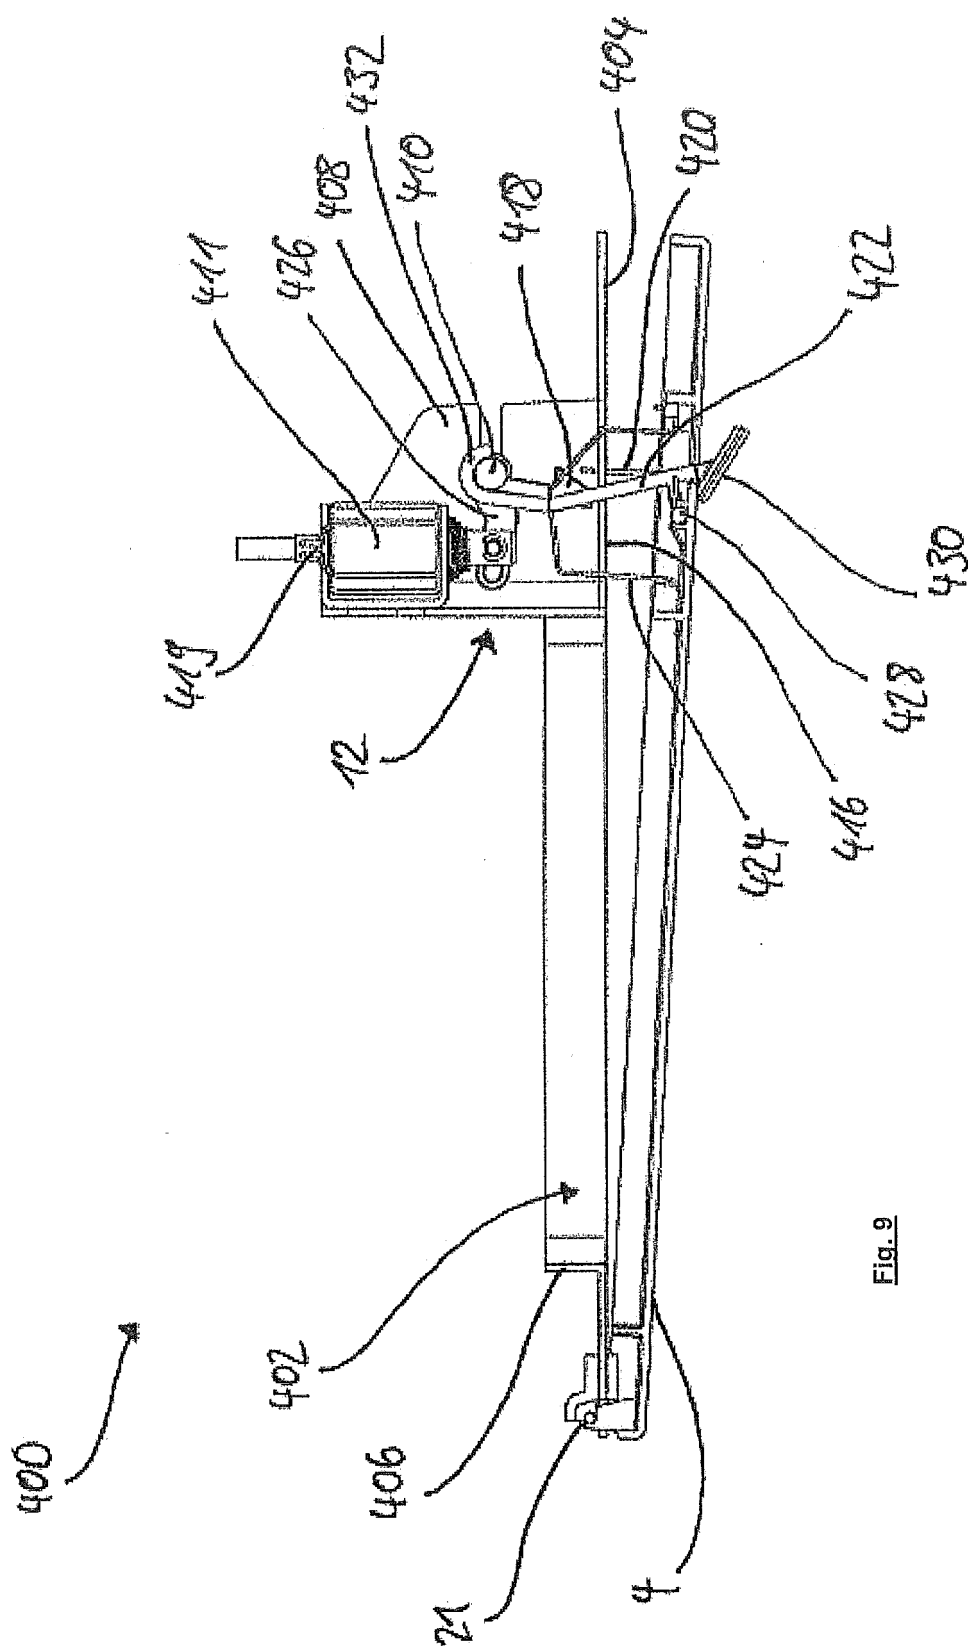


Fig. 9

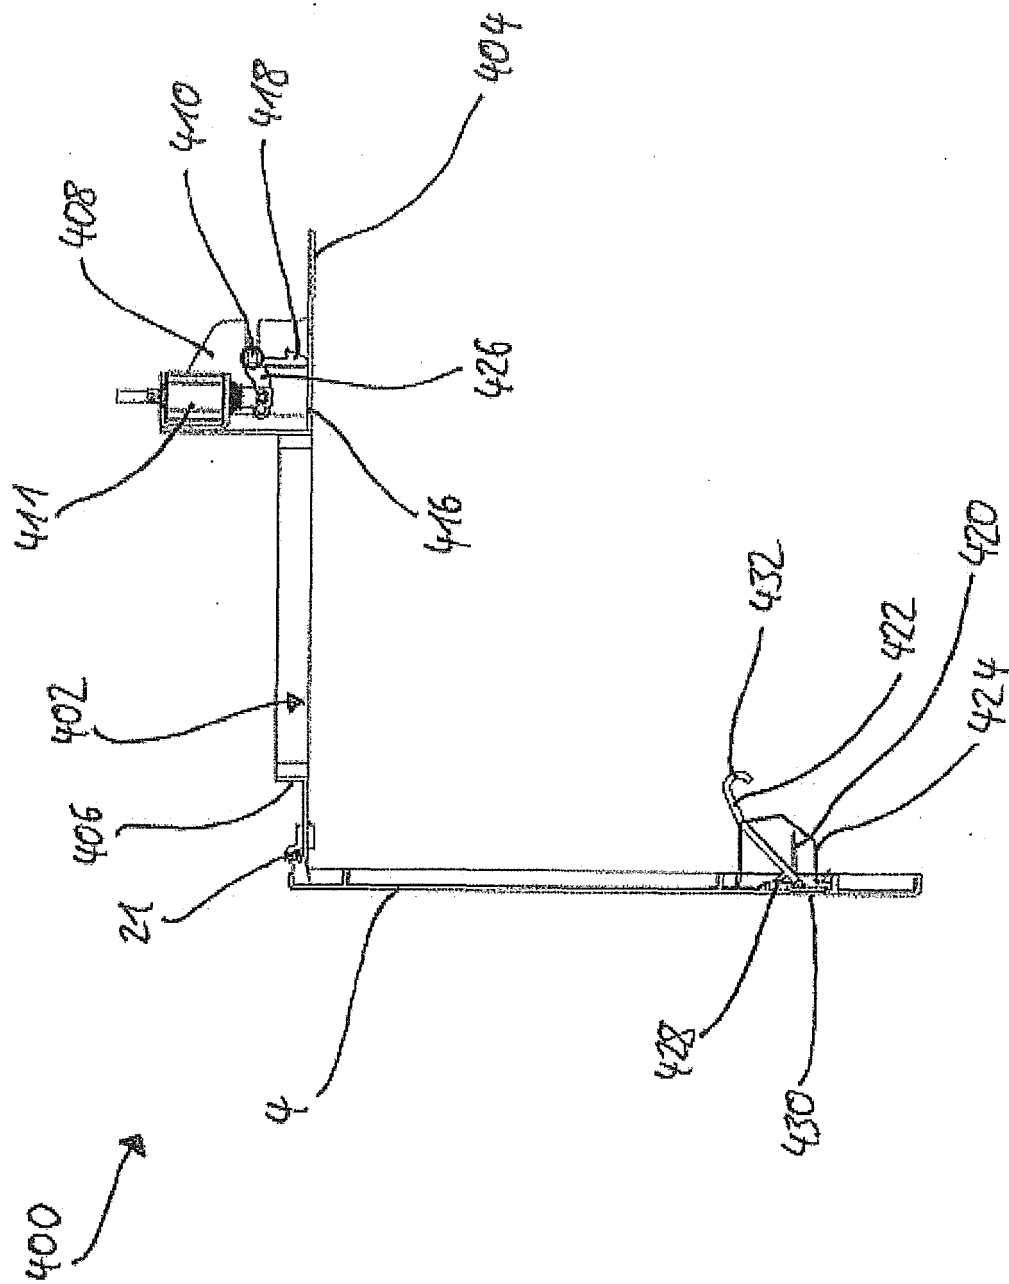


Fig. 10

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 2090335 A1 [0002]