



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
28.11.2012 Bulletin 2012/48

(51) Int Cl.:
A47B 88/00 (2006.01)

(21) Application number: **12168206.6**

(22) Date of filing: **16.05.2012**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(71) Applicant: **Essetre S.r.l.**
61043 Cagli (PS) (IT)

(72) Inventor: **Mensà, Stefano**
61043 Cagli (PS) (IT)

(74) Representative: **Baldi, Claudio**
Ing. Claudio Baldi S.r.l.
Viale Cavallotti, 13
60035 Jesi (Ancona) (IT)

(30) Priority: **23.05.2011 IT AN20110065**

(54) **Drawer with front panel provided with an adjustment lock system for said front panel**

(57) The present invention relates to a drawer (C) comprising a front door (A) and an adjustment lock system of said front door (A); said system comprising a first adjustment lock device (1) of the door (A) with respect

to the drawer (C) according to a horizontal axis "X" and a vertical axis "Y" and optionally a second adjustment lock device (2) of the door (A) with respect to the drawer (C) according to a "Z" axis.

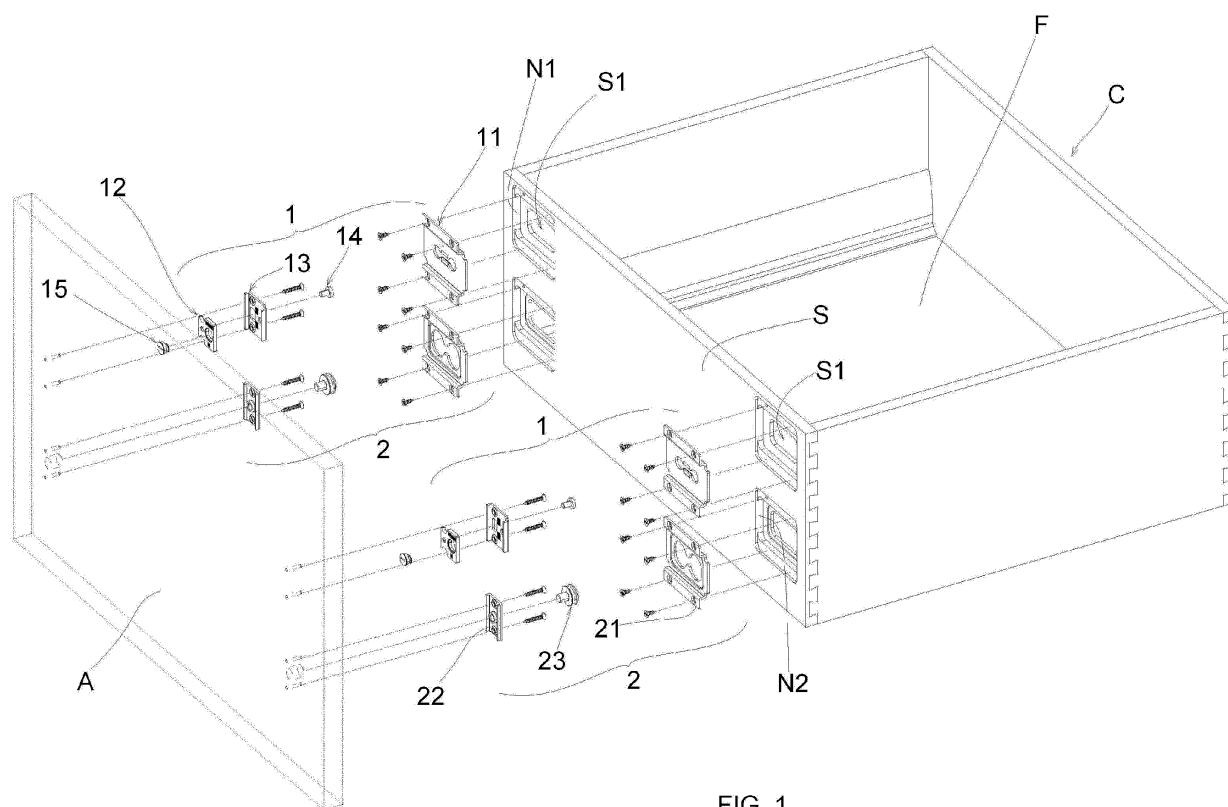


FIG. 1

Description

[0001] The present patent application for industrial invention relates to a drawer provided with front door and comprising an adjustment lock system for said front door.

[0002] A drawer provided with front door is a drawer composed of a horizontal bottom and at least one front vertical side where a front door is fixed.

[0003] Said front door, or finishing door, is adapted to remain visible when the drawer is closed, covering the compartment where the drawer is contained.

[0004] Said front door is often higher and wider than the front side.

[0005] The peculiarity of the devices used to connect said door to the drawer consist in that they allow for adjusting the door after positioning the drawer inside the furniture.

[0006] The drawback of the devices that are currently available on the market refers to the complexity of the adjustment operation of the front door with respect to the drawer.

[0007] In order to be actuated, some devices require to remove the drawer from the compartment, whereas other devices do not permit a rapid, intuitive locking of the door on the drawer, in such manner that the position of the door can accidentally change upon locking.

[0008] JP 5007515 discloses an adjustment system that comprises adjustment elements disposed between a front frame of a piece of furniture and a decorative plate of a drawer. Such an adjustment system allows for adjusting the decorative plate in order to make it easier to assemble the drawer with respect to the furniture, without impairing the aesthetics of the furniture because of the adjustment system.

[0009] The purpose of the present invention is to devise a drawer with front door provided with adjustment lock system that permits to adjust the position of the door with respect to the drawer and lock the door, without impairing its position.

[0010] In order to achieve the aforesaid purpose, the drawer of the invention comprises a system provided at least with a first adjustment lock device composed of a first adjustment means and a first lock means.

[0011] Said first device permits to move the door with respect to the drawer according to a horizontal axis "X" and a vertical axis "Y".

[0012] Optionally, said system comprises a second adjustment lock device that permits to move the door with respect to the drawer according to a "Z" axis.

[0013] According to an additional embodiment of the invention, said apparatus is composed of a single device that incorporates the first and second adjustment lock device.

[0014] The description of the invention continues with reference to the attached drawings, which only have an illustrative, not limiting value, wherein:

- Figure 1 is an exploded axonometric view of the

drawer of the invention provided with adjustment lock system of the front door.

- Figure 1a is an enlarged view of a detail of Fig. 1 showing the adjustment lock system;
- Figure 2 is a sectional view of Fig. 1 according to the vertical plane;
- Figure 3 is an axonometric view of the drawer of the invention with front door connected to the front side of the drawer by means of the adjustment lock means;
- Figure 4 is a detailed front view of the adjustment lock devices of Fig. 3;
- Figure 4a is a sectional view of the devices of Fig. 3 according to plane IV-IV;
- Figures 5 and 6 are two detailed front views of the adjustment lock devices of Fig. 3, respectively at the end of the lower and upper travel;
- Figures 5a and 6a are a sectional view of Fig. 5 along plane V-V and of Fig. 6 along plane VI-VI, respectively;
- Figures 7 and 8 are a sectional view showing two operating positions of the second adjustment lock devices.
- Figure 9 to 11 are axonometric views showing the assembly of the drawer according to the invention.
- Figure 12 is an exploded axonometric view of the drawer of the invention provided with adjustment lock system of the front door according to a second alternative embodiment.

[0015] The drawer (C) of the invention comprises a horizontal bottom (F) and a vertical front side (S) where a front door (A) is fixed.

[0016] The system comprises a first adjustment lock device (1) comprising:

- a first bracket (11) fixed on the front of the front side (S) of the drawer (C);
- a first plate (12) fixed on said first bracket (11) by means of adjustment lock means (14, 11a) according to an "X" axis;
- a first cursor (13) fixed on the back of the front door (A) and positioned between said first bracket (11) and said first plate (12).

[0017] Said first cursor (13) and said first plate (12) cooperate by means of adjustments means (12b, 13a, 15) according to a "Y" axis.

[0018] More precisely, said adjustment lock means (14, 11a) according to an "X" axis consist in:

- a screw (14) with enlarged head (14a) inserted into a slot (13b) obtained on the cursor (13) and screwed into a threaded hole (12a) obtained on the plate (12);
- a keyhole slot (11a) obtained on the first bracket (11) with horizontal development, as shown in Fig. 1 A.

[0019] Said keyhole slot (11a) has an extended central

section (11b) and two end grooves (11c) to receive the enlarged head (14a) of the screw (14).

[0020] The adjustment means (12b, 13a, 15) according to a "Y" axis between said first cursor (13) and said first plate (12) consist in:

- an eccentric screw (15) with stem (15a) and eccentric enlarged head (15b);
- a through hole (13a) obtained on the cursor (13) where the stem (15a) is inserted;
- a hole (12b) obtained on the first plate (12) and adapted to house said eccentric enlarged head (15b).

[0021] As shown in Figs. 4, 4A, 5, 5A, 6, and 6A, the rotation of said eccentric screw (15) determines the upward or downward sliding of the cursor (13) with respect to the first plate (12).

[0022] As shown in all of the enclosed figures, the system of the invention preferably comprises two first adjustment lock devices (1).

[0023] The assembly of each of said two first devices (1) provides for:

- fixing the first bracket (11) to the front side (S) of the drawer (C);
- making the cursor (13) adhere to the first plate (12) and insert the eccentric screw (15) inside the pair of holes (12b, 13a);
- fixing the cursor (13) on the back of the door (A), preferably with screws, in such manner to prevent the eccentric screw (15) from coming out of the holes (12b, 13a);
- inserting the screw (14) inside the slot (13b) of the cursor (13) and tightening it into the threaded hole (12a) of the first plate (12);
- (as shown in Figs. 9 to 11) bringing the front door (A) close to the front side (S) of the drawer (C) according to an L-shaped direction in such manner to permit the insertion of the enlarged head (14a) of the screw (14) inside one of the two grooves (11c) of the keyhole slot (11a) - see Fig. 10 - and successively the horizontal translation of the enlarged head (14a) until it is positioned on the extended central section (11b) - see Fig. 11.

[0024] After mounting the front door (A) on the drawer (C), its position must be adjusted and stabilized by means of the first lock devices (1).

[0025] Adjustment along the "X" axis is obtained by making the screw (14) slide horizontally along the extended central section (11b) of the keyhole slot (11).

[0026] After finding the correct position along the "X" axis, the screw (14) is tightened so that the head (14a) bites against the edge of the extended central section (11b), which is suitably provided with knurled surface for higher grip between contact surfaces.

[0027] In order to actuate the screw (14), from the in-

side of the drawer, the front side (S) of the drawer (C) is provided with a first opening (S1).

[0028] Through said first opening (S1) the eccentric screw (15) is actuated in order to make the cursor (13) slide with respect to the first plate (12) with consequent movement of the front door (A) along the "Y" axis.

[0029] The actuation of the screw (15) from inside the drawer (C) is possible because when the enlarged head (14a) of the screw (14) is in the extended central section (11b) of the slot (11), the tip of the stem (15a) of the eccentric screw (15) is situated in one of the two grooves (11c) of the keyhole slot (11), as shown in Fig. 11.

[0030] As mentioned above, referring to Figs. 4, 4a, 5, 5a, 6, and 6a, the rotation of the eccentric screw (15) determines a mutual movement of the cursor (13) with respect to the first plate (12) along the "Y" axis; said cursor (13) being fixed to the front door (A) and said first plate (12) being fixed by means of the screw (14) to the first bracket (11) - which is joined with the front side (S) of the drawer (C) - said mutual movement along the "Y" axis being translated into a movement of the front door (A) with respect to the drawer (C).

[0031] In order to move the cursor (13) with the eccentric screw (15), the screw (14) must not be tightened.

[0032] After being rotated in the correct position, the eccentric screw (15) can be locked by tightening the screw (14), after positioning the front door (A) in the correct position first along the "Y" axis and then along the "X" axis.

[0033] Said system optionally comprises a second adjustment lock device according to a "Z" axis, which is adapted to adjust the distance between the front side (S) of the drawer (C) and the front door (A).

[0034] As shown in the enclosed figures, said system preferably comprises a pair of said second adjustment lock devices (2).

[0035] When used in combination with said first device (1), said adjustment lock device (2) according to a "Z" axis permits the oscillation of the front door (A) with respect to a horizontal axis passing through the pair of said first adjustment lock devices (1).

[0036] More precisely, referring to Figs. 7 and 8, after positioning and locking the first devices (1) by tightening the screws (14), the front door (A) can be oscillated by actuating the second adjustment lock devices (2).

[0037] Each of said second devices (2) comprises:

- a second bracket (21) fixed on the front of the front side (S) of the drawer (C);
- a second plate (22) fixed on the back of the front door (A);
- fixing adjustment means (23, 22a, 21 a) according to a "Z" axis between said second bracket (21) and said second plate (22).

said fixing adjustment means (23, 22a, 21a) according to a "Z" axis consisting in:

- a threaded hole (22a) obtained on the second plate (22);
- an adjustment screw (23) with threaded stem (23a) engaged in said threaded hole (22a) and a head (23b) with perimeter groove (23c);
- a keyhole slot (21 a) obtained on the second bracket (21) with horizontal development, as shown in Fig. 1 A.

[0038] Said keyhole slot (21 a) has a central section (21 b) and two end grooves (21 c) to receive the head (23b) of the adjustment screw (23).

[0039] Referring to Figs. 9 to 11, the assembly of the second device provides for:

- fixing the second plate (22) on the front door (A);
- fixing the second bracket (21) on the front side (S) of the drawer (C);
- bringing the front door (A) closer to the front side (S) of the drawer (C) according to an L-shaped direction in order to permit the insertion of the head (23b) of the adjustment screw (23) inside one of the two grooves (21 c) of the keyhole slot (21 a) - see Fig. 10 - and successively the horizontal translation of the head (23b) inside the keyhole slot (21 a), making the central section (21 b) penetrate inside the perimeter groove (23c) - see Fig. 11.

[0040] As shown in Fig. 11, said perimeter groove (23c) permits the sliding inside it of the edges of said central section (21 b) of the keyhole slot (21).

[0041] Figs. 7 and 8 show that, by rotating the adjustment screw (23), the second plate (22) is brought closer or farther with respect to the second bracket (21), with consequent rotation of the front door (A) that can oscillate with respect to a horizontal axis.

[0042] It must be noted that the actuation of the adjustment screw (23) is permitted also when the front door (A) is fixed to the drawer (C) because of the provision of a second opening (S2) on the front side (S) in correspondence of the keyhole slot (21 a) of the second bracket (21).

[0043] So, the head (23a) of the adjustment screw (23) can be actuated without disengaging the head (23a) from the keyhole slot (21 a).

[0044] The provision of said openings (S1 and S2) permits to actuate the first (1) and second device (2), with consequent movement of the front door (A), directly from the inside of the drawer (C) also when the same is installed in the furniture, by simply opening the drawer (C).

[0045] In order for the front door to engage on the front of the front side (S) of the drawer (C), the drawer (C) is provided, for each device (1, 2), with a niche (N1,N2) on the front side (S), which exactly contains the adjustment lock device (1, 2).

[0046] Moreover, it must be noted that said niche (N1, N2) can be alternatively obtained on the back side of the front door (A).

[0047] Finally, Fig. 12 shows the system according to

a second embodiment of the invention.

[0048] According to said second embodiment, the system comprises two identical monolithic adjustment lock devices (103), each of them being composed of said first (1) and second (2) adjustment lock device.

[0049] As shown in the figures, said monolithic device (103) integrates both the aforementioned devices (1 and 2).

[0050] In said monolithic device (103) the first (11) and second bracket (21) are the same monolithic bracket (111), and likewise the first (12) and second plate (22) are the same monolithic plate (112).

15 Claims

1. A drawer (C) comprising:

- a vertical front side (S), a front door (A) and an adjustment lock system of said front door (A) with respect to said front side (S); a drawer **characterized in that** said system comprises a first adjustment lock device composed of:

- a first bracket (11) fixed on the front of the front side (S) of the drawer (C);
- a first plate (12) fixed on said first bracket (11) by means of adjustment lock means (14,11a) according to an "X" axis;
- a first cursor (13) fixed on the back of the front door (A) and positioned between said first bracket (11) and said first plate (12).

2. A drawer (C) as claimed in the preceding claim, **characterized in that** said adjustment lock means (14,11a) according to an "X" axis comprise:

- a slot (13b) obtained on the cursor (13);
- a threaded hole (12a) obtained on the plate (12);
- a screw (14) with enlarged head (14a) inserted into the slot (13b) and screwed into said threaded hole (12a) obtained on the plate (12);
- a keyhole slot (11a) obtained on the bracket (11) with horizontal development.

3. A drawer (C) as claimed in the preceding claim, **characterized in that** said keyhole slot (11a) has an extended central section (11b) and two end grooves (11c) to receive the enlarged head (14a) of the screw (14).

4. A drawer (C) as claimed in one of the preceding claims, **characterized in that** said first cursor (13) and said first plate (12) cooperate by means of adjustment means (12b, 13a, 15) according to a "Y" axis.

5. A drawer (C) as claimed in the preceding claim, **characterized in that** said adjustment means (12b, 13a, 15) according to a "Y" axis between said first cursor (13) and said first plate (12) comprise:

- an eccentric screw (15) with stem (15a) and eccentric enlarged head (15b);
- a through hole (13a) obtained on the cursor (13) that receives the stem (15a);
- a hole (12b) obtained on the plate (12) and adapted to house said eccentric enlarged head (15b).

6. A drawer (C) as claimed in one of the preceding claims, **characterized in that** the front side (S) of the drawer (C) has a first opening (S1) in correspondence of the first bracket (11) by which the adjustment lock means of said first device (1) are actuated.

7. A drawer (C) as claimed in one of the preceding claims, **characterized in that** the front side (S) of the drawer (C) is provided with a first niche (N1) that completely houses the first adjustment lock device (1).

8. A drawer (C) as claimed in one of the preceding claims, **characterized in that** said system comprises at least a second adjustment lock device (2) according to a "Z" axis.

9. A drawer (C) as claimed in the preceding claim, **characterized in that** said second device (2) comprises:

- a second bracket (21) fixed on the front of the front side (S) of the drawer (C);
- a second plate (22) fixed on the back of the front door (A);
- fixing adjustment means (23, 22a, 21 a) according to a "Z" axis between said second bracket (21) and said second plate (22).

10. A drawer (C) as claimed in the preceding claim, **characterized in that** said fixing adjustment means (23, 22a, 21 a) according to a "Z" axis consist in:

- a threaded hole (22a) obtained on the second plate (22);
- an adjustment screw (23) with threaded stem (23a) engaged in said threaded hole (22a) and a head (23b) with perimeter groove (23c);
- a keyhole slot (21 a) obtained on the second bracket (21) with horizontal development.

11. A drawer (C) as claimed in the preceding claim, **characterized in that** said keyhole slot (21 a) is provided with a central section (21 b) and two end grooves (21 c) to receive the head (23b) of the adjustment screw (23); it being provided that said perimeter

groove (23c) allows the edges of said central section (21 b) of the keyhole slot (21) to slide inside it.

12. A drawer (C) as claimed in one of claims 8 to 11, **characterized in that** the front side (S) of the drawer (C) has an opening (S1) in correspondence of the second bracket (11) by which the adjustment lock means of said second device (2) are actuated.

13. A drawer (C) as claimed in one of claims 8 to 12, **characterized in that** the front side (S) of the drawer (C) is provided with a second niche (N2) that completely houses the second adjustment lock device (2).

14. A drawer as claimed in one of claims 8 to 13, **characterized in that** said system comprises at least one monolithic adjustment lock device (103), composed of the first (1) and second (2) adjustment lock device; it being provided that the first (11) and second (21) bracket are the same monolithic bracket (111), and the first (12) and second (22) plate are the same monolithic plate (112).

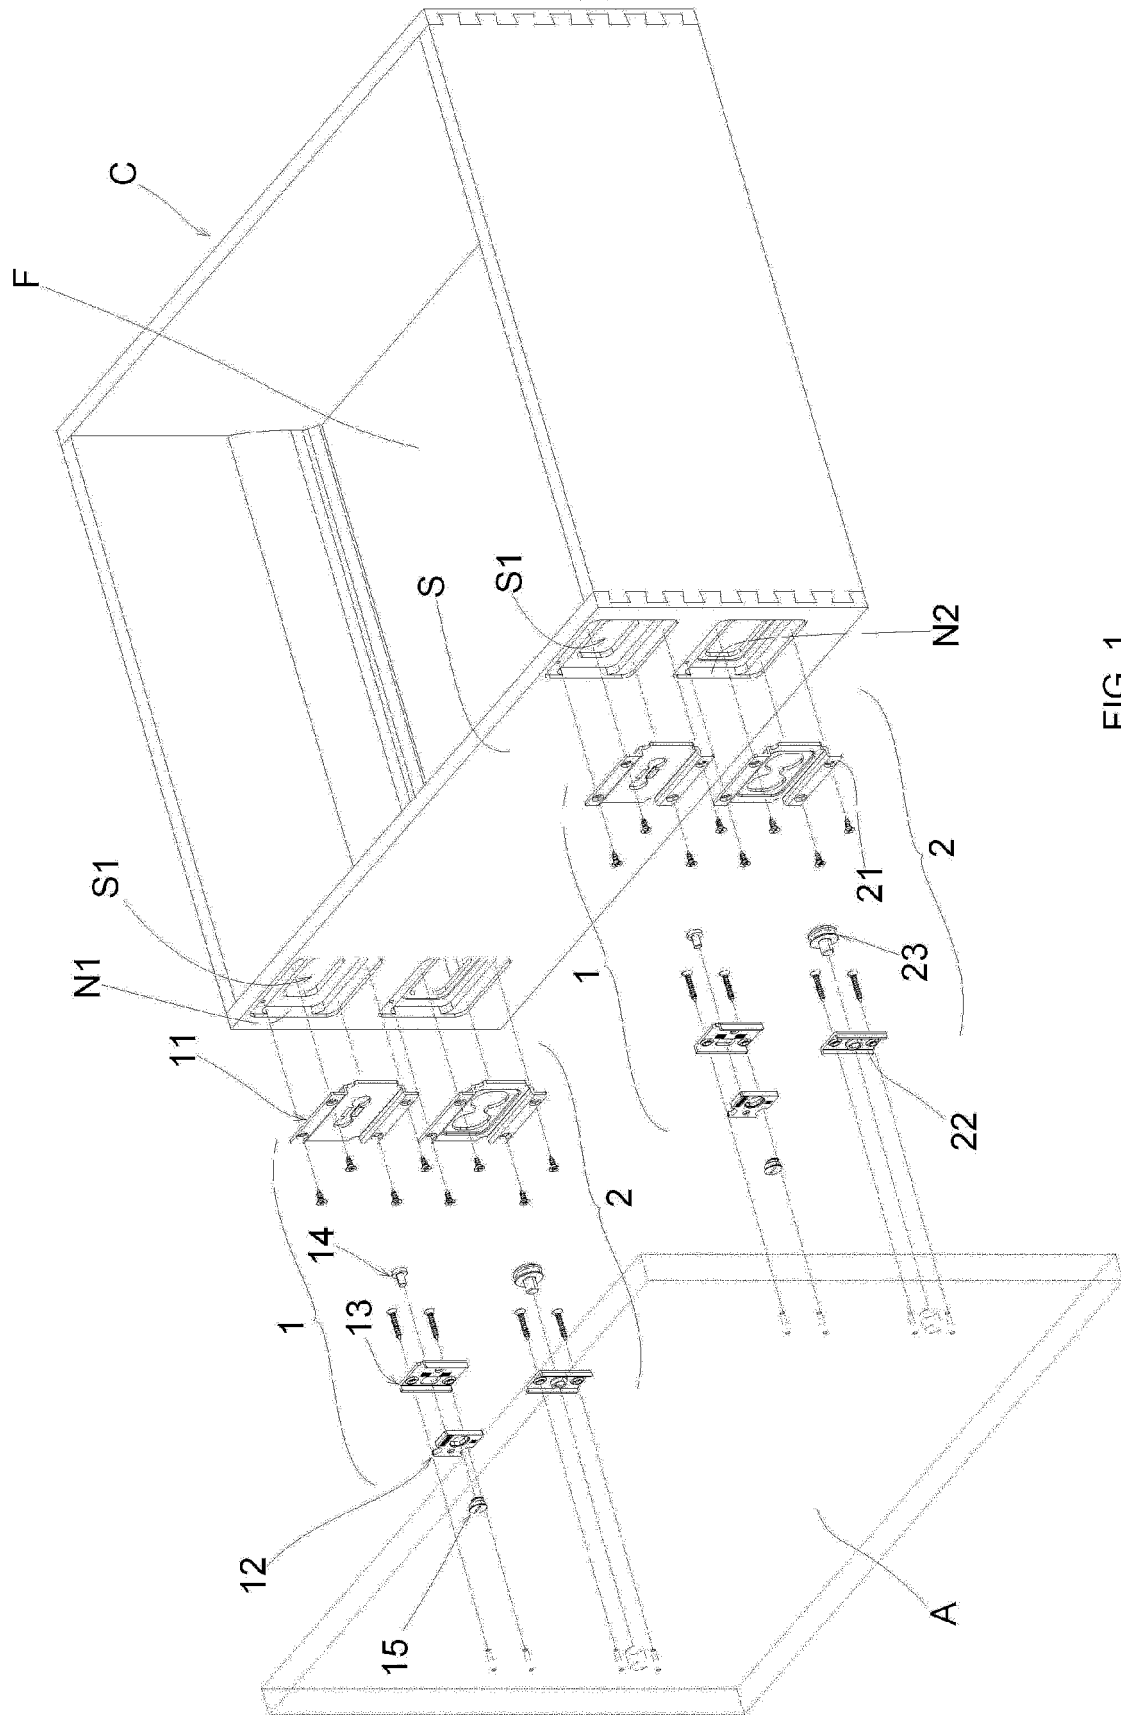
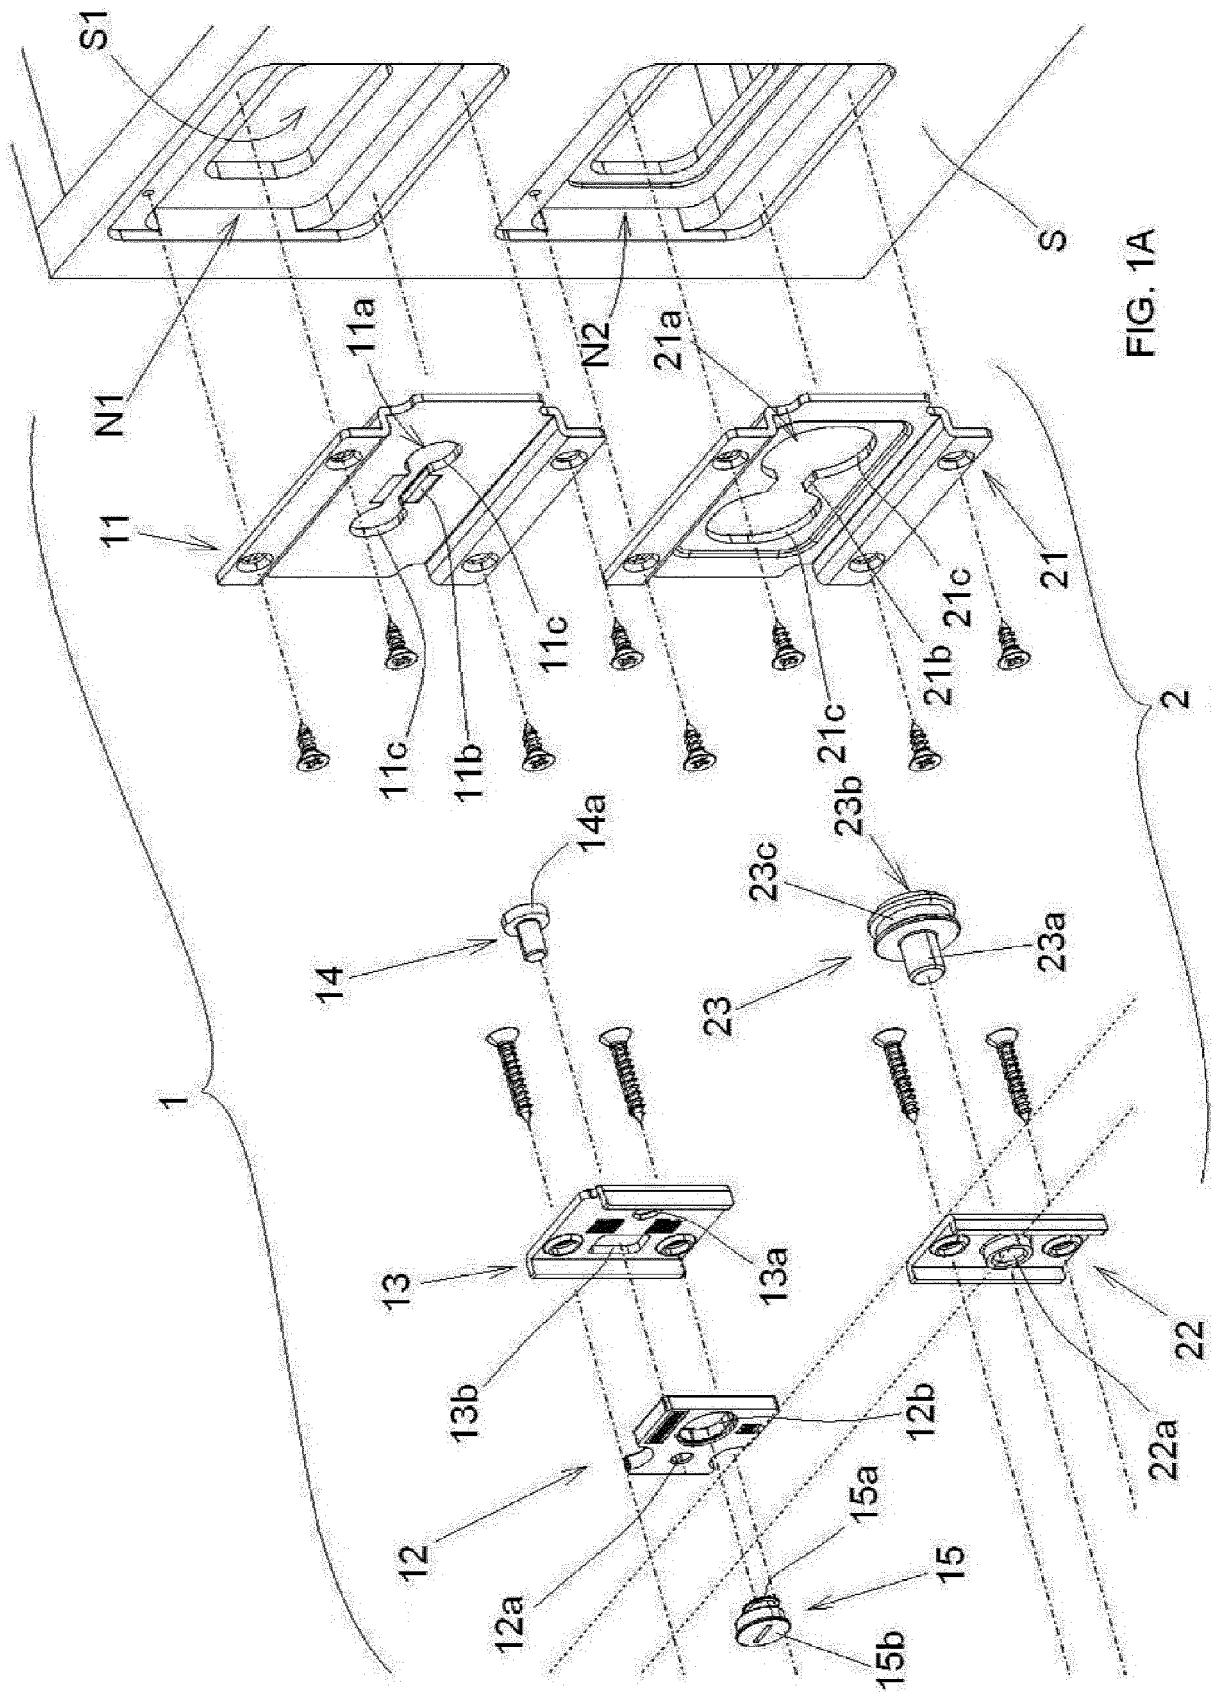


FIG. 1



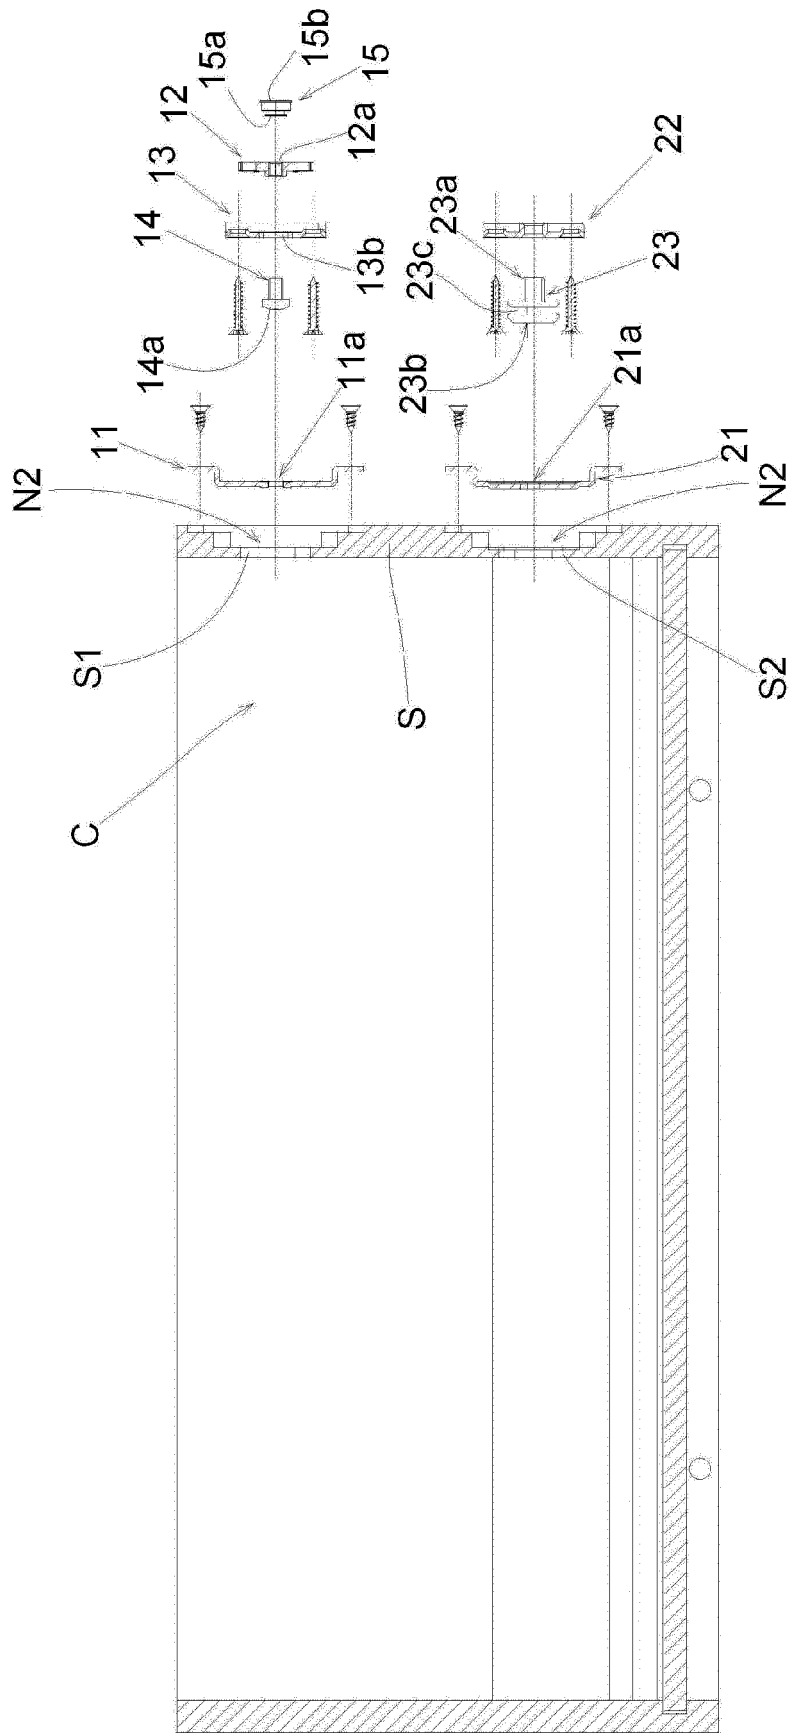


FIG. 2

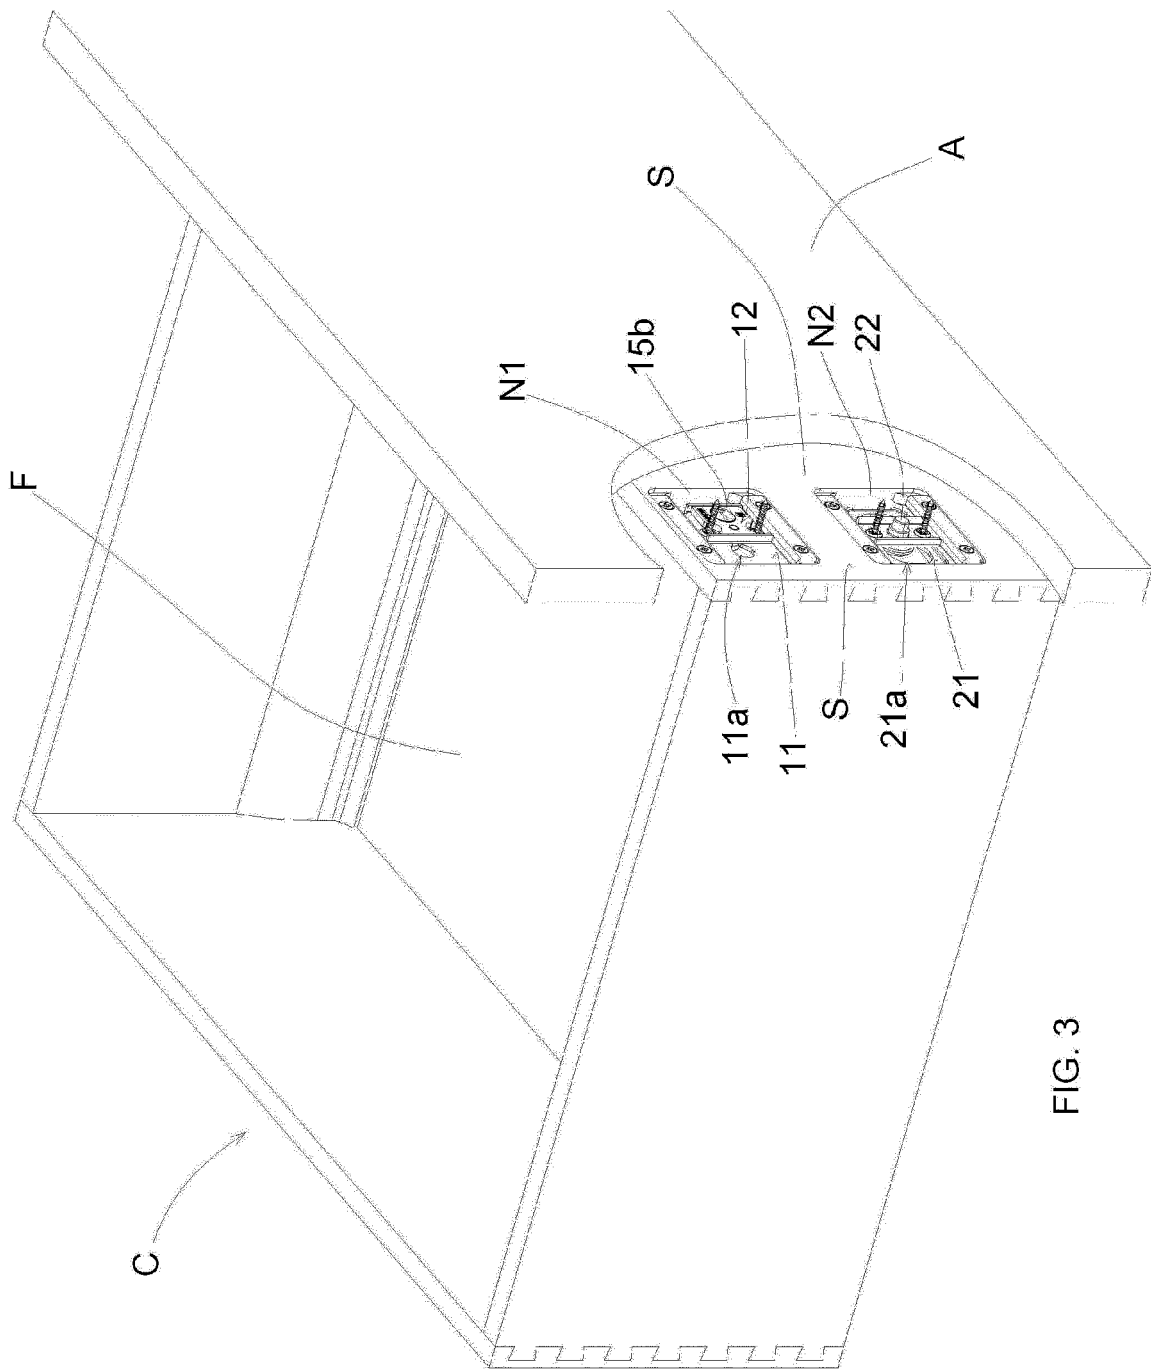
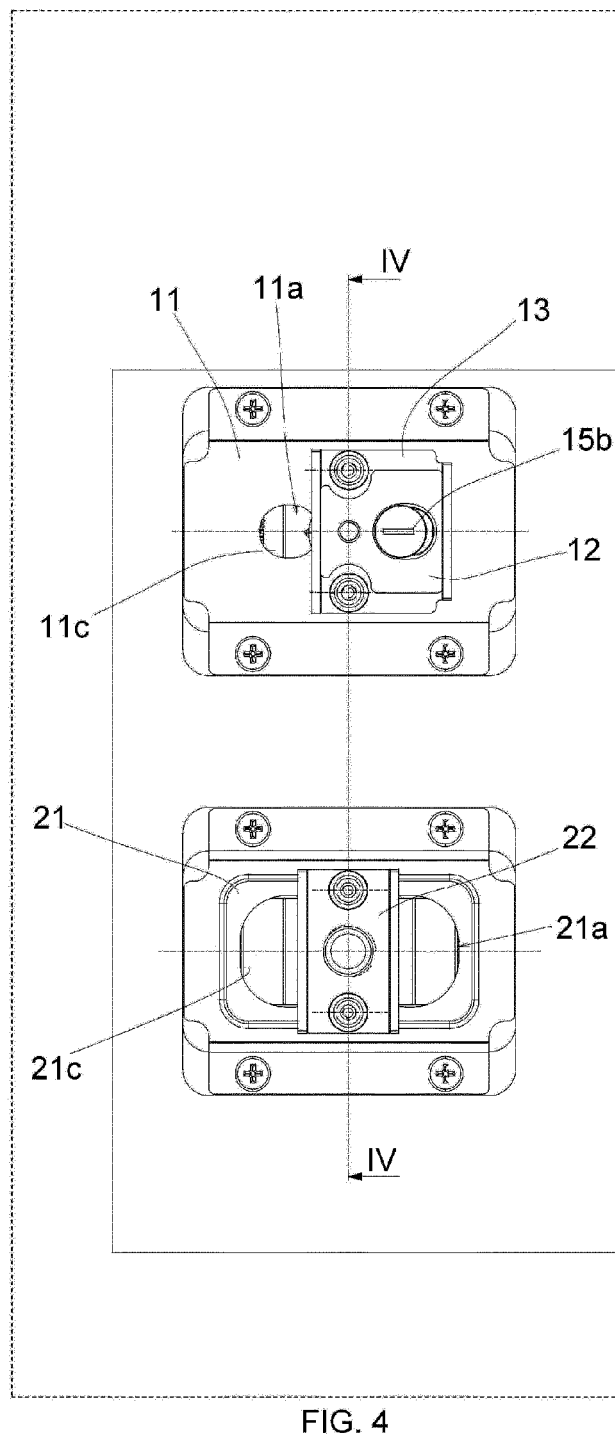
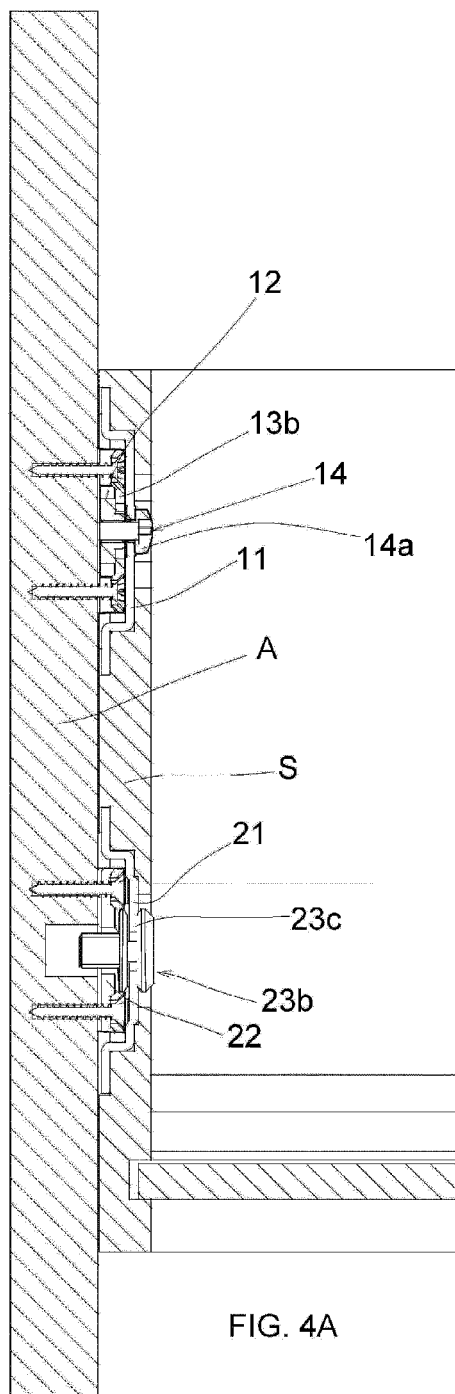
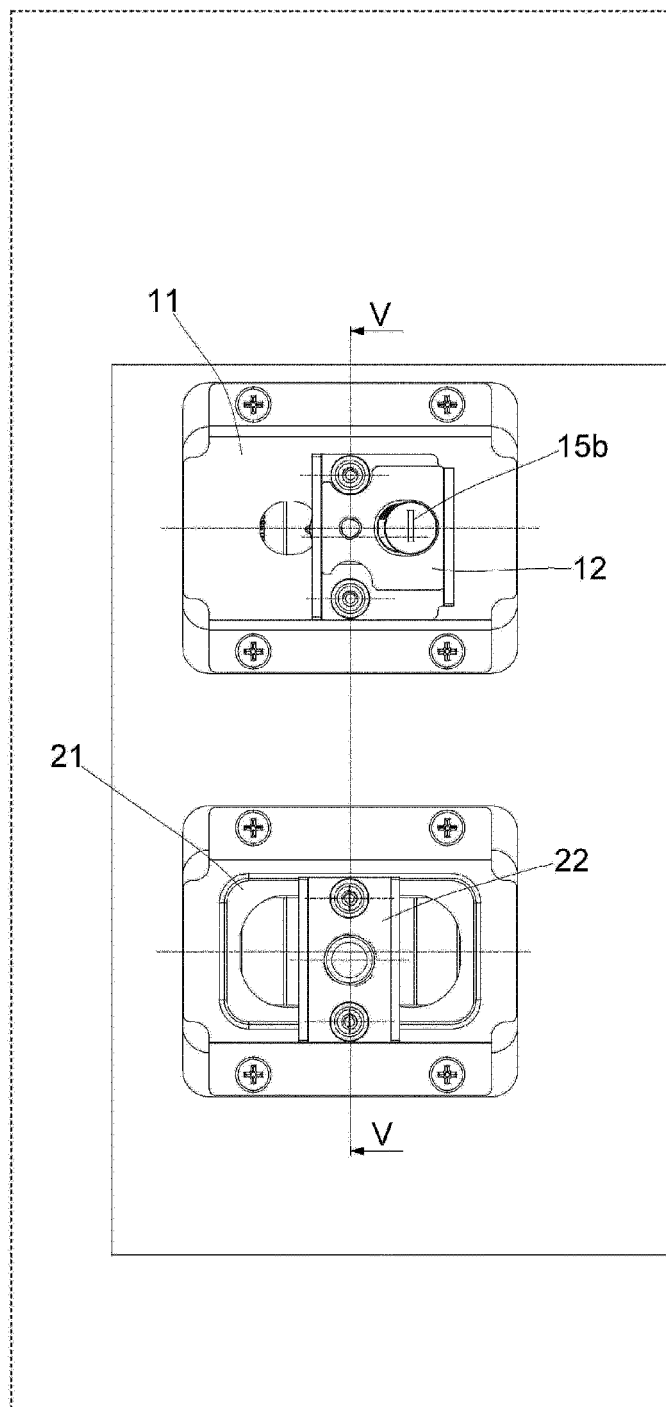
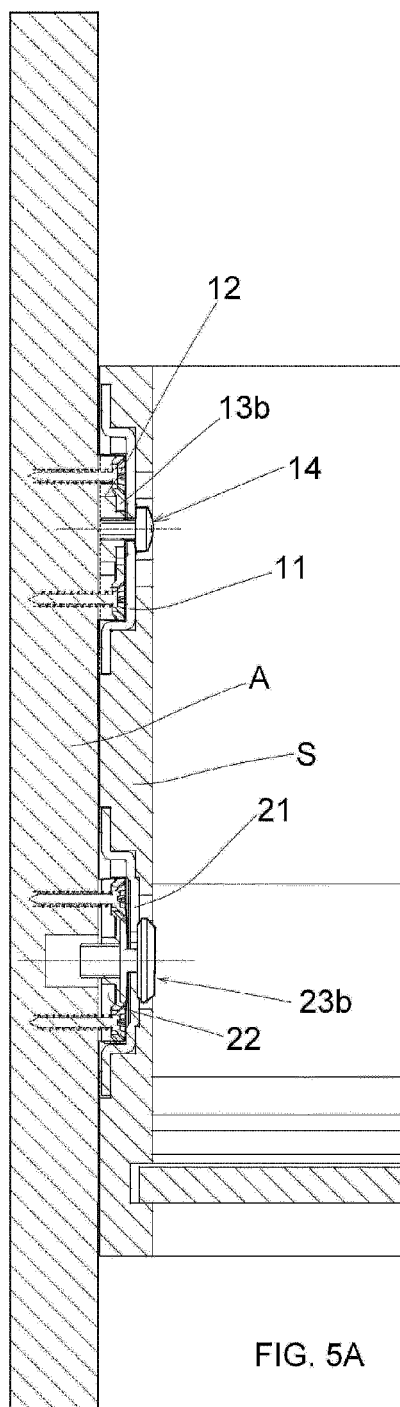
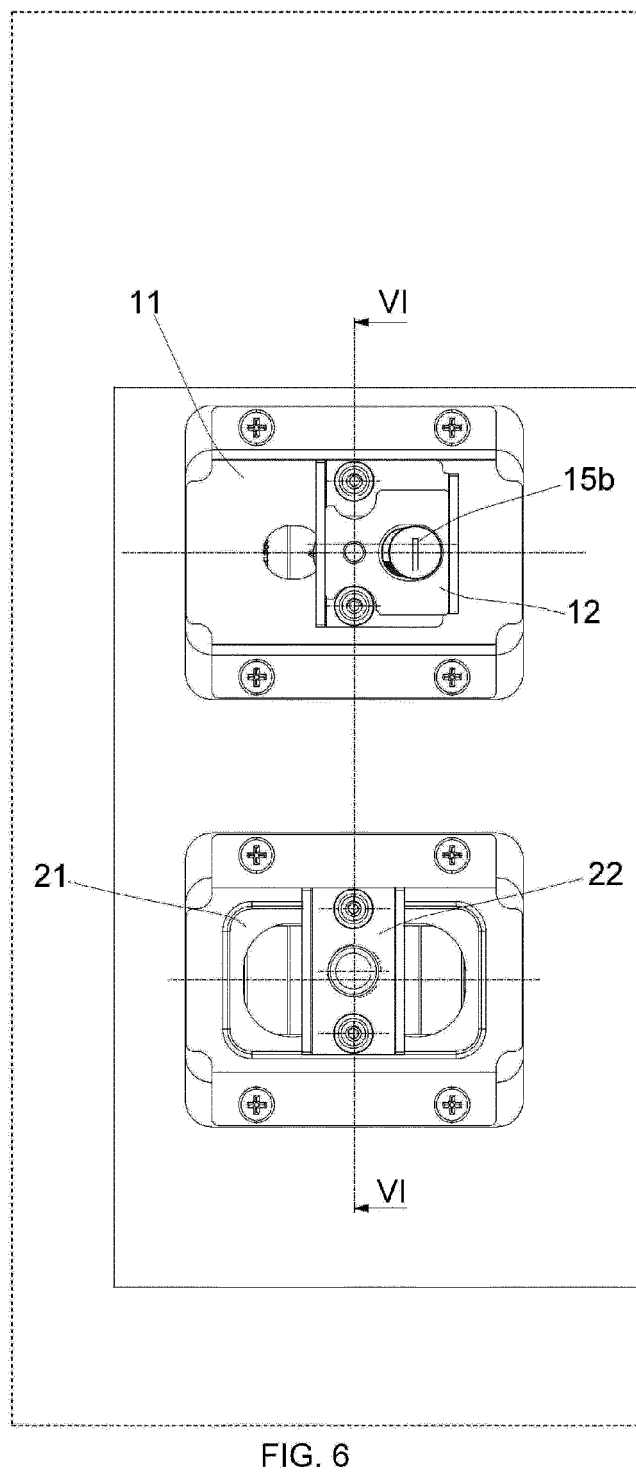
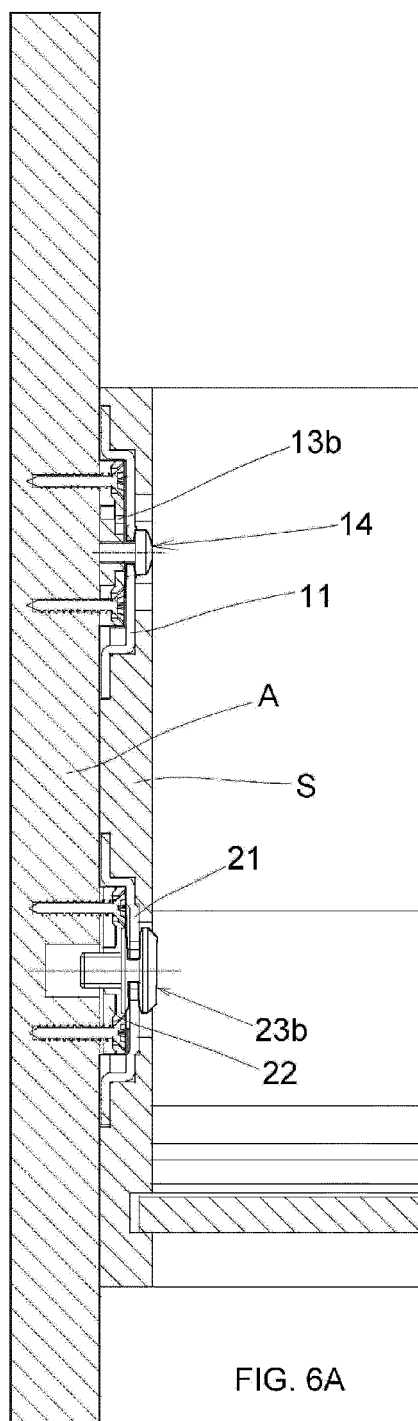


FIG. 3







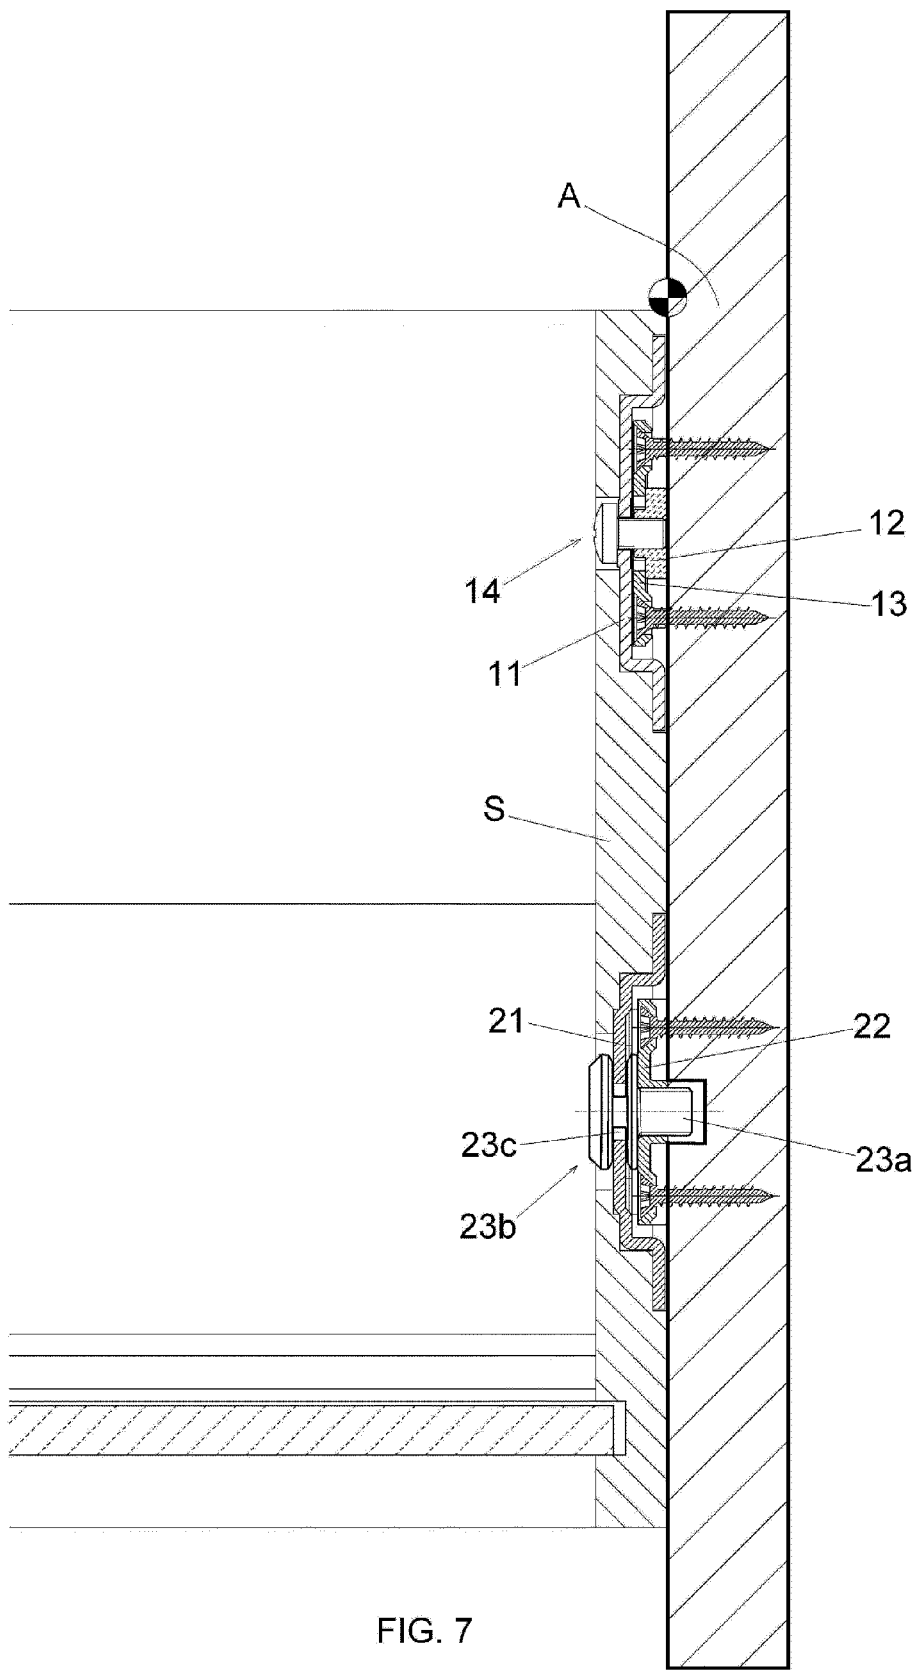


FIG. 7

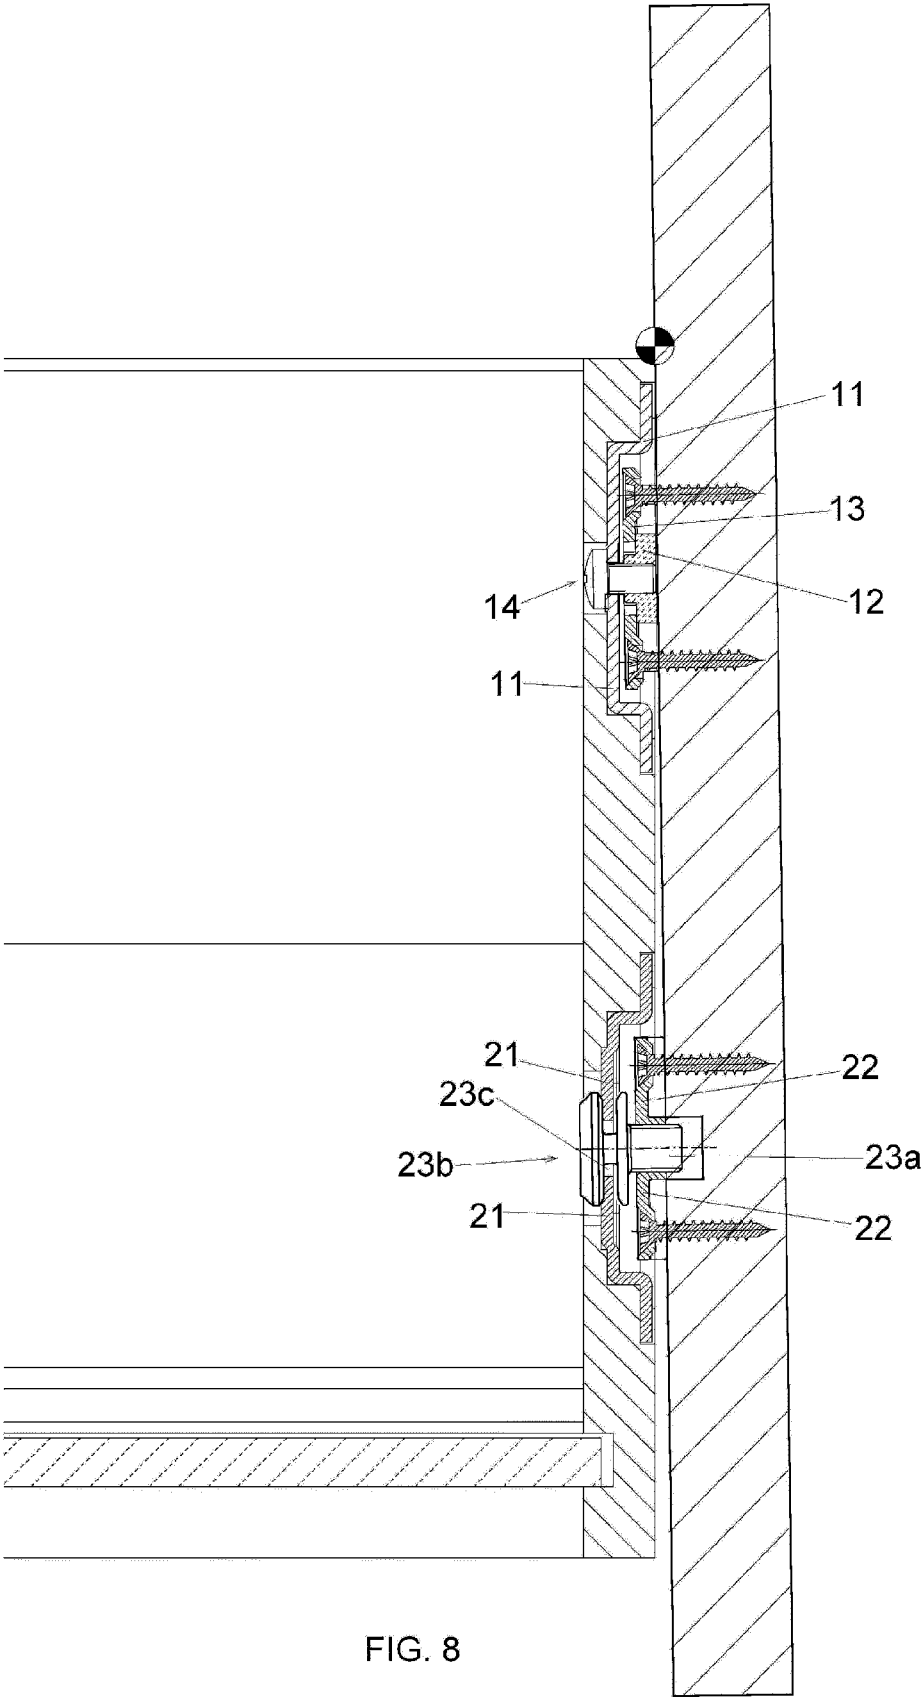
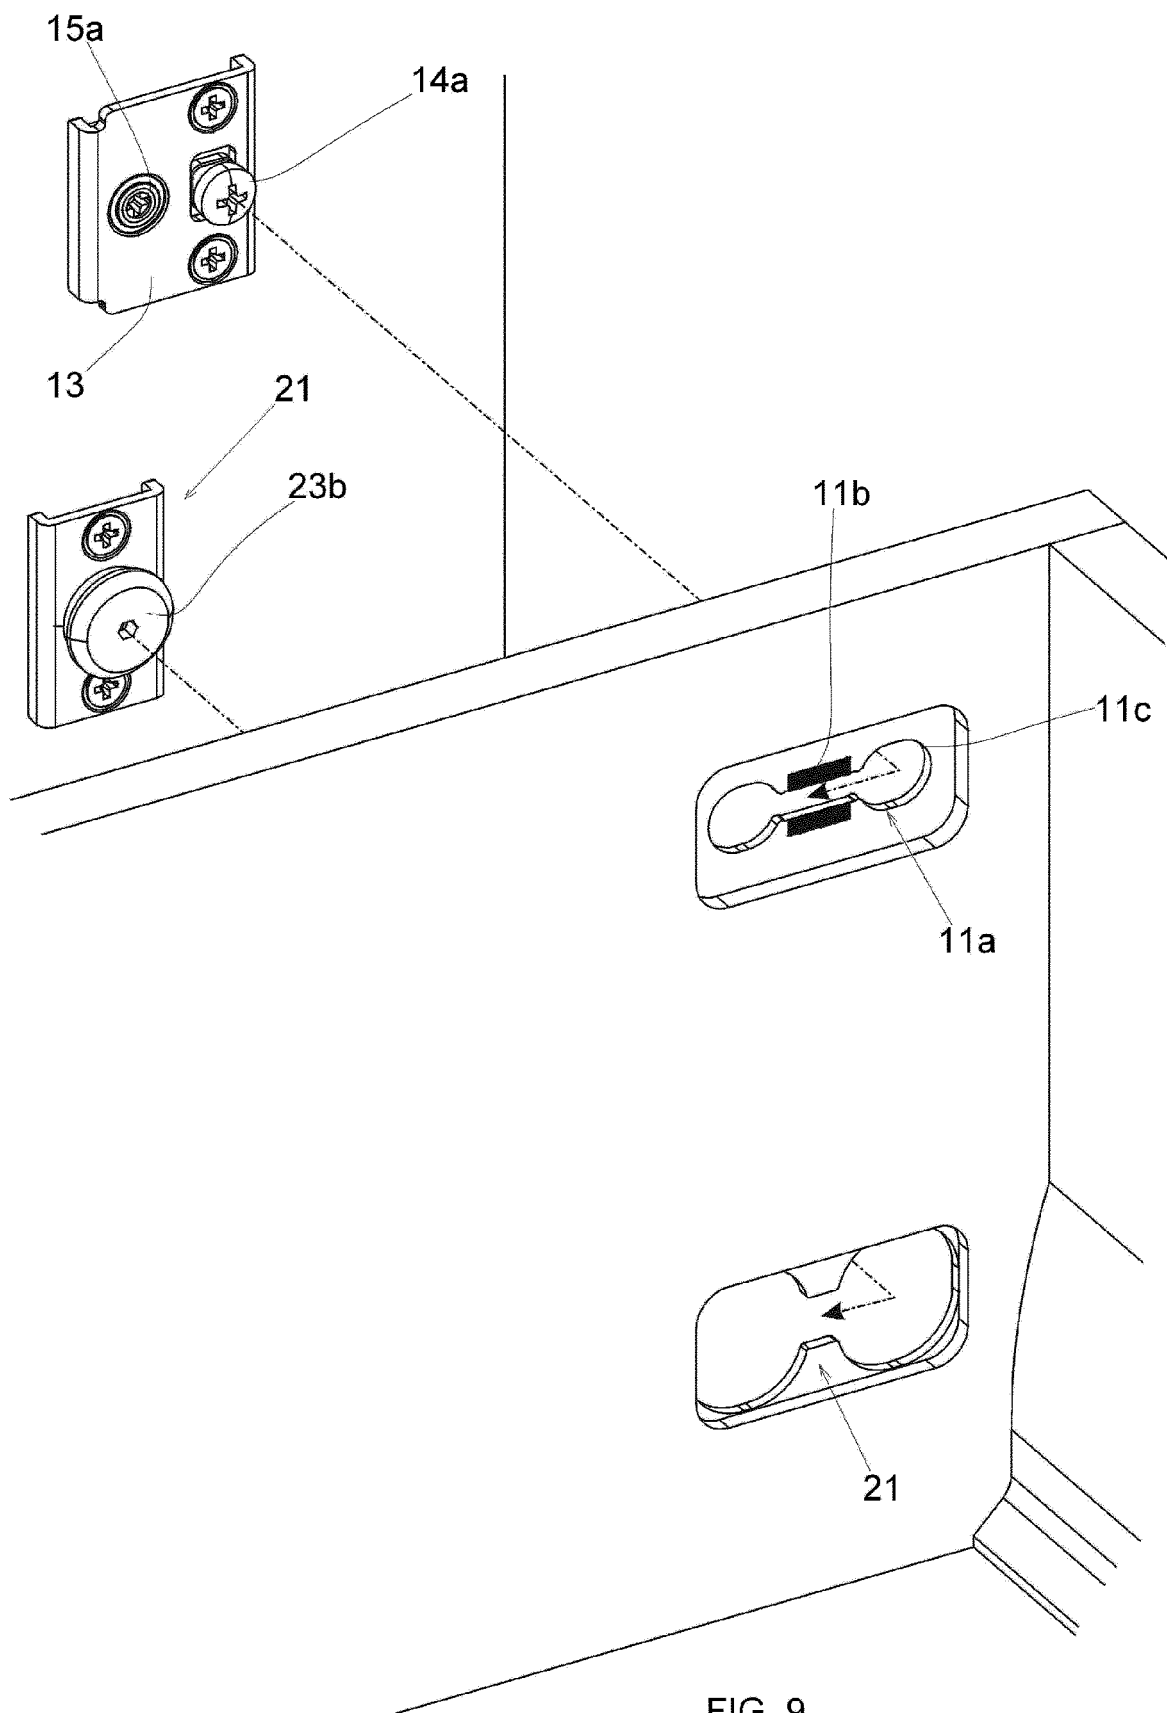
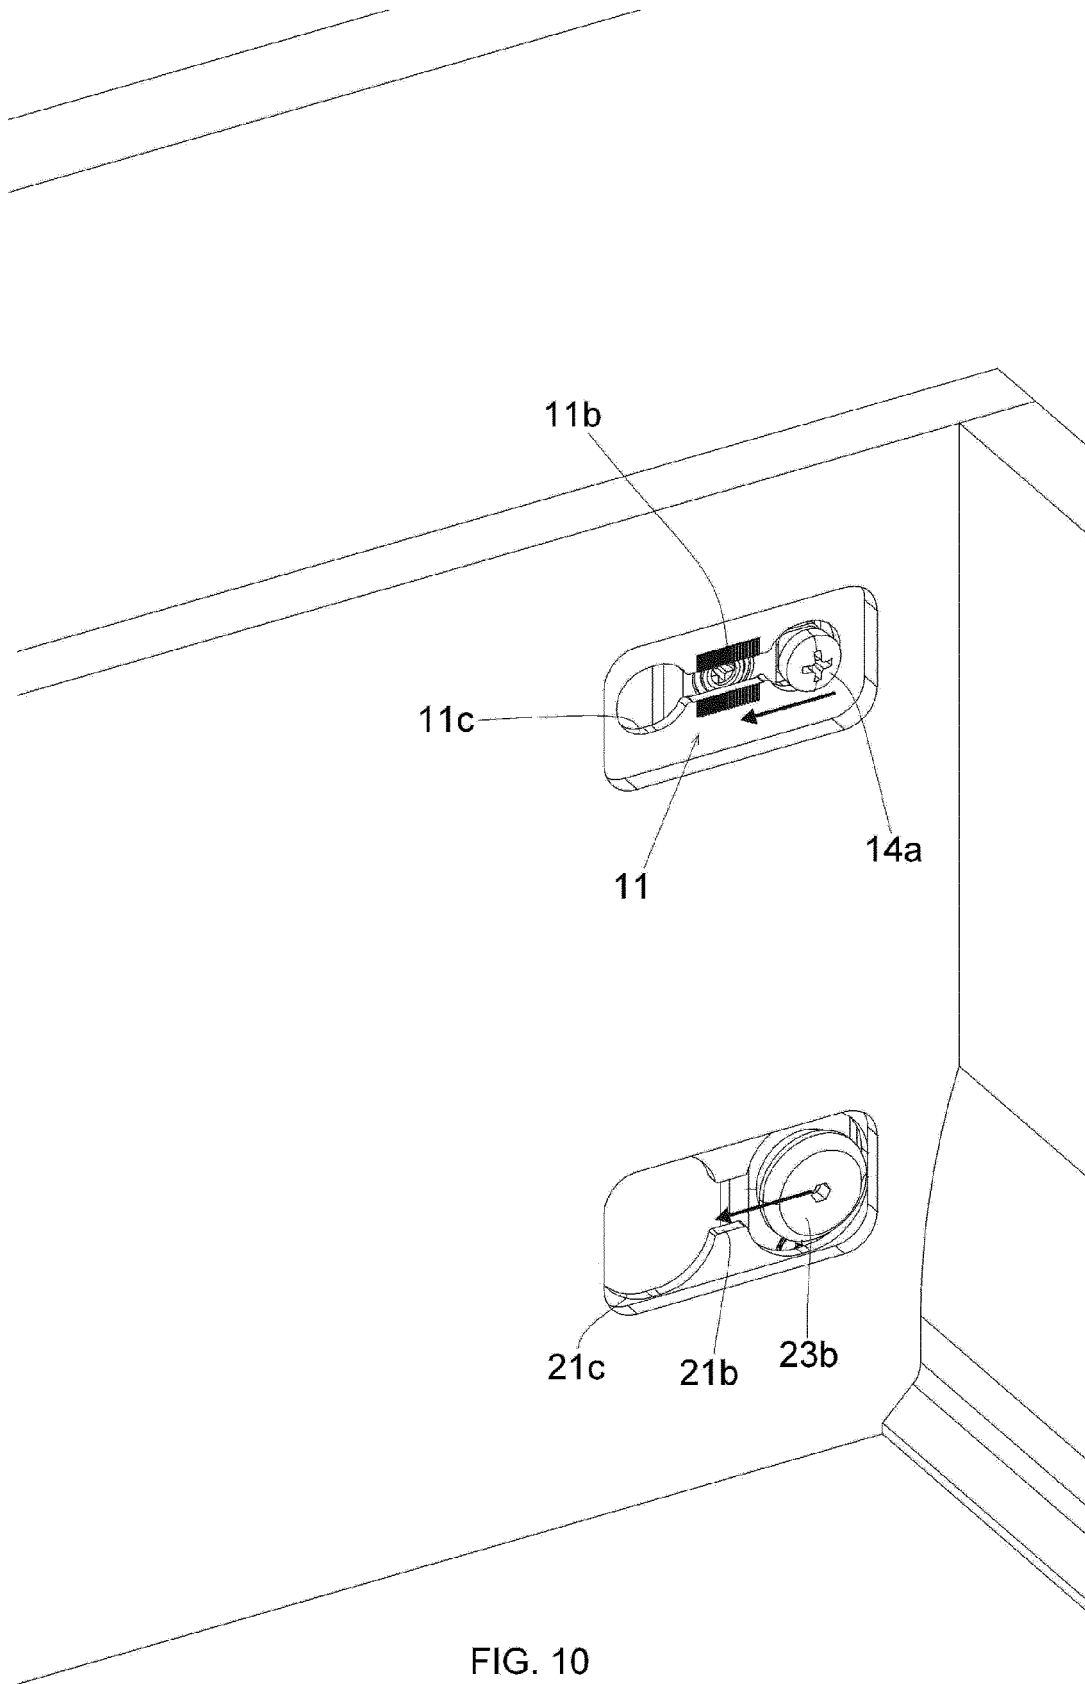


FIG. 8






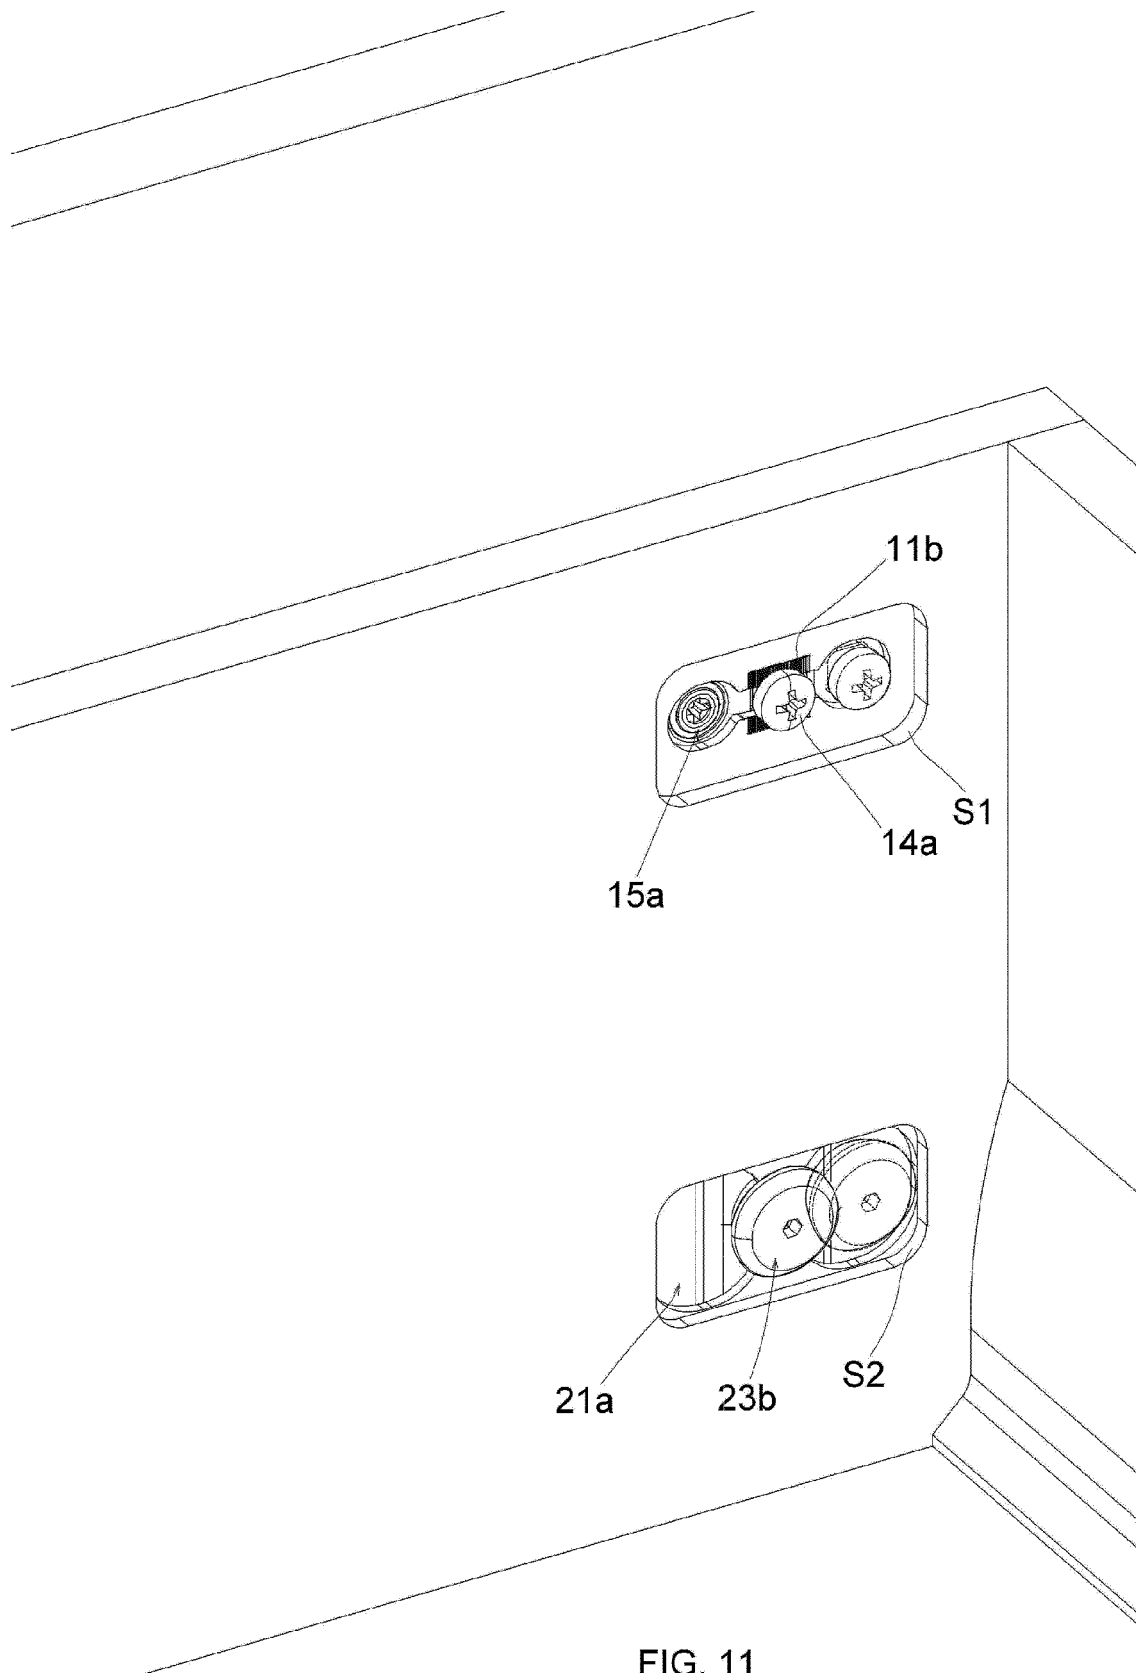


FIG. 11



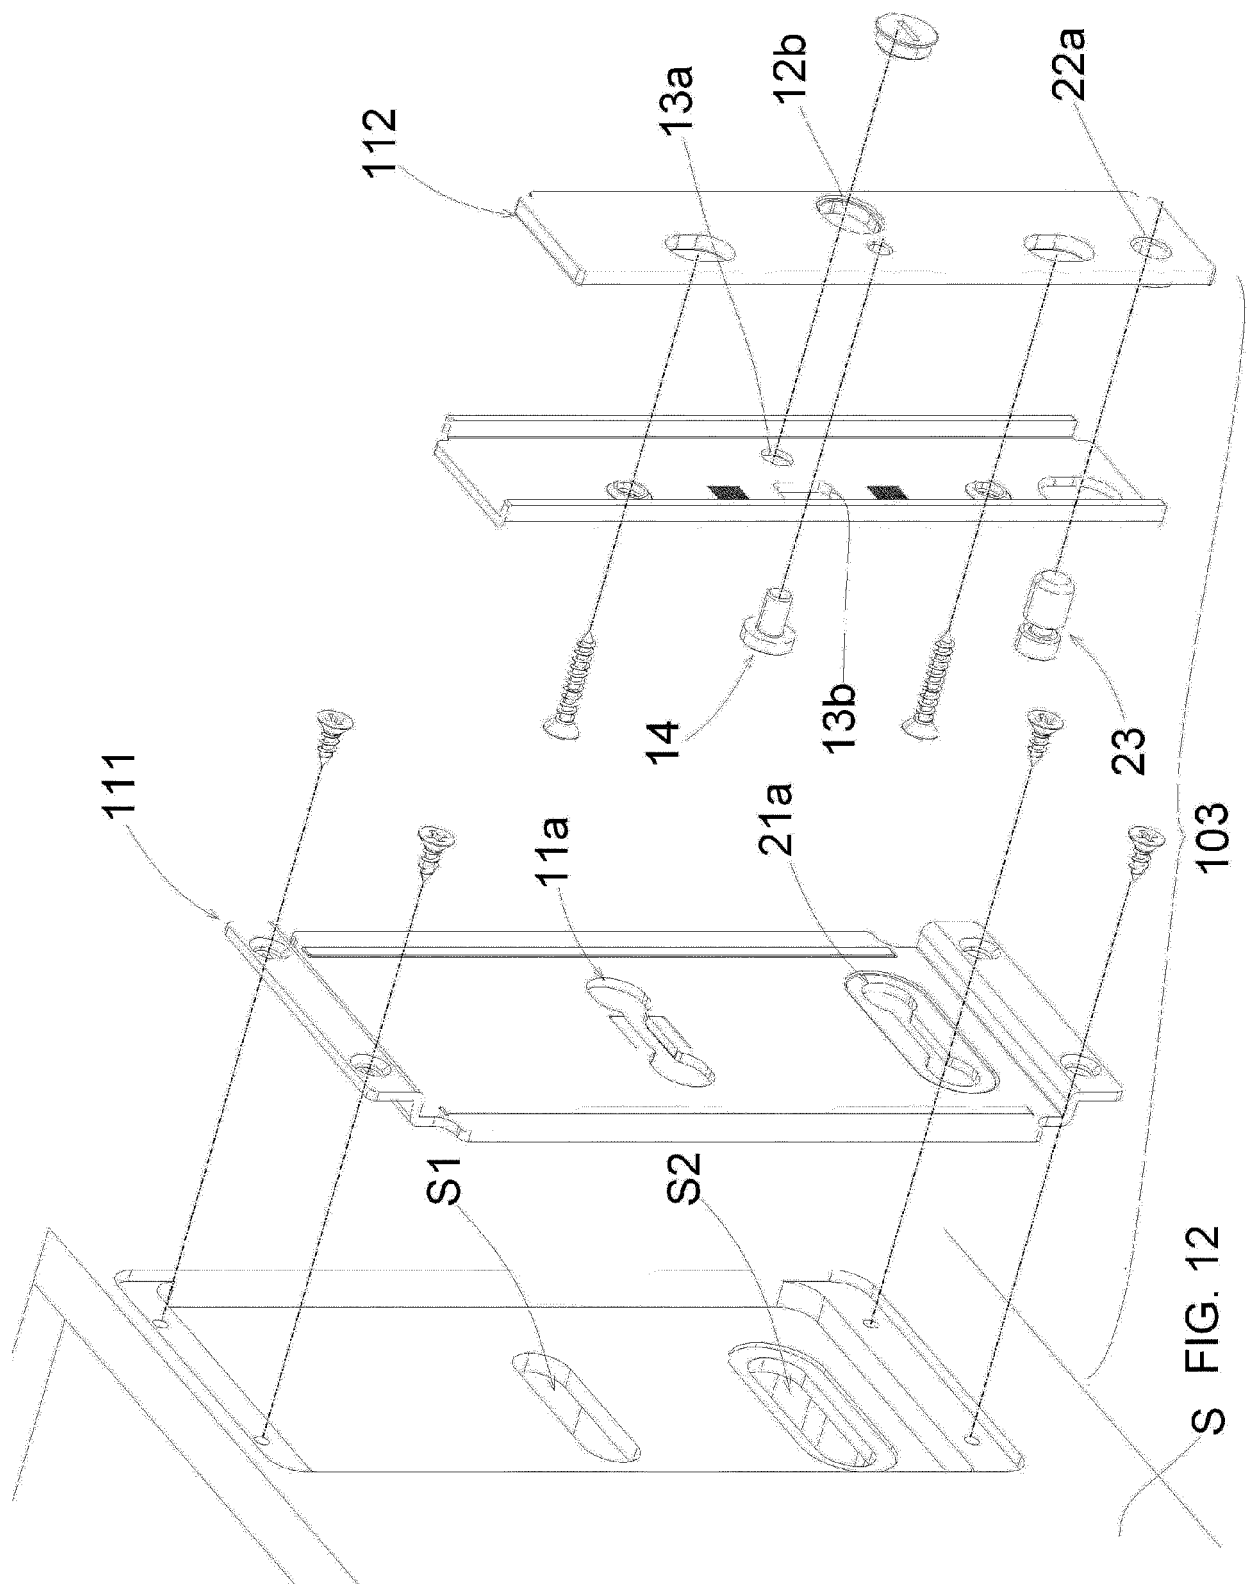

EUROPEAN SEARCH REPORT

Application Number
EP 12 16 8206

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	JP 5 007515 A (TAKAHASHI KANAMONO KK; ISOKAWA SANGYO KK) 19 January 1993 (1993-01-19) * paragraph [0013] - paragraph [0053]; figures 1-25 *	1-14	INV. A47B88/00
A	DE 80 21 658 U1 (JULIUS BLUM GMBH) 13 November 1980 (1980-11-13) * page 5 - page 7; figures 1-6 *	1-14	
A	US 2005/093407 A1 (FEELEY DAVID [US] ET AL) 5 May 2005 (2005-05-05) * paragraph [0025] - paragraph [0030]; figures 1-3 *	1-14	
			TECHNICAL FIELDS SEARCHED (IPC)
			A47B
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 20 September 2012	Examiner Klintebäck, Daniel
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 12 16 8206

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-09-2012

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 5007515 A	19-01-1993	JP 2000615 C	20-12-1995
		JP 5007515 A	19-01-1993
		JP 7024614 B	22-03-1995
DE 8021658 U1	13-11-1980	NONE	
US 2005093407 A1	05-05-2005	NONE	

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 5007515 B [0008]