

(19)



(11)

EP 2 543 772 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

16.03.2016 Bulletin 2016/11

(51) Int Cl.:

E02D 29/14^(2006.01)

(21) Application number: **12002012.8**

(22) Date of filing: **22.03.2012**

(54) **Anti-theft device for manhole covers and related securing method**

Diebstahlsicherung für Schachtabdeckungen und dazugehöriges Sicherungsverfahren

Dispositif antivol pour couvercles de regard et procédé de sécurisation associé

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

Designated Extension States:

BA ME

(30) Priority: **23.03.2011 PT 10558011**

(43) Date of publication of application:

09.01.2013 Bulletin 2013/02

(73) Proprietor: **FUCOLI-SOMEPAL FUNDIÇÃO DE
FERRO, S.A.**

3001-906 Coimbra (PT)

(72) Inventor: **Da Fonseca Mendes Pereira, Luis Miguel**

3001-906 Columbra (PT)

(74) Representative: **Ferreira, Maria Silvina**

Clarke, Modet & Co.

Rua Castilho, 50-9°

1269-163 Lisboa (PT)

(56) References cited:

EP-A1- 0 039 301 DE-U1-202005 019 900

EP 2 543 772 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

[0001] This invention relates to an anti-theft device and method applied to locking systems with hinge pins, in particular, those used in manholes of sewage systems or the like.

BACKGROUND OF THE INVENTION

[0002] Locking devices for manholes typically comprise a ring and the related lid made out of cast iron (see for example document EP-A1-0 039 301). Up to the mid-80s, locking devices for manholes were made out of flake graphite cast iron and would comprise two elements, the ring and the lid, whereby the interaction between them would solely be accomplished with the laying/overlaying of the lid into the ring. Usually, they would not feature any fastening elements, a rotary joint or alike, that would allow the lid tilting as related to the ring. The said locking devices, namely those applied to heavy traffic lanes, distinguished for exhibiting high weights, in order to prevent its fracture and the lid lifting or displacement as related to the ring whenever vehicles would drive over it.

[0003] The advent of spheroidal graphite cast iron allowed maintaining the parts strength with a significantly smaller weight. As locking devices, became increasingly lighter, however, means that would ensure that the lid would be fitted within the ring without any displacement became necessary, namely under more demanding traffic requirements. This situation has been provided for, and it has been particularly focused, in the standard EN 124 in 1989.

[0004] The fact that locking devices became lighter and easier to be handled made them more vulnerable to unlawful operations, including the covers burglary. The assemblies available in the market allow the lid to be easily removed from the ring by a sole individual and without using any specific kind of tool whatsoever.

[0005] The invention disclosed herein, upon being applied to the assembly (ring and lid) averts the cover from being disconnected from the ring, thus preventing it from being stolen.

SUMMARY OF THE INVENTION

[0006] The purpose of the invention disclosed herein is to describe an anti-theft device to be applied to ring-lid assemblies of manhole locking systems, in particular, to underground manholes or the like, wherein prevention against the cover theft is a major issue. The said device comprises a ring (1), a lid (2) to engage the ring, a locking hook (3) to secure the lid (2) to the ring (1), the hook (3) being placed onto cavities (1A and 1B) located in the ring (1), and, the lid (2) comprising an assembly of claws (2A and 2B) that are held locked with the ring (1), wherein the ring (1) pertaining to the assembly is secured to the

ground with bituminous filler, cement or other binders and/or via anchoring means, and the claw (2A, 2B) locking of the lid (2) pivot with the ring (1), is accomplished via closing means and the hook (3) engagement, and the external body (3J) of the hook (3) protrudes from the ring (1) and features an knurled edge (31) to secure the hook onto the pavement.

[0007] In a preferred embodiment of the invention, the anti-theft device for manhole covers includes a hook (3) which, upon the mounting position, includes a "U" shape viewed from an upper view, comprising locking tabs (3C, 3D) and anti-removal collars (3E, 3F) in the device's arms that prevent the removal of the hook (3) as related to the ring (1) when the lid (2) is closed, and the arms (3A, 3B) of the hook (3) including closing means and engagement means comprising two vertical locking tabs (3C and 3D), that are aided/complemented with the vertical engagement and locking tabs (3G and 3H), whereby the said tabs prevent the hook (3A and 3B) arms, as they have been applied to the assembly comprising the ring (1) and the lid (2), from rotating, being displaced from its position and, therefore, prevent the removal of the lid claws (2A and 2B) as related to the ring (1).

[0008] In a preferred embodiment of the invention, the anti-theft device for manhole covers exhibits the cover material made out of cast iron, preferentially, made out of spheroidal graphite cast iron.

[0009] Another purpose of the invention disclosed herein describes an anti-theft method to be applied to ring-lid assemblies of manholes locking systems, wherein the assembly locking includes the following steps, as follows:

- a) Composition of a flat, solid support surface wherein the ring will lay, by applying a binder, e.g., cement, layered to approximately 3 cm at least below the pavement level;
- b) Setting up the lid (2) into the ring (1);
- c) Fitting of the hook (3) onto the cavities (1A and 1B) of the ring (1), provided for that purpose;
- d) Engagement of the hook arms (3A, 3B) using the claws (2A, 2B) of the lid to enable the connection and the locking between the ring and lid, while preventing the withdrawal of the lid (2) as related to the ring (1);
- e) Application of the bitumen, or another binder, layered to the ground level, being levelled with the remaining bitumen of the pavement, thus covering the external body (3J) of the hook (3) and, therefore, wrapping the locking knurled edge (31), whereupon the lid (2) will be locked against the ring (1) nevertheless, on a pivoting way.

[0010] In a preferred embodiment, the anti-theft method of manhole covers includes a hook (3) that, as it is placed at a side position of the ring (1) does not interfere whatsoever with the proper laying of the entire ring (1) surface, thus allowing the correct ring (1) application upon the manhole support structure.

[0011] In a preferred embodiment, the anti-theft method of manhole covers includes two arms (3A and 3B) that engage the cavities (1A and 1B) located in the ring, whereby the said cavities (1A and 1B) have been designed to enable the hook to connect with in one sole position, by means of the engagement tabs (3G and 3H) located in the arms (3A and 3B) of the hook (3).

[0012] In another preferred embodiment, the anti-theft method of manhole covers includes arms (3A, 3B) of the hook (3) that are provided with two vertical locking tabs (3C and 3D), which are aided/complemented with the vertical engagement and locking tabs (3G and 3H), whereby these tabs prevent the ring arms (3A and 3B), as they have been applied to the assembly comprising the ring (1) and the lid (2), from rotating, thus being displaced from its position and, therefore, they prevent the removal of the lid claws (2A and 2B) as related to the ring (1).

[0013] In a further preferred embodiment, the anti-theft method of manhole covers includes tabs (3C, 3D, 3G, 3H) that have been designed so that, as the hook (3) is installed within the assembly comprising the ring (1) and the lid (2), there isn't any available space whatsoever to slot in any type of tool, thus rendering impossible the hook (3) rupture with the application of a force that might otherwise be exerted upon the bottom part of the hook arms (3A and 3B).

[0014] In another preferred embodiment, the anti-theft method of manhole covers includes vertical locking tabs (3A and 3B) and vertical engagement and locking tabs (3G and 3H) which, as they have been placed within the ring (1) into cavities (1A and 1B), engage the internal part of the box located in the ring (1) to hook up the claws (2A and 2B) of the lid (2), thus enabling its pivoting without, however, making its removal possible, unless otherwise accomplished with the removal/destruction of the pavement to take the hook (3) and the lid (2) out.

GENERAL DESCRIPTION OF THE INVENTION

[0015] This invention relates to an anti-theft device and method for manhole covers applied to hinge pin-based locking systems, in particular, those used in underground manholes or the like, wherein prevention against the cover theft is a major issue. The device disclosed herein is characterized in that it preferably comprises the following elements, as follows: A ring (1); a lid (2) to connect with the ring; a locking hook (3) of the lid (2) pivot placed onto cavities (1A and 1B) located in the ring (1); wherein the lid (2) comprises a set of joining means (2A and 2B) with the ring; the ring (1) of the said assembly being secured to the ground by means of a bituminous filler, cement or other binders; wherein the rear part of the hook (3), being formed with the knurled edge for securing (31) and the external body of the hook (3J), is entirely covered with the pavement in order to, solely with the removal/destruction hereof, would become possible to remove the hook (3) and the lid (2).

DESCRIPTION OF FIGURES

[0016]

Figure 1: Schematic view of the assembly comprising the ring, lid and the hook, where the following numerals correspond to the elements, as follows:

1 - Ring
2 - Lid
1A - Cavity
1B - Cavity
3 - Hook

Figure 2: Cross-section view of the ring cavity wherein the lid claw and the hook are fitted into and where the following numerals correspond to the elements, as follows:

1 - Ring
2A - Lid claw
3 - Hook

Figure 3: Upper view of the assembly and where the following numerals correspond to elements, as follows:

1 - Ring
2 - Lid
2A - Lid claw
2B - Lid claw
3 - Hook
3A - Hook arm
3B - Hook arm

Figure 4: Upper view of the anti-theft hook, and where the following numerals correspond to elements, as follows:

3 - Hook
3A - Hook arm
3B - Hook arm
3C and 3D - Vertical locking tabs
3E and 3F - Anti-removal collars
3G and 3H - Vertical engagement and locking tabs

Figure 5: Side view of the anti-theft hook, and where the following numerals correspond to elements, as follows:

3A and 3B - Hook arms
3C and 3D - Vertical locking tabs
3E and 3F - Anti-removal collars
3J - External body of the hook

Figure 6: Rear view of the anti-theft hook, and where the following numerals correspond to elements, as follows:

follows:

- 3E and 3F - Anti-removal collars
- 31 - Knurled edge for securing
- 3J - External body of the hook

Figure 7: View of the opening/closure of a general assembly with the hinge pin system:

- 1 - Ring
- 2 - Lid
- 3 - Hook

DETAILED DESCRIPTION OF THE INVENTION

[0017] As can be seen in Figures 1 and 2, the lid (2) is pivoted in the ring (1), and the hook (3) fits, through its arms, within cavities (1A, 1B) of the ring (1).

[0018] Figure 3 shows the lid (2) assembled inside the ring (1). As illustrated, the lid claw (2A, 2B) remains locked, because when the locking hook (3) is introduced within cavities (1A, 1B), the arms (3A and 3B) of the hook remain on top of the lid (2A, 2B) pivot.

[0019] Figures 4 and 5 show in particular the building detail of the anti-theft hook. The upper view illustrates the arms (3A and 3B) of the hook, the anti-removal collars (3E and 3F), that work as backstops, and the engagement tabs (3C, 3D, 3G and 3H) and, finally, the knurled edge (31) to secure the hook (3) employing bituminous material or alike.

[0020] Figure 6 is particularly interesting, as it details the anti-removal collars (3E, 3F) and the knurled edge (31) to secure the hook (3) with bituminous material or alike.

[0021] And finally, Figure 7 depicts the opening/closure mode of a cover featuring the hinge pin system provided with the related locking hook (3). The lid (2) can be pivoted with the ring (1), yet the claw remains locked by the hook (3).

[0022] The securing method of the ring (1) to the ground is preferentially carried out in two steps. In the first step, a binder, e.g. cement, is placed and layered to at least 3 cm below the pavement level.

[0023] Upon the completion of this first step, the lid (2) is to be slotted in the ring (1) and connected thereto with the claws (2A and 2B), where subsequently the hook (3), is to be placed onto cavities (1A and 1B) of the ring (1) that are provided for that purpose and through the engagement among the arms (3A, 3B) and the claws (2A, 2B) to enable the connection and locking between the ring and the lid, while preventing the lid (2) from being removed as related to the ring (1), but on a pivoting mode, as shown in Figure 3.

[0024] After the hook (3) has been placed, the lid (2) may be completely closed, thus moving forward to the second step of the device installation with the application of the bitumen, or another binder, layered to the ground level, covering the hook (3), in its external body (3J) and

the knurled edge (31).

[0025] As the bitumen is completely dried, the lid (2) may be opened and closed, but cannot though be removed from the ring (1).

5 It should be noted that the system claimed herein allows the ring (1), upon its application, to be perfectly levelled and supported along the entire extension of its laying surface, as the hook (3), as it is placed at side position of the ring (1), does not interfere whatsoever with the proper laying of the ring (1) within the manhole support structure.

10 **[0026]** The hook comprises two arms (3A and 3B) that fit within cavities (1A and 1B) located in the ring. Cavities (1A and 1B) have been designed to allow the hook engagement in a sole position, by means of the engagement tabs (3G and 3H) located in the arms (3A and 3B) of the hook (3), in order to clear out any doubt whatsoever to the assembler upon the engagement of the hook (3) in the ring (1).

20 **[0027]** The arms (3A and 3B) of the hook (3) are provided with two vertical locking tabs (3C and 3D), which are aided/complemented with the vertical engagement and locking tabs (3G and 3H). These tabs prevent the hook arms (3A and 3B), upon being applied to the assembly comprising the ring (1) and the lid (2), from rotating, being displaced of its position, while enabling the removal of the lid claws (2A and 2B) as related to the ring (1). The said tabs are further designed so that, when the hook (3) is installed in the assembly comprising the ring (1) and the lid (2), there isn't any available space whatsoever to slot in any type of tool, thus rendering impossible the hook (3) rupture with the application of a force that might otherwise be exerted upon the bottom part of the hook (3A and 3B) arms.

30 **[0028]** The vertical locking tabs (3A and 3B) and vertical engagement and locking tabs (3G and 3H), after they have been placed within the ring (1) into cavities 1A and 1B, engage the internal part of the box located in the ring (1) to hook up the claws (2A & 2B) of the lid (2).

40 **[0029]** The arms (3A and 3B) of the hook (3) have two collars (3E and 3F) that avert the hook (3) removal as related to the ring (1) when the lid (2) is closed.

[0030] The hook (3) features a knurled edge (31) that enables an enhanced securing of the hook upon the application of the bitumen, or another binder, layered to ground level.

50 **[0031]** The hook (3) includes an external body (3J), which has been designed, so to allow an improved connection with the ring (1) and the binding material. This external body (3J) prevents or hinders the hook (3) removal as related to the assembly comprising the ring (1) and the lid (2), including in some events wherein, either deliberately or due to wear and tear of the binding material, it is partially removed.

55

Claims

1. Anti-theft device for manhole covers, comprising the following elements, as follows:

- a ring (1) of the assembly that is secured to the ground by means of bituminous filler, cement, other binders and/or anchoring means;
 - a lid (2) to slot in the ring (1) comprising an set of claws (2A, 2B) that are locked against the ring (1);
 - a hook (3) that locks the lid (2) against the ring (1) wherein the hook (3) is placed onto cavities (1A and 1B) located in the ring (1), and also the locking of the claws (2A, 2B) of the lid pivot with the ring, is carried out by locking and engagement means of the hook (3), **characterized in that**, the external body (3J) of the hook (3) protrudes from the ring (1) and features a knurled edge (3I).

2. Anti-theft device for manhole covers according with Claim 1, wherein the hook includes in its arms locking tabs (3C, 3D) and anti-removal collars (3E and 3F).

3. Anti-theft device for manhole covers according with the previous Claims 1 and 2, wherein the arms (3A, 3B) of the hook (3) include locking and engagement means comprising two vertical locking tabs (3C and 3D), which are aided/complemented with the vertical engagement and locking tabs (3G and 3H).

4. Anti-theft device for manhole covers according with Claim 1, wherein the lid material is made out of cast iron.

5. Securing method for manhole covers that include the anti-theft device for manhole covers claimed in previous Claims 1 to 4, wherein the assembly and securing of the assembly comprises the elements, as follows:

a) composition of a flat, solid support surface wherein the ring will lay, by applying a binder, layered to at least 3 cm below the pavement level;
 b) Setting up the lid (2) into the ring (1);
 c) Fitting the hook (3) onto cavities (1A and 1B) of the ring (1);
 d) Engagement of the arms (3A, 3B) of the hook with the lid claws (2A, 2B);
 e) Application for the binder layered to the ground level, thus covering the external body (3J) of the hook (3) and wrapping the locking knurled edge (3I), whereupon the lid (2) will be locked against the ring (1) on a pivoting way.

6. Securing method for manhole covers according with

Claim 4, wherein the two arms (3A and 3B) are engaged with cavities (1A and 1B) located in the ring, by means of the engagement tabs (3G and 3H) located in the arms (3A and 3B) of the hook (3).

7. Securing method for manhole covers according with Claim 4, wherein the arms (3A, 3B) of the hook (3) are provided with two vertical locking tabs (3C and 3D), which are aided/complemented with the vertical engagement and locking tabs (3G and 3H).

8. Securing method for manhole covers according with Claim 6, wherein the vertical locking tabs (3A and 3B) and the vertical engagement and locking tabs (3G and 3H), after they have been placed within the ring (1) onto cavities (1A and 1B), engage the internal part of the box located in the ring (1) to hook up the claws (2A and 2B) of the lid (2).

Patentansprüche

1. Diebstahlsicherung für Mannlochdeckel, umfassend die folgenden Elemente, wie folgt:

- einen Ring (1) der Anordnung, der mittels bituminösen Füllmaterial, Zement, anderen Bindemitteln und/oder Verankerungsmitteln, an dem Boden befestigt wird;
 - einen Deckel (2) zum eingreifen in den Ring (1) umfassend einen Satz von Klauen (2A, 2B), die gegen den Ring (1) verriegelt werden;
 - einen Haken (3), der den Deckel (2) gegen den Ring (1) verriegelt, wobei der Haken (3) auf sich in dem Ring (1) befindlichen Hohlräumen (1A und 1B) angeordnet wird und ebenfalls die Verriegelung der Klauen (2A, 2B) des Deckels mit dem Ringgelenk mittels Verriegelungs- und Eingreifsmitteln des Hakens (3) erfolgt, **dadurch gekennzeichnet, dass** der äußere Körper (3J) des Hakens (3) von dem Ring (1) absteht und einen gekerbten Rand (3I) aufweist.

2. Diebstahlsicherung für Mannlochdeckel nach Anspruch 1, **dadurch gekennzeichnet, dass** der Haken in seinen Armen Verriegelungslaschen (3C, 3D) und Anti-Entfernungskragen (3E und 3F) umfasst.

3. Diebstahlsicherung für Mannlochdeckel nach den vorhergehenden Ansprüchen 1 und 2, **dadurch gekennzeichnet, dass** die Arme (3A, 3B) des Hakens (3) Verriegelungs- und Eingreifsmittel umfassen, umfassend zwei vertikale Verriegelungslaschen (3C und 3D), die mittels der vertikalen Eingreifs- und Verriegelungslaschen (3G und 3H) unterstützt/vervollständigt werden.

4. Diebstahlsicherung für Mannlochdeckel nach An-

spruch 1, **dadurch gekennzeichnet, dass** das Deckelmaterial aus Gusseisen hergestellt wird.

5. Befestigungsverfahren für Mannlochdeckel, die die Diebstahlsicherung für Mannlochdeckel nach den vorhegehenden Ansprüchen 1 bis 4 umfassen, **dadurch gekennzeichnet, dass** die Anordnung und die Befestigung der Anordnung folgende Elemente umfasst, wie folgt:
 - a) Ausbildung einer flachen, festen Trägeroberfläche, worin der Ring liegen wird, durch Aufbringen eines Bindemittels auf mindestens 3 cm unterhalb der Oberbauebene;
 - b) Einsetzen des Deckels (2) in den Ring (1);
 - c) Anordnung des Hakens (3) auf Hohlräumen (1A und 1B) des Rings (1) ;
 - d) Eingreifen der Arme (3A, 3B) des Hakens mit den Deckelklauen (2A, 2B);
 - e) Aufbringen des Bindemittels bis auf die Bodenebene, wodurch der äußere Körper (3J) des Hakens (3) abgedeckt wird und der verriegelnde gekerbte Rand (3I) eingewickelt wird, woraufhin der Deckel (2) auf eine schwenkbare Weise gegen den Ring (1) verriegelt wird.
6. Befestigungsverfahren für Mannlochdeckel nach Anspruch 4, **dadurch gekennzeichnet, dass** die zwei Arme (3A und 3B) mittels der in den Armen (3A und 3B) des Hakens (3) befindlichen Eingreiflaschen (3G und 3H) in die in dem Ring befindlichen Hohlräume (1A und 1B) eingreifen.
7. Befestigungsverfahren für Mannlochdeckel nach Anspruch 4, **dadurch gekennzeichnet, dass** die Arme (3A, 3B) des Hakens (3) mit zwei vertikalen Verriegelungslaschen (3C und 3D) versehen werden, die mit den vertikalen Eingreifs- und Verriegelungslaschen (3G und 3H) unterstützt/vervollständigt werden.
8. Befestigungsverfahren für Mannlochdeckel nach Anspruch 6, **dadurch gekennzeichnet, dass** die vertikalen Verriegelungslaschen (3A und 3B) und der vertikalen Eingreifs- und Verriegelungslaschen (3G und 3H), nachdem diese in den Ring (1) auf Hohlräumen (1A und 1B) angeordnet wurden, in den inneren Teil des in dem Ring (1) befindlichen Kastens eingreifen, um die Klauen (2A und 2B) des Deckels (2) zu verbinden.

Revendications

1. Dispositif antivol pour les couvercles de trous d'homme, comprenant les éléments suivants, comme suit:
 - un anneau (1) de l'ensemble qui est fixé au sol

au moyen de matériel de remplissage bitumineux, de ciment, d'autres liants et/ou de moyens d'ancrage;

- un couvercle (2) à insérer dans l'anneau (1) comprenant un ensemble de griffes (2A, 2B) qui sont verrouillées contre l'anneau (1);
- un crochet (3) qui verrouille le couvercle (2) contre l'anneau (1) dans lequel le crochet (3) est placé sur cavités (1A et 1B) disposées dans l'anneau (1), et également le verrouillage des griffes (2A, 2B) de l'articulation du couvercle à l'anneau est réalisé par des moyens de verrouillage et d'emboîtement du crochet (3), **caractérisé en ce que** le corps externe (3J) du crochet (3) fait saillie à partir de l'anneau (1) et présente un bord crénelé (31).

2. Dispositif antivol pour les couvercles de trous d'homme selon la revendication 1, **caractérisé en ce que** le crochet comprend dans ses bras des onglets de verrouillage (3C, 3D) et des colliers anti-enlèvement (3E et 3F).

3. Dispositif antivol pour les couvercles de trous d'homme selon les revendications précédentes 1 et 2, **caractérisé en ce que** les bras (3A, 3B) du crochet (3) comprennent des moyens de verrouillage et d'emboîtement comprenant deux onglets de verrouillage verticaux (3C et 3D), qui sont assistés/complétés par les onglets d'emboîtement et de verrouillage verticaux (3G et 3H).

4. Dispositif antivol pour les couvercles de trous d'homme selon la revendication 1, **caractérisé en ce que** le matériel de couvercle est réalisé en fonte.

5. Procédé de fixation pour les couvercles de trous d'homme qui comprennent le dispositif antivol pour les couvercles de trous d'homme selon les revendications précédentes de 1 à 4, **caractérisé en ce que** l'assemblage et la fixation de l'ensemble comprend les éléments, comme suit:
 - a) composition d'une surface d'appui plane et solide dans laquelle se posera l'anneau, en appliquant un liant, en couches jusqu'à au moins 3 cm en dessous du niveau du sol;
 - b) insertion du couvercle (2) dans l'anneau (1);
 - c) colocation du crochet (3) sur les cavités (1A et 1B) de l'anneau (1);
 - d) emboîtement des bras (3A, 3B) du crochet avec les griffes du couvercle (2A, 2B);
 - e) application du liant en couches jusqu'au niveau du sol, couvrant ainsi le corps externe (3J) du crochet (3) et enveloppant le bord crénelé de verrouillage (31), après quoi le couvercle (2) est verrouillé contre l'anneau (1) d'une manière pivotante.

6. Procédé de fixation pour les couvercles de trous d'homme selon la revendication 4, **caractérisé en ce que** les deux bras (3A et 3B) sont emboîtés avec des cavités (1A et 1B) disposées dans l'anneau, au moyen des onglets d'emboîtement (3G et 3H) disposées dans les bras (3A et 3B) du crochet (3). 5
7. Procédé de fixation pour les couvercles de trous d'homme selon la revendication 4, **caractérisé en ce que** les bras (3A, 3B) du crochet (3) sont munis de deux onglets de verrouillage verticaux (3C et 3D), qui sont aidés/complétés par les onglets d'emboîtement et de verrouillage verticaux (3G et 3H). 10
8. Procédé de fixation pour les couvercles de trous d'homme selon la revendication 6, **caractérisé en ce que** les onglets de verrouillage verticaux (3A et 3B) et les onglets l'emboîtement et de verrouillage verticaux (3G et 3H), après qu'ils ont été placés à l'intérieur de l'anneau (1) sur les cavités (1A et 1B), sont emboîtés dans la partie interne de la boîte disposée dans l'anneau (1) pour raccorder les griffes (2A et 2B) du couvercle (2). 15 20

25

30

35

40

45

50

55

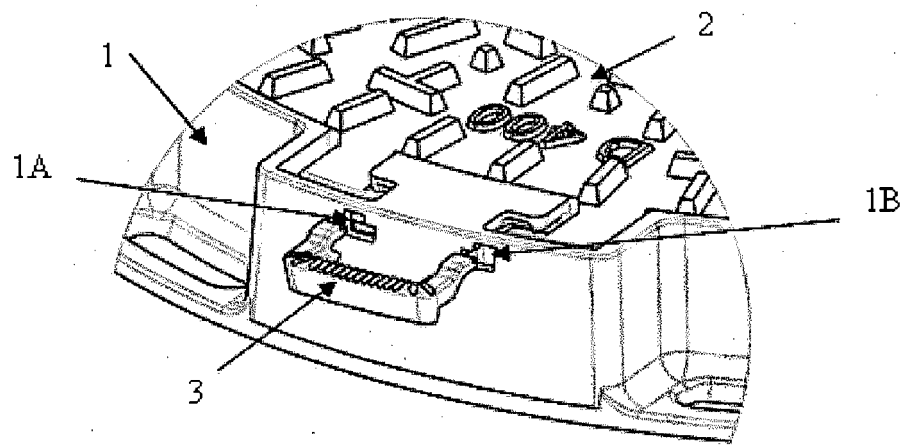


Figure 1

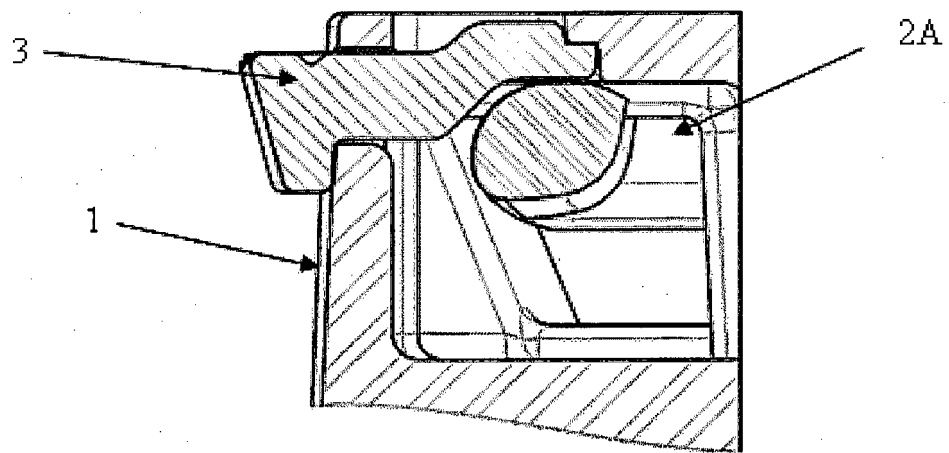


Figure 2

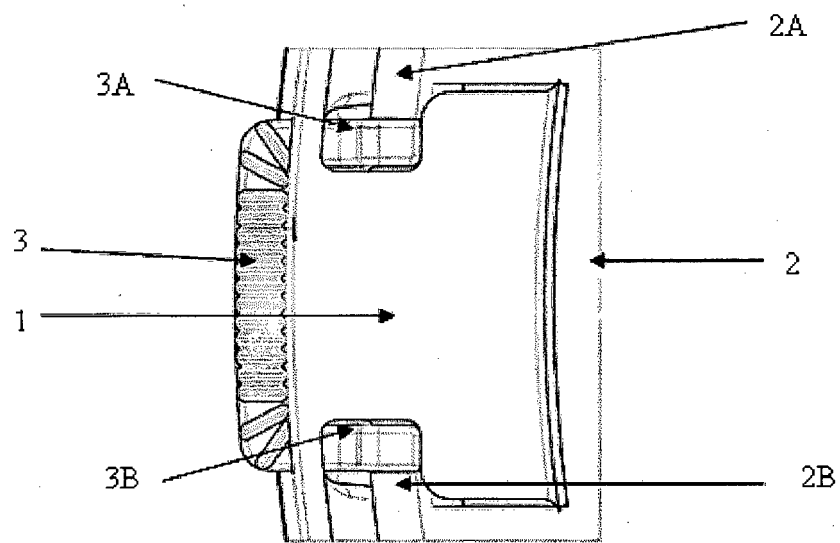


Figure 3

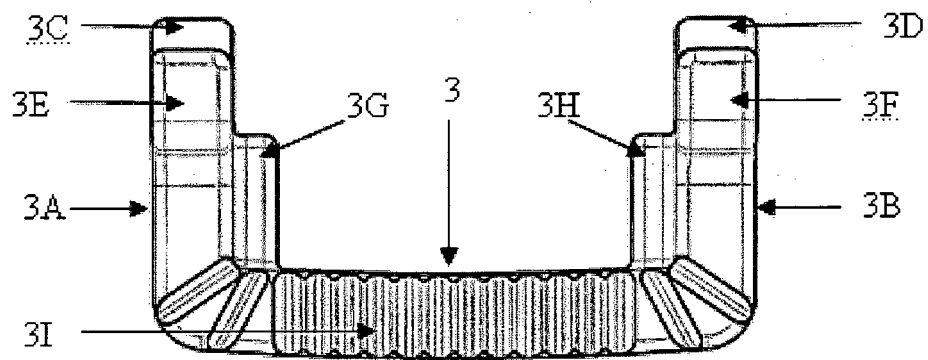


Figure 4

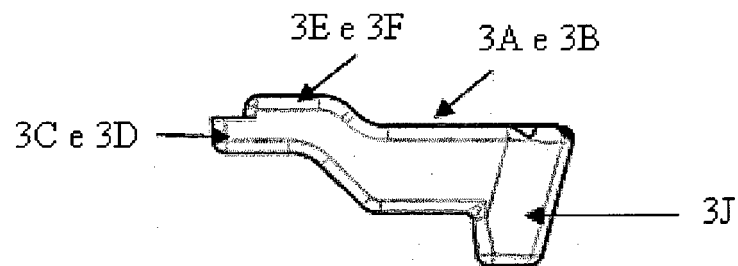


Figure 5

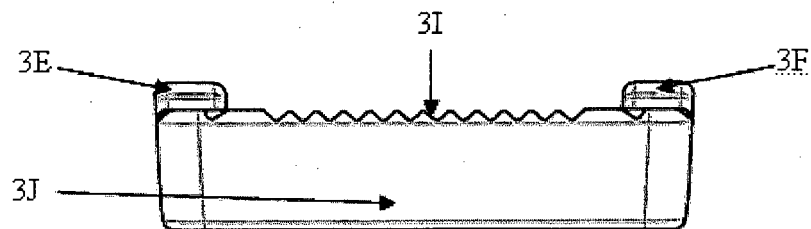


Figure 6

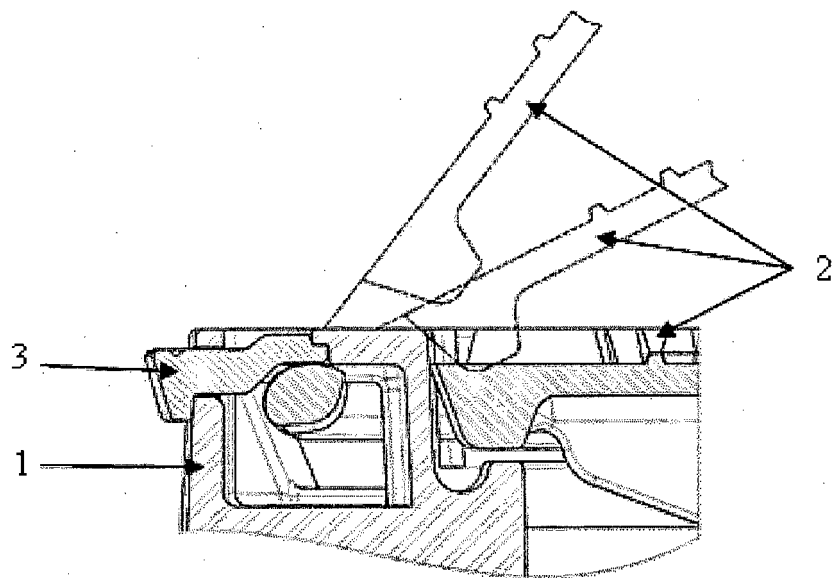


Figure 7

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 0039301 A1 [0002]