



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
30.01.2013 Bulletin 2013/05

(51) Int Cl.:
G09F 3/10 (2006.01)

(21) Application number: **11175474.3**

(22) Date of filing: **27.07.2011**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

• **Brookshire, Jody**
Flowery Branch
GA Georgia 30542 (US)

(71) Applicant: **NCR Corporation**
Duluth, Georgia 30096 (US)

(74) Representative: **MacLeod, Roderick William**
NCR Limited
Architecture & Technology
Discovery Centre
3 Fulton Road
Dundee DD2 4SW (GB)

(72) Inventors:
• **Roth, Joseph**
Springboro, OH Ohio 45066 (US)

(54) **Linerless labels**

(57) Linerless labels (202) are described. A label (202) includes a specific pattern or set of patterns of adhesive (203) applied to one side of the label (202). The adhesive pattern(s) (203) reduces contact between a cutter blade of a printer and the adhesive on the one side of the label (202). Moreover, the adhesive patterns (203)

reduce buildup of adhesive on the cutter blade and reduce buildup at specific locations on the cutter blade. That is, the adhesive patterns (203) more evenly distribute adhesive buildup across the cutter blade. Consequently, the cutter blade can be used for a longer period of time before the cutter blade needs to be cleaned of the adhesive.

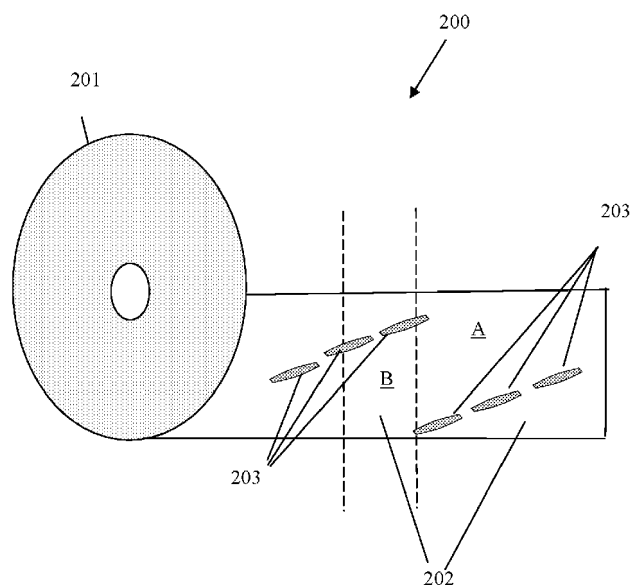


Fig 2

Description

[0001] Linerless labels are an environmentally friendly labeling solution, avoiding the need for inclusion and/or disposal of a removable release liner. Use of linerless labels may pose a host of problems including increasing the propensity for adhesive build-up in a printer, resulting in printer jams, mis-feeds and/or decreased performance.

[0002] According to a first aspect of the invention there is provided label media comprising: a substrate having a first side and a second side opposite the first side; a thermally sensitive coating on the first side of the substrate; and adhesive on the second side of the substrate; wherein the adhesive is variably patterned on the second side of the substrate to vary locations of contact between the adhesive and a cutting mechanism making variably located lateral cuts across the width of the substrate.

[0003] According to a second aspect of the invention there is provided a label making apparatus comprising: a roll of media; and a thermal printer, wherein the roll of media has a front portion including thermally sensitive ink, and a back portion having repeating patterns of adhesive material coated thereon, the thermal printer has a cutter blade for cutting discrete labels from the roll of media, and the repeating patterns of adhesive material are configured on the back portion to minimize contact between the cutter blade and the adhesive material each time the cutter blade cuts the roll of media.

[0004] According to a third aspect of the invention there is provided a label making apparatus comprising: a roll of media; and a thermal printer, wherein the roll of media has a front portion including thermally sensitive ink, and a back portion having repeating patterns of adhesive material coated thereon, the thermal printer has a cutter blade for cutting discrete labels from the roll of media, and the repeating patterns of adhesive material are configured on the back portion to distribute contact between the adhesive material and the cutter blade across the width of the cutter blade each time the cutter blade cuts the roll of media.

[0005] According to a fourth aspect of the invention there is provided a method comprising: acquiring a pattern for adhesive material; determining a repeat distance for repeating the pattern; and providing the pattern and the repeat distance to a printing press or a coater, the printing press or the coater coating a first side of a web of media with thermally sensitive inks and a second side of the web of media with the adhesive material in the pattern repeated at the repeat distance, wherein within at least a portion of the repeating distance, the pattern varies such that a lateral cut across the web of media will vary contact of the adhesive with a cutting mechanism at each different cut location within such portion.

[0006] In various embodiments, techniques for design, manufacture and/or use of linerless labels are presented. According to an embodiment, linerless label media is presented. The media includes a first portion, and a second

portion. The first portion of the media is situated on a front side of the media and includes one or more thermally sensitive coating(s), and may further include one or more coating(s) of release material. The one or more thermally sensitive coating(s) and/or the one or more release coating(s) may comprise one or more flood and/or patterned thermally sensitive and/or release material coating(s). The second portion of the media is situated on a back side of the media and includes one or more coating(s) of patterned adhesive(s). Depending on the embodiment, the release material(s) may be positioned on top of the thermally sensitive coating(s) on the first portion such that, where the media is wound in a roll, the release material lies proximate to and/or covers the patterned adhesive in a similar pattern thereto, and/or as a flood coat.

[0007] A label may optionally be configured to be cut (e.g., custom cut at a custom length) from a web or roll of the media via a cutting mechanism of, for example, a thermal printer. The pattern of adhesive(s) situated on the second portion of the media may be selected to, for example, reduce contact between the cutting mechanism and the adhesive material(s) of the patterned adhesive. The pattern may also be selected to increase the uniformity of contact occurring between the cutting mechanism and the adhesive material(s) over the length of the cutting mechanism (e.g., knife or blade).

[0008] According to various embodiments, label media is provided, which label media may comprise a substrate having a first side and a second side opposite the first side, a thermally sensitive coating on the first side of the substrate, and adhesive on the second side of the substrate, wherein the adhesive is variably patterned on the second side of the substrate to vary locations of contact between the adhesive and a cutting mechanism making variably located lateral cuts across the width of the substrate. In some embodiments, the patterned adhesive may be configured to be coated on the second side of the substrate via a banded gravure cylinder coating device. Further, in some embodiments, the patterned adhesive may be configured to include adhesive free lanes arranged vertically and/or horizontally therein. Additionally, in some embodiments, the patterned adhesive may comprise a continuous pattern of, for example, elongated diamond shapes of adhesive stretching vertically across the second side.

[0009] Depending on the embodiment, the pattern of adhesive of label media may be configured to repeat on the second side at intervals that exceed lengths associated with individual labels cut therefrom. Alternately or additionally, a repeat length for the patterned adhesive may be configured to be equal to a circumference of a gravure cylinder used to apply the patterned adhesive to the second side.

[0010] Further, in some embodiments, the patterned adhesive of label media may be configured to provide information. Depending on the embodiment, at least a portion of the patterned adhesive may include a dye, pigment, and/or ink to render the information readable. In

some embodiments, the patterned adhesive may be configured as a logo.

[0011] The patterned adhesive for label media may, in some embodiments, also be configured as custom repeating text and/or images. Depending on the embodiment, the text and/or images may be patterned to provide a mechanism for detecting counterfeiting of the media. Likewise, in some embodiments, the patterned adhesive of label media may comprise a series of repeating bar codes and/or an inverse of the bar codes, both constructed of the adhesive, the bar codes capable of being machine read for information represented thereby. Depending on the embodiment, the regions surrounding the adhesive bar codes may include color from a water based marker which may be read to discern information represented by the respective bar code.

[0012] Further, in some embodiments, the patterned adhesive of label media may comprise a repeating series of a multiplicity of (e.g., three) adhesive patches, with each patch being at a predefined angle and a predefined pitch, and each repeating series being separated by a predefined distance along a running axis of the media. Depending on the embodiment, each patch may have a predefined minimum width and a predefined maximum width.

[0013] In various embodiments, a label making apparatus is also provided, which apparatus may comprise a roll of media, and a thermal printer, wherein the roll of media has a front portion including thermally sensitive ink and a back portion having repeating patterns of adhesive material coated thereon, and the thermal printer has a cutter blade for cutting discrete labels from the roll of media. Depending on the embodiment, the repeating patterns of adhesive material may be configured on the back portion to minimize contact between the cutter blade and the adhesive material each time the cutter blade cuts the roll of media. Likewise, depending on the embodiment, the repeating patterns of adhesive material may be configured on the back portion to vary and/or distribute contact between the adhesive material and the cutter blade across the width of the cutter blade each time the cutter blade cuts the roll of media.

[0014] In some embodiments of the label making apparatus, the roll of media may be configured for the cutting of custom length labels therefrom, and/or the label making apparatus may be configured to cut custom length labels from the roll of media. Likewise, in some embodiments, the front portion of a label may display information associated with a transaction, including as a result of the activation of the ink by the thermal printer, and the back portion may permit the label to be affixed to an object via the adhesive material.

[0015] Further, the patterns of adhesive material may, in some embodiments of the label making apparatus, include information that is visible or that can be acquired from the adhesive material via a scanning device. In certain embodiments, select portions of the adhesive material may include ink to make the portions visible.

[0016] In some embodiments of the label making apparatus, at least one of the repeating patterns of adhesive material may be configured to have a predefined maximum width, a predefined minimum width, a predefined pitch, and a predefined angle, and be separated from another of the repeating patterns by a predefined distance. Likewise, in some embodiments, distance between repeating patterns of adhesive may be configured to be larger than a maximum length for any label made by the label making apparatus.

[0017] According to various further embodiments, a method is provided, the method comprising acquiring a pattern for adhesive material, determining a repeat distance for repeating the pattern, and providing the pattern and the repeat distance to a printing press or a coater, the printing press or the coater coating a first side of a web of media with thermally sensitive inks and a second side of the web of media with the adhesive material in the pattern repeated at the repeat distance. In some embodiments, the pattern may repeat at the repeat distance so as to vary contact of the adhesive with a cutting mechanism for making lateral cuts across the media web. Likewise, in some embodiments, within at least a portion of the repeating distance, the pattern may vary such that a lateral cut across the web of media will result in differing contact of the adhesive with a cutting mechanism at each different length-wise cut location within such portion. In some embodiments, the at least a portion of the repeating distance may comprise all, one-half, or one-quarter of the repeating distance. Likewise, in some embodiments, the pattern and/or the repeating distance may be variable and/or random.

[0018] In some embodiments, the method may further comprise identifying inks, pigments, and/or dyes for the printing press and/or coater to selectively color portions of the adhesive material appearing as the pattern on the second side of the roll. Likewise, in some embodiments, acquiring a pattern for the adhesive material may further include obtaining the pattern as a distinctive image and/or text message, which image and/or text message provides visual and/or encoded information.

[0019] According to various other embodiments, label media is again provided, the label media comprising a substrate having a first side and a second side opposite the first side, a thermally sensitive coating on the first side, and adhesive on the second side, wherein the adhesive is variably patterned. In some embodiments, the pattern of adhesive may vary locations of contact between the adhesive and a cutting mechanism making variably located lateral cuts across width of the substrate. Further, in some embodiments, the pattern may comprise a column of circular dots diagonally oriented along the running axis of the substrate.

[0020] These and other aspects of the present invention will become apparent from the following specific description, given by way of example, with reference to the accompanying drawings, in which:

[0021] FIGS. 1A-1H are diagrams of different configu-

rations for linerless label media, according to various example embodiments;

[0022] FIG. 2. is a diagram of a linerless label media making apparatus, according to an example embodiment;

[0023] FIG. 3 is a diagram of a method for creating and using linerless label media, according to an example embodiment; and

[0024] FIG. 4 is a diagram of a thermal printer for thermally printing linerless label media, according to an example embodiment.

[0025] FIGS. 1A-1H are diagrams of different configurations for linerless label media, according to various example embodiments. FIGS. 1A-1H are shown for purposes of illustration only. Further configurations are achievable with the teachings presented herein.

[0026] In each of the FIGS. 1A-1H a back side of linerless label media is depicted. The back side includes a pattern of adhesive material(s) coated thereon. It is also noted that a front side, opposite the back side, exists for each linerless label media depicted in FIGS. 1A-1H, which front side may include one or more thermally sensitive coating(s), comprising one or more thermally sensitive ink(s), dye(s) and/or pigment(s), that, when thermally activated, may display information, such as information associate with a transaction (e.g., as for a receipt). The front side may further include one or more coating(s) of one or more release material(s), which coating(s) may be provided in flood and/or spot/patterned configurations. Such release material coating(s) may be configured to lie proximate to and/or cover the patterned adhesive when the linerless label media is wound in a roll, facilitating unrolling of the media without the adhesive bonding the back side to the front side. Where provided in patterned configuration, the release material coating(s) may replicate the pattern of the adhesive and thereby selectively cover the adhesive, providing for the above described ease of unwinding, and/or additional readability (human and/or machine) and/or security benefits as described hereinbelow with respect to the patterned adhesive(s). In one embodiment, a pattern of release material is provided on a first media side so as to cover the pattern of adhesive material on a second media side when the media is wound in a roll, wherein such coverage may be in excess of the coverage of the patterned adhesive by a predetermined amount (e.g., 5%, 10%, 20% and the like).

[0027] The thermally sensitive coatings(s) on the first side of the linerless label media may be activated by feeding the media (including a longitudinally slit portion thereof) through a thermal (e.g., a direct thermal) printer, such as the thermal printer 400 of FIG. 4. As shown in FIG. 4, a thermal printer 400 may include a thermal print head 410, a platen 420, and cutting mechanism 430, such as a knife/blade, a slitter, and the like. The cutting mechanism 430 may be used to custom produce a linerless label of a custom size from installed linerless label media 100. One (first or front) side of the label may include the

thermally sensitive coating(s) (activated or not) and/or release material(s), and the other (second or back) side may include the patterns of adhesive materials, as illustrated with respect to FIGS. 1A-1H. The linerless label media 100 may be further be provided in a roll.

[0028] As shown in FIG. 4, a thermal printer 400 may further include a motor and/or drive assembly 450 for transporting media 100 through the printer 400 (such as, for example, via driving rotation of the platen 420), a controller 460 (including, for example, a processor, and static / permanent and/or volatile memory) for controlling operation of the printer 400 (such as, for example, signaling a drive assembly 450 to transport media 100 through the printer 400; providing a signal to a print head 410 to print particular information on the media 100; and/or signaling a cutter 430 to cut the media 100 at a location based on a signal provided by a sensor 440 in sensing presence, absence, distribution, and the like of adhesive), and a communication module 470 for receiving print information (e.g., transaction data) and/or commands (e.g., print and/or knife cut commands) from an associated host computer (not shown) and/or providing the same to the controller 460.

[0029] Each label may be configured to be custom cut at a custom length from a web or roll of the media via a thermal printer which includes a cutting mechanism. Further, the patterned adhesive may be configured on the second portion of the media in such a manner so as to reduce and/or vary the contact between the cutting mechanism and the adhesive materials. In some embodiments the patterned adhesive may be configured on the second portion of the media in such a manner so as to uniformly / approximately uniformly distribute any contact occurring between a cutting mechanism and the adhesive material over a length / width of the cutting mechanism over the course of continued use thereof / cutting therewith. Such use may include cuts across (e.g., perpendicular to) and/or along (e.g., parallel to) the running axis of a web of media, including multiple cuts to produce like and/or varied length labels from such media. The details of this and the patterns are now presented in detail with reference to the FIGS. 1A-1H.

[0030] In one embodiment, as depicted in the FIG. 1A, the patterned adhesive may be coated on a relatively wide web (e.g., a log roll) of label media in elongated diamond shapes, which shapes may interlock (e.g. cross into the region defined by the maximum width of an adjacent shape, with or without physically overlapping at any location), and may repeat at predefined or random distance(s). After production thereof, such web may be slit lengthwise (e.g., along its running axis) at various widthwise positions thereof (e.g., as illustrated in FIG. 1A by the vertical arrows) to produce various narrower width products (e.g., approximately 44 mm, approximately 58 mm, approximately 80 mm, and like widths) for, for example, end customer use in receipt / label thermal printers.

[0031] As shown in FIG. 1A, a diamond adhesive pat-

tern may be provided. In the illustration of FIG. 1A, such pattern may be provided on multiple portions of a wide web for, for example, later slitting into a final, narrow width product as illustrated in FIG. 1B. Likewise, as shown in FIG. 1B, such pattern may be centrally located across the width of a narrow width product, and may span only a portion of the width of such final product, although variations are possible (see, e.g., FIG. 1H).

[0032] In the embodiment of FIG. 1A, the portion of media that would become the edges of a narrow, slit label product as in, for example, FIG. 1B (e.g., following the vertical arrows down the length of the illustration of FIG. 1A), are free of adhesive to create adhesive free lanes for slitting of the wide with product of FIG. 1A, and thereby mitigate build-up of adhesive on the slitting mechanism (e.g., cutter, knife, and the like). Variations are possible including where the adhesive pattern is offset with respect to the centerline of a final, slit product, and/or where the adhesive spans the width of the wide and/or final slit product, including where no adhesive free lanes are provided for slitting.

[0033] In the embodiment of FIG. 1B, a narrow web of media, cut, for example, from the wide web of FIG. 1A, is shown. In FIG. 1B, three, potential, horizontal cut locations (A, B, and C) are illustrated. Such cut locations may be utilized during and/or result from cutting the web of media of FIG. 1B to product a label / receipt associated with, for example, three separate transactions, by a cutter or cutting mechanism associated with a thermal (e.g., receipt) printer. As shown, the three cuts would result in three, varied / custom length linerless labels. The first linerless label is represented by the area appearing vertically above the A cut in FIG. 1B. The second linerless label is represented by the area appearing vertically above the B cut and bounded on the top by the A cut in FIG. 1B. Finally, the third linerless label is represented by the area appearing vertically above the C cut and bounded on the top by the B cut in FIG. 1B.

[0034] As illustrated in this and other embodiments, problems associated with adhesive buildup on a cutter of a thermal printer can be minimized by patterning the adhesive in a certain manner. For example, the adhesive may be patterned such that the location(s) where the adhesive comes into contact with the cutter may vary with each cut such as, for example, via varying the pattern and/or any repeat of its pattern along the running axis of the web of media, and/or via varying the location of the cut(s) (e.g., as in cut locations A, B and C of FIG. 1B) including as a consequence of the varied length of material that may be required for a given use (e.g., variation of media length with transactions / receipt details) or purposefully via printer control logic (etc). In preferred embodiments the pattern and or the cutting location through the media should spread the adhesive contact across as much of the cutter as possible (e.g., over time) to minimize deposition in localized regions which may adversely affect subsequent cutter performance and/or media feed (resulting in, for example, media mis-feeds and/or jams).

[0035] For example, at position "A" in the embodiment of FIG. 1B the cutter passes through adhesive in four discrete locations across the width of the media web. At position "C" the cutter passes through adhesive in five discrete locations, different from the locations of position A (e.g., the adhesive areas at position A and C do not coincide and/or overlap). At position "B" the cutter passes through adhesive in nine discrete locations which, in the embodiment of FIG. 1B, coincide with a portion of each of the locations of positions A and C.

[0036] Within the repeat length (if any) of an adhesive pattern, such as that shown in FIG. 1B (e.g., 202 mm), the adhesive distribution across the cutter is different at each of the different, illustrated cross-web cut locations (e.g., A, B and C). Thus the contact between the adhesive and the cutter from the various cuts is distributed across the cutter and, any buildup its, therefore, not concentrated in a particular area or areas. Spreading the adhesive, and any resultant buildup, over the width of the cutter increases the number of cuts required to reach a problem amount of buildup, thereby minimizing the occurrence of associated problems. Further, cutting through regions without adhesive, which adhesive free regions may also vary with different cross-web cut location (e.g., locations A, B and C in FIG. 1B), can assist in cleaning / removing any previously deposited adhesive therefrom.

[0037] In addition to mitigating problems associated with adhesive build-up on a printer cutter, selectively patterned adhesive may minimize adhesive buildup on other portions of a printer along a media feed path (e.g., rollers, platens, print heads, and the like), thereby mitigating problems (e.g., media mis- / choppy feed, jams, and the like) associated therewith. Patterned adhesives can reduce these problems.

[0038] Patterning the adhesive can also reduce the amount (e.g., surface area) of adhesive in contact with various surfaces and/or portions of the thermal printer. This may allow the use of tackier adhesives without additional printer (e.g., jamming and/or mis-feed) problem.

[0039] In addition, patterned adhesive may mitigate issues associated with print media jamming as a result of adhesive bonding / the bond strengthening over time such as, for example, between the period of time when a final print is made on a first day and a period of time when a print is first attempted to be made on a second day.

[0040] Depending on the embodiment, it may be desirable to avoid having the repeat length of the adhesive pattern the same or approximately the same as the length of a typical label / receipt such as, for example, where the same length label / receipt is printed / produced repeatedly. This would cause the same part of the cutter to pass through adhesive with every cut, potentially, depending on the embodiment, negating some of the benefits of the patterned adhesive. This problem can be avoided by going to long repeat lengths in the adhesive pattern, and/or randomized adhesive patterns.

[0041] FIG. 1C illustrates various variations in the re-

peat length of an adhesive pattern. For example, the left pattern in FIG. 1C shows a short repeat length. The center pattern illustrates an adhesive pattern with a modified, increased repeat length. Finally, the right pattern illustrates an adhesive pattern with a further modified, increased repeat length. Note, depending on the embodiment, the repeat length may be varied (including increased) without varying the overall nature (including design) of the pattern. Varying the repeat length with respect to an expected cut length / location (e.g., long repeat lengths for typically short receipts) can avoid repeatedly cutting through the same location of a patterned adhesive, and thereby avoid localized / heavy adhesive build-up. The likelihood of a typically short, cut media portion (e.g., label / receipt) length equaling a long adhesive pattern repeat length, and thereby having a cut fall on a similar portion of the pattern, is small. It should be noted that, where possible, repeatedly cutting media portion (e.g., label / receipt) lengths which are and/or are expected to be an integer multiple of the repeat length should be avoided. Likewise, repeat lengths should be selected such that they are longer than, and not an integer multiple of, typical / expected cut media portion (e.g., label / receipt) lengths.

[0042] Permissible repeat lengths may be limited depending on the apparatus used to manufacture label media, including applying an adhesive pattern to a substrate / web. For example, for a rotary printing press, the maximum repeat length may be limited to the circumference of the cylinder used to apply the adhesive to the web.

[0043] In an embodiment, a gravure coater may be modified to put down a patterned coating (e.g., adhesive). The "normal" gravure cylinder may be replaced by a banded gravure cylinder. A banded gravure cylinder has bands of gravure cells with un-engraved areas between the bands. The absence of gravure cells results in no coating in that area. In a similar manner, patterns may be produced by placing gravure cells in the mirror image of the desired pattern. In essence, a patterned gravure cylinder turns a gravure coater into a simple one-station gravure press.

[0044] The functionality of an adhesive pattern can be further enhanced by placing or otherwise encoding human or machine readable information in the pattern. This is illustrated with respect to FIG. 1D and FIG. 1E. FIG. 1D shows an adhesive pattern as a series of company logos. In FIG. 1D, the shape of the adhesive comprises a logo (other shapes and sizes, and/or information content(s) are possible), while the pattern thereof is set to distribute the adhesive across the cutter such that cutter contact with adhesive is different at every potential cut-off position within the repeat length of the pattern. In addition to mitigating printer jams and cutter deposition / fouling issues, this configuration provides a methodology for providing for brand recognition and/or document security as it is more difficult to print adhesive than inks, and therefore more costly / difficult to counterfeit. For example, the pattern of FIG. 1D would be extremely dif-

ficult to be counterfeited on a personal computer / printer.

[0045] Further, adding coloration (e.g., dyes and/or pigments) to the adhesive can make the image more visible / attractive, enhance machine readability, and/or further enhance the security aspect. For example a printed textual and/or graphical image (e.g., NCR in FIG. 1D) may be provided using a green colored adhesive, and thereby be read / viewed directly, and/or with a suitable (e.g., green) spectrum reader. Likewise, security dyes and/or pigments (e.g., ultraviolet (UV) and/or fluorescent) may further enhance the security aspect of the adhesive image, including machine readability. It should be noted that in further embodiments, the shape of the adhesive can be any human and/or machine readable text and/or graphic. Likewise, depending on the shape / characteristics thereof, various information may be encoded in the adhesive and/or its pattern, and/or represented / provided by it.

[0046] FIG. 1E illustrates a further embodiment of including information in and/or as a result of the shape of the adhesive via using an adhesive pattern comprising (e.g., machine-readable) barcodes. In the example of FIG. 1E, the adhesive image is a 1-D (one dimensional) barcode followed by the inverse image of the same barcode. Such alternating pattern distributes the adhesive across the web in a desired (e.g., non-uniform) manner. As described above, depending on the embodiment, the adhesive may include one or more colorants (e.g., dyes and/or pigments) and/or security markers (e.g., fluorescent dyes and/or pigments) to enhance its human and/or machine viewing / readability. Additionally or alternatively, the substrate surrounding the adhesive pattern may be colored to render the bar code (or other image / pattern) human and/or machine readable, and/or enhance its human and/or machine readability. Such coloring may occur via application of, for example, a water-based coating which may preferentially be absorbed by the substrate surrounding the patterned adhesive, as opposed to the adhesive itself. Such surrounding coloration, including via visible and/or security dyes and/or pigments, makes the barcodes visible to a human and/or machine (e.g., scanner). As stated above, this approach may be used to provide additional security features to a linerless label / receipt. It should be noted that while 1-D barcodes were used in this example, the concept can readily be extended to 2-D barcodes and/or other shapes and/or patterns.

[0047] In various embodiments, the machine readable nature of the patterned adhesive may be used to augment use of the physical characteristics of the pattern via triggering a cut of the media to minimize adhesive contact and/or deposition. For example, in various embodiments, features of the adhesive pattern (e.g., presence of adhesive, absence of adhesive, distribution of adhesive, repeat length, including relative location therein) may be sensed (e.g., by a sensor 440, such as an optical sensor, of a thermal printer 400) and a cut location selected to maximize variation of the cut location, such as with re-

spect to the repeat length, and thereby minimize deposits and their resultant deleterious effects. In addition, depending on the pattern, a cut-wise "gap" in the pattern may be sensed (e.g., as between adjacent bar codes in FIG. 1E) and a cut made therein. Likewise, periodic "cleaning" of the print surfaces (e.g., cutter) may be performed by variously and/or alternately selecting cut portions having, for example, a mirror imaged adhesive pattern to that recently, and/or in aggregate formerly, cut through in order to wipe the adhesive contacted areas with non-adhesively coated media portions, and thereby clean the cutting surface(s) of prior deposits. Further, sensing of an adhesive pattern may be performed to cut through a clear or near-clear (or other desired) region irrespective of what the particular print job (e.g. transaction receipt) may require in order to periodically and/or systematically (e.g., when a cut is called for proximate to such a region) clean the entire cutter width and/or minimize new deposition, maximize the variability of the portion of the adhesive pattern cut through, and the like.

[0048] The FIG. 1F shows a further embodiment of a patterned adhesive. Here, a predefined shape of adhesive (shown in the embodiment of FIG. 1F as having two parallel and two convex sides, although other shapes / sizes are permissible) is organized in sets (of, for example, three) having predefined dimensions and situated at predefined angles and pitches within the media roll or web. Additionally, the predefined sets are spaced at predefined distances from one another along the running axis of the roll / web. For the embodiment / dimensions depicted in the FIG. 1F, the probability of no adhesive contact with a cutter is 3%, the probability for maximum adhesive contact is 14%, and, significantly, the probability of achieving between the maximum and minimum (e.g., random) contact is 97%.

[0049] FIG. 1G and 1H show further embodiments of patterned adhesive for, for example, use in linerless labels. In FIG. 1G, various adhesive shapes (e.g., circles and triangles), and sizes / distributions thereof, on a second side of a narrow media product are shown. In addition, for all of the configurations of FIG. 1G, the patterned adhesive approximately spans the width of the respective illustrated media products, although variations, such as where such patterns span less than the entire width and/or are biased and/or confined to a particular center-line / running axis side, are possible.

[0050] FIG. 1H illustrates a wide web of patterned adhesive media having a multitude of different adhesive patterns thereon. Such wide web may be produced by, for example, a gravure coater / press as, for example, described hereinabove. Further, individual (e.g., six in the illustrated embodiment), narrow web products (e.g., for end use in a thermal printer) may be slit from the wide web, or it may be used as produced. In an embodiment, six narrow web products may be slit from the wide web product following and along the direction of the arrows on the top of FIG. 1H.

[0051] As shown in FIG. 1H, various adhesive patterns

may be produced utilizing having similar, or different, overall elements shapes. For example, the left four patterns all include variations of diamond shaped adhesive. Likewise, the right two patterns both include variations of circular shaped adhesive. In the left four configurations, coverage of the adhesive pattern is varied via varying the uncoated media portion within the region of the media coated with adhesive (e.g., within the overall width of the adhesive band), as well as via varying the size of the region itself (e.g., the width of the adhesive with respect to the width of the web / to-be-slit portion thereof). The right two configurations illustrate variations in coverage with respect to the width of the adhesive band as compared to width of the web / media. In all instances, the illustrated band of adhesive is centered / approximately centered on the width of what would be the narrow media product when the wide web is slit as indicated. Variations are, however, possible, such as where the illustrated band(s) of adhesive are biased with respect to the center of the to-be-cut, narrow web portions, including being biased to one side thereof (including being located proximate to an edge of a to-be-cut, narrow web portion).

[0052] As illustrated with respect to the configurations of FIG. 1H, the overall width of a band of adhesive may vary with respect to the width of the web of media, whether taken as a wide web or one or more narrow webs that may be slit therefrom. For example, in various embodiments, the width of a band of adhesive may span a portion of the width of a web of media, including spanning an amount equivalent to approximately 20%, 25%, 50%, 66%, or 80% of such width, and the like. In one embodiment, the width of the band of adhesive is set to be not more than 50% of the width of the web (wide or narrow) of media. In another embodiment, the width of the band of adhesive is set to be not less than approximately 80% of the width of the media web. Variations are possible.

[0053] It can be now appreciated that linerless labels can be constructed via patterned adhesive for purposes mitigating deleterious effects of adhesive contacting various portions of a printer including, among other things, a cutter. Likewise, cutting thereof may be performed without sense marks and/or may be performed using the patterned adhesive as a sense marks, further enhancing the beneficial effects. Further, as described hereinabove, a gravure coater / press may be used to prepare a web of patterned adhesive media.

[0054] FIG 2. illustrates a diagram of linerless label material 200, according to an example embodiment. While the linerless label material 200 is described hereinbelow with respect to the patterned adhesive of FIG. 1F, the linerless label material 200 may comprise any of the configurations depicted for the patterned adhesive media in FIGS. 1A-1E and/or 1G-1H.

[0055] The linerless label material 200 includes a roll or web of media 201 comprising patterned adhesive media in roll form and, thereby, laminated to itself. Linerless label material 200 may be used to provide a series of individual linerless labels 202 (identified as, for example,

the regions of unrolled media marked as "A" and "B" in the FIG. 2). Each of these components and their relationship to one another is now discussed in detail below with reference to the FIG. 2.

[0056] In various embodiments, the roll of media 201 includes a front side or portion having one or more thermally sensitive coatings (not shown) and a back portion (visible in the FIG. 2) with repeating patterns of adhesive materials 203. A label 202 (shown as, for example, A and B in FIG. 2) may be custom cut from the roll of media 201 by, for example, a cutter of a thermal printer, at custom lengths. The front portion of the label 202 (not shown in the FIG. 2) may further display information (e.g., from a transaction) when the thermally sensitive coating is activated by a thermal print head of the thermal printer.

[0057] Once printed / cut, the back portion of a label 202 may permit the label 202 to be affixed to another surface (e.g., carton, container, surface, or substrate) via the adhesive materials. Moreover, the repeating patterns 203 of the adhesive materials are configured or situated on the back portion of the roll of media 201 so as to minimize contact between various surfaces of a thermal printer, such as a cutter blade, and the adhesive materials each time the thermal printer custom cuts a particular label (A or B) from the roll of media 201.

[0058] According to an embodiment, the repeating pattern 203 may include information (e.g., via a particular pattern, graphic, text or the like) that is visibly conveyed, or that can be acquired via a scanning device from the adhesive material (such as, for example, via a bar code scanner when the repeating pattern 203 is a bar code as described with respect to FIG. 1C hereinabove).

[0059] Further, in various embodiments, some or all of the adhesive material(s) may include colorants to make portions of the adhesive materials visible to the naked eye or visible when exposed to UV light or different predefined frequencies of light.

[0060] In a particular case, such as what was discussed above with reference to the FIG. 1F, at least one of the patterns may be configured to have a predefined maximum width, a predefined minimum width, a predefined pitch, a predefined angle, and have respective repeating patterns be separated from one another by a predefined distance on the roll of media 201. This statistically improves the exposure of the cutting mechanism in the thermal printer to the adhesive material at various locations each time a cut is made on the roll of media 201 to produce a linerless label 202.

[0061] In yet another situation, the distance between the repeating patterns is configured to be large enough so as to exceed a maximum length for any custom linerless label 202 that produced from the linerless label material 200.

[0062] FIG. 3 is a diagram of a method 300 for creating and using a linerless label (such as the linerless label 202 of FIG. 2), according to an example embodiment. The method 300 (hereinafter "labeling process") is implemented in one or more machines adapted to process

print media. The labeling process produces and uses the linerless labels discussed with respect to FIGS. 1A-1G and FIG. 2.

[0063] At 310, the labeling process acquires a pattern for adhesive material. This can be preconfigured into the machine that executes the labeling process (e.g., via a banded gravure cylinder) or it can be acquired from a database based on the identity of a customer, type of roll or web of media, end use(s) (including printer design / type), and the like.

[0064] In one case, at 311, the labeling process obtains the pattern as a distinctive image or text message, which provides security to each label subsequently cut from the roll of media by the slit or cutter of the thermal printer.

[0065] At 320, the labeling process determines a repeat distance for the pattern. Here, the repeat distance can also be a machine configuration parameter, a profile for a customer based on largest known size for a receipt on a cut label, a parameter based on end use (including printer) requirements, and the like.

[0066] At 330, the labeling adhesive process provides the pattern and the repeat distance to an adhesive application device (e.g., a printing press or a coater). The printing press or coater may, then, apply a thermally sensitive coating to the first side of the media and/or (including subsequently) coat a second side of the media with the adhesive material in the acquired pattern. The printing press or coater uses the repeat distance to repeat the adhesive pattern on the second side of the roll of media.

[0067] The repeating pattern at the repeat distance on the second side of the media assists in reducing buildup of and/or evenly distributing of any buildup of the adhesive material on a slit or cutter (or other surface) associated with a printer (e.g., a thermal printer) that subsequently prints and/or custom cuts the roll into linerless labels.

[0068] According to an embodiment, at 340, the labeling process 300 may also identify colorants (e.g., inks, pigments, and/or dyes) for the printing press and/or coater to selectively color portions of the adhesive materials appearing as the pattern on the second side of the roll. Again, this can be used to reduce counterfeiting and improve linerless label security, as well as provide for improved human and/or machine readability.

[0069] The above description is illustrative, and not restrictive. Many other embodiments will be apparent to those of skill in the art upon reviewing the above description. The scope of embodiments should therefore be determined with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled.

[0070] The Abstract is provided to comply with 37 C.F.R. §1.72(b) and will allow the reader to quickly ascertain the nature and gist of the technical disclosure. It is submitted with the understanding that it will not be used to interpret or limit the scope or meaning of the claims.

[0071] In the foregoing description of the embodi-

ments, various features are grouped together in a single embodiment for the purpose of streamlining the disclosure. This method of disclosure is not to be interpreted as reflecting that the claimed embodiments have more features than are expressly recited in each claim. Rather, as the following claims reflect, inventive subject matter lies in less than all features of a single disclosed embodiment. Thus the following claims are hereby incorporated into the Description of the Embodiments, with each claim standing on its own as a separate exemplary embodiment.

Claims

1. Label media (200) comprising:

a substrate (201) having a first side and a second side opposite the first side;
a thermally sensitive coating on the first side of the substrate; and
adhesive (203) on the second side of the substrate;
wherein the adhesive is variably patterned on the second side of the substrate (201) to vary locations of contact between the adhesive (203) and a cutting mechanism (430) making variably located lateral cuts across the width of the substrate (201).

2. The label media (200) of claim 1, wherein the patterned adhesive (203) is configured to include adhesive free lanes arranged vertically and/or horizontally therein.

3. The label media (200) of claim 1, wherein the patterned adhesive (203) comprises a continuous pattern of elongated diamond shapes of adhesive stretching vertically across the second side.

4. The label media (200) of claim 1, wherein the patterned adhesive (203) comprises a column of circular dots diagonally oriented along the running axis of the substrate (201).

5. The label media (200) of claim 1, wherein the adhesive pattern is random.

6. The label media (200) of claim 1, wherein the patterned adhesive is configured to provide information.

7. The label media (200) of claim 1, wherein the patterned adhesive (203) comprises a series of repeating bar codes and/or an inverse of the bar codes, both constructed of the adhesive, the bar codes capable of being machine read for information represented thereby.

8. The label media (200) of claim 5, wherein the regions surrounding the adhesive bar codes include a color which is read to discern the information represented by the bar code.

9. The label media (200) of claim 1, wherein the patterned adhesive (203) comprises a repeating series of three adhesive patches with each patch being at a predefined angle and predefined pitch, each repeating series separated by a predefined distance along a running axis of the media, and each patch having a predefined minimum width and a predefined maximum width.

10. A label making apparatus, comprising:

a roll of media (100); and
a thermal printer (400),
wherein the roll of media (100) has a front portion including thermally sensitive ink, and a back portion having repeating patterns of adhesive material coated thereon, the thermal printer (400) has a cutter blade (430) for cutting discrete labels (202) from the roll of media (100), and the repeating patterns of adhesive material are configured on the back portion to minimize contact between the cutter blade (430) and the adhesive material each time the cutter blade (430) cuts the roll of media (100).

11. A label making apparatus according to claim 10, wherein the repeating patterns of adhesive material are configured on the back portion to distribute contact between the adhesive material and the cutter blade (430) across the width of the cutter blade (430) each time the cutter blade (430) cuts the roll of media (100).

12. A method, comprising:

acquiring a pattern for adhesive material;
determining a repeat distance for repeating the pattern; and
providing the pattern and the repeat distance to a printing press or a coater, the printing press or the coater coating a first side of a web of media with thermally sensitive inks and a second side of the web of media with the adhesive material in the pattern repeated at the repeat distance, wherein within at least a portion of the repeating distance, the pattern varies such that a lateral cut across the web of media will vary contact of the adhesive with a cutting mechanism at each different cut location within such portion.

13. The method of claim 12, wherein the pattern and/or the repeating distance is random.

14. The method of claim 12 or 13 further comprising, identifying inks, pigments, and/or dyes for the printing press and/or coater to selective color portions of the adhesive material.

5

15. The method of any of claims 12 to 14, wherein acquiring a pattern for adhesive material further includes obtaining the pattern as a distinctive image and/or text message, which image and/or text message provides visual and/or encoded information.

10

15

20

25

30

35

40

45

50

55

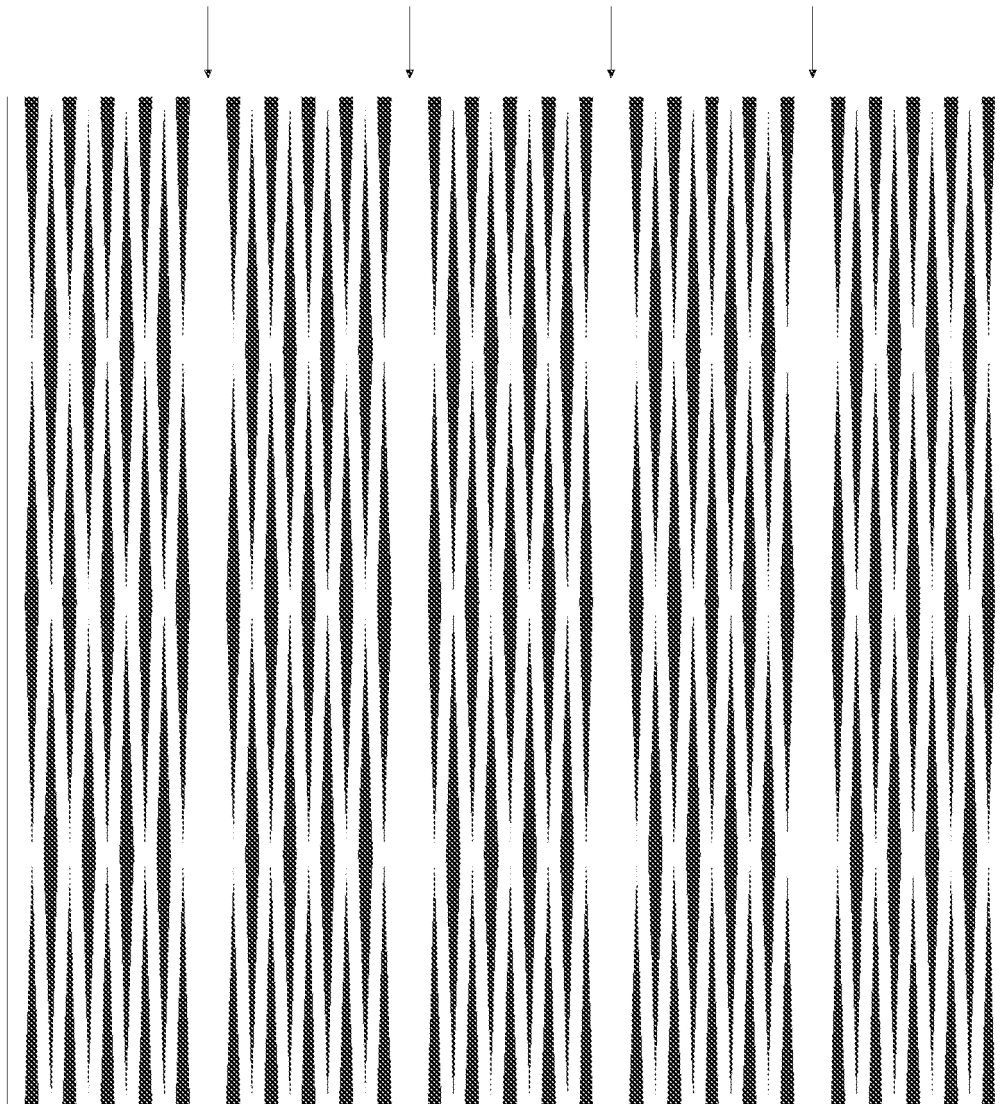


Fig 1A

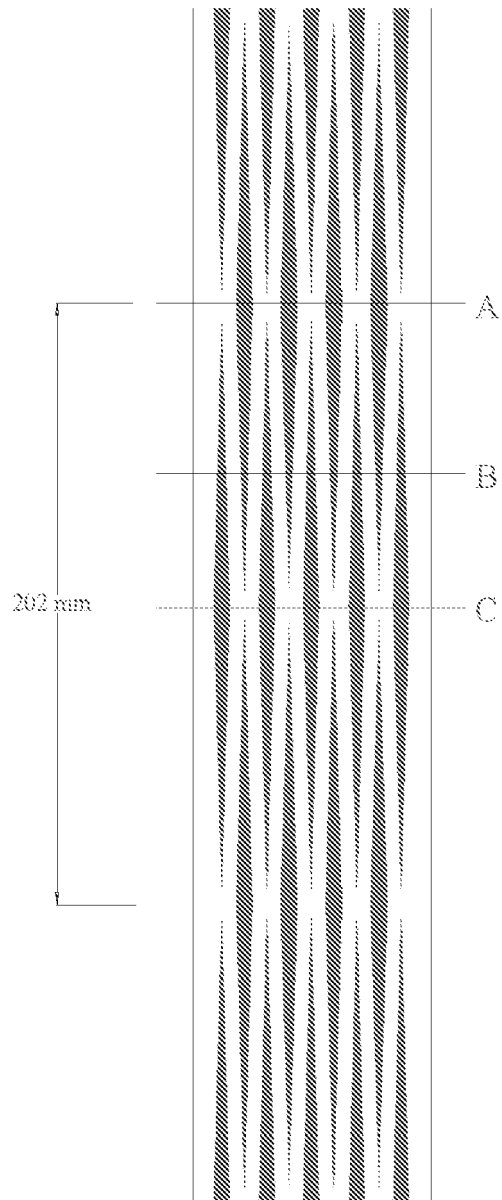


Fig 1B

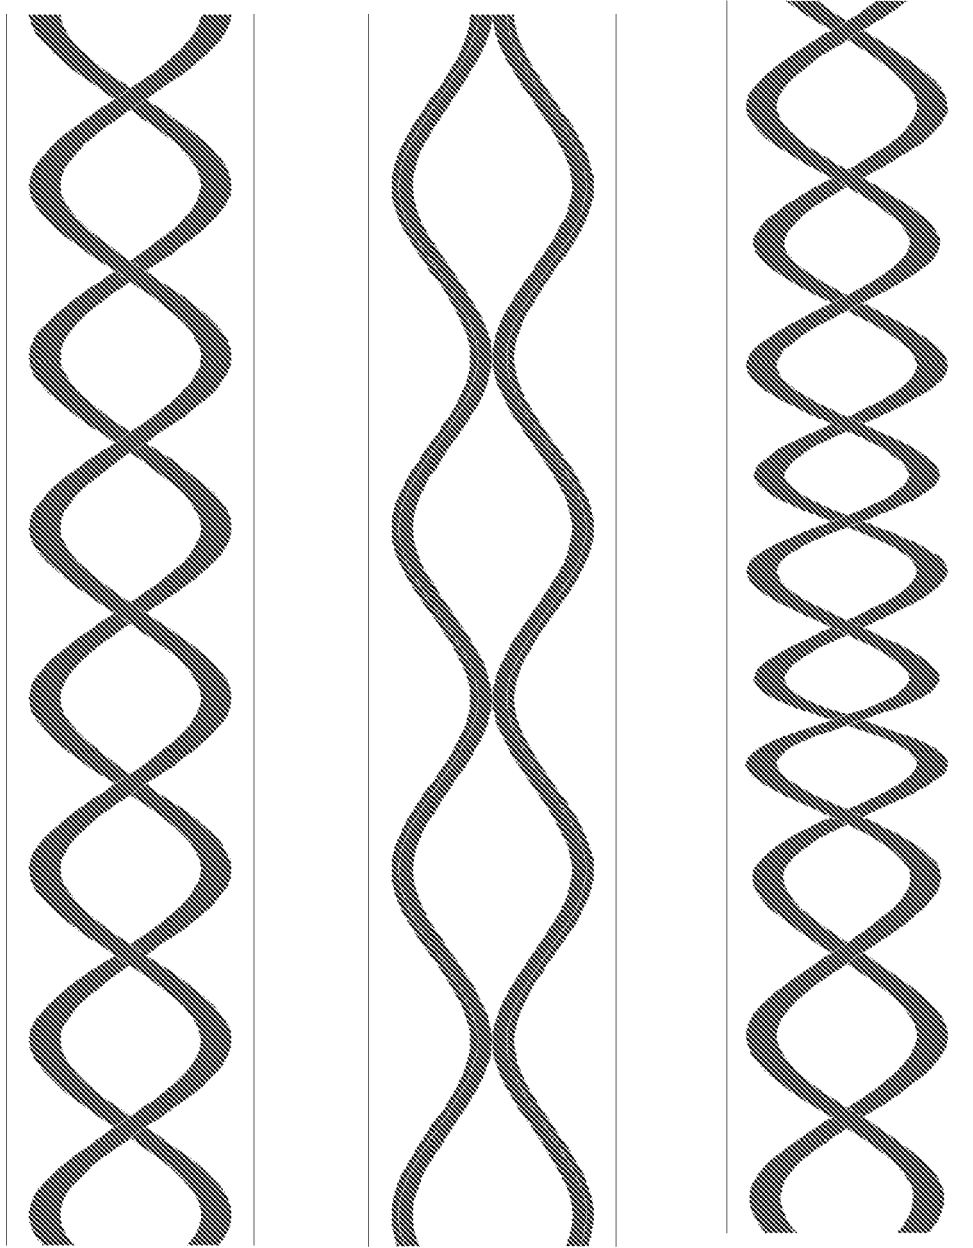


Fig 1C

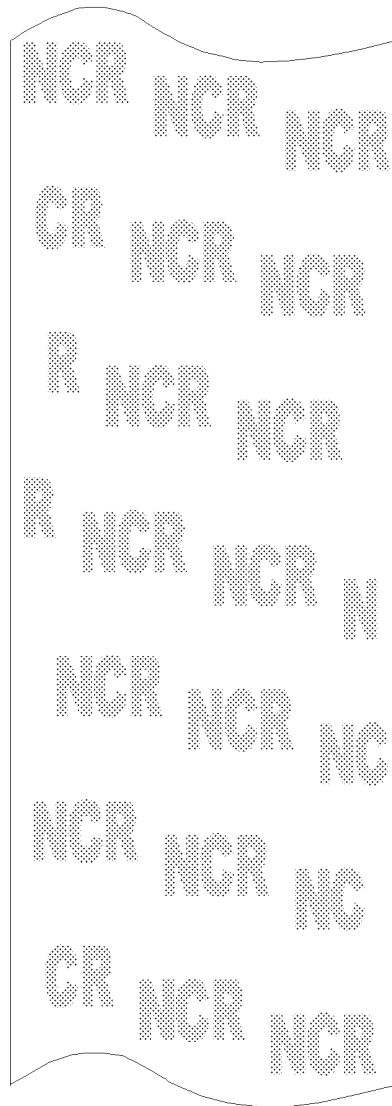


Fig 1D


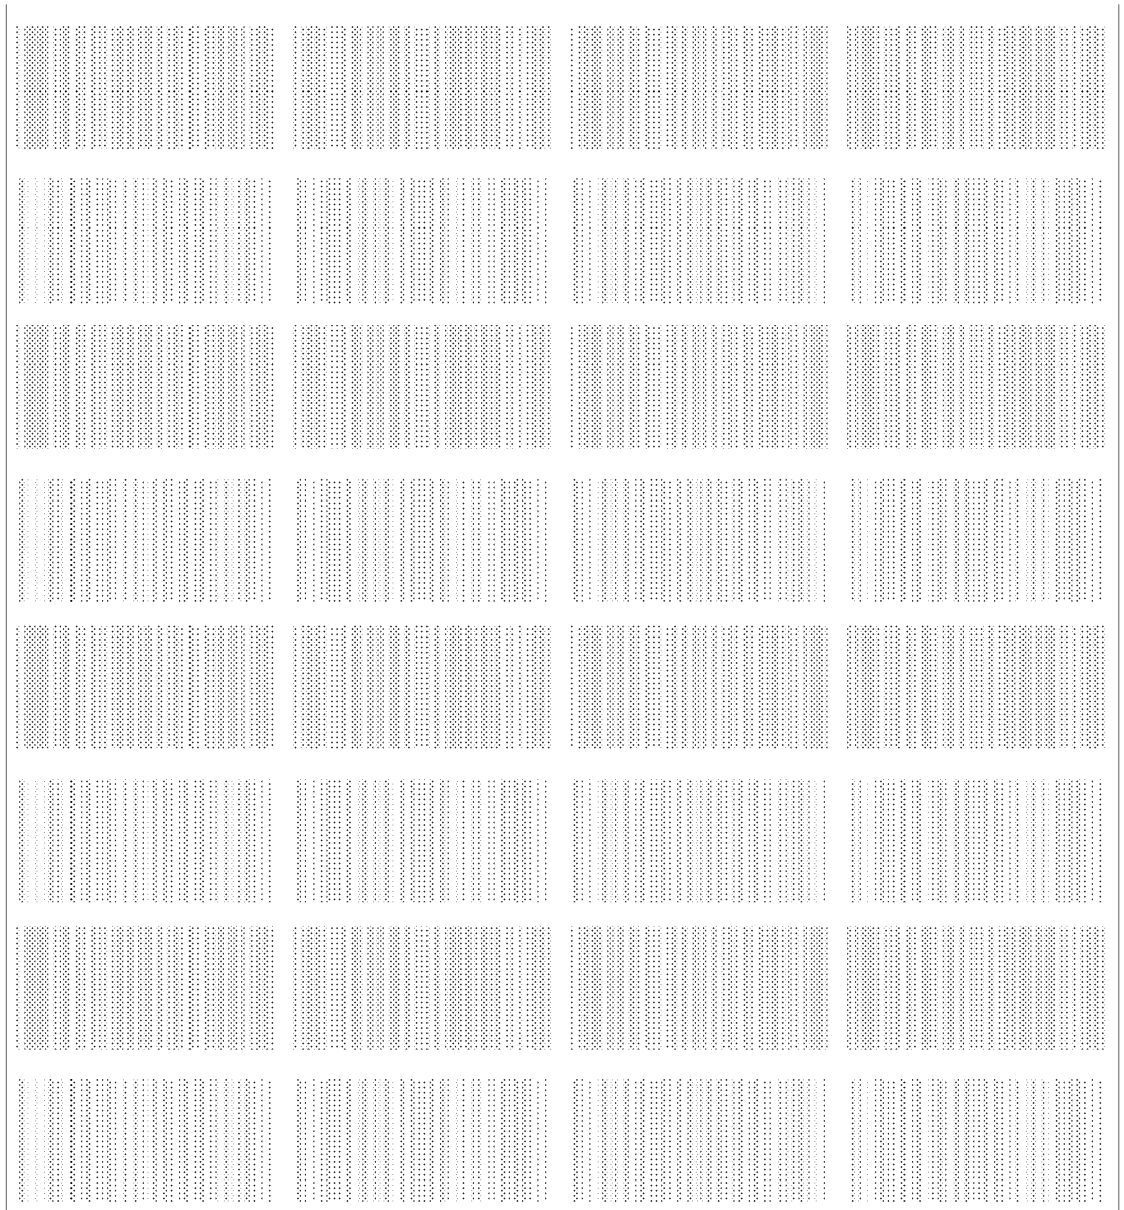


Fig 1E

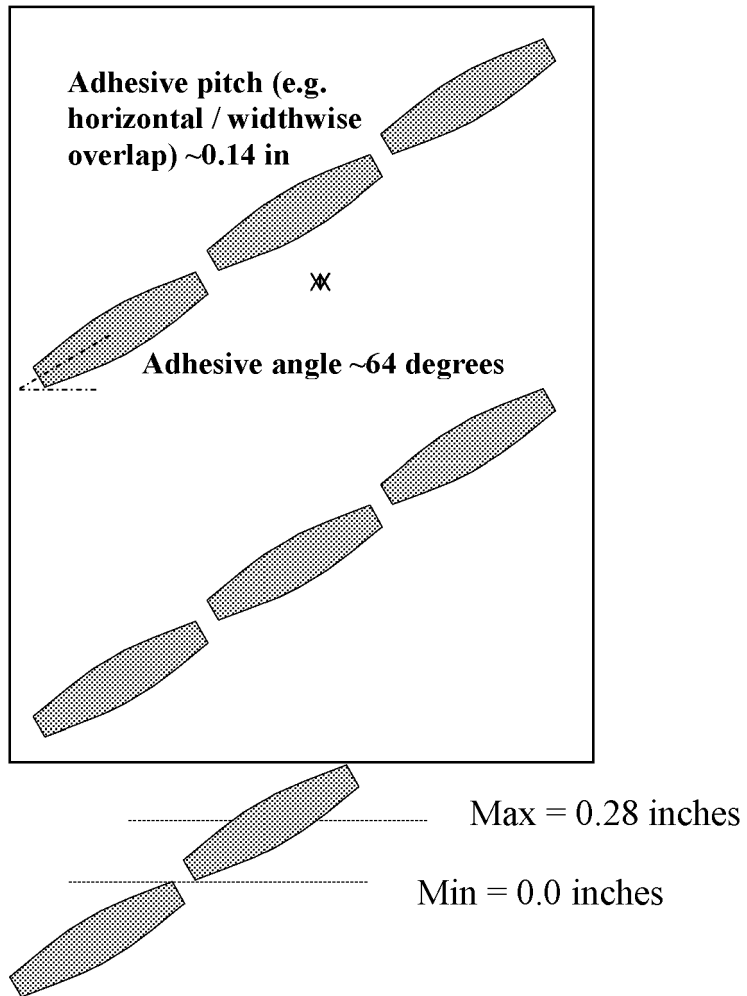

- Adhesive area is $\sim 0.22 \text{ in}^2$ per patch

Fig 1F

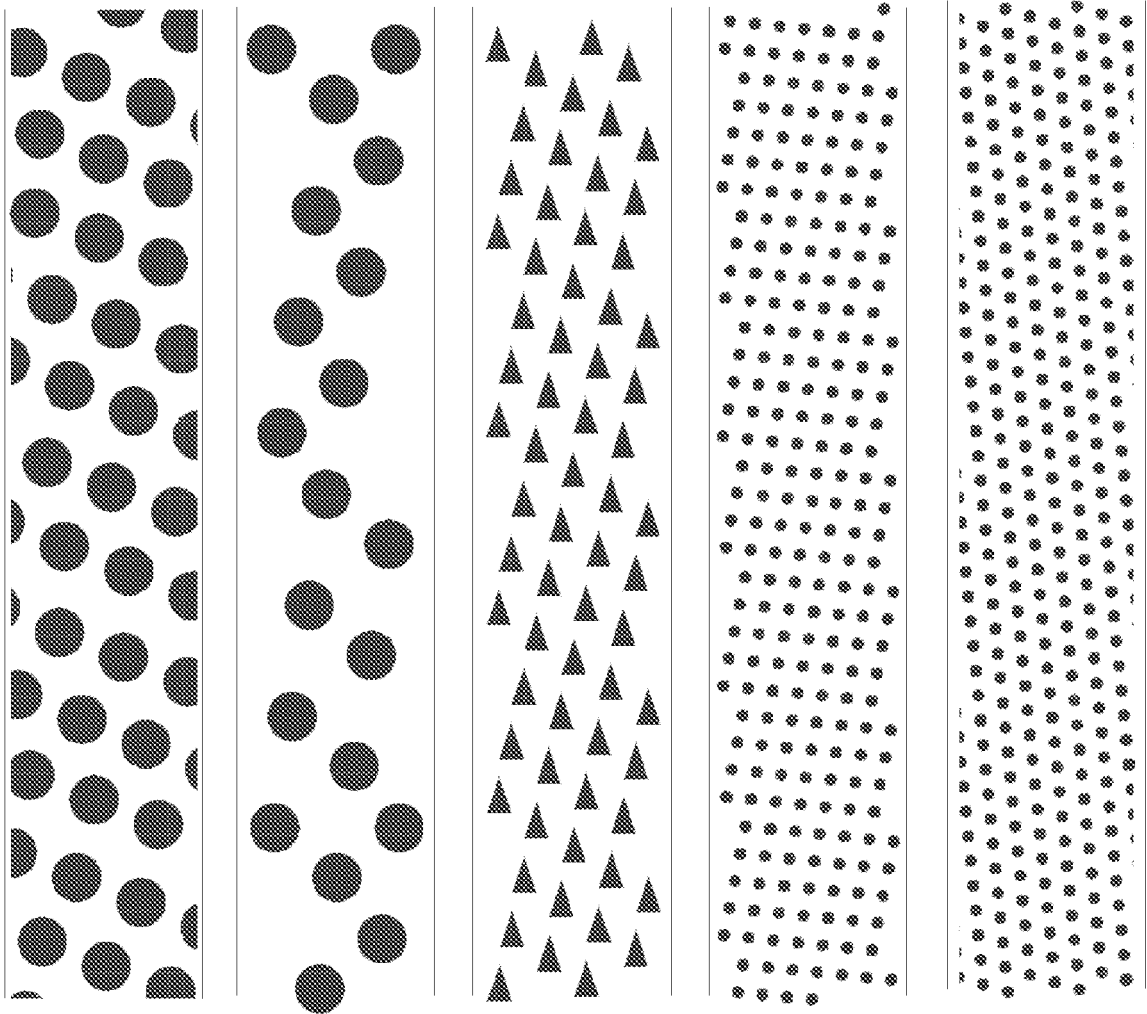


Fig 1G

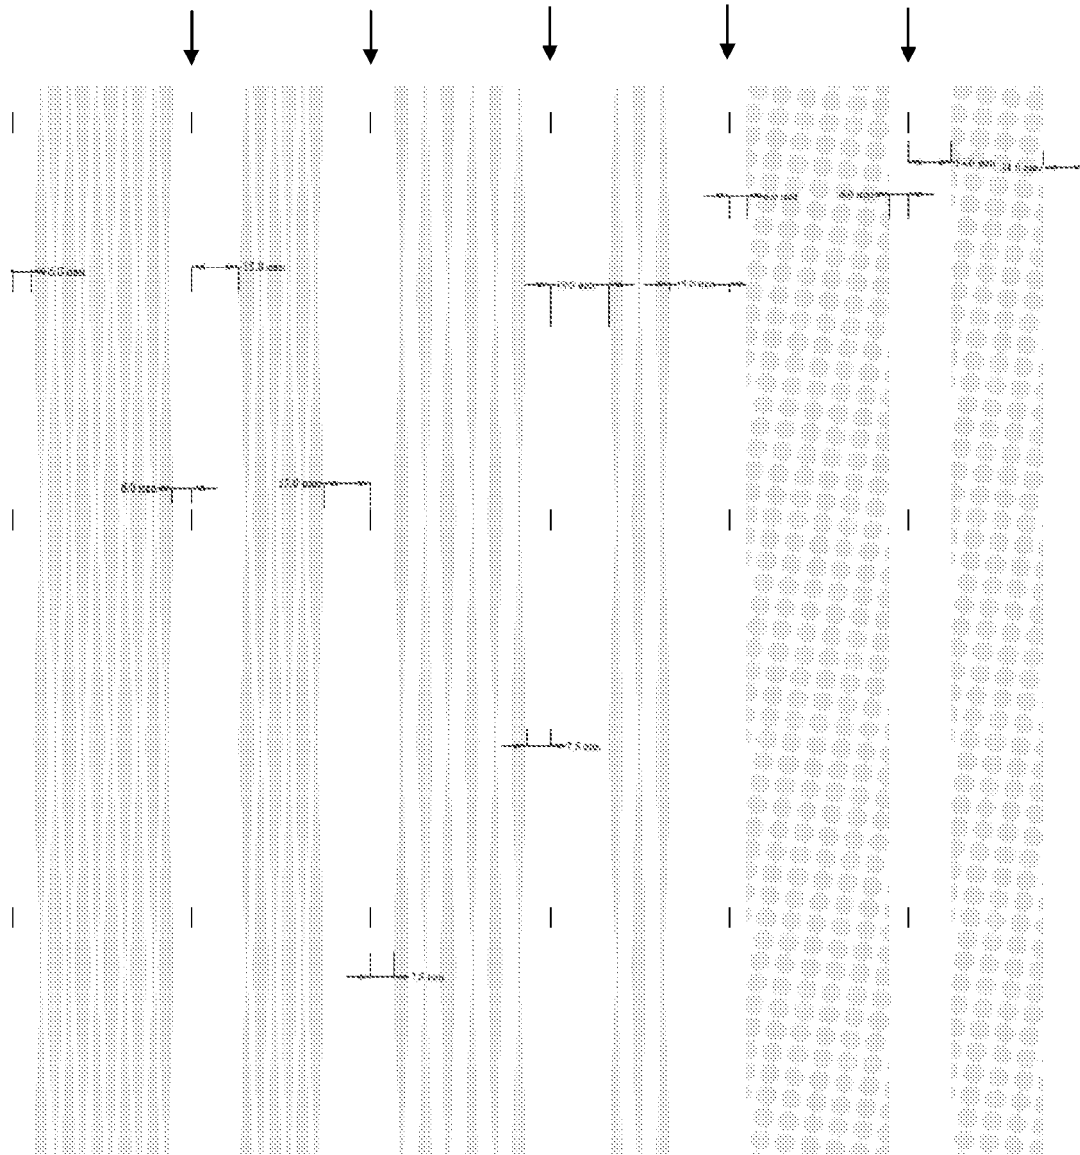


Fig 1H

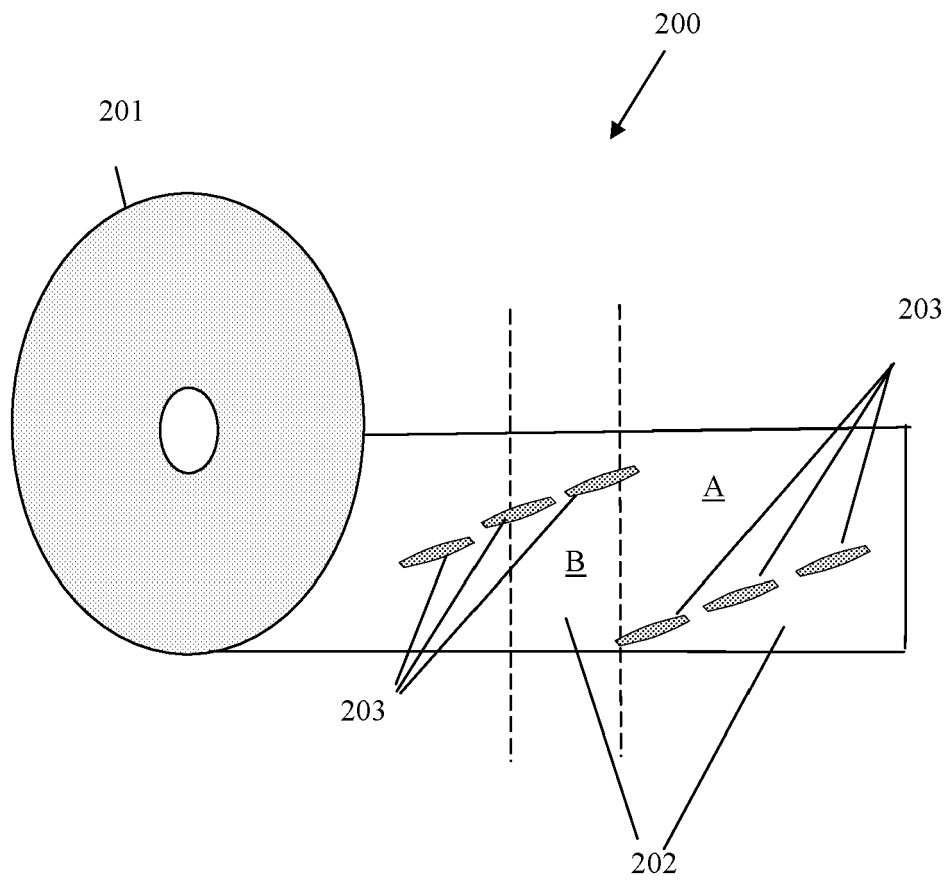


Fig 2

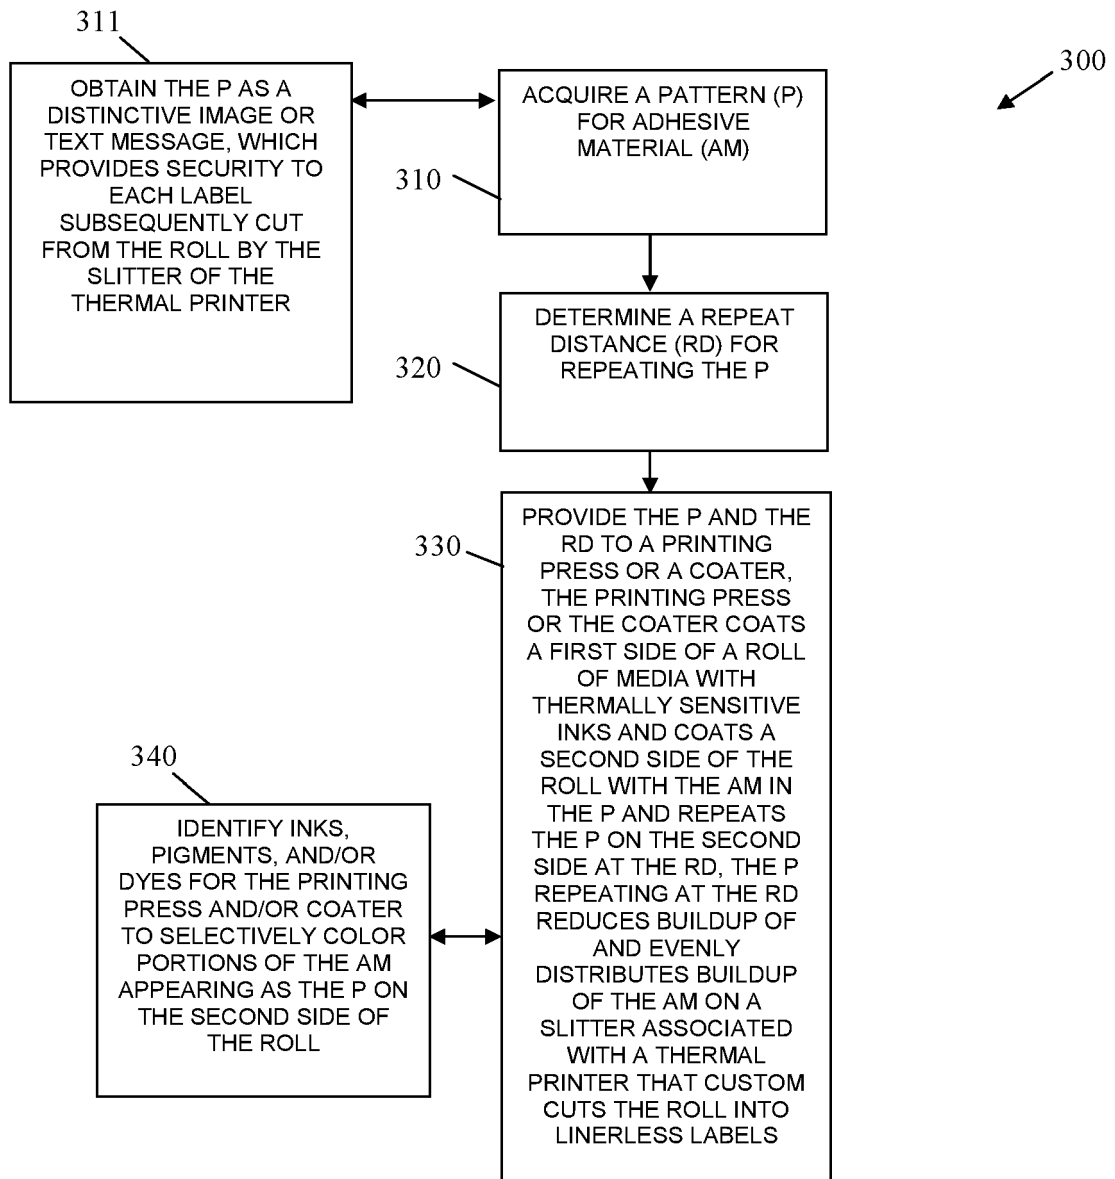


Fig 3

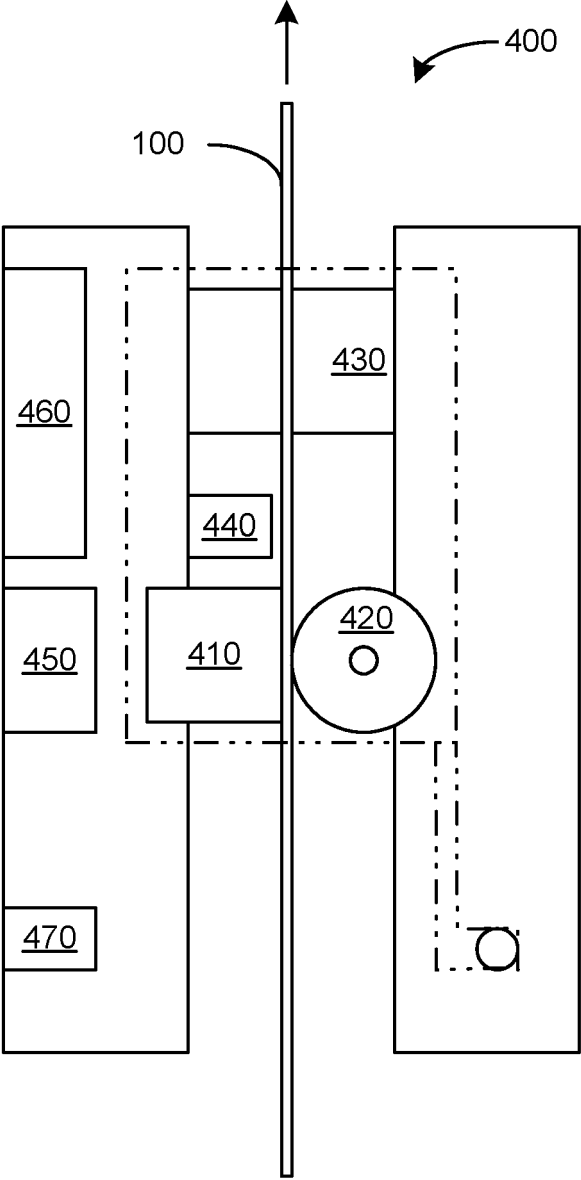


Fig 4



EUROPEAN SEARCH REPORT

Application Number
EP 11 17 5474

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	EP 1 577 860 A2 (NCR INT INC [US]) 21 September 2005 (2005-09-21)	1,2,9-12	INV. G09F3/10
A	* paragraphs [0008], [0019], [0020], [0021], [0022], [0024], [0037], [0039], [0040], [0041] * * figures 1-8 *	3-8, 13-15	
X	WO 2009/126328 A2 (RESTAURANT TECHNOLOGY [US]; PEYTON ARTHUR [US]; RICE-BAILEY TAMMY [US]) 15 October 2009 (2009-10-15)	1,2,9,12	
A	* paragraphs [0037] - [0039] * * figures 11-14 *	3-8,10, 11,13-15	
A	EP 1 302 333 A2 (MINNESOTA MINING & MFG [US]) 16 April 2003 (2003-04-16)	1-15	
A	* paragraphs [0027], [0028], [0030] * * figures 5-14 *	1-15	
A	JP 2000 003134 A (MIND KK; SHIROMIZU MINORU) 7 January 2000 (2000-01-07)	1-15	TECHNICAL FIELDS SEARCHED (IPC)
A	EP 0 042 073 A1 (MONARCH MARKING SYSTEMS INC [US]) 23 December 1981 (1981-12-23)	1-15	G09F
A	* page 5, line 22 - line 32 * * page 6, line 12 - line 13 * * page 6, line 27 - page 7, line 10 * * figures 3-5 *	1-15	
A	US 4 889 234 A (SORENSEN TERRY J [US] ET AL) 26 December 1989 (1989-12-26)	1-15	
	* column 6, line 61 - line 65 * * column 7, line 14 - line 59 * * column 8, line 12 - line 14 * * figures 2,5,6,7,8,9,10,11,12,14 *		
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 20 December 2011	Examiner Lechanteux, Alice
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

 1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 11 17 5474

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-12-2011

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1577860	A2	21-09-2005	AU 2005200803 A1	06-10-2005
			CA 2499384 A1	19-09-2005
			EP 1577860 A2	21-09-2005
			US 2005208250 A1	22-09-2005

WO 2009126328	A2	15-10-2009	US 2009258116 A1	15-10-2009
			WO 2009126328 A2	15-10-2009

EP 1302333	A2	16-04-2003	NONE	

JP 2000003134	A	07-01-2000	NONE	

EP 0042073	A1	23-12-1981	CA 1179843 A1	25-12-1984
			DE 3162352 D1	29-03-1984
			EP 0042073 A1	23-12-1981
			JP 57025380 A	10-02-1982
			US 4457981 A	03-07-1984

US 4889234	A	26-12-1989	NONE	
