

(19)



(11)

EP 2 554 095 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

06.02.2013 Bulletin 2013/06

(51) Int Cl.:

A47L 15/50 (2006.01)

(21) Application number: **12179133.9**

(22) Date of filing: **03.08.2012**

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

Designated Extension States:

BA ME

• **Mauri, Duccio Gualtiero Giovanni**
I-20143 MILANO (IT)

• **Rossi, Paola**
I-20127 MILANO (IT)

• **Di Bartolo, Carmelo**
I-20124 Milano (IT)

• **Binda, Stefano**
I-21023 Besozzo (VA) (IT)

(30) Priority: **05.08.2011 IT TO20110742**

(71) Applicant: **Indesit Company S.p.A.**
60044 Fabriano (AN) (IT)

(74) Representative: **Dini, Roberto et al**
Metroconsult S.r.l.
Via Sestriere 100
10060 None (TO) (IT)

(72) Inventors:

• **Votadoro, Samuele**
I-56012 Fornacette (PI) (IT)

(54) **Dishwasher rack comprising tilting and folding supports**

(57) The invention relates to a dishwasher rack (1) comprising a bottom (30) from which a plurality of walls (31,32,33,34) extend, a first pivoting support (3) arranged on the bottom (30) of the rack (1), wherein the first support

(3) comprises a corrugated strip (19,19'); this first support (3) is movable between a lowered position, wherein the corrugated strip (19,19') extends inside the rack (1), and a raised position, wherein the corrugated strip (19,19') is substantially parallel to the bottom (30).

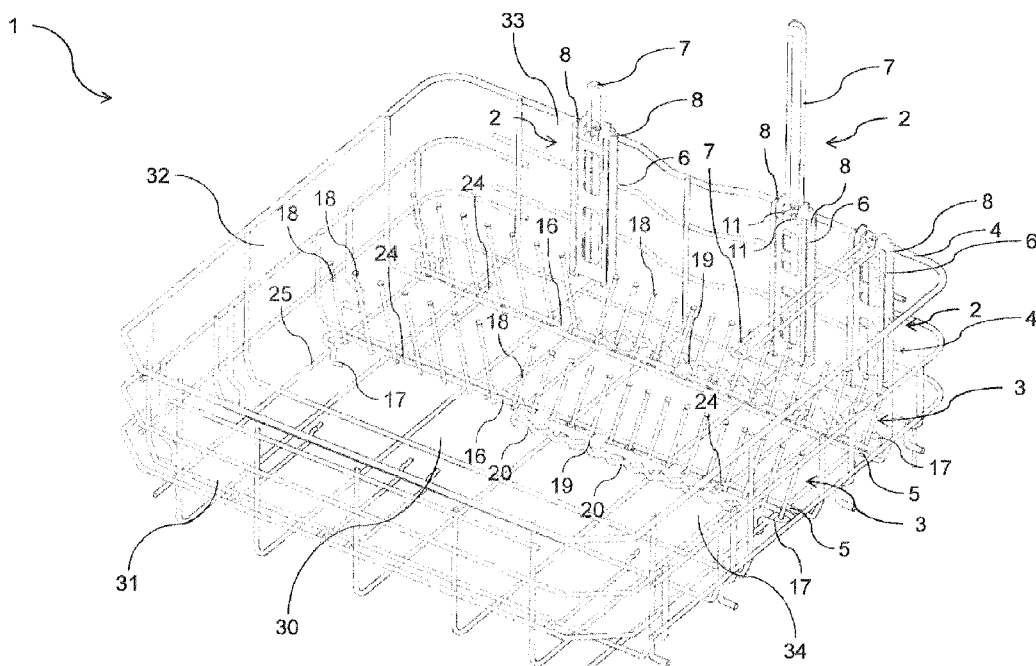


Fig. 1

EP 2 554 095 A1

Description

[0001] The present invention relates to a dishwasher rack comprising pivoting/folding supports.

[0002] As it is known, the positioning of medium/large pots and pans in the rack of a dishwasher is difficult: the positioning of pots with the bottom facing up causes the horizontal surface to be considerably occupied thus reducing the loading capacity of the dishwasher, while the wrong positioning of pots and pans, that is with the axis perpendicular or nearly perpendicular to that of the washing jets, leads to a reduction of the washing and/or drying efficacy.

[0003] The problem of positioning pots and pans inside a dishwasher rack has been already discussed in patent IT1289748 to Merloni Elettrodomestici S.p.A.

[0004] In this prior art document, the problem has been overcome by using rotatable supports, which however have some drawbacks: the supports are difficult to be accomplished when the rack is partially or totally full, making it necessary to put them in the raised position before beginning the rack loading step, thus making this step difficult for the user.

[0005] The handling of the supports requires two movements: a first upward coupling or uncoupling movement and a second upward or downward side movement.

[0006] In addition to that, these supports require sliding guides comprising wires that form the dishwasher rack, and that therefore are statically constrained in a predetermined position, making it impossible to re-position and/or remove them to the detriment of the loading flexibility of the dishwashing machine.

[0007] The present invention provides to solve these and other problems by making available a dishwasher rack comprising pivoting supports, preferably for positioning pots and pans, as in the annexed claim 1.

[0008] The idea at the base of the present invention is a pair of supports both being folding/pivoting ones, wherein the first is positioned at one side of the rack and the second at the bottom thereof, allowing one or more pots to be supported in an optimal washing/drying position in a dishwasher rack, further allowing the inner volume of the washing tank of the dishwasher to be better exploited.

[0009] Further advantageous characteristics of the present invention are the object of the annexed claims.

[0010] The characteristics of the invention, the effects deriving therefrom and the advantages obtained, will be more clear from the description of a preferred and non-exclusive embodiment of the invention, shown in the annexed drawings wherein:

fig. 1 shows a perspective view of the dishwasher rack comprising the supports for pots and pans, wherein the first support (a frame) is in the raised position;

fig. 2 shows a perspective view of the dishwasher rack of fig. 1, wherein the first support (a frame) is in

the lowered position;

fig. 3 shows a detailed perspective view of the first support for pots and pans positioned on the bottom of the dishwasher rack;

fig. 4 shows an horizontal view of a corrugated strip for pots and pans comprised in the first support;

fig. 5 shows a vertical view of the component of fig. 4;

fig. 6 shows a perspective view of a variant of the strip of fig. 4.

[0011] With reference to fig. 1, a dishwasher rack 1 will be now described. This rack 1 has a substantially parallelepiped shape, it is made of metal wires suitably shaped and welded together and it comprises a bottom 30 from which a plurality of walls 31, 32, 33, 34 extend, a first support 3 for pots and pans (that for more clarity will be denoted by the term frame) and a second support 2.

[0012] The combined action of these two supports 2,3 allows pots and pans (such as pans, frying pans, over-proof dishes, etc.) to be positioned inside a washing tub of a dishwasher (not shown in the figures) in an inclined manner.

[0013] Both these supports 2,3 are equipped with hook devices that will be described below, which allow such supports to be advantageously coupled to wires 4,5 comprised in the rack 1.

[0014] The support 2 comprises a container 6, preferably having a parallelepiped shape, from which a supporting element 7 protrudes, which is preferably made of the same material as the wire forming the rack 1, and has a shape similar to an elongated omega, wherein the two ends (not shown in the figures) are contained into the container 6.

[0015] This shape allows the two ends of the supporting element 7 to act as guide elements by sliding into sliding guides (not shown in the figures) comprised in the container 7.

[0016] The top of the container 6 is closed by walls 8, thus acting as end-of-travel element upon the deployment of the supporting element 7 due to the interference between the two ends of the element 7 and the inner parts of said walls 8.

[0017] It is possible, for a person skilled in the art, to accomplish the connection between the container 6 and the rack 1 by alternative means than those just described, without anyway departing from the teaching of the present patent.

[0018] As regards the operation of the support 2, figs. 1 and 2 show three supports 2 in three possible positions (from left to the right):

- non-operating position, with the supporting element 7 completely arranged into an housing seat (not shown in the figures) inside the container 6 and away from the inside of the rack 1;
- intermediate position, with the supporting element 7 completely deployed from its housing seat in a vertical position;

- operating position, with the supporting element 7 completely deployed from its housing seat in a locked horizontal position, and extended to the inside of the rack 1 such to allow objects to be supported.

[0019] The locking, in this last position, is accomplished by the action of a pair of housings 11 comprising constraint side walls 12, each of them comprising a coupling tooth 13; these teeth 13 lock the supporting element 7 when it is in the operating position, preventing it from accidentally moving upwardly.

[0020] When the supporting element 7 is reaching the operating position, it is elastically deformed by compression by the coupling teeth 13, then it extends, once it reaches the operating position; this elastic deformation action by compression of the supporting element 7 is repeated during the release operation.

[0021] The release occurs by applying a force from the bottom to the top in a point of the supporting element 7; this force has to have a modulus value sufficient for compressing and deforming the supporting element 7 for allowing it to pass beyond the coupling teeth 13.

[0022] The procedure for deploying and folding the support 2 occurs by moving the supporting element 7 in the positions listed above, in the direct and opposite order described above and repeated here: non-operating position, intermediate position, operating position, or, operating position, intermediate position, non-operating position.

[0023] When a load (for example pots and pans) is put on the supporting element 7, the support 7 behaves like a lever whose fulcrum is the portion of the support 7 positioned in the housings 11, the first arm is the portion of the support 7 upon which the load can be placed, and the second arm is the portion of the support 7 comprised between the housings 11 and the walls 8.

[0024] It is clear that the force applied on the supporting element 7 is released on the inside of the wall 8 from the bottom to the top, and due to the rigidity of the support 2 and the provision of the snap-on capture mechanism 14 (acting as a further fulcrum for the support 2) it is possible to note how the force is released mainly on the snap-on clips 10 and so on the lower wire 4, with horizontal direction and sense faced to the outside of the rack 1. The support 2 is preferably placed on the rear wall 33 of the rack 1, but obviously it is possible, for the person skilled in the art, to find a place suitable for meeting the design requirements by placing this support 2 on one of the other walls 31, 32, 34.

[0025] Figs. 1 and 2 show three supports 2 coupled to the rack 1, but it is again possible for the person skilled in the art to select the number of supports 2 to be included in said rack 1 such to better meet the loading flexibility requirements, necessary for achieving the design objects.

[0026] Now the frame 3 (or first support) will be described with reference to figs. 1-2 and 4-6. Figures 1 and 2 show two frames 3, each frame 3 comprises the fol-

lowing parts:

- a base wire 16 comprising bent ends 17;
- wire segments 18 arranged parallel to each other and welded to the base wire preferably uniformly spaced and with a predetermined angle with respect to the base wire 16;
- a corrugated strip 19.

[0027] The frame 3 pivots between a raised position, wherein the segments 18 are faced to the inside of the rack 1 while the corrugated strip 19 is substantially parallel to the bottom 30, and a lowered position, wherein the segments 18 are substantially parallel to the bottom 30 while the corrugated strip 19 is substantially vertical.

[0028] The corrugated strip 19 serves for advantageously preventing pots and pans from slipping by means of loops 20 in an horizontal position, thus facilitating the proper positioning already described above; this strip 19 is integral with the base wire 16, and therefore, also with segments 18 (with which it forms a right angle) by fastening means that comprise snap-on hooks 21 and 22, which can match with the base wire 16 and the segments 18 respectively.

[0029] Figure 6 shows a corrugated strip 19' similar to the corrugated strip 19 just described; this strip 19' is different than the previous one for the used fastening means. Instead of hooks 21,22, snap-on seats 21' and slots 22' are used respectively allowing the strip 19' to be coupled with the frame 3.

[0030] Snap-on seats 21' match with the base wire 16, while the slots 22' match with the segments 18 of the frame 3. Sliding the segments 18 inside said slots 22', until snap-on seats 21' are coupled with the base wire 16, makes possible to accomplish a firm coupling between the strip 19' and the frame 3.

[0031] It is possible, for a person skilled in the art, to accomplish the coupling between the corrugated strip 19, 19', the base wire 16, and therefore also the segments 18 by alternative means than those just described, without departing anyway from the teaching of the present patent.

[0032] The bottom 30 of the rack 1 comprises a plurality of constraints suitable for eliminating all the degrees of freedom of the frame 3 except for the rotation about the axis of the base wire 16. Particularly the bottom 30 comprises to this end a plurality of semi-circular seats 24, formed by wire portions and arranged along the extension of the base wire 16 with such a shape to stably house the base wire 16, only allowing it to rotate about its own axis. The free rotation of the base wire 16 is limited by the provision of the bent ends 17, which are shaped so as to act as end-of-travel elements by interfering with a wire 25, which is comprised in the bottom 30 of the rack 1, when the frame 3 is in a raised position. Each bent end 17 comprises a groove in which the wire 25 stably is housed thus guaranteeing the interference necessary for firmly keeping the frame 3 in the raised position and

for releasing on the rack 1 the weight of the dishes supported on segments 18, without the need of tensioning the base wire 16.

[0033] It is clear that all the parts comprised in the first support or frame 3 are integral with each other.

[0034] In fig.1 it is possible to see the frame 3 in the raised position, that is with the segments 18 in a nearly vertical position, which is suitable for positioning the dishes (such as flat dishes) in a proper washing position, which is with the axis of symmetry at an angle of some degrees with respect to the horizontal, such to allow a washing liquid sprayed from a sprayer arm (not shown in the figures) to reach the inside of the cavities of the dishes, thus allowing this liquid to drain by gravity.

[0035] In this position, the corrugated strip 19,19' is in a substantially horizontal position and parallel to the bottom 30; said strip, in addition, comprises orifices 23 such to advantageously increase the flow of the washing fluid directly reaching the dishes arranged on the frame 3 and to facilitate the subsequent drainage in the drying step.

[0036] Fig.2 shows two frames 3, in the lowered position, with the corrugated strips 19,19' in a nearly vertical position, in this position it is possible to easily position pans and pots exploiting also at least one of the supports 2, thus increasing the washing efficiency of the dishwasher, since (as already said above) it is possible to better wash more frying pans or pots than a dishwasher equipped with a conventional rack. In each one of the frames 3, this position is made stable by the segments 18 acting as end-of-travel elements by interfering with the wires of the rack 1 and/or by a particular shape of the bent ends 17 allowing them to act as end-of-travel elements even in the lowered position of the rack 3.

[0037] In this position, the segments 18 of the two frames 3 are arranged on the bottom of the rack 1 at a very close distance one another, such to form an almost supporting surface upon which it is possible to put not only pots and pans but also objects having a certain length (e.g. knives, ladles, etc.).

[0038] Therefore, it is clear, for the person skilled in the art, how the combined action of these two supports 2 and 3 of the movable type, allows pots and pans to be properly positioned, that is having the axis of symmetry of said pots and pans with an angle of some tens of degrees with respect to the horizontal. By using such advantageous positioning, it is possible, for the dishwasher to perform a more efficient washing cycle and at the same time to increase the loading flexibility thereof.

[0039] Moreover, it has to be pointed out the possibility of using two or more supports 2 in the operating position for supporting objects having a certain length (e.g. knives, ladles, etc.) by using the supporting elements 7 as stands.

[0040] Finally, it has to be pointed out how in the example shown in figs. 1 and 2, the frames 3 extend for all the width of the rack 1, but as an alternative these frames can occupy only a portion of the rack width.

Claims

1. A dishwasher rack (1) comprising a bottom (30) from which a plurality of walls (31,32,33,34) extend, a first pivoting support (3) positioned on the bottom (30) of the rack (1), **characterized in that** the first support (3) comprises a corrugated strip (19,19'), and said first support (3) is movable between a lowered position, in which the corrugated strip (19,19') extends inside the rack (1), and a raised position, in which the corrugated strip (19,19') is substantially parallel to the bottom (30).
2. A rack (1) according to claim 1, wherein the corrugated strip (19,19') is coupled to a base wire (16) positioned on the bottom (30) of the rack (1), said base wire (16) being able to rotate about its own axis.
3. A rack (1) according to claim 2, wherein the base wire (16) comprises at least one bent end (17) so shaped as to act as an end-of-travel element.
4. A rack (1) according to claim 3, wherein at least one bent end (17) comprises a groove which securely houses a wire (25) of the bottom (30) of the rack (1), so as to generate the necessary interference for holding the first support (3) stably in the raised position without tensioning the base wire (16).
5. A rack (1) according to any one of the preceding claims, wherein the first support further comprises segments (18) adapted to bear a load, such as crockery or the like, which are integral with the corrugated strip (19,19').
6. A rack (1) according to claim 5, wherein the segments (18) are arranged at an angle with respect to the corrugated strip (19,19').
7. A rack (1) according to any one of claims 2 to 6, wherein the corrugated strip (19,19') comprises one or more snap-on hooks (21) located near its periphery and adapted to be coupled to the base wire (16).
8. A rack (1) according to any one of claims 5 to 7, wherein the corrugated strip (19) comprises one or more snap-on hooks (22) located near its periphery and adapted to be coupled to the segments (18).
9. A rack (1) according to any one of claims 5 to 7, wherein the corrugated strip (19') comprises one or more slots (22') adapted to be coupled to the segments (18).
10. A rack (1) according to claim 9, wherein the slots (22') are located near the periphery of the corrugated strip (19').

11. A rack (1) according to any one of the preceding claims, wherein said rack (1) comprises at least one second support (2) positioned on one of the walls (31,32,33,34) and co-operating with the first support (3).

5

12. A rack (1) according to claim 11, wherein said rack (1) comprises a plurality of first (3) and/or second (2) supports.

10

15

20

25

30

35

40

45

50

55

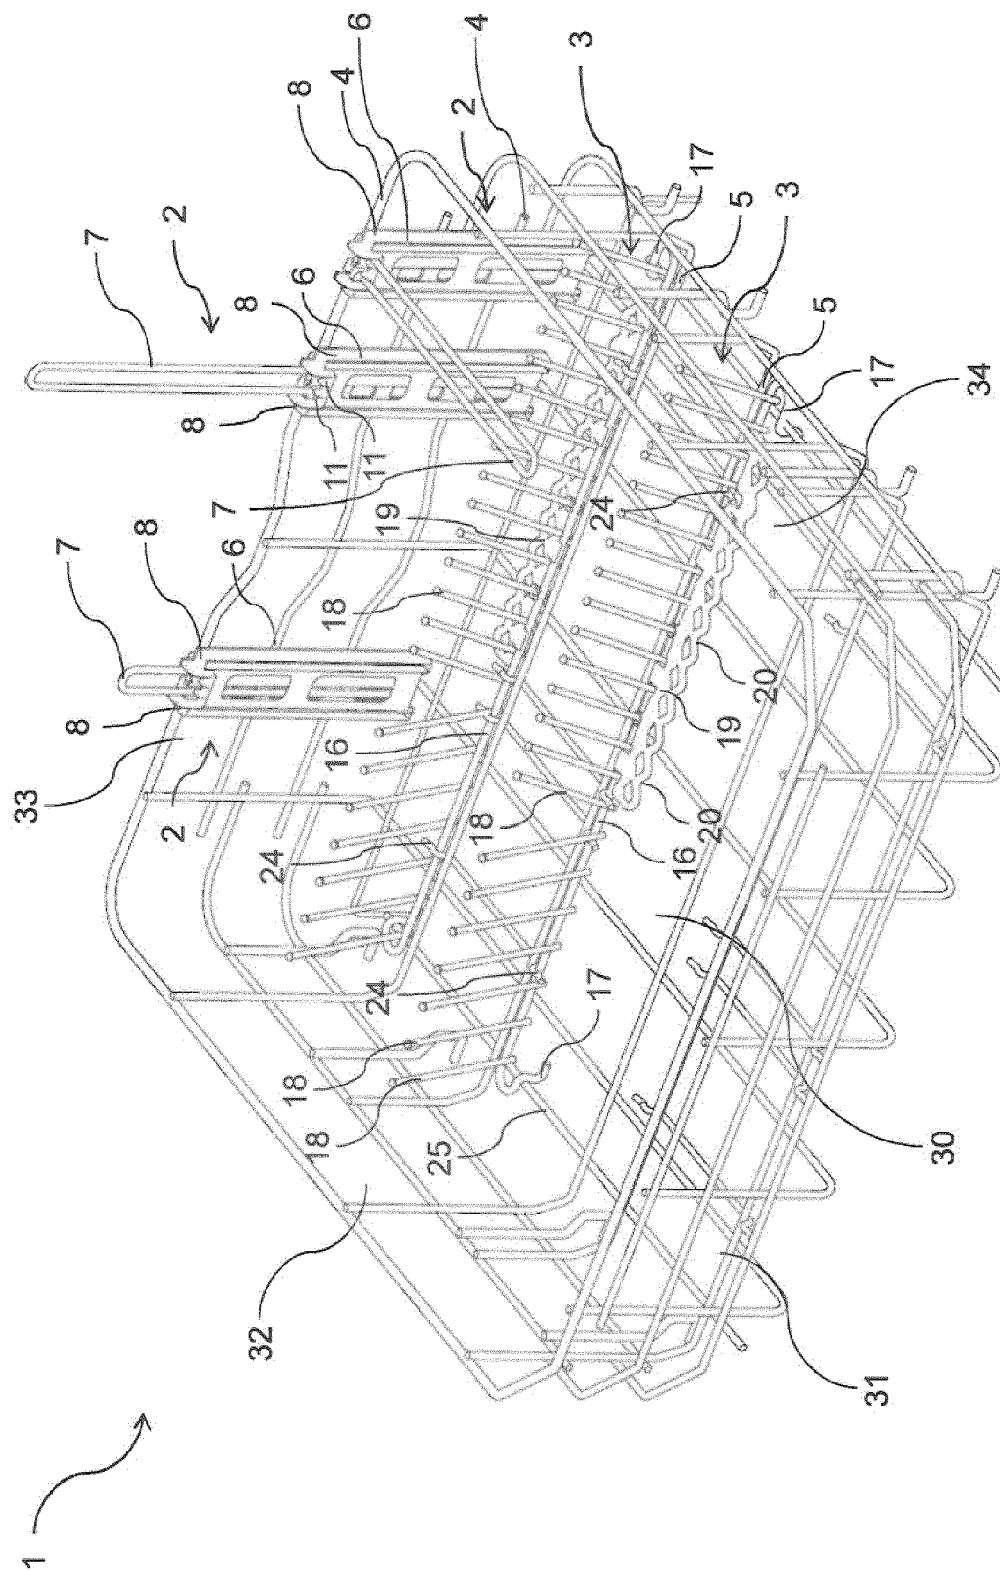


Fig. 1

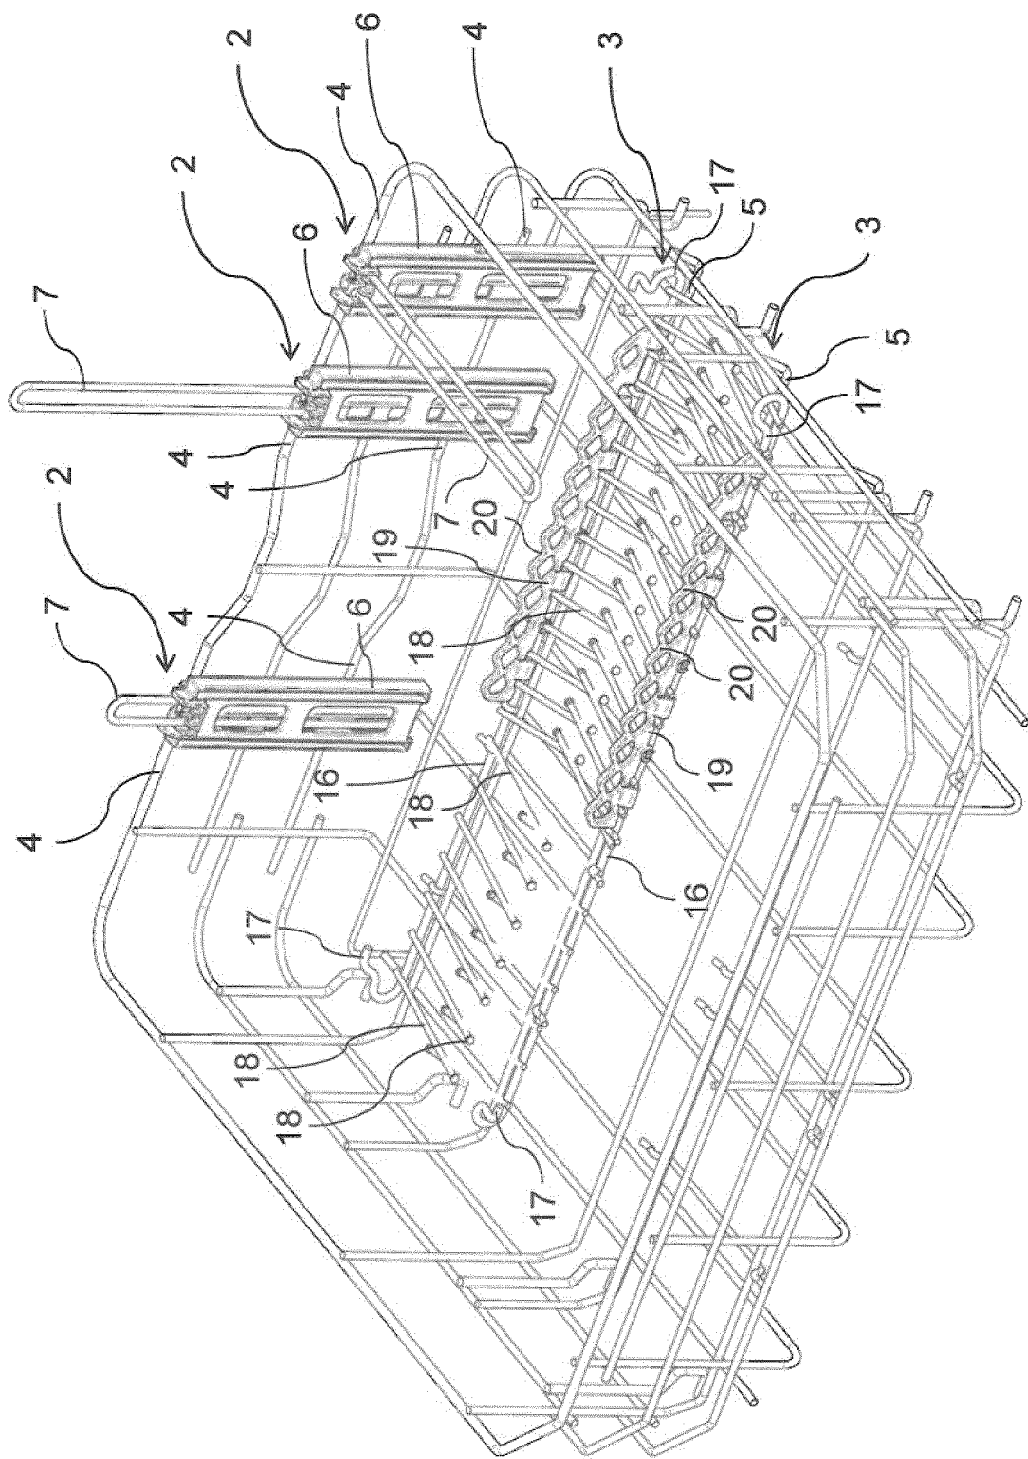


Fig. 2

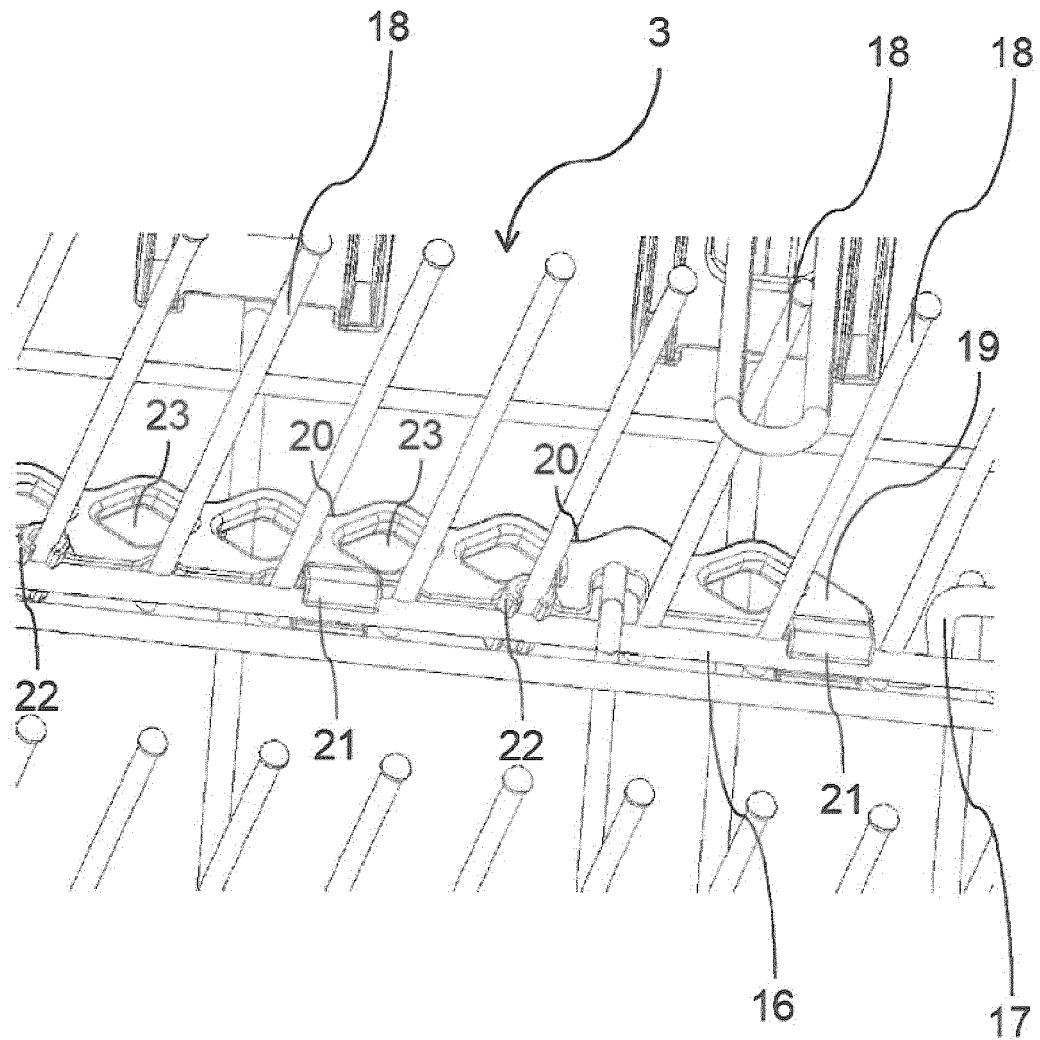


Fig. 3

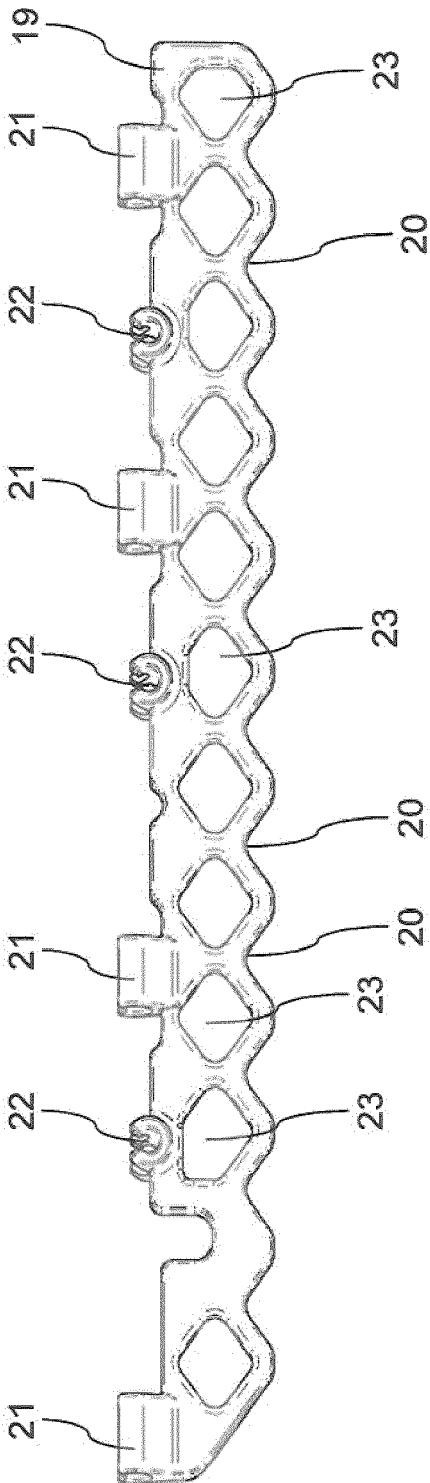


Fig. 4

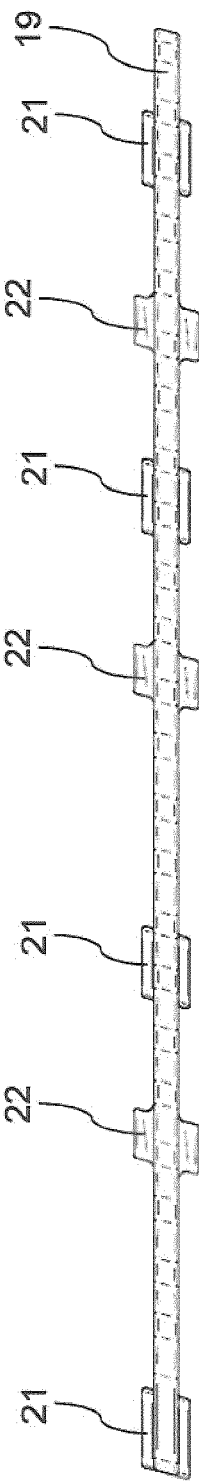


Fig. 5

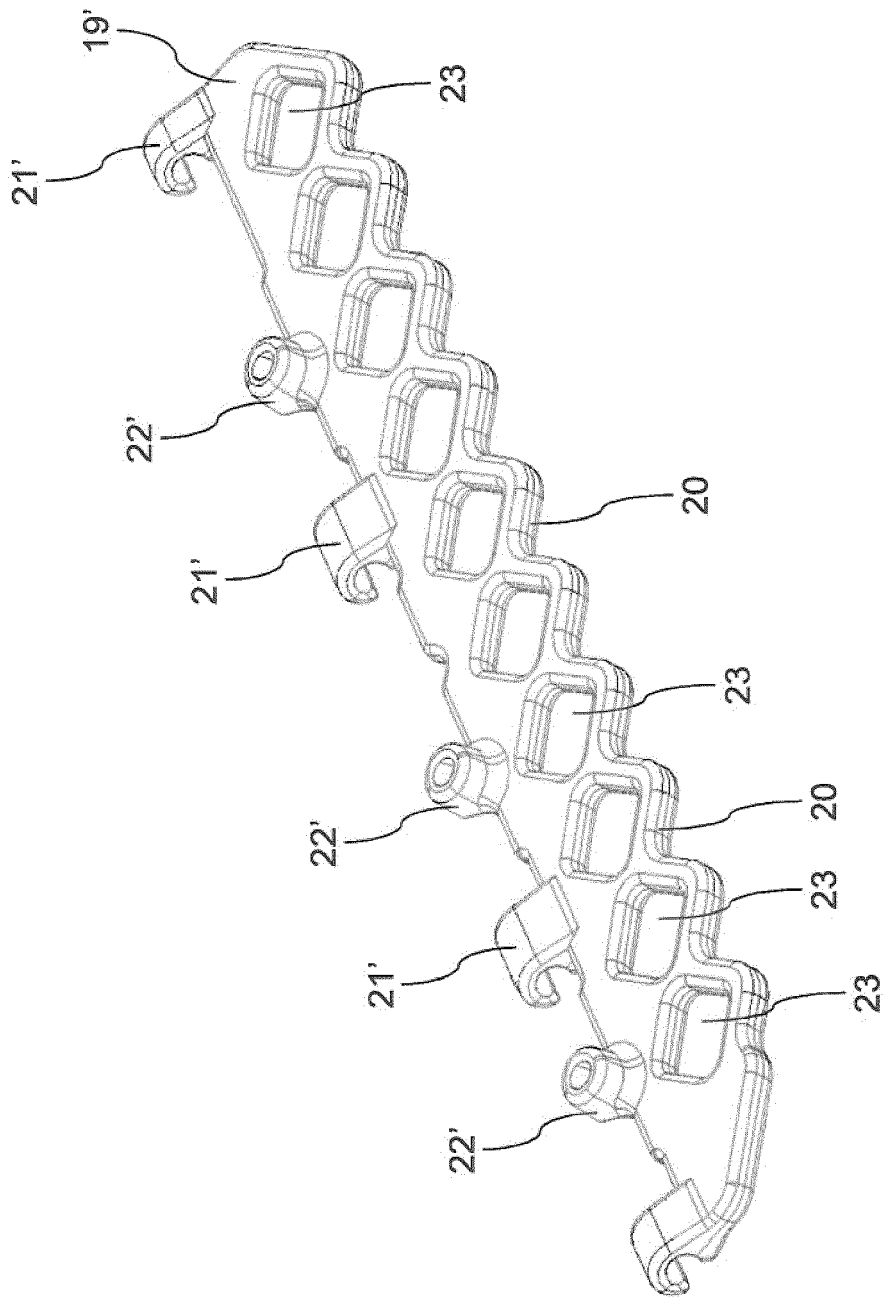


Fig. 6



EUROPEAN SEARCH REPORT

Application Number
EP 12 17 9133

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	EP 2 245 975 A1 (VESTEL BEYAZ ESYA SANAYI VE TI [TR] VESTEL BEYAZ ESYA SANAYI VE TICARE) 3 November 2010 (2010-11-03)	1,5,6,11,12	INV. A47L15/50
Y	* paragraphs [0012] - [0021]; figures * -----	3,4	
X	US 5 332 105 A (STANFIELD JOHN [US]) 26 July 1994 (1994-07-26) * column 2 - column 3; figures * -----	1	
Y	EP 1 336 370 A2 (ELECTROLUX HOME PROD CORP [BE]) 20 August 2003 (2003-08-20) * paragraph [0031]; figures * -----	3,4	
A	US 2007/039904 A1 (PURUSHOTHAMAN BALAJI [US]) 22 February 2007 (2007-02-22) * claims; figures * -----	11,12	
A	US 4 969 560 A (STANFIELD JOHN [US]) 13 November 1990 (1990-11-13) * column 2 - column 3 * -----	1	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
			A47L
1 Place of search Munich Date of completion of the search 25 October 2012 Examiner Lopez Vega, Javier			
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 12 17 9133

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-10-2012

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2245975 A1	03-11-2010	AT 526862 T EP 2245975 A1	15-10-2011 03-11-2010
US 5332105 A	26-07-1994	NONE	
EP 1336370 A2	20-08-2003	AT 326898 T DE 10204692 A1 EP 1336370 A2 ES 2266650 T3	15-06-2006 14-08-2003 20-08-2003 01-03-2007
US 2007039904 A1	22-02-2007	NONE	
US 4969560 A	13-11-1990	NONE	

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- IT 1289748 [0003]