



(12) **CORRECTED EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 71, 72

(51) Int Cl.:
H01M 8/24 ^(2006.01) **C09J 9/02** ^(2006.01)
C09J 201/00 ^(2006.01) **H01M 8/02** ^(2006.01)
H01M 8/10 ^(2006.01)

(48) Corrigendum issued on:
29.05.2013 Bulletin 2013/22

(86) International application number:
PCT/JP2010/002413

(43) Date of publication:
06.02.2013 Bulletin 2013/06

(87) International publication number:
WO 2011/125088 (13.10.2011 Gazette 2011/41)

(21) Application number: **10849338.8**

(22) Date of filing: **01.04.2010**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK SM TR

(72) Inventor: **SEKINE, Shinobu**
Toyota-shi
Aichi-ken, 471-8571 (JP)

(71) Applicant: **TOYOTA JIDOSHA KABUSHIKI**
KAISHA
Toyota-shi,
Aichi-ken, 471-8571 (JP)

(74) Representative: **Kuhnen & Wacker**
Patent- und Rechtsanwaltsbüro
Prinz-Ludwig-Strasse 40A
85354 Freising (DE)

(54) **BONDING MATERIAL FOR FUEL CELL, AND FUEL CELL**

(57) An adhesive material is used to bond between layers of a fuel cell. The adhesive material comprises an

adhesive resin, conductive particles and a conductive resin.

Fig.2A

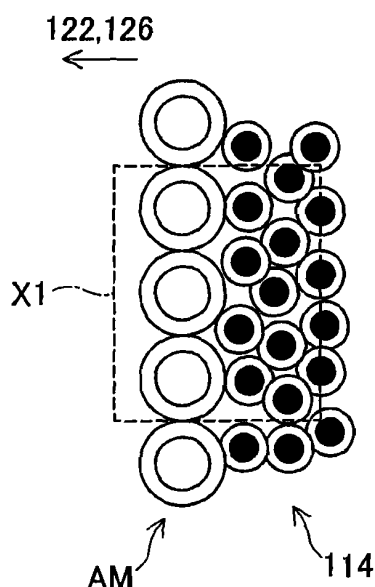


Fig.2B

