



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
13.02.2013 Bulletin 2013/07

(51) Int Cl.:
G06F 11/267 (2006.01)

(21) Application number: **11177200.0**

(22) Date of filing: **11.08.2011**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(72) Inventors:
• **Melzer, Lars**
01099 Dresden (DE)
• **Aue, Volker**
01326 Dresden (DE)

(71) Applicant: **Intel Mobile Communications Technology Dresden GmbH**
01099 Dresden (DE)

(74) Representative: **Lippert, Stachow & Partner Patentanwälte**
Krenkelstrasse 3
01309 Dresden (DE)

(54) **Circuit arrangement and method for testing same**

(57) The invention relates to a circuit arrangement and to a method for testing same. A circuit arrangement is provided that comprising a plurality of functional units which are coupled by at least one streaming data bus. Each of the functional units comprises a plurality of hardware modules and a switch matrix. At least one of the streaming data busses is provided with a data width of at least that of the widest hardware module of any of the

functional units of the circuit arrangement. The switch matrices are configurable to establish a streaming data path between and through the plurality of functional units which is used as a test link for any of the hardware modules of the circuit arrangement. The invention provides for non-intrusive real-time tracing in SoCs with a minimum of additional hardware resources and at low cost in terms of die size and power consumption.

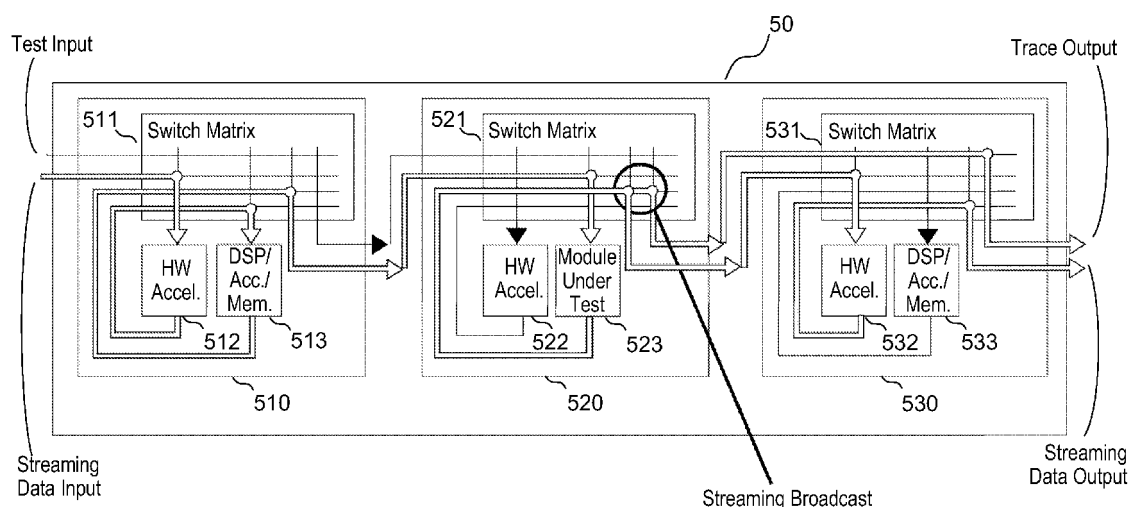


Fig. 5

Description

Field of the invention

[0001] The invention relates to a circuit arrangement and to a method for testing the circuit arrangement. More particularly the invention relates to test and real-time trace of systems on chips (SoCs).

Background of the invention

[0002] Debug and trace tools and techniques play an exceptionally important role at all stages of design of integrated circuitry. Debugging complex Systems on a Chip (SoC) requires the observability of internal signals at speed. This needs to be possible without any influence on the real time behavior of the SoC.

[0003] Modern telecommunications modems require complex Systems-on-Chip (SoC) solutions and they are very hard to debug if the system does not provide dedicated debug and trace capabilities. Typically, a modem is implemented using one or more processor cores that control additional computational logic.

[0004] Debugging typically refers to the detection and resolutions of behavioral flaws of the software running on the embedded cores. For debugging, special test modes are implemented in the SoC.

[0005] Traditional debug and software based tracing techniques can be often unacceptably invasive, burdensome or impractical. Current hardware assisted tracing techniques help, but there are still many limitations. Also, a system wide approach is necessary to analyze the interoperations between the many processing agents and the complex infrastructure on an SoC. When debugging the embedded software, the SoC is most likely not working at speed, and parts of the SoC are isolated for better controllability and observability (measure for how well internal states of a system can be inferred by knowledge of its external outputs). Controllability and observability are dual aspects of the same problem. In order to assist the implementer with identifying programming or implementation flaws on system level, modern implementations include several trace features. Trace features allow observability of internal signals in normal operation mode whereas the normal function is not influenced by the trace.

[0006] One example of a conventional trace architecture is ARM's CoreSight® architecture, see e.g. at <http://www.arm.com/products/system-ip/debug-trace/core-sight-architecture.php>. In a typical System-on-Chip implementation, the CoreSight infrastructure includes a debug subsystem and a trace subsystem. Each processing element (DSP, CPU etc.) can be paired with an instruction/data trace IP block (ETM - Embedded Trace Module) or program (PTM) trace IP block, enabling it to generate trace information about executed instructions or program flow respectively. This architecture, however, requires much of additional logics such as trace arbiter and ETMs,

many multiplexers, additional large buses and large wiring overhead. So the main disadvantage of this approach is the additional hardware cost of the additional trace circuitry.

[0007] In summary, a deficiency of the prior art is that both test and trace features need additional dedicated hardware resources which are consuming extra power and increase the cost by increasing the die size of a chip, while the challenge remains that the system behavior must not be influenced by real time tracing.

[0008] It is therefore a general object of the invention to provide a method for testing circuit components which requires a minimum of additional test hardware and wiring so to provide for less power consumption and less chip area required. Another object of the invention is to provide a non-intrusive method for test and real-time trace for systems on a chip (SoCs), i.e. a method that does not influence system behavior by real time tracing operation.

Summary of the invention

[0009] According to a first aspect of the invention a circuit arrangement comprising a plurality of functional units that are coupled by at least one streaming data bus is provided. Each of the functional units comprises a plurality of hardware modules and a switch matrix. The switch matrix has at least one streaming data input and at least one streaming data output and is connected between a streaming data input and a streaming data output of the respective functional unit and is further coupled to each of the hardware modules so that by configuring the switch matrix a streaming data path is established between and through the plurality of functional units. At least one of the streaming data busses has a data width of at least that of the widest hardware module of any of the functional units of the circuit arrangement so that it may be configured as a test link for any of the hardware modules of the circuit arrangement.

[0010] In one embodiment of the invention the plurality of functional units of the circuit arrangement are coupled by a single streaming data bus, and the switch matrices of the functional units are configurable to connect a single one of the hardware modules that is to be tested between the single streaming data input and the single streaming data output while detouring all of the other hardware modules of all functional units of the circuit arrangement.

[0011] In another embodiment of the invention the plurality of functional units of the circuit arrangement are coupled by a first and a second streaming data bus, and at least one of the streaming data busses has a data width of at least that of the widest hardware module of any of the functional units of the circuit arrangement, for use as a test link. In this embodiment the switch matrices are configurable to connect a single one of the hardware modules to be tested between the second streaming data input and the second streaming data output while detouring all of the other hardware modules of all functional

units of the circuit arrangement.

[0012] In the embodiment of the circuit arrangement with a first and a second streaming data bus, the switch matrices are also configurable to establish a first streaming data path for streaming processing data through the circuit arrangement and to establish a broadcast connection at an output of a module to be tested so that downstream the module to be tested streaming data are supplied to both the first streaming data path for normal processing operation, and to the second streaming data bus for detecting test data from the module to be tested under real-time processing conditions at a trace output of the second streaming data bus.

[0013] The hardware modules may be any of a group comprising hardware accelerators, local memory and local processors.

[0014] According to a second aspect of the invention there is provided a method for testing a circuit arrangement which has a plurality of functional units that are coupled by at least one streaming data bus, wherein each of the functional units comprises a plurality of hardware modules and a switch matrix that has at least one streaming data input and at least one streaming data output and is connected between a streaming data input and a streaming data output of the respective functional unit and is further coupled to each of the hardware modules. The method comprises the steps of providing at least one of the streaming data busses with a data width of at least that of the widest hardware module of any of the functional units of the circuit arrangement; configuring the switch matrices of the circuit arrangement to establish a streaming data path between and through the plurality of functional units; and using the streaming data path as a test link for any of the hardware modules.

[0015] In a case where the plurality of functional units are coupled by a single streaming data bus the method further comprises configuring the switch matrices of the circuit arrangement to establish a streaming data path that passes from the single streaming data input through a single one of the hardware modules that is to be tested and to the single streaming data output while detouring all of the other hardware modules of all functional units of the circuit arrangement; feeding a test sequence from the input to the hardware module to be tested; and detecting test data at the output.

[0016] In a case where the plurality of functional units are coupled by a first and a second streaming data bus the method further comprises providing the second streaming data bus with a data width of at least that of the widest hardware module of any of the functional units of the circuit arrangement, for use as a test link. As with the case of a single streaming data bus the testing method may comprise the further steps of configuring the switch matrices to connect a single one of the hardware modules to be tested between the second streaming data input and the second streaming data output while detouring all of the other hardware modules of all functional units of the circuit arrangement; feeding a test sequence

from the second input to the hardware module to be tested; and detecting test data at the second output.

[0017] Most advantageously, in case of a first and a second streaming data bus being provided, the testing method may comprise testing a hardware module under real-time processing conditions. In that case the method further comprises the steps of configuring the switch matrices to establish a first streaming data path and streaming processing data through the first streaming path; configuring the switch matrices to establish a broadcast connection at an output of a module to be tested to supply streaming data downstream the module to be tested to the first streaming data path for normal processing operation, and to the second streaming data bus, and detecting test data from the module to be tested under real-time processing conditions at a trace output of the second streaming data bus.

[0018] In configuring the switch matrices of each individual processing unit, the configuration of each switch matrix may be controlled by a local processor such as a DSP or a RISC that constitutes a component of that processing unit. The local processor in turn can be controlled by firmware. In another embodiment, the configuration of the switch matrices of the individual processing units may be controlled by a controller of the circuit arrangement external to said functional units, thereby offering the possibility of testing even a local processor that constitutes a component of any processing unit of a circuit arrangement. In an application example in which the circuit arrangement represents an LTE physical layer subsystem of a telecommunications device, configuration of the switching matrices of the individual processing units for test/trace purposes may be controlled by the main controller.

[0019] The provided solution enables real time tracing on streaming based, data driven architectures. It combines circuit architecture features, streaming broadcast features and a dedicated multi-purpose test link with a minimum of hardware overhead and simplicity of integration to add real time trace capabilities while ensuring observability and controllability. That is, the streaming based trace approach does not influence the behavior of the system and consumes little power, requires less chip area compared to known tracing approaches and is easy to extend and to adapt.

Brief Description of the Drawings

[0020] Additional features and advantages of the present invention will be apparent from the following detailed description of specific embodiments which is given by way of example only and in which reference will be made to the accompanying drawings, wherein:

Fig. 1 illustrates the generic architecture of a functional unit of a circuit arrangement according to one embodiment of the invention;

- Fig. 2 shows a circuit arrangement according to one embodiment of the invention;
- Fig. 3 illustrates an operational example of a test method according to one embodiment of the invention in the circuit arrangement of Fig. 2;
- Fig. 4 illustrates the generic architecture of a functional unit of a circuit arrangement according to another embodiment of the invention;
- Fig. 5 illustrates an operational example of a test method in a circuit arrangement comprising functional units as shown in Fig. 4, including real-time tracing;
- Fig. 6 illustrates basic aspects of a data broadcasting scenario as used according to the invention;
- Fig. 7 illustrates signal flow in the data broadcasting scenario of Fig. 6;
- Fig. 8 illustrates one embodiment of broadcast synchronization that can be used with the invention;
- Fig. 9 illustrates another embodiment of broadcast synchronization that can be used with the invention;
- Fig. 10 illustrates one example of the signal forms of a streaming data transfer protocol that can be used with the invention; and
- Fig. 11 shows an implementation of a synchronizer that can be used with the invention.

Detailed Description

[0021] Fig. 1 illustrates the generic architecture of a functional unit of a circuit arrangement according to one embodiment of the invention. This generic architecture of a functional unit has already been proposed for a telecommunications modem as disclosed in the applicant's co-pending European patent application "Modem Architecture" (EP 10 197 313.9). The functional units are components of a system-on-chip (SoC). To give an application example, the functional units may constitute components of an LTE layer subsystem of a telecommunications device, in which case the functional units may be any of a digital front end (DFE) unit, LTE Tx unit, shared RAM unit, forward error correction (FEC) data unit, fast Fourier transform (FFT) unit, parameter estimation unit, searcher unit, and FEC control unit, without being limited thereto.

[0022] A functional unit 1 as represented in Fig. 1 comprises a plurality of hardware modules which may include

a local RISC or digital signal processor, as shown at 40, a plurality of hardware accelerators 21 - 23, and, optionally, a memory module 30. Also, each of the functional units comprises a switch matrix 10 connected between a streaming data input of the respective functional unit and each of said sub-components. Each column of six points, as exemplified by reference numeral 11, may be understood as a seven point switch wherein the points represent potential connection points. The switch matrix can be configured at run time. Local processor 40 is adapted to receive task instructions from a higher level controller over a control bus system using a first protocol. The first protocol includes addressing and may be a AHB based protocol. The local processor 40, in response to the task instructions from the controller, may be adapted to configure hardware modules 21 - 23, 30 and switch matrix 10 to selectively produce connections between the streaming data input and said sub-components in a manner to perform the dedicated task on the data that are streamed through the functional unit on a streaming data path as defined by the switch matrix. It should be noted here that the presence of processor 40 is optional and that, if provided, the connection thereof to the switch matrix is optional. In another embodiment of the invention the configuration of the switch matrix of an individual processing unit may be controlled by a controller of the circuit arrangement external to that functional unit which case even offers the possibility of testing a local processor that constitutes a component of this processing unit. In yet another embodiment of the invention a functional unit can be provided without a local processor which is the case in the embodiment shown in Fig. 4, or, in another embodiment, a functional unit can be provided that includes a local processor which however need not be connected to the switch matrix.

[0023] For streaming data through a functional unit and between several functional units of a circuit arrangement, a handshake based data streaming protocol is used. One embodiment of the invention uses the data streaming protocol as illustrated in Fig. 10 and described in the applicant's co-pending European patent application "Method for High Speed Data Transfer" (EP 10 197 315.4). It comprises three binary signals including a valid and an accept signal for handshaking between a data source and a data sink, and a frame signal which marks the beginning and the end of a logical group of data elements within a data stream. Further details will be described below in conjunction with Fig. 6 to Fig. 9.

[0024] Generally, by using switchable matrices the point-to-point connections between hardware modules of a functional unit can be changed. Fig. 2 illustrates a circuit arrangement 20 according to one embodiment of the invention. Circuit arrangement 20 comprises three functional units, 210, 220, 230, which are designed similar to that illustrated in Fig. 1. So each of functional units 210, 220, 230 comprises hardware modules, 212, 213; 222, 223; and 232, 233, respectively, and a switch matrix, 211; 221; 231, respectively, that is coupled between a

respective streaming data input of the respective functional unit and each of the hardware modules of the respective functional unit. Switch matrices 211, 221, 231 are configurable to provide a continuous streaming data path between the functional units and through each of the functional units passing selected one of the hardware modules and detouring others, according to the configuration defined by the switch matrices. A streaming data path of a specific operational example is represented in the Fig. 2 by hollow arrows. As can be seen in the figure, the data stream passes from the streaming data input of circuit arrangement 20 into functional unit 210, through switch matrix 211 thereof to hardware accelerator 212, then again through switch matrix 211 to hardware module 213, again through switch matrix 211 and out of functional unit 210 to functional unit 220. In functional unit 220, the data stream passes through switch matrix 221 thereof to hardware module 213, and again through switch matrix 221 to the output of functional unit 220, in detouring hardware module 222. From the output of functional unit 220, the data stream passes into functional unit 230, into the switch matrix 231 thereof, from there through hardware module 232, and again through switch matrix 231 to the output of functional unit 230 and the output of the circuit arrangement.

[0025] In circuit arrangement 20, the functional units are coupled by a single streaming data bus, so according to the invention this streaming data bus is provided with a data width of at least that of the widest hardware module of any of the functional units of the circuit arrangement so that it can be configured as a test link for any of the hardware modules.

[0026] Fig. 3 illustrates an operational example of a test method according to one embodiment of the invention in the circuit arrangement of Fig. 2. As can be seen in the figure, switch matrices 211, 221, 231 are configured such as to connect hardware module 300 which is the module to be tested between the single streaming data input and the single streaming data output of circuit arrangement 20 while detouring all of the other hardware modules of all functional units of the circuit arrangement. So a test sequence can be supplied to hardware module 300, and test data can be detected at the output of circuit arrangement 20. Otherwise stated, a test on an MuT (Module under Test) can be performed by generating external stimuli and evaluating the MuT's behavior at the output of the circuit arrangement while the MuT is isolated from the rest of the circuit arrangement, and is controllable and observable.

[0027] Fig. 4 illustrates the generic architecture of a functional unit 400 of a circuit arrangement according to another embodiment of the invention. Functional unit 400 is similar to the functional units described above with reference to Fig. 2 and Fig. 3. Additionally, functional unit 400 comprises a second streaming data bus which provides a multi-purpose streaming link and will be referred to as a 'test link' below. As can be seen in the figure, the test link requires an additional streaming data test input

and output to functional component 400 and switch matrix 41.

[0028] In this embodiment of the invention, the test link may have the following purposes:

- (1) isolate the MuT in test mode;
- (2) Provide test data directly to the MuT by connecting the inputs via the test link and switching matrices to the primary inputs of the circuit device or another data source, so ensuring controllability of the MuT;
- (3) Provide the output data of the MuT directly to the primary output or another data sink by routing them through the test link and the switch matrices, so ensuring observability of the MuT;
- (4) Trace output data of the MuT to the primary output in an operational mode of the circuit device so providing for validation of an MuT.

[0029] Tracing herein is intended to refer to a way for debugging which may be performed e.g. by recording output data from an MuT in trace memory, generating reference data for the MuT and comparing the output data with the reference data.

[0030] Obviously, with the architecture as shown in Fig. 2 it would be quite difficult to provide trace data to an MuT or to observe undistorted output data of the MuT under real-time operation conditions of the circuit arrangement as both input and output data have to pass other processing modules which would modify the data.

[0031] Fig. 5 illustrates an operational example of a real-time tracing procedure in a circuit arrangement comprised of functional units as shown in Fig. 4.

[0032] In the circuit arrangement of Fig. 5, all hardware modules can be connected to the test input via the switch matrices, and all module outputs can be connected to the test output via the switch matrices. So test data can be provided via the additional test link directly to an MuT 523 without a devious route through other hardware modules, in similar manner as shown in Fig. 3 which however uses the single streaming data bus for test purposes.

[0033] The major advantage of the embodiment with the additional test link is that it can also be used for data tracing in the functional mode of the circuit device. The trace functionality is enabled by combining the test link with a streaming data broadcast feature which is described in the applicant's co-pending EP application 10153465.9 entitled "Method and device for synchronizing data broadcasts". Apart from the hardware effort for the broadcast implementation within the switch matrix, which will be described below with reference to Fig. 6 ff., this feature comes almost for free because the test link is already there for test purposes. In the functional mode, the test link is not allocated and can be used for trace exclusively. This means, the real time behavior of the system is not affected or influenced in any case. Tracing data using the new approach enables observability of all modules' inputs and outputs that are connected to a switch matrix.

[0034] In the operational example of Fig. 5, data of hardware module 523 of functional unit 520 are traced. Switch matrices 511, 521, and 531 are configured so that a first streaming data path is established similar to that illustrated in Fig. 2. Additionally, switch matrices 511, 521 and 531 are configured so that a broadcast connection is established at the output of the MuT 523. Thus, downstream MuT 523 the streaming data are supplied to the first streaming data path for normal processing operation, and are also supplied to the test link which supplies that data directly to a trace output of the circuit arrangement in detouring any further hardware modules.

[0035] Fig. 6 illustrates basic aspects of a data broadcasting scenario as used according to the invention, and Fig. 7 illustrates the signal flow in the data broadcasting scenario of Fig. 6. Most generally stated, data streams are to be broadcasted by a transmitting unit to a plurality of receiving units. Each data stream to a respective receiver has a different speed and each receiver acts independently, so the acknowledge latency is not predictable. The transmitter has to ensure that all receivers have received the first data word before the second data word is delivered. In Fig. 7, after the transmitter has broadcasted a first data word, data1, it first receives an acknowledge message from receivers 1 and 3, "Ack RCV1"; "Ack RCV3" followed by an acknowledge message from receiver 2, "Ack RCV2". Once, acknowledge messages have been received from all receivers, the transmitter broadcasts a second data word, data2, and then again waits for acknowledge messages from the receivers.

[0036] For detecting the moment when acknowledge messages have arrived from all receivers, it has been proposed to include a synchronizer module in the transmitter which synchronizer collects all acknowledge messages from the receivers and generates an indication when the next data can be transmitted, as described in the applicant's co-pending European patent application entitled "Method and device for synchronizing data broadcasts" (EP10153465.9).

[0037] Fig. 8 illustrates one embodiment of broadcast synchronization in which the synthesizer is level based, e.g. when a receiver receives a data word, its ACK signal goes to high level. Synchronization is reached when all acknowledge signals from the receivers are "high". This is illustrated in Fig. 8 at time Tsync. The implementation of the synchronizer is really simple, if the acknowledge message is transmitted on a 1-bit line. In that case, the synchronizer may consist of a logical gate, typically a logic AND gate. When all three ACK signals, Ack RCV 1-3 of Fig. 8 have been received, the AND gate outputs a "1" meaning all acknowledgements have been detected and the next data word can be transferred.

[0038] Fig. 9 illustrates another embodiment of broadcast synchronization in which the receivers acknowledge by a high active pulse. In this case, the synchronizer has to capture these pulses. Synchronization is done, when all pulses are captured which is illustrated in the figure at time Tsync. One implementation example of a syn-

chronizer for this case is shown in Fig. 11. A small edge detection unit or state machine is added in each Ack input path which traps each pulse, and the outputs thereof are "AND"-ed to detect when the next data word can be transferred.

[0039] Fig. 10 illustrates one example of the signal forms of a streaming data transfer protocol that can be used with the invention; and Fig. 11 shows an implementation of a synchronizer that can be used with the invention.

[0040] Fig. 10 shows the streaming signals used for data transfer through a plurality of functional units of an SoC according to a preferred embodiment of the invention. This streaming data transfer protocol comprises four signals: data, valid, accept, frame. The valid/accept signals are similar to that from other handshake-based transfer protocols and are used to drive and stall the communication from source to sink. Source and sink can set or reset these signals at any time. Data is taken over if both are "high" on the rising edge of the clock. Data source and data sink must have the same understanding of what the frame signal means. Data source and data sink, herein, can be any of the functional units of an SoC. A 'frame' in the sense of this transfer protocol is a logical group or sequence of data, such as e.g. an OFDM symbol, a block of control data, a block of information data, etc.

[0041] Used in conjunction with the method for synchronizing data broadcast as described above, the transmitter of Fig. 6 corresponds to a data source and receivers 1 - 3 correspond to a data sink. The data frame consisting of data elements D0, D1, D2, D3, in Fig. 10 is equivalent to a data word, data1 or data2, in Fig. 7. The accept signal of Fig. 10 corresponds to acknowledge signals Ack RCV1... Ack RCV3 of Fig. 7.

[0042] When used in conjunction with the invention, the above data broadcast synchronizer will be implemented in each of the switch matrices 511, 521, and 531 of the embodiment shown in Fig. 5. It will be understood that the invention is not limited to be used in conjunction with this particular transfer protocol but can generally be used with any handshake-type data streaming protocol.

Claims

1. A circuit arrangement comprising a plurality of functional units (210, 220, 230; 400; 510, 520, 530) that are coupled by at least one streaming data bus, each of said functional units comprising a plurality of hardware modules (212, 213, 222, 223, 232, 233; 512, 513, 522, 523, 532, 533) and a switch matrix (211, 221, 231; 41; 511, 521, 531), wherein the switch matrix has at least one streaming data input and at least one streaming data output and is connected between a streaming data input and a streaming data output of the respective functional unit and is further coupled to each of said hardware modules so that by

configuring the switch matrix a streaming data path is established between and through the plurality of functional units;

wherein at least one of the streaming data busses has a data width of at least that of the widest hardware module of any of the functional units of the circuit arrangement to be configurable as a test link for any of said hardware modules.

2. The circuit arrangement of claim 1, wherein the plurality of functional units (210, 220, 230) are coupled by a single streaming data bus, and wherein said the switch matrices (211, 221, 231) are configurable to connect a single one of said hardware modules (300) that is to be tested between said single streaming data input and said single streaming data output while detouring all of the other hardware modules of all functional units of the circuit arrangement.

3. The circuit arrangement of claim 1, wherein the plurality of functional units (400; 510, 520, 530) are coupled by a first and a second streaming data bus, and wherein at least one of the streaming data busses has a data width of at least that of the widest hardware module of any of the functional units of the circuit arrangement, for use as a test link.

4. The circuit arrangement of claim 3, wherein the switch matrices (41; 511, 521, 531) are configurable to connect a single one of said hardware modules to be tested between said second streaming data input and said second streaming data output while detouring all of the other hardware modules of all functional units of the circuit arrangement.

5. The circuit arrangement of claim 3, wherein the switch matrices (511, 521, 531) are configurable to establish a first streaming data path for streaming processing data through the circuit arrangement and to establish a broadcast connection at an output of a module (523) to be tested so that downstream said module to be tested streaming data are supplied to both said first streaming data path for normal processing operation, and to the second streaming data bus for detecting test data from said module to be tested under real-time processing conditions at a trace output of said second streaming data bus.

6. The circuit arrangement of any of claims 1 to 5, wherein said hardware modules are selected from a group consisting of hardware accelerators, local memory and local processor.

7. A method for testing integrated circuitry, comprising:

providing a circuit arrangement with a plurality of functional units that are coupled by at least one streaming data bus, each of said functional

units comprising a plurality of hardware modules and a switch matrix, wherein the switch matrix has at least one streaming data input and at least one streaming data output and is connected between a streaming data input and a streaming data output of the respective functional unit and is further coupled to each of said hardware modules;

providing at least one of said streaming data busses with a data width of at least that of the widest hardware module of any of the functional units of the circuit arrangement; configuring the switch matrices of the circuit arrangement to establish a streaming data path between and through the plurality of functional units; and using said streaming data path as a test link for any of said hardware modules.

8. The method of claim 7, wherein the plurality of functional units are coupled by a single streaming data bus and the method further comprises:

configuring the switch matrices of the circuit arrangement to establish a streaming data path that passes from said single streaming data input through a single one of said hardware modules that is to be tested and to said single streaming data output while detouring all of the other hardware modules of all functional units of the circuit arrangement; feeding a test sequence from said input to said hardware module to be tested; and detecting test data at said output.

9. The method of claim 7, wherein the plurality of functional units are coupled by a first and a second streaming data bus and the method further comprises:

providing the second streaming data bus with a data width of at least that of the widest hardware module of any of the functional units of the circuit arrangement, for use as a test link.

10. The method of claim 9, further comprising:

configuring the switch matrices to connect a single one of said hardware modules to be tested between said second streaming data input and said second streaming data output while detouring all of the other hardware modules of all functional units of the circuit arrangement; feeding a test sequence from said second input to said hardware module to be tested; and detecting test data at said second output.

11. The method of claim 9, further comprising:

configuring the switch matrices to establish a first streaming data path and streaming processing data through said first streaming path;
configuring the switch matrices to establish a broadcast connection at an output of a module to be tested to supply streaming data downstream said module to be tested to said first streaming data path for normal processing operation, and to said second streaming data bus, and
detecting test data from said module to be tested under real-time processing conditions at a trace output of said second streaming data bus.

12. The method of any of claims 7 to 11, wherein the configuration of the switch matrix in each individual processing unit is controlled by a local processor of said processing unit.
13. The method of claim 7 to 11, wherein the configuration of the switch matrices of the individual processing units is controlled by a controller of the circuit arrangement external to said functional units.

25

30

35

40

45

50

55

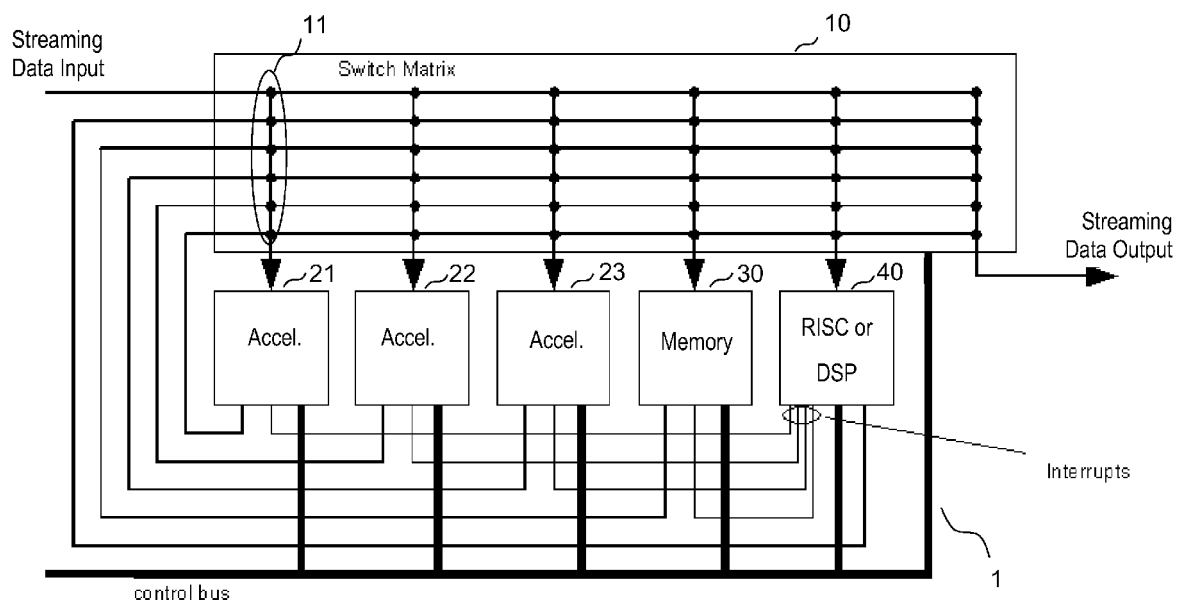


Fig. 1

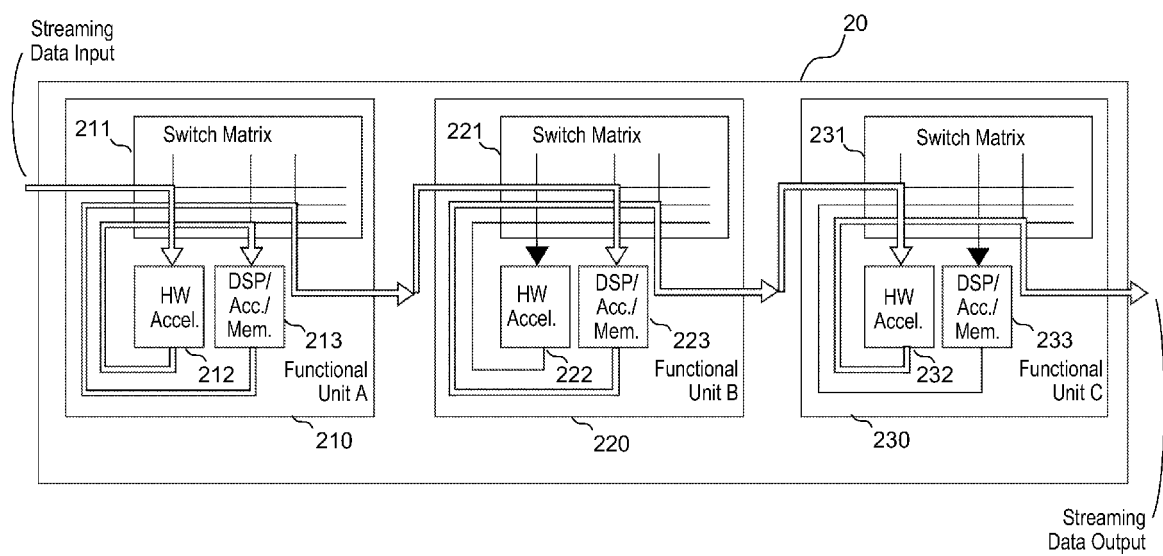


Fig. 2

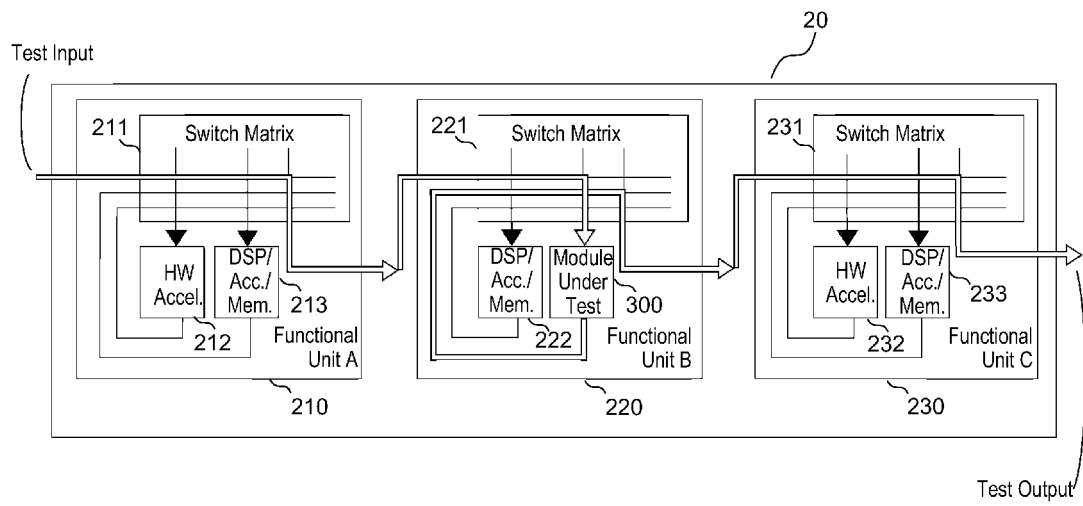


Fig. 3

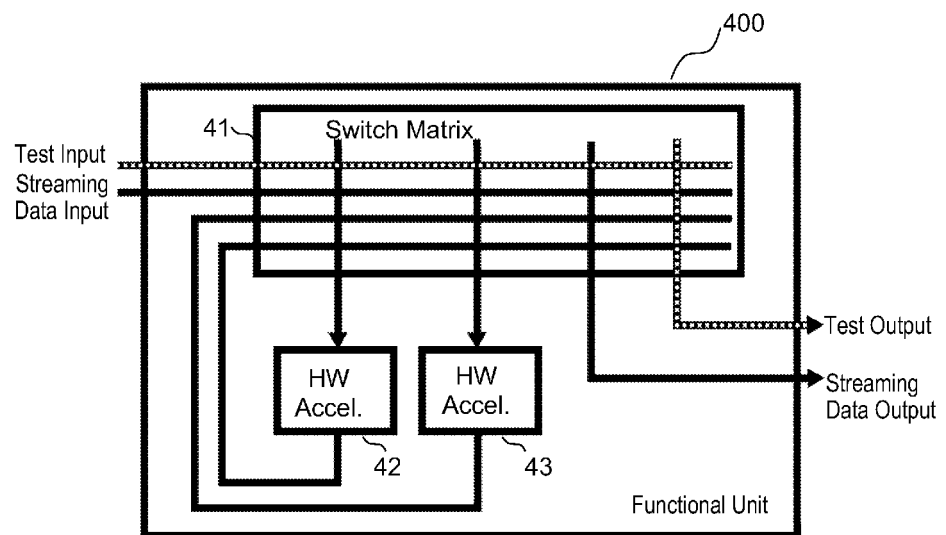


Fig. 4

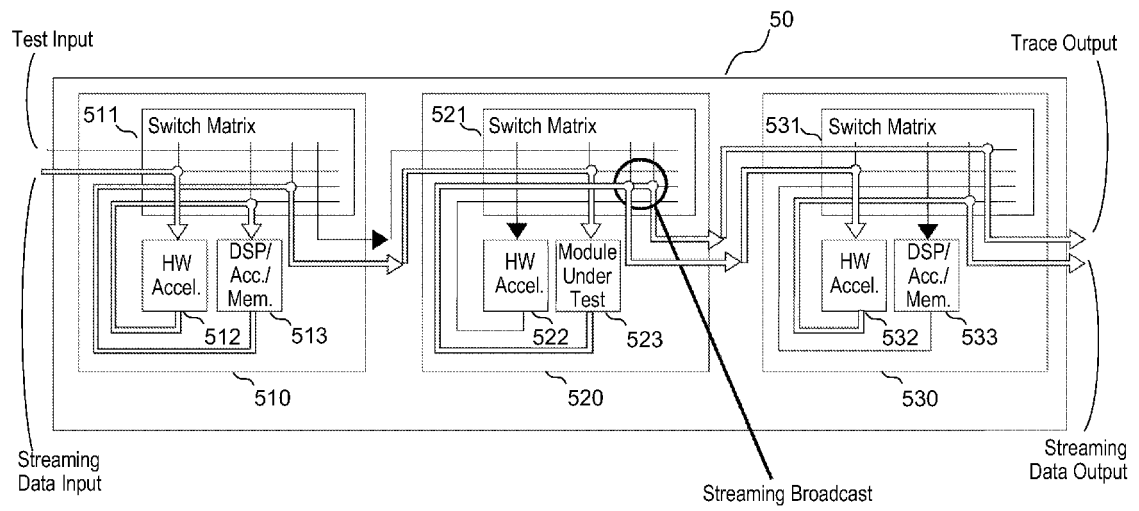


Fig. 5

Fig. 6

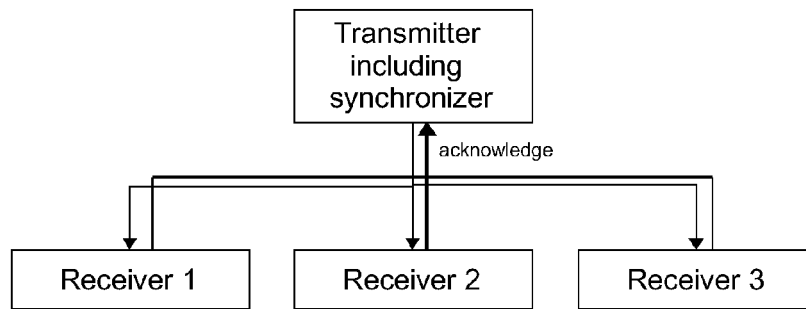


Fig. 7

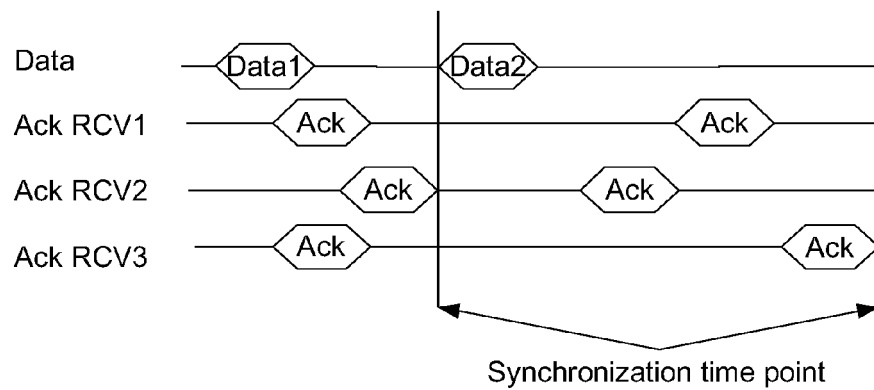


Fig. 8

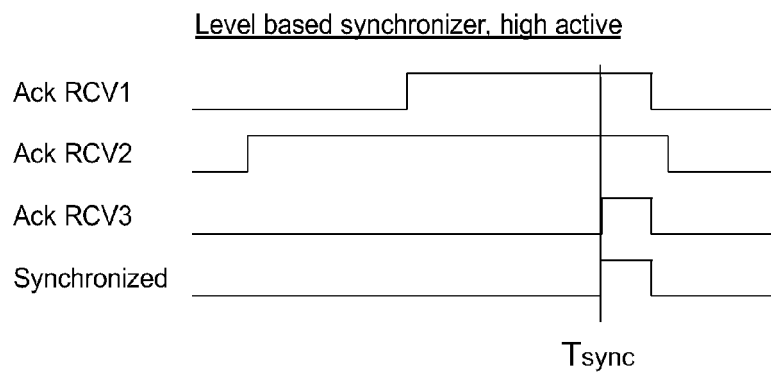
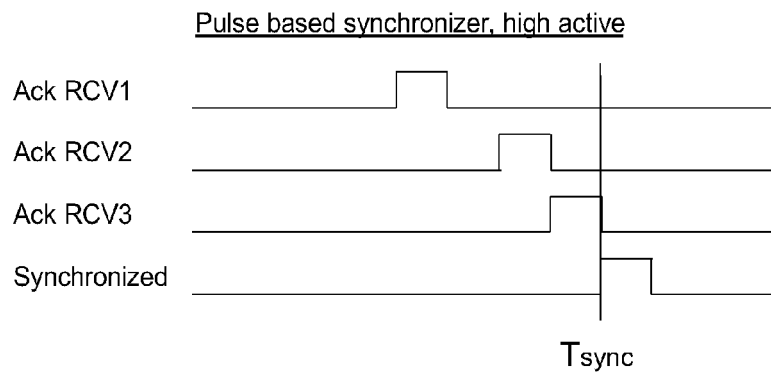


Fig. 9



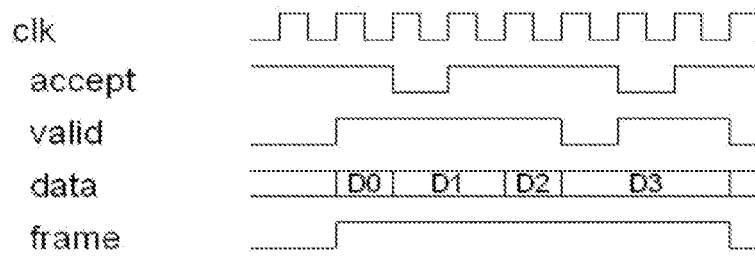


Fig. 10

Pulse based, high active synchronizer

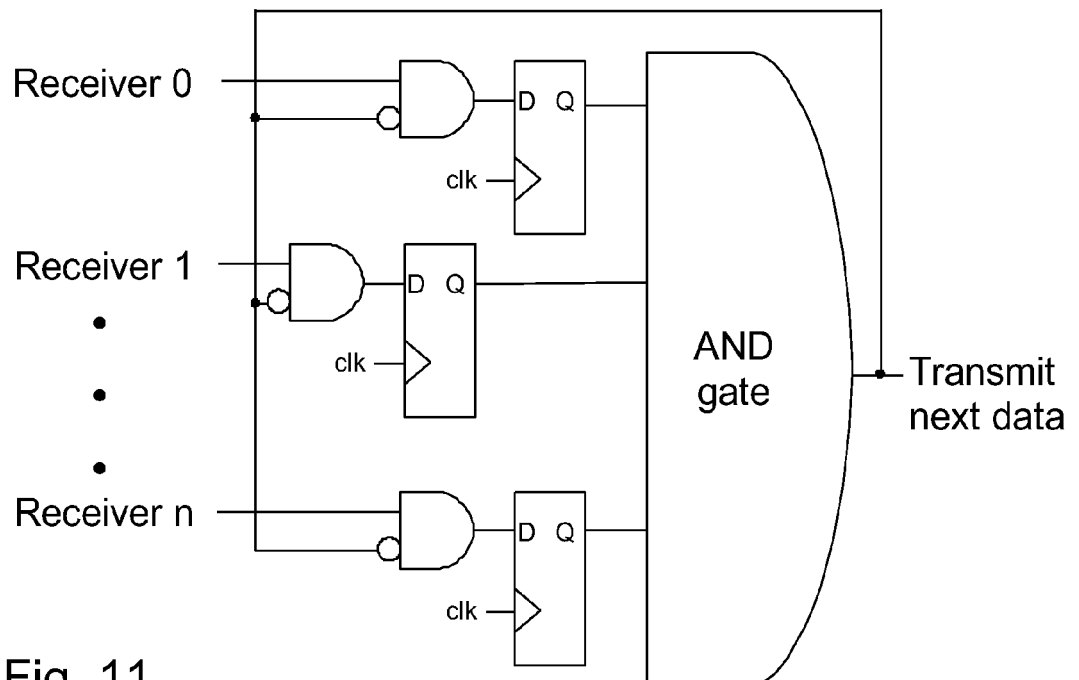


Fig. 11



EUROPEAN SEARCH REPORT

Application Number
EP 11 17 7200

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	EP 2 341 681 A2 (BLUE WONDER COMM GMBH [DE]) 6 July 2011 (2011-07-06) * paragraph [0014] - paragraph [0017] * * paragraph [0025] - paragraph [0026] * * paragraph [0032] * * claim 1; figure 2 * -----	1-4, 6-10,12, 13	INV. G06F11/267
A	US 2005/015669 A1 (DURON MIKE CONRAD [US] ET AL) 20 January 2005 (2005-01-20) * paragraph [0016] - paragraph [0018] * * paragraph [0020]; claim 4; figure 4 * -----	1,2,7,8	
			TECHNICAL FIELDS SEARCHED (IPC)
			G06F
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 13 January 2012	Examiner Gorzewski, Michael
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 11 17 7200

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-01-2012

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
EP 2341681	A2	06-07-2011	CN 102143109 A	03-08-2011
			EP 2341681 A2	06-07-2011
			US 2011158301 A1	30-06-2011

US 2005015669	A1	20-01-2005	US 2005015669 A1	20-01-2005
			US 2009037639 A1	05-02-2009

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 10197313 A [0021]
- EP 10197315 A [0023]
- EP 10153465 A [0033] [0036]