



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
06.03.2013 Bulletin 2013/10

(51) Int Cl.:
A63H 1/00 (2006.01) **A63H 1/02** (2006.01)
A63H 1/24 (2006.01)

(21) Application number: **11179478.0**

(22) Date of filing: **31.08.2011**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(74) Representative: **Kirschner, Klaus Dieter et al**
Puschmann Borchert Bardehle
Patentanwälte Partnerschaft
Bajuwarenring 21
82041 Oberhaching (DE)

(71) Applicant: **Shye Chi Enterprise Co., Ltd.**
Kaohsiung City 830 (TW)

Remarks:
Amended claims in accordance with Rule 137(2) EPC.

(72) Inventor: **Tsai, Chao-Yang**
830 Kaohsiung City (TW)

(54) **Spinning top**

(57) A spinning top (2) includes a main body (4) tapering from a top end to a bottom end thereof and having a rotating (2) tip end (40) at the bottom end, and a plate body (3) including a base portion (31) connected to and covering the top end of the main body (4), an annular grip portion (32) extending outwardly and radially from

the base portion (31), and a top face (30) defined by top surfaces of the base portion (31) and the annular grip portion (32). The base portion (31) has a central tapered groove (311) tapering downwardly from the top face (30) of the plate body (3). The rotating tip end (40) has a diameter smaller than a smallest diameter of the central tapered groove (311).

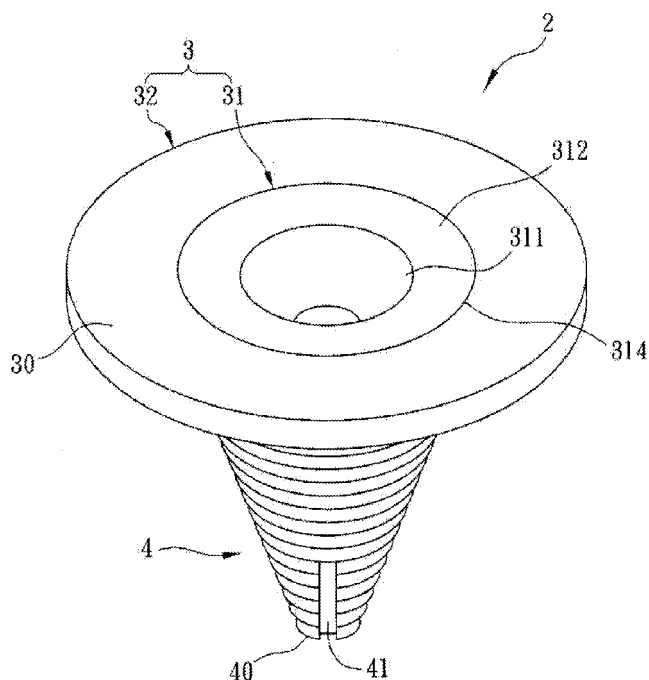


FIG. 2

Description

[0001] This invention relates to a spinning top, and more particularly to a spinning top that can be spun for a prolonged period of time.

[0002] Referring to Fig. 1, a conventional spinning top 1, as disclosed in Taiwanese Publication No. 200948447, includes a main body 11, and a shaft 12 projecting downward from the main body 11. In use, a cord 13 is wound around the main body 11, and is pulled at one end 131 thereof to spin the main body 11 and the shaft 12.

[0003] As shown in Fig. 1, the main body 11 of the conventional spinning top 1 has a simple configuration that tapers downward, and has no structure that can increase centrifugal force, so that the spinning time of the top 1 cannot be prolonged. Further, a top face of the main body 11 has a conical shape with a tip end facing upward, so that it is not possible to stack another spinning top to the conventional spinning top 1 while spinning.

[0004] Therefore, an object of the present invention is to provide a spinning top that is capable of overcoming the aforementioned drawbacks of the prior art.

[0005] According to this invention, a spinning top comprises a main body tapering from a top end to a bottom end thereof and having a rotating tip end at the bottom end, and a plate body including a base portion connected to and covering the top end of the main body, an annular grip portion extending outwardly and radially from the base portion, and a top face defined by top surfaces of the base portion and the annular grip portion. The base portion has a central tapered groove tapering downwardly from the top face of the plate body. The rotating tip end has a diameter smaller than a smallest diameter of the central tapered groove.

[0006] The advantage of this invention resides in that through the annular grip portion that extends outwardly and radially from the base portion, gripping of the spinning top can be facilitated, so that not only a greater throwing force can be imparted, but also the centrifugal force generated during spinning of the spinning top can be increased, thereby prolonging the spinning time of the spinning top. Further, through the presence of the central tapered groove, a second spinning top may be spun on the central tapered groove of a first spinning top. Hence, a plurality of spinning tops may be stacked on top of each other while spinning.

[0007] Further advantages, features and potential applications of the present invention may be gathered from the description which follows, in conjunction with the embodiments illustrated in the drawings.

[0008] Throughout the description, the claims and the drawings, those terms and associated reference signs will be used as are notable from the enclosed list of reference signs. In the drawings

Fig. 1 is a perspective view of a conventional spinning top disclosed in Taiwanese Publication No. 200948447;

Fig. 2 is a perspective view of a spinning top according to the first preferred embodiment of this invention;

5 Fig. 3 is a partial sectional view of the first preferred embodiment;

Fig. 4 illustrates how one end of a pull cord is placed in a retaining flute of a main body of the spinning top of the first preferred embodiment;

10 Fig. 5 illustrates how to operate the spinning top of the first preferred embodiment;

15 Fig. 6 is a partial sectional view of the first preferred embodiment, illustrating how two spinning tops may be stacked on top of each other while spinning;

20 Fig. 7 is a view similar to Fig. 3, but illustrating an alternative form of a slope area of a plate body of the spinning top of the first preferred embodiment;

25 Fig. 8 is an exploded partial sectional view of a spinning top according to the second preferred embodiment of this invention;

30 Fig. 9 is a schematic view of a spinning top according to the third preferred embodiment of this invention;

35 Fig. 10 is a view similar to Fig. 9, but illustrating an alternative form of a light-emitting element of the spinning top of the third preferred embodiment;

40 Fig. 11 is an exploded schematic view of a spinning top according to the fourth preferred embodiment of this invention, and

45 Fig. 12 is a view similar to Fig. 11, but illustrating an alternative form of the spinning top of the fourth preferred embodiment.

[0009] Before the present invention is described in greater detail, it should be noted that the same reference numerals have been used to denote like elements throughout the specification.

50 **[0010]** Referring to Figs. 2 to 5, a spinning top 2 according to the first preferred embodiment of this invention is shown to comprise a plate body 3 and a main body 4.

[0011] The plate body 3 includes a base portion 31, an annular grip portion 32 extending outwardly and radially from an outer periphery of the base portion 31, and a top face 30 defined by top surfaces of the base portion 31 and the grip portion 32. The base portion 31 has a central tapered groove 311 tapering downwardly from the top

face 30 of the plate body 3, and a slope area 312 that surrounds the central tapered groove 311 and that has an upper periphery 314 directly connected to the top face 30 of the plate body 3, and a lower periphery 316 connected directly to a top periphery 317 of the central tapered groove 311. The slope area 312 is tapered from the upper periphery 314 to the lower periphery 316.

[0012] The main body 4 tapers gradually from a top end to a bottom end, and has a rotating tip end 40 at the bottom end thereof. In this embodiment, the main body 4 is connected integrally as one piece to the plate body 3 such that the base portion 31 of the plate body 3 covers the top end of the main body 4. The rotating tip 40 has a diameter smaller than a smallest diameter of the central tapered groove 311. The main body 4 further has a retaining flute 41 extending upwardly from the rotating tip end 40.

[0013] With reference to Figs. 4 and 5, one end 91 of a pull cord 900 is first placed in the retaining flute 41, after which the remaining portion of the pull cord 900 is wound around the main body 4 of the spinning top 2 in a bottom-to-top direction covering the end 91 of the pull cord 900. A free end 92 of the pull cord 900 and the grip portion 32 of the plate body 3 are then simultaneously gripped by the user. Finally, the spinning top 2 is thrown out like a flying saucer to rotate on its rotating tip end 40 while pulling back the pull cord 900.

[0014] In the spinning top 2 of this invention, the grip portion 32 not only extends outwardly and radially from the base portion 31, but also extends outwardly of the main body 4. Hence, aside from the design of the spinning top 2 being relatively novel and special, the grip portion 32 can also facilitate gripping of the spinning top 2 by the user so that a greater throwing force can be imparted to the spinning top 2, and the centrifugal force generated during spinning of the spinning top 2 can be simultaneously increased. Thus, the spinning time of the spinning top 2 can be prolonged.

[0015] Referring to Fig. 6, because the base portion 31 is formed with the central tapered groove 311 that tapers downward from the top face 30 of the plate body 3, and the diameter of the rotating tip end 40 is smaller than the smallest diameter of the central tapered groove 311, when the spinning top 2 is spinning, a second spinning top 2' may be whirled to the top face 30 of the spinning top 2, so that a rotating tip end 40' of the second spinning top 2' rotates within the central tapered groove 311 of the spinning top 2. Hence, the second spinning top 2' is stacked on top of the spinning top 2 while spinning simultaneously. It should be noted that through the presence of the slope area 312 that surrounds the central tapered groove 311, when the second spinning top 2' does not directly fall into the central tapered groove 311 but is within the slope area 312, the second spinning top 2' will continue to spin from the slope area 312 toward the direction of an arrow shown in Fig. 6 and into a bottom end 319 of the central tapered groove 311.

[0016] In this embodiment, the slope area 312 is

formed on the base portion 31. Alternatively, as shown in Fig. 7, the slope area 312 may extend from the base portion 31 to the annular grip portion 32, so that the area of the slope area 312 may be enlarged to thereby enhance the rotational stability and success rate of a plurality of stacked spinning tops 2.

[0017] Referring to Fig. 8, a spinning top 2 according to the second preferred embodiment of this invention is shown to be similar to the first preferred embodiment. However, in this embodiment, the base portion 31 further has an internally threaded connecting slot 313 extending downwardly from the bottom end 319 of the central tapered groove 311. The spinning top 2 further comprises a decorative element 5. The decorative element 5 has an externally threaded engaging portion 51, and a decorative portion 52 connected to the externally threaded engaging portion 51. When the externally threaded engaging portion 51 is engaged to the internally threaded connecting slot 313, the decorative portion 58 projects upwardly and outwardly from the plate body 3.

[0018] Through the aforesaid configuration, not only can the advantages described in the first preferred embodiment be achieved, but the configuration of the decorative portion 52 can also be altered according to the custom and tradition of each region or country. Taking for example Brazil, which is a football-loving country, the decorative portion 52 in Fig. 8 is configured as a football. When the plate body 3 and the main body 4 of the spinning top 2 rotates, the decorative portion 52 rotates there along, thereby enhancing the entertainment and decorative effects of the spinning top 2. If the decorative element 5 is not required, a screw (not shown) may be engaged to the internally threaded connecting slot 313 to maintain the appearance of the spinning top 2 and to prevent dust and dirt from falling into the connecting slot 313.

[0019] Referring to Fig. 9, a spinning top 2 according to the third preferred embodiment of this invention is shown to be similar to the first preferred embodiment. However, in this embodiment, the spinning top 2 further comprises a power supply 6, and a plurality of spaced-apart light-emitting elements 61 connected electrically to the power supply 6. In this embodiment, the power supply 6 is disposed in the main body 4. Alternatively, the power supply 6 may be disposed on a top or bottom face of the annular grip portion 32. As long as the counter weight and balance of the entire spinning top 2 is maintained, any suitable disposition of the power supply 6 is acceptable. The power supply 6 may be a lithium battery, an alkaline battery, or a carbon-zinc cell. When the power supply 6 is disposed on the top face of the grip portion 32, the power supply 6 may be configured as a solar power.

[0020] Further, in this embodiment, the light-emitting elements 61 are configured as light-emitting diodes (LEDs) disposed on a peripheral face 321 of the annular grip portion 32. Alternatively, the light-emitting elements 61 may be disposed on the top face of the grip portion

32 or an outer surface of the main body 4. As shown in Fig. 10, the light-emitting elements 61 may be in the form of fiber optic strip lights that surround the outer surface of the main body 4. The number of the light-emitting element 61 maybe one, and is not limited to the disclosed embodiment. Since an electrical connection between the power supply 6 and the light-emitting elements 61 are known in the art, a detailed description thereof is dispensed herewith.

[0021] Hence, not only are the advantages described in the first preferred embodiment can be achieved, but also, in this embodiment, the spinning top 2 can emit light rays during rotation thereof, so that the spinning top 2 is lustrous and attractive. If the light-emitting elements 61 are multi-colored, during rotation of the spinning top 2, different light rays are mixed to produce a dazzling and moving visual effect.

[0022] Referring to Fig. 11, a spinning top 2 according to the fourth preferred embodiment of this invention is shown to be similar to the first preferred embodiment. However, in this embodiment, the plate body 3 and the main body 4 are connected detachably to each other. The plate body 3 further includes an externally threaded protrusion 33 projecting downwardly from a bottom surface of the base portion 31. The main body 4 further has an internally threaded depression 42 to engage the externally threaded protrusion 33. Alternatively, as shown in Fig. 12, the plate body 3 may be formed with an internally threaded depression 34 formed in the bottom surface of the base 10 portion 31, while the main body 4 may be formed with an externally threaded protrusion 43 projecting upwardly therefrom to engage the internally threaded depression 34. It should be noted that, in this embodiment, the thickness of the base portion 31 may be increased depending on the requirement, such that the thickness of the grip portion 32 is smaller than that of the base portion 31, and the gripping of the spinning top 2 by the user is not affected.

[0023] Through the aforesaid configuration, the plate body 3 may be altered to a different size according to the requirement, or when one of the plate body 3 and the main body 4 is damaged, said one of the plate body 3 and the main body 4 can be replaced with a new one. Hence, there is no need to throw away the spinning top 2 when a portion thereof is damaged.

[0024] In summary, the spinning top 2 of this invention has the annular grip portion 32 extending outwardly from the main body 4, so that gripping of the spinning top 2 is easy, a greater throwing force can be imparted, and the centrifugal force generated during spinning can be increased, thereby prolonging the spinning time of the spinning top 2. Further, through the configuration of the central tapered groove 311, a plurality of the spinning tops 2 can be stacked on top of each other while spinning simultaneously. Hence, the object of the present invention can be achieved.

List of reference signs

[0025]

5	1	spinning top
	2	spinning top
	2'	spinning top
10	3	plate body
	4	main body
15	5	decorative element
	6	power supply
	9	pull cord
20	11	main body
	12	shaft
25	13	cord
	30	top face
	31	base portion
30	32	grip portion
	33	threaded protrusion
35	34	threaded depression
	40	rotating tip
	40'	rotating tip
40	41	retaining flute
	42	threaded depression
45	43	threaded protrusion
	51	engaging portion
	52	decorative portion
50	58	decorative portion
	61	light-emitting element
55	91	one end
	92	free end

131 one end
 311 tapered groove
 312 slope are
 313 connecting slot
 314 upper periphery
 316 lower periphery
 317 top periphery
 319 bottom end
 321 peripheral face
 900 pull cord

Claims

1. A spinning top (2), comprising:

a main body (4) tapering from a top end to a bottom end thereof and having a rotating tip end (40) at said bottom end; **characterized by** a plate body (3) including a base portion (31) connected to and covering said top end of said main body (4), an annular grip portion (32) extending outwardly and radially from said base portion (31), and a top face (30) defined by top surfaces of said base portion (31) and said annular grip portion (32), said base portion (31) having a central tapered groove (311) tapering downwardly from said top face (30) of said plate body (3); wherein said rotating tip end (40) has a diameter smaller than a smallest diameter of said central tapered groove (311).

2. The spinning top (2) of claim 1, **characterized in that** said plate body (3) further includes a slope area (312) that surrounds said central tapered groove (311) and that has an upper periphery (314) directly connected to said top face (30) of said plate body (3), and a lower periphery (316) connected directly to a top periphery (317) of said central tapered groove (311), 13 said slope area (312) being tapered from said upper periphery (314) to said lower periphery (316).

3. The spinning top (2) of claim 2, **characterized in that** said slope area (312) is formed in said base portion (31).

4. The spinning top (2) of claim 2, **characterized in that** said slope area (312) extends from said base

portion (31) to said annular grip portion (32).

5. The spinning top (2) of Claim 1, **characterized in that** said main body (4) further has a retaining flute (41) extending upwardly from said rotating tip end (40) for receiving one end (91) of a pull cord (9).

6. The spinning top (2) of claim 1, **characterized in that** said base portion (31) of said plate body (3) further has an internally threaded connecting slot (313) extending downwardly from a bottom end (319) of said central tapered groove (311), said spinning top (2) further comprising a decorative element (5) that has an externally threaded engaging portion (51) to engage said internally threaded connecting slot (313), and a decorative portion (52) connected to said externally threaded engaging portion (51) .

7. The spinning top (2) of claim 1, further **characterized by** a power supply (6) disposed on one of said main body (4) and said plate body (3), and a light-emitting element (61) connected electrically to said power supply (6) .

8. The spinning top (2) of claim 7, wherein said power supply (6) is disposed in said main body (4).

9. The spinning top (2) of claim 7, **characterized in that** said light-emitting element (61) is disposed on a peripheral face (321) of said annular grip portion (32).

10. The spinning top (2) of claim 7, **characterized in that** said light-emitting element (61) is disposed on an outer surface of said main body (4).

11. The spinning top (2) of claim 7, **characterized in that** said light-emitting element (61) is a light-emitting diode (LED).

12. The spinning top (2) of claim 7, **characterized in that** said light-emitting element (61) is a fiber optic strip light.

13. The spinning top (2) of claim 1, **characterized in that** said main body (4) and said plate body (3) are connected detachably to each other.

14. The spinning top (2) of claim 13, **characterized in that** said plate body (3) further includes an externally threaded protrusion (33) projecting downwardly from a bottom surface of said base portion (31), and said main body (4) further has an internally threaded depression (42) to engage said externally threaded protrusion (33).

15. The spinning top (2) of claim 13, **characterized in that** said main body (4) further has an externally

threaded protrusion (43) projecting upwardly therefrom, and said plate body (3) further includes an internally threaded depression (34) formed in a bottom surface of said base portion (31) to engage said externally threaded protrusion (43).

16. The spinning top (2) of claim 1, **characterized in that** said grip portion (32) has a thickness smaller than that of said base portion (31).

Amended claims in accordance with Rule 137(2) EPC.

1. A spinning top (2), comprising:

a main body (4) tapering from a top end to a bottom end thereof and having a rotating tip end (40) at said bottom end; a plate body (3) including a base portion (31) connected to and covering said top end of said main body (4), an annular grip portion (32) extending outwardly and radially from said base portion (31), and a top face (30) defined by top surfaces of said base portion (31) and said annular grip portion (32), said base portion (31) having a central tapered groove (311) tapering downwardly from said top face (30) of said plate body (3);

wherein said rotating tip end (40) has a diameter smaller than a smallest diameter of said central tapered groove (311), **characterized in that** said plate body (3) further includes a slope area (312) that surrounds said central tapered groove (311) and that has an upper periphery (314) directly connected to said top face (30) of said plate body (3), and a lower periphery (316) connected directly to a top periphery (317) of said central tapered groove (311), 13 said slope area (312) being tapered from said upper periphery (314) to said lower periphery (316).

2. The spinning top (2) of claim 1, **characterized in that** said slope area (312) is formed in said base portion (31).

3. The spinning top (2) of claim 1, **characterized in that** said slope area (312) extends from said base portion (31) to said annular grip portion (32).

4. The spinning top (2) of claim 1, **characterized in that** said main body (4) further has a retaining flute (41) extending upwardly from said rotating tip end (40) for receiving one end (91) of a pull cord (9).

5. The spinning top (2) of claim 1, **characterized in that** said base portion (31) of said plate body (3) further has an internally threaded connecting slot (313) extending downwardly from a bottom end (319)

of said central tapered groove (311), said spinning top (2) further comprising a decorative element (5) that has an externally threaded engaging portion (51) to engage said internally threaded connecting slot (313), and a decorative portion (52) connected to said externally threaded engaging portion (51).

6. The spinning top (2) of claim 1, further **characterized by** a power supply (6) disposed on one of said main body (4) and said plate body (3), and a light-emitting element (61) connected electrically to said power supply (6).

7. The spinning top (2) of claim 6, **characterized in that** said power supply (6) is disposed in said main body (4).

8. The spinning top (2) of claim 6, **characterized in that** said light-emitting element (61) is disposed on a peripheral face (321) of said annular grip portion (32).

9. The spinning top (2) of claim 6, **characterized in that** said light-emitting element (61) is disposed on an outer surface of said main body (4).

10. The spinning top (2) of claim 6, **characterized in that** said light-emitting element (61) is a light-emitting diode (LED).

11. The spinning top (2) of claim 6, **characterized in that** said light-emitting element (61) is a fiber optic strip light.

12. The spinning top (2) of claim 1, **characterized in that** said main body (4) and said plate body (3) are connected detachably to each other.

13. The spinning top (2) of claim 12, **characterized in that** said plate body (3) further includes an externally threaded protrusion (33) projecting downwardly from a bottom surface of said base portion (31), and said main body (4) further has an internally threaded depression (42) to engage said externally threaded protrusion (33).

14. The spinning top (2) of claim 12, **characterized in that** said main body (4) further has an externally threaded protrusion (43) projecting upwardly therefrom, and said plate body (3) further includes an internally threaded depression (34) formed in a bottom surface of said base portion (31) to engage said externally threaded protrusion (43).

15. The spinning top (2) of claim 1, **characterized in that** said grip portion (32) has a thickness smaller than that of said base portion (31).

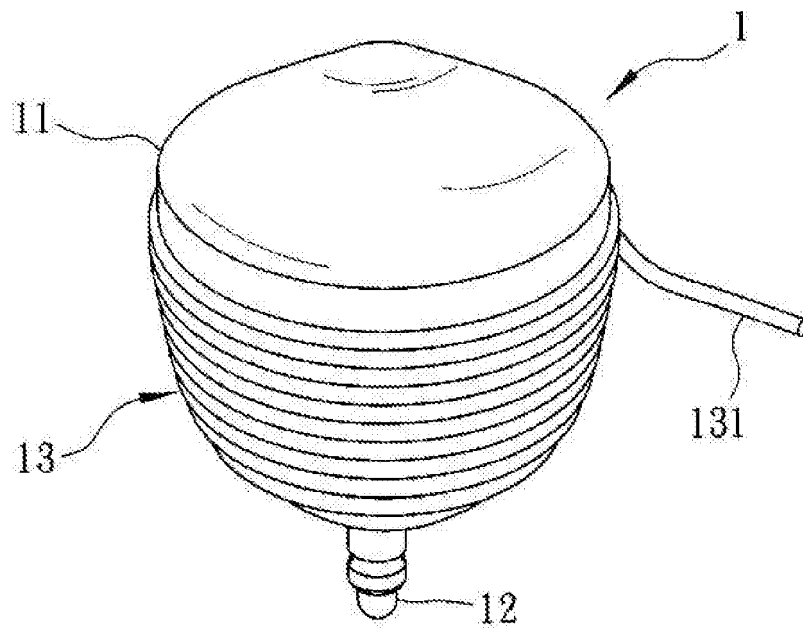


FIG. 1
PRIOR ART

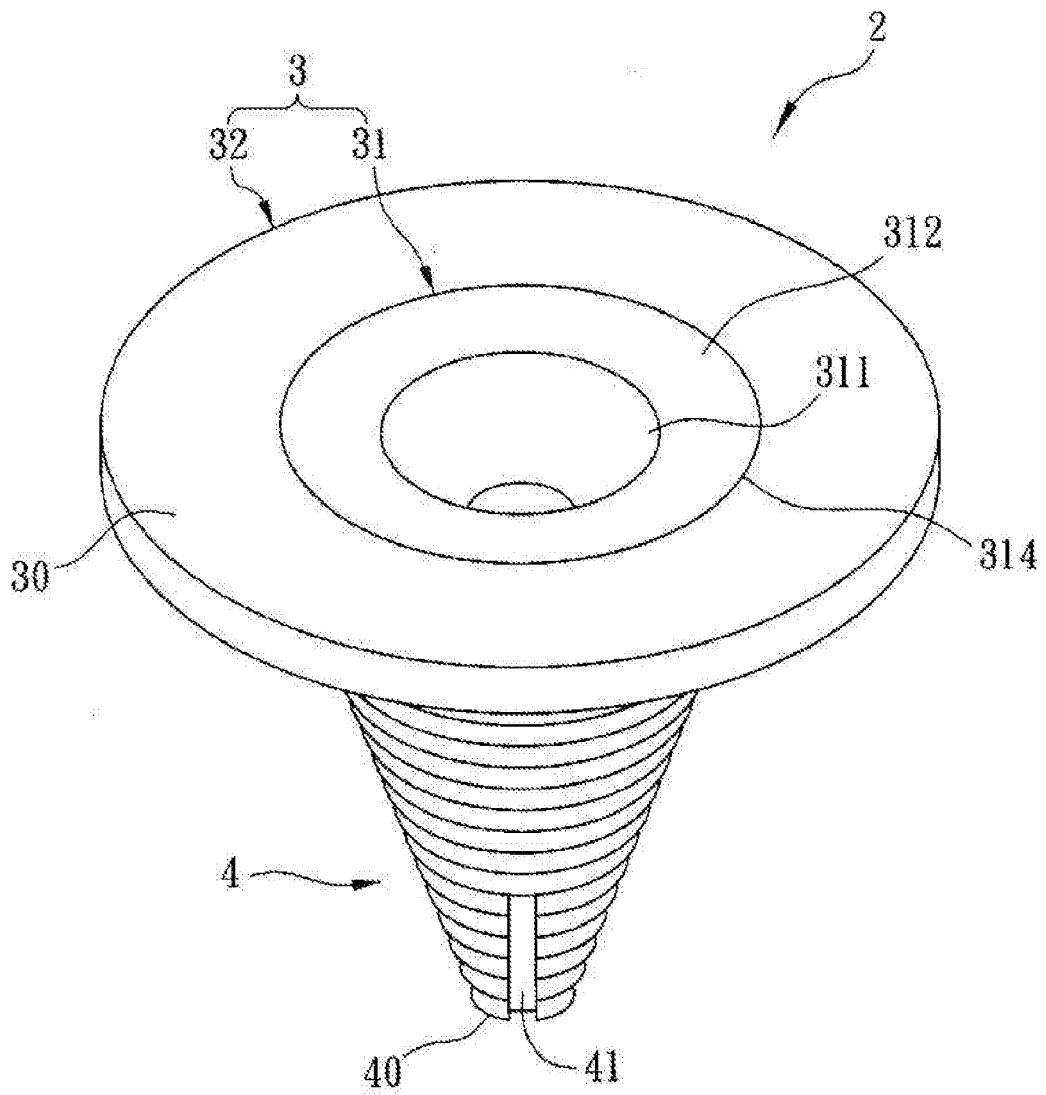


FIG. 2

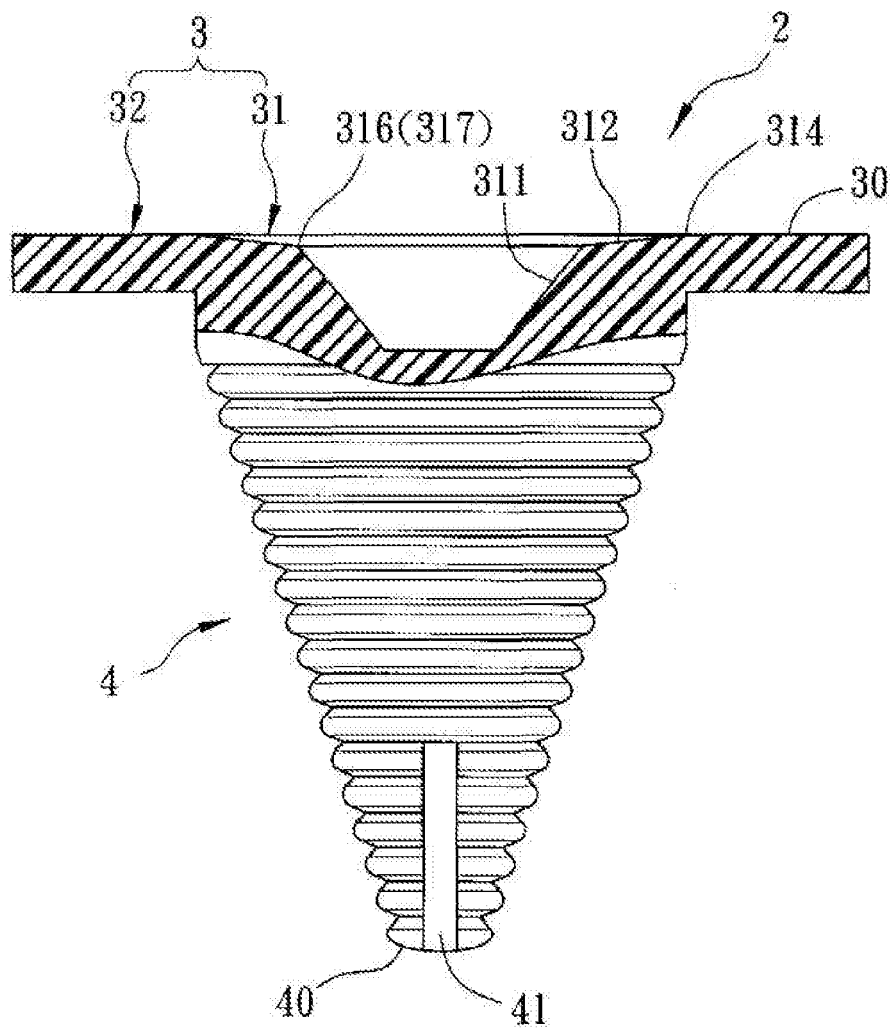


FIG. 3

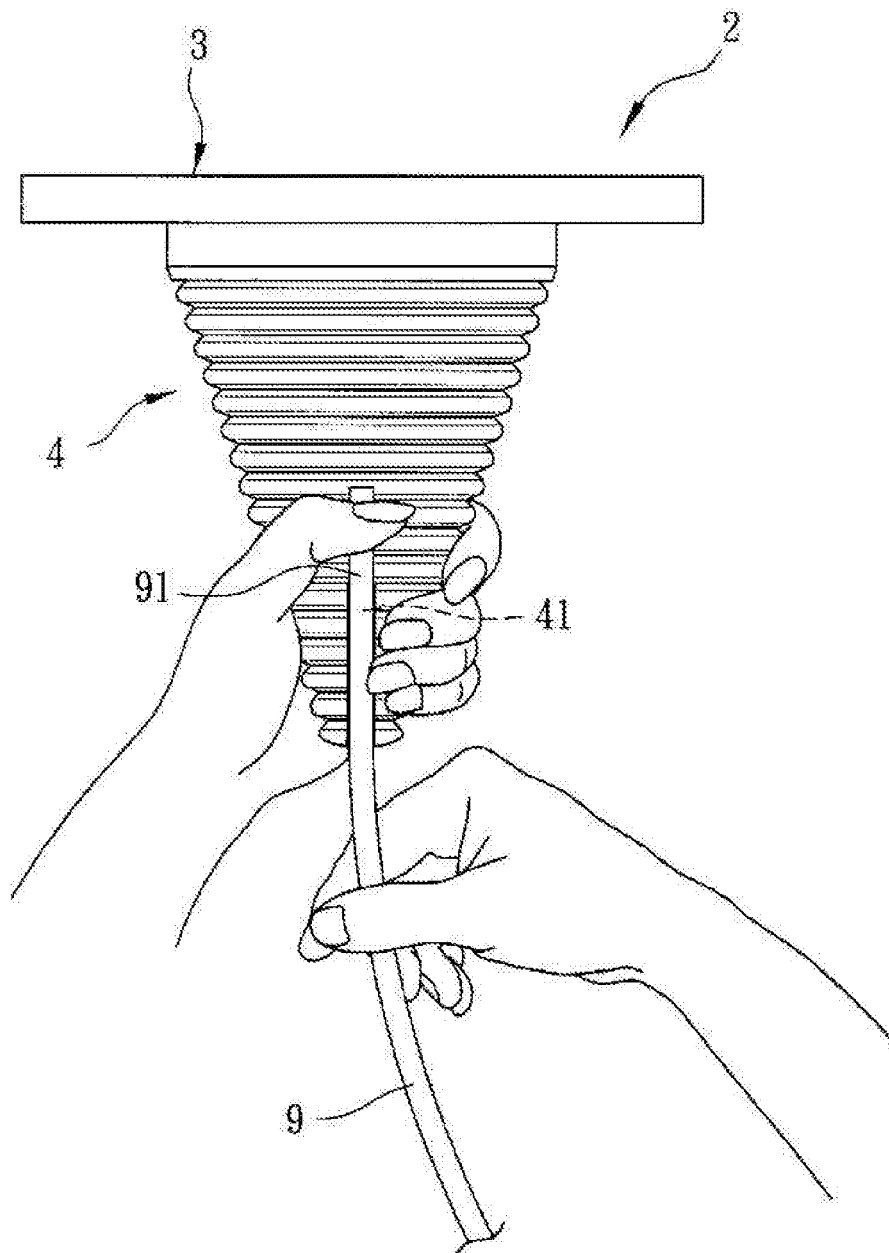


FIG. 4

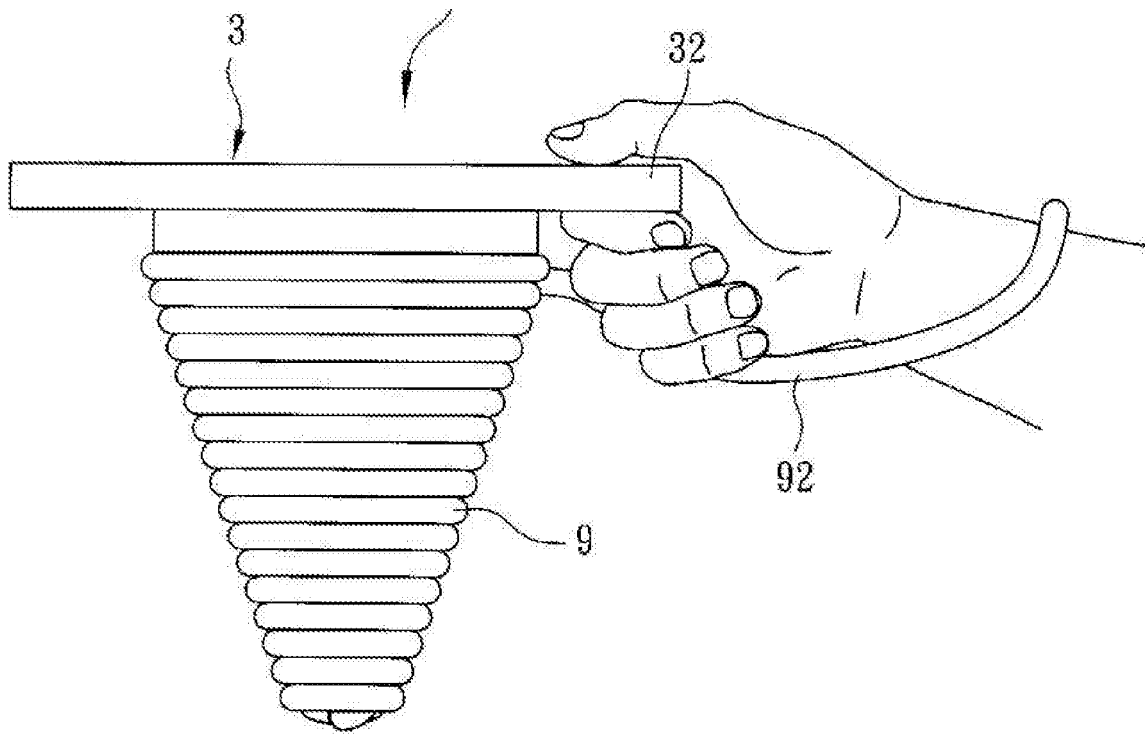


FIG. 5

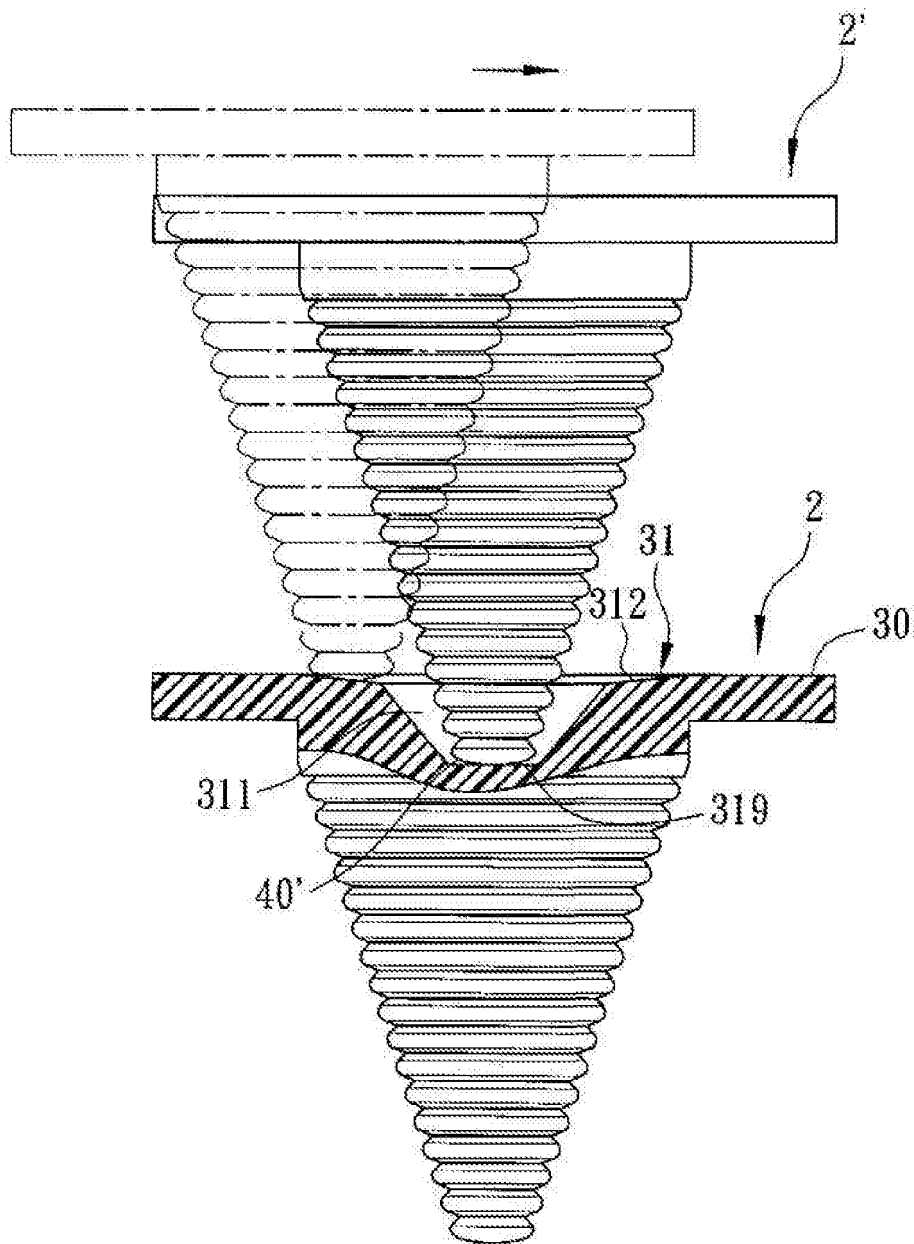


FIG. 6

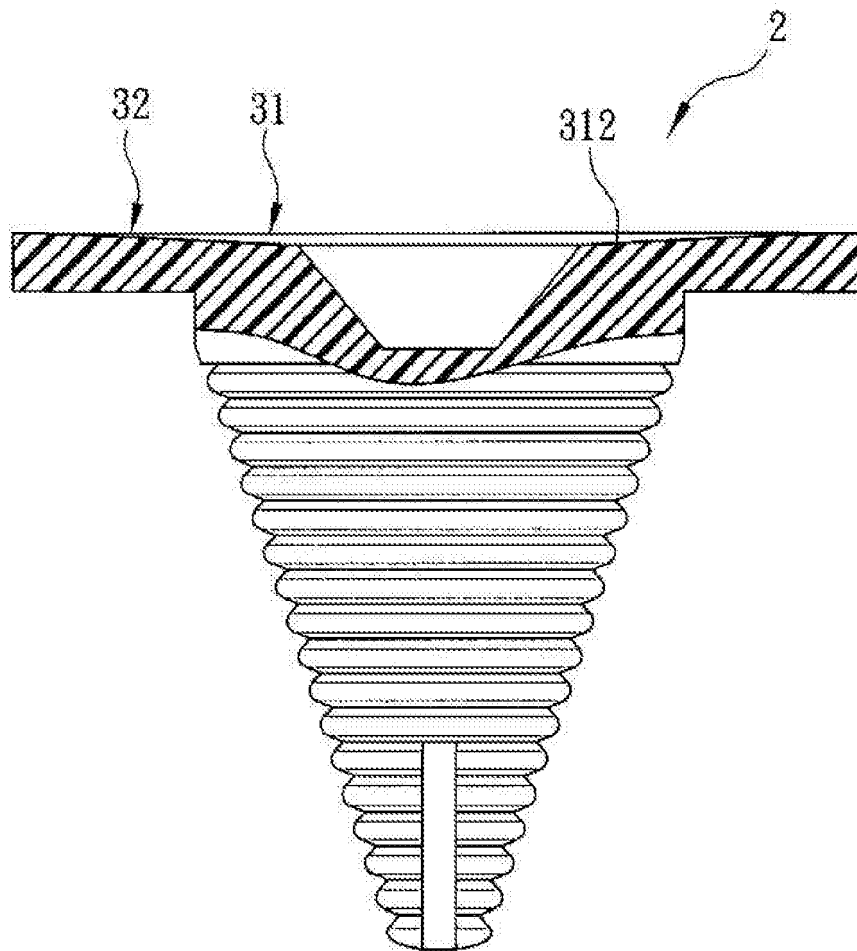


FIG. 7

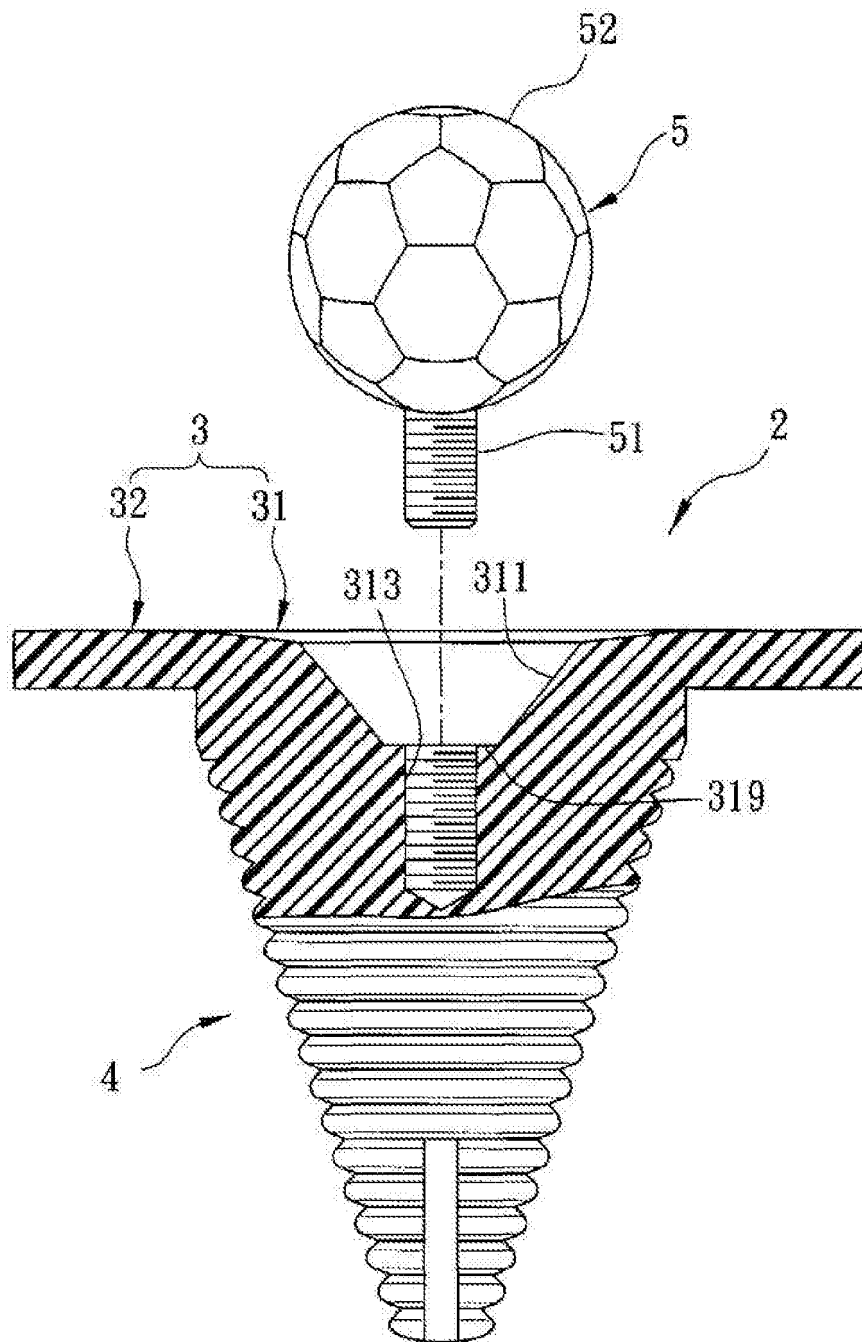


FIG. 8

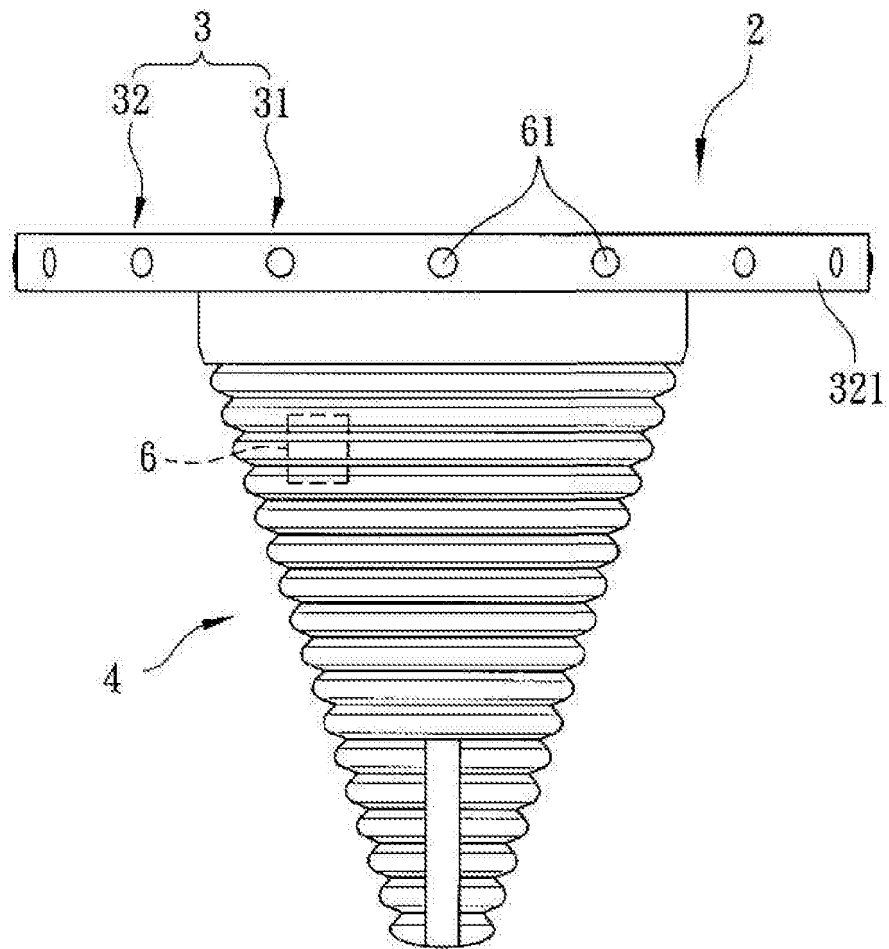


FIG. 9

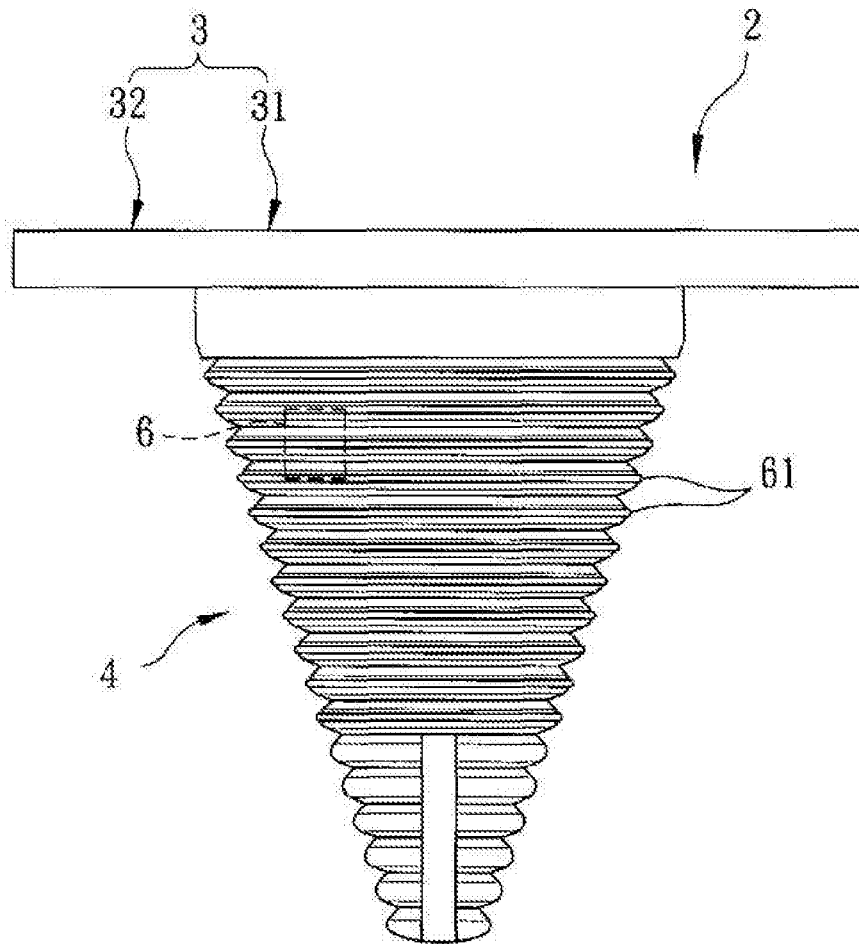


FIG. 10

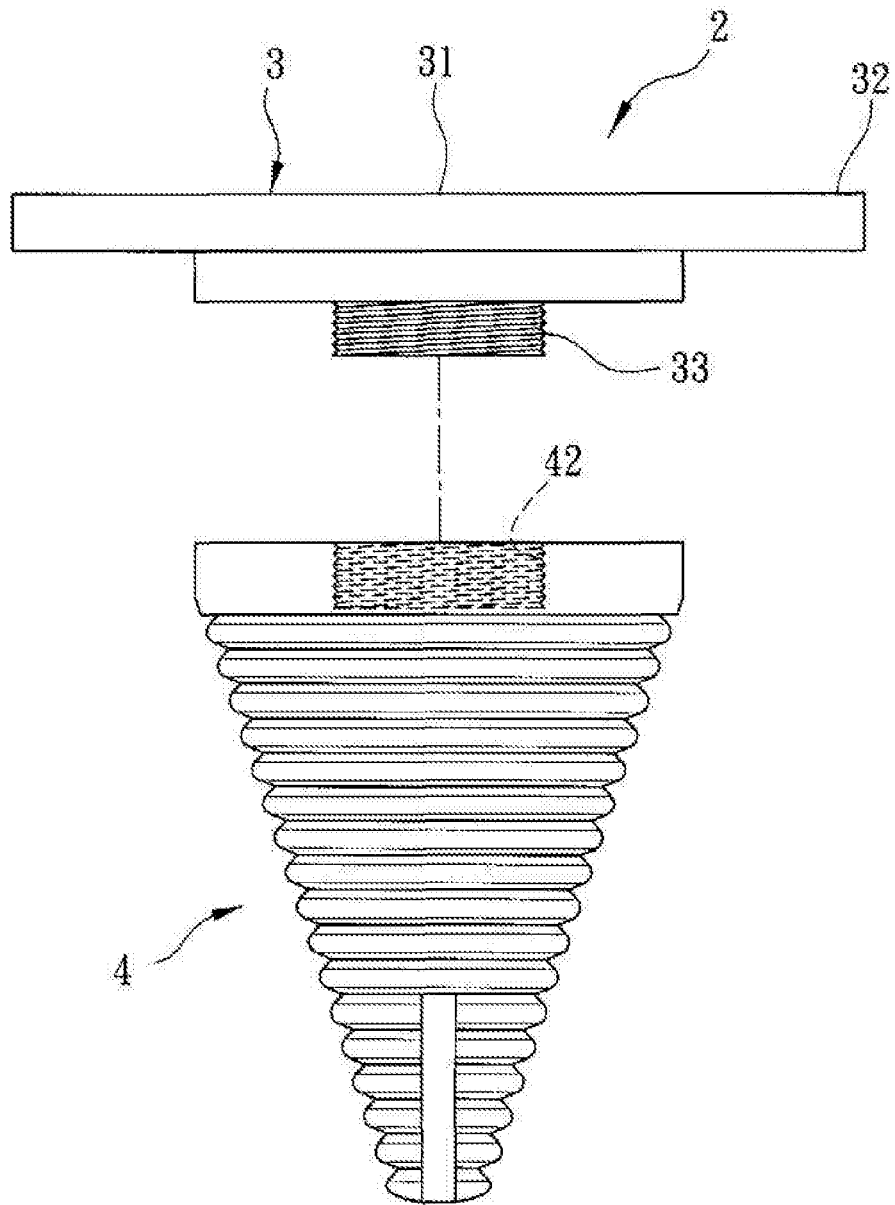


FIG. 11

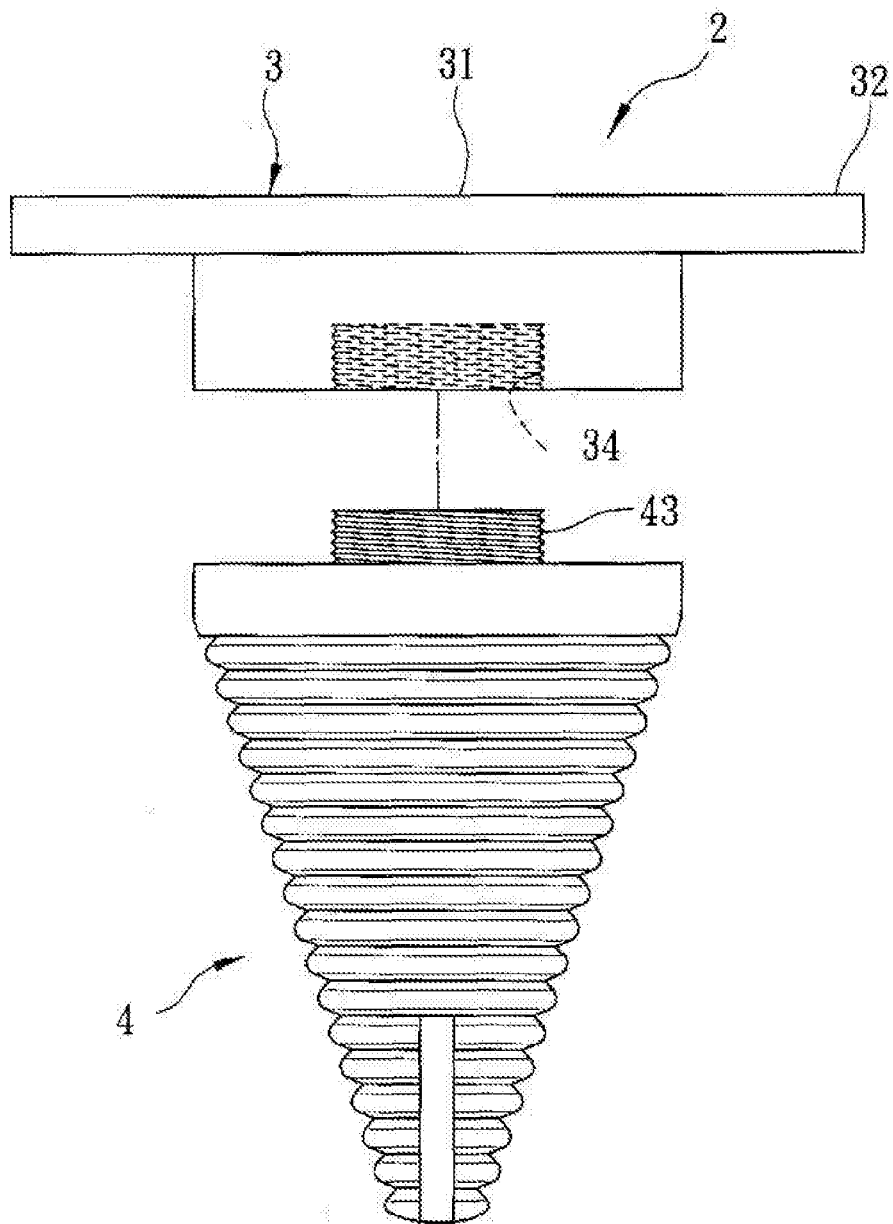


FIG. 12



EUROPEAN SEARCH REPORT

Application Number
EP 11 17 9478

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	GB 1 181 333 A (RADA MANUFACTORY LTD [HK]) 11 February 1970 (1970-02-11)	1,16	INV. A63H1/00
Y	* page 1, line 33 - line 47 *	6-15	A63H1/02
A	* page 1, line 76 - line 85; figures * -----	2-4	A63H1/24
Y	US 814 962 A (IRVING JAMES A [US]) 13 March 1906 (1906-03-13) * page 1, line 44 - line 54; figures * -----	6	
Y	US 2010/120324 A1 (GOOZNER RAPHAEL [US]) 13 May 2010 (2010-05-13) * paragraph [0025] - paragraph [0026]; figures *	7-12	
Y	EP 2 106 832 A1 (TOMY CO LTD [JP]) 7 October 2009 (2009-10-07) * paragraphs [0002], [0021] - [0023]; figure 2 *	13-15	
A	US 6 364 734 B1 (NG RICKY [HK]) 2 April 2002 (2002-04-02) * column 3, line 5 - line 37; figures *	1-4,16	TECHNICAL FIELDS SEARCHED (IPC)
A	GB 420 931 A (GUSTAV ERNST PAUL LEHMANN) 11 December 1934 (1934-12-11) * page 1, line 89 - line 100; figures *	1-4,16	A63H
A	US 3 906 660 A (VOTH HARRY A) 23 September 1975 (1975-09-23) * column 1, line 24 - column 2, line 21; figures *	1-4,16	
A	DE 23 61 232 A1 (SCHELLENBERG GEB FREIBERG GRET) 12 June 1975 (1975-06-12) * figure 1 *	1-4,16	
	----- -/--		
5 The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 19 April 2012	Examiner Lucas, Peter
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)



EUROPEAN SEARCH REPORT

Application Number
EP 11 17 9478

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	CN 2 238 672 Y (ZHU CHANGSONG [CN]) 30 October 1996 (1996-10-30) * the whole document *	1-4, 16	
A	DE 203 04 502 U1 (LIN MON SHENG [TW]) 26 June 2003 (2003-06-26) * page 3, line 15 - page 4, line 6; figure 4 *	6	
A	WO 00/43091 A1 (KOOKE HERMANUS NICOLAAS FRANCI [NL]) 27 July 2000 (2000-07-27) * page 6, line 20 - line 32; figures *	7-12	
A	US 2004/198152 A1 (MATSUKAWA HIROYUKI [JP]) 7 October 2004 (2004-10-07) * paragraphs [0006], [0008], [0038]; figure 3 *	13-15	
			TECHNICAL FIELDS SEARCHED (IPC)
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 19 April 2012	Examiner Lucas, Peter
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

5
EPO FORM 1503 03/82 (P04C01)



Application Number

EP 11 17 9478

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing claims for which payment was due.

☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for those claims for which no payment was due and for those claims for which claims fees have been paid, namely claim(s):

☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for those claims for which no payment was due.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

☐ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.

☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.

☒ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:

1-4, 6-16

☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:

☐ The present supplementary European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims (Rule 164 (1) EPC).



LACK OF UNITY OF INVENTION
SHEET B

Application Number
EP 11 17 9478

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. claims: 1-4, 16

Spinning top having a sloping area in the the plate body, solving the problem of guiding a second spinning towards the central tapered groove.

2. claims: 1, 5

Spinning top having a retaining flute, solving the problem of fixing a pull cord.

3. claims: 1, 6

Spinning top having a decorative element, solving the problem of differentiating the spinning top from other spinning tops.

4. claims: 1, 7-12

Spinning top comprising a power source and a light emitting element, solving the problem of seeing the top in the dark.

5. claims: 1, 13-15

Spinning top where the plate body and and the main body are detachably connected to each other, solving the problem easily changing the characteristics of the spinning top.

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 11 17 9478

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

19-04-2012

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 1181333	A	11-02-1970	NONE	
US 814962	A	13-03-1906	NONE	
US 2010120324	A1	13-05-2010	NONE	
EP 2106832	A1	07-10-2009	CN 201271495 Y EP 2106832 A1 JP 3142474 U US 2009253344 A1	15-07-2009 07-10-2009 12-06-2008 08-10-2009
US 6364734	B1	02-04-2002	NONE	
GB 420931	A	11-12-1934	NONE	
US 3906660	A	23-09-1975	NONE	
DE 2361232	A1	12-06-1975	NONE	
CN 2238672	Y	30-10-1996	NONE	
DE 20304502	U1	26-06-2003	NONE	
WO 0043091	A1	27-07-2000	AU 2466800 A WO 0043091 A1	07-08-2000 27-07-2000
US 2004198152	A1	07-10-2004	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- TW 200948447 [0002] [0008]